

dong_chris_housing

Chris Dong

September 20, 2017

Loading the data and any packages

```
options("max.print"=3)
suppressMessages(library(tidyverse))
suppressMessages(library(magrittr))
suppressMessages(library(leaps))
suppressMessages(library(VIM))
suppressMessages(library(car))
suppressMessages(library(Hmisc))
suppressMessages(library(glmnet))
house <- read_csv("housing.txt", col_types = cols())
names(house) <- tolower(names(house))
house0 <- house
```

Convert mssubclass to factor and check for NAs

```
house$mssubclass <- factor(house$mssubclass)
house %>% sapply(function(x) sum(is.na(x))) %>% sort(decreasing = T)
```

```
##      poolqc miscfeature      alley
##      1453      1406      1369
## [ reached getOption("max.print") -- omitted 78 entries ]
```

Convert numeric variables that have NA to 0. Change garageyrblt to indicate whether or not the garage was built AFTER the house was built.

```
house$masvnrarea[which(is.na(house$masvnrarea))] <- 0
house$bsmtfintype1[which(is.na(house$bsmtfintype1))] <- 0
house$bsmtfintype2[which(is.na(house$bsmtfintype2))] <- 0
house$garageyrblt <- (house$garageyrblt > house$yearbuilt) * 1
house$garageyrblt[is.na(house$garageyrblt)] <- 0
```

Impute the NA in lotfrontage, electrical with K-Nearest Neighbors

```
k = round(sqrt(1460*.8) / 2)

house$lotfrontage <- kNN(house, variable = "lotfrontage", k = k)$lotfrontage
house$electrical <- kNN(house, variable = "electrical", k = k)$electrical
```

Convert all other NAs to "None"

```
house[is.na(house)] <- "None"
```

Make a new variable, **remodel** that indicates whether or not remodeling took place. Remove the **yearremodadd** variable because it is no longer needed. Make a new variable **soldminusbuilt** that indicates the number of years that it took for the house to get sold after getting built.

```
house$remodel <- T
house[house$yearbuilt == house$yearremodadd,]$remodel <- F
house$remodel <- as.numeric(house$remodel)
house %<>% select(-yearremodadd)
```

```
house$soldminusbuilt <- (house$yrsold - house$yearbuilt)
house %<>% select(-yrsold,-yearbuilt)
```

Combine all of the porch variables into one. Remove id because it is obviously not important.

```
house$porcharea <- with(house, openporchsf + enclosedporch +
  `3ssnporch` + screenporch)
house %<>% select(-id)
```

Change lotshape to a boolean whether or not it is Regular.


```
table(house$lotshape)
```

```
##
## IR1 IR2 IR3 Reg
## 484 41 10 925
```

```
house$lotshape <- (house$lotshape == 'Reg') *1
```

Looking at the histogram of mosold we see many more houses being sold near summer time (and part of spring too) so we create a boolean. Most of the time, when we are creating a boolean, it is because it is insignificant otherwise.

```
house %>% ggplot(aes(x=mosold)) + geom_histogram(binwidth = 1) + xlim(0,13)+
  xlab("Month Sold") +
  ylab("Frequency")
```

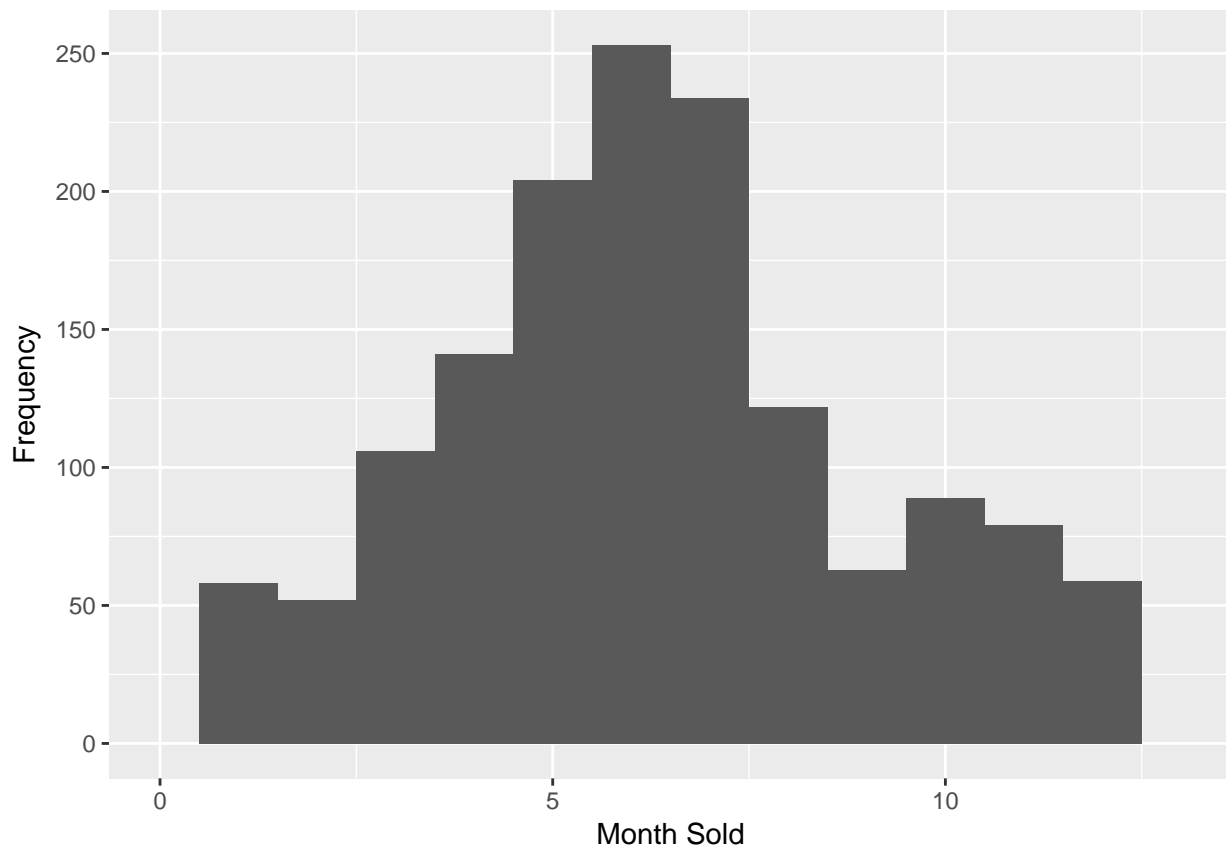

```
house$summertime <- (house$mosold %in% 5:7) * 1
```

The next part of the code was very time-consuming but here's the general outline: It is similar to backwards

selection but by hand and possibly more thorough because of the refactoring involved rather than simply removing it.

1. Check the p-value and significance for a particular variable.
2. If the variable is numeric and significant, keep it. If the variable is categorical and all levels are significant, keep it. If only some levels are significant then try to bin the factors into smaller number of levels to try and make them statistically significant. If nothing can be done, then remove the variable.
3. Repeat the above steps for the rest of the variables. Each time we remove a variable, we re-run the lm model to check if the Adjusted R Squared changed significantly or not.
4. When we finish going through all the variables, there will be about 30 ones left to consider.

```
house %<>% select(-mosold, -landcontour, -alley, -lotshape)
```

```
house$lotconfig <- (house$lotconfig == "Inside") * 1
house %<>% select(-lotconfig)
```

Here, we noticed `lotfrontage` became significant when we take the square root. We remove `1stflrsf`, `2ndflrsf`, `lowqualfinsf` because they make up the variable `grlivarea`. At first, we tried having all three of them and deleting `grlivarea` however we found that having just `grlivarea` performed better. We are deleting the porch variables because we have already aggregated them into `porcharea`.

```
fullmodel <- lm(saleprice~sqrt(lotfrontage)+porcharea+.,data = house)
summary(fullmodel)$r.squared
```

```
## [1] 0.9328122
```

```
house$condition1 <- relevel(factor(house$condition1), ref = "Norm")
house$condition2 <- relevel(factor(house$condition2), ref = "Norm")
```

```
house %<>% select(-roofstyle)
house %<>% select(-exterior2nd)
```

```
table(house$bldgtype)
```

```
##
## 1Fam 2fmCon Duplex
## 1220 31 52
## [ reached getOption("max.print") -- omitted 2 entries ]
```

```
house <- house %>% select(-`1stflrsf`, -`2ndflrsf`, -lowqualfinsf,
  -totalbsmtsf, -openporchsf, -enclosedporch, -`3ssnporch`,
  -screenporch, -garagearea)
```

```
house %>% group_by(salecondition) %>% summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc))
```

```
## # A tibble: 6 x 2
##   salecondition avgprc
##   <chr> <dbl>
## 1 Partial 244600
## 2 Normal 160000
## 3 Alloca 148145
## 4 Family 140500
## 5 Abnorml 130000
## 6 AdjLand 104000
```

```
house$salecondition <- (house$salecondition == "Normal") * 1
```

```
house %>% group_by(saletype) %>% summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc))
```

```
## # A tibble: 9 x 2
##   saletype avgprc
##   <chr>   <dbl>
## 1     Con 269600
## 2     New 247453
## 3     CWD 188750
## 4      WD 158000
## 5   ConLw 144000
## 6   ConLD 140000
## 7     COD 139000
## 8   ConLI 125000
## 9     Oth 116050
```

```
house$newtype <- (house$saletype == 'New') * 1
house <- house %>% select(-saletype)

house$miscfeature <- (house$miscfeature != 'None') * 1
house %<>% select(-miscval, -miscfeature)

house$paveddrive <- (house$paveddrive == 'Y') * 1
house %<>% select(-paveddrive)

house$poolqc <- (house$poolqc != "None")*1
house$fence <- (house$fence != "None")*1
```

Here, I am changing the ordered factor into numeric. I want to make a correlation plot with every significant variable so I am converting all variables (as long as it makes sense) to numeric.

```
house$garagecond <- as.numeric(factor(house$garagecond,
  levels = c("None", "Po", "Fa", "TA", "Gd", "Ex"), labels = 0:5))
house$garagequal <- as.numeric(factor(house$garagequal,
  levels = c("None", "Po", "Fa", "TA", "Gd", "Ex"), labels = 0:5))

house %<>% select(-fence, -poolqc, -garagecond)

house %>% group_by(garagefinish) %>%
  summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc)) %>% head(2)
```

```
## # A tibble: 2 x 2
##   garagefinish avgprc
##   <chr>   <dbl>
## 1      Fin 215000
## 2     RFn 190000
```

```
house$garagefinish <- (house$garagefinish == "Fin") * 1
house %<>% select(-garagefinish)
```

Here, fireplacequ and fireplaces are obviously correlated so I choose the one that seems to explain saleprice better. However, they both end up being insignificant.

```
house$fireplacequ <- as.numeric(factor(house$fireplacequ,
  levels = c("None", "Po", "Fa", "TA", "Gd", "Ex"), labels = 0:5))
cor(house$saleprice, house$fireplacequ); cor(house$saleprice, house$fireplaces)
```

```
## [1] 0.5204376
```

```
## [1] 0.4669288
```

```
house %<>% select(-fireplacequ, -fireplaces)
```

```
house %<>% select(-garageyrblt)
```

```
house$garagetype <- relevel(factor(house$garagetype), ref = "None")
```

```
house$functional <- (house$functional == "Typ") * 1
```

```
house$kitchenqual <- as.numeric(factor(house$kitchenqual,  
  levels = c("Po", "Fa", "TA", "Gd", "Ex"), labels = 1:5))
```

Similarly, totrmsabvgrd is highly correlated with grlivarea so I keep the better of the two.

```
cor(house$totrmsabvgrd ,house$saleprice);cor(house$grlivarea ,house$saleprice)
```

```
## [1] 0.5337232
```

```
## [1] 0.7086245
```

```
house %<>% select(-totrmsabvgrd)
```

I try to combine all of the bath variables but they end up not being significant so I just remove them.

```
table(house$fullbath)
```

```
##
```

```
## 0 1 2 3
```

```
## 9 650 768 33
```

```
house$bath <- house$fullbath + house$halfbath + house$bsmtfullbath + house$bsmthalfbath
```

```
house %<>% select(-fullbath, -halfbath, -bsmthalfbath, -bsmtfullbath)
```

```
house %<>% select(-bath)
```

```
house %>% group_by(electrical) %>% summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc))
```

```
## # A tibble: 5 x 2
```

```
##   electrical avgprc
```

```
##   <chr> <dbl>
```

```
## 1 SBrkr 170000
```

```
## 2 FuseA 121250
```

```
## 3 FuseF 115000
```

```
## 4 FuseP 82000
```

```
## 5 Mix 67000
```

```
house$electrical <- (house$electrical == "SBrkr") * 1
```

```
house %<>% select(-electrical, -centralair)
```

```
house$heatingqc <- as.numeric(factor(house$heatingqc,  
  levels = c("Po", "Fa", "TA", "Gd", "Ex"), labels = 1:5))
```

```
table(house$heatingqc)
```

```
##
```

```
## 1 2 3
```

```
## 1 49 428
```

```
## [ reached getOption("max.print") -- omitted 2 entries ]
```

```
house$heatingqc <- (house$heatingqc == 5) * 1
```

```
house %<>% select(-heating)
```

```

table(house$bsmtfintype1)

##
##    0 ALQ BLQ
## 37 220 148
## [ reached getOption("max.print") -- omitted 4 entries ]

house$bsmtfintype1 <- as.numeric(factor(house$bsmtfintype1,
  levels = c("0", "Unf", "LwQ", "Rec", "BLQ", "ALQ", "GLQ"),
  labels = 0:6))
house$bsmtfintype2 <- as.numeric(factor(house$bsmtfintype2,
  levels = c("0", "Unf", "LwQ", "Rec", "BLQ", "ALQ", "GLQ"),
  labels = 0:6))
house$bsmtfintype1 <- house$bsmtfintype1 + house$bsmtfintype2
house %<>% select(-bsmtfintype1, -bsmtfintype2)

house$bsmtexposure <- relevel(factor(house$bsmtexposure), ref = "None")

table(house$bsmtexposure)

##
## None    Av    Gd
##   38  221  134
## [ reached getOption("max.print") -- omitted 2 entries ]

house %>% group_by(bsmtexposure) %>% summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc))

## # A tibble: 5 x 2
##   bsmtexposure avgprc
##         <fctr> <dbl>
## 1             Gd 226975
## 2             Av 185850
## 3             Mn 182450
## 4             No 154000
## 5             None 104025

house$bsmtexposure <- (house$bsmtexposure == "Gd") * 1

house %>% group_by(bsmtcond) %>% summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc))

## # A tibble: 5 x 2
##   bsmtcond avgprc
##        <chr> <dbl>
## 1          Gd 193879
## 2          TA 165000
## 3          Fa 118500
## 4        None 101800
## 5          Po  64000

table(house$bsmtcond)

##
##   Fa    Gd None
##  45   65   37
## [ reached getOption("max.print") -- omitted 2 entries ]

```

```

house$bsmtcond <- as.numeric(factor(house$bsmtcond,
  levels = c("None", "Po", "Fa", "TA", "Gd", "Ex"),
  labels = 0:5))

house$bsmtqual <- as.numeric(factor(house$bsmtqual,
  levels = c("None", "Po", "Fa", "TA", "Gd", "Ex"),
  labels = 0:5))
cor(house$bsmtcond, house$bsmtqual)

## [1] 0.6337134
cor(house$bsmtcond, house$saleprice); cor(house$bsmtqual, house$saleprice)

## [1] 0.2126072
## [1] 0.5852072
house %<>% select(-bsmtcond)
house %<>% select(-bsmtqual)

table(house$foundation)

##
## BrkTil CBlock PConc
## 146 634 647
## [ reached getOption("max.print") -- omitted 3 entries ]
house %>% group_by(foundation) %>% summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc))

## # A tibble: 6 x 2
## foundation avgprc
## <chr> <dbl>
## 1 PConc 205000
## 2 Wood 164000
## 3 CBlock 141500
## 4 Stone 126500
## 5 BrkTil 125250
## 6 Slab 104150
house$foundation <- (house$foundation == "PConc")*1

house$extercond <- as.numeric(factor(house$extercond,
  levels = c("Po", "Fa", "TA", "Gd", "Ex"),
  labels = 1:5))
house$exterqual <- as.numeric(factor(house$exterqual,
  levels = c("Po", "Fa", "TA", "Gd", "Ex"),
  labels = 1:5))
cor(house$extercond, house$exterqual)

## [1] 0.00918398
house$masvnrtype <- relevel(factor(house$masvnrtype), ref = "None")

table(house$masvnrtype)

##
## None BrkCmn BrkFace Stone
## 872 15 445 128

```

```

house$masvnrtype <- (house$masvnrtype != "None") * 1

Boolean whether or not housestyle is either 2Story or 2.5Fin.
table(house$housestyle)

##
## 1.5Fin 1.5Unf 1Story
##      154      14      726
## [ reached getOption("max.print") -- omitted 5 entries ]
house %>% group_by(housestyle) %>% summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc))

## # A tibble: 8 x 2
##   housestyle avgprc
##   <chr>      <dbl>
## 1      2.5Fin 194000
## 2      2Story 190000
## 3        SLvl 164500
## 4      1Story 154750
## 5      SFoyer 135960
## 6      2.5Unf 133900
## 7      1.5Fin 132000
## 8      1.5Unf 111250

house$housestyle <- (house$housestyle == "2Story" |
                     house$housestyle == "2.5Fin")*1

table(house$bldgtype)

##
## 1Fam 2fmCon Duplex
## 1220   31    52
## [ reached getOption("max.print") -- omitted 2 entries ]
house %>% group_by(bldgtype) %>% summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc))

## # A tibble: 5 x 2
##   bldgtype avgprc
##   <chr>      <dbl>
## 1  TwnhsE 172200
## 2    1Fam 167900
## 3  Twnhs 137500
## 4  Duplex 135980
## 5  2fmCon 127500

house$bldgtype <- (house$bldgtype == "1Fam" | house$bldgtype == "2FmCon") * 1
house %<>% select(-bldgtype)

table(house$landslope)

##
##  Gtl  Mod  Sev
## 1382   65   13

house$landslope <- (house$landslope == "Gtl") * 1
house %<>% select(-landslope)

```



```

table(house$utilities)

##
## AllPub NoSeWa
##    1459      1
house %<>% select(-utilities, -street)

house %>% group_by(mszoning) %>% summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc))

## # A tibble: 5 x 2
##   mszoning avgprc
##   <chr>   <dbl>
## 1      FV 205950
## 2      RL 174000
## 3      RH 136500
## 4      RM 120500
## 5 C (all) 74700

table(house$mszoning)

##
## C (all)      FV      RH
##      10      65      16
## [ reached getOption("max.print") -- omitted 2 entries ]
house$mszoning <- relevel(factor(house$mszoning), ref = "RL")

house %<>% select(-mszoning)

house %>% group_by(mssubclass) %>% summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc))

## # A tibble: 15 x 2
##   mssubclass avgprc
##   <fctr>   <dbl>
## 1         60 215200
## 2        120 192000
## 3         80 166500
## 4         75 163500
## 5         20 159250
## 6         70 156000
## 7        160 146000
## 8         40 142500
## 9         85 140750
## 10        90 135980
## 11         50 132000
## 12        190 128250
## 13         45 107500
## 14         30  99900
## 15        180  88500

house %<>% select(-mssubclass, -lotfrontage, -porcharea, -extercond, -foundation,
                 -exterior1st)

house %>% group_by(condition1) %>% summarise(avgprc = median(saleprice)) %>% arrange(desc(avgprc))

```

```
## # A tibble: 9 x 2
##   condition1 avgprc
##   <fctr>    <dbl>
## 1      RRNn 214000
## 2      PosA 212500
## 3      PosN 200000
## 4      RRNe 190750
## 5      RRAn 171495
## 6      Norm 166500
## 7      RRAe 142500
## 8      Feedr 140000
## 9      Artery 119550
```

```
house$condition1 <- (house$condition1 == "Artery" | house$condition1 == "Feedr" |
  house$condition1 == "RRAe") * 1
house$condition2 <- (house$condition2 == "PosN") * 1

cor(house$garageequal, house$garagecars)
```

```
## [1] 0.5766224
```

```
house %<>% select(-garageequal)
```

```
fullmodel <- lm(saleprice~., data = house)
summary(fullmodel)
```

```
##
## Call:
## lm(formula = saleprice ~ ., data = house)
##
## Residuals:
##      Min       1Q   Median
## -188576  -11780     563
## [ reached getOption("max.print") -- omitted 2 entries ]
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## [ reached getOption("max.print") -- omitted 65 rows ]
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 25940 on 1395 degrees of freedom
## Multiple R-squared:  0.8981, Adjusted R-squared:  0.8934
## F-statistic: 192.1 on 64 and 1395 DF, p-value: < 2.2e-16
```

Checking multicollinearity. Looks good. For the generalized variance inflation factor (normalized by the degree of freedom), everything except one is less than 2.

```
vif(fullmodel)
```

```
##              GVIF Df GVIF^(1/(2*Df))
## lotarea      1.433292  1      1.197202
## [ reached getOption("max.print") -- omitted 29 rows ]
```

Interestingly, soldminusbuilt which is yrsold - yearbuilt becomes insignificant in this smaller model with only the best predictors

```
house_numeric <- house[,sapply(house,function(x) is.numeric(x))]
house_numeric %<>% select(saleprice, everything())
bestpredictors <- names(house_numeric)[sapply(house_numeric,
function(x) abs(cor(house_numeric$saleprice, x))) >= 0.5)[-1]
```

```
bestpredictors <- bestpredictors[-6]
```

```
bestmodel <- lm(saleprice~overallqual + exterqual + grlivarea +
  kitchenqual + garagcars + neighborhood, data = house)
```

```
summary(bestmodel)$r.squared
```

```
## [1] 0.808378
```

Subset with only best predictors

```
housesubset <- house %>% select(bestpredictors)
```

So, 6 variables capture 0.808378 of the variation in sale price for our model.

Checking assumptions.

```
cor(housesubset)
```

```
##              overallqual  exterqual  grlivarea  kitchenqual  garagcars
## [ reached getOption("max.print") -- omitted 5 rows ]
```

```
vif(bestmodel)
```

```
##              GVIF Df GVIF^(1/(2*Df))
## overallqual  3.464742  1          1.861382
## [ reached getOption("max.print") -- omitted 5 rows ]
```


```
par(mfrow=c(2,4))
```

```
qqnorm(housesubset$grlivarea); qqline(housesubset$grlivarea)
```

```
qqnorm(log(housesubset$grlivarea)); qqline(log(housesubset$grlivarea))
```

```
qqnorm(house$saleprice); qqline(house$saleprice)
```

```
qqnorm(log(house$saleprice)); qqline(log(house$saleprice))
```

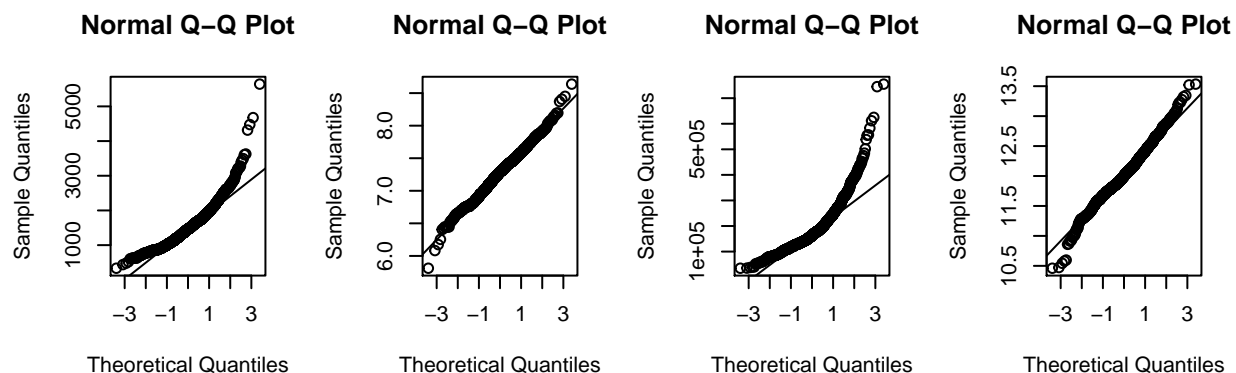

```
bestmodel2 <- lm(log(saleprice)~overallqual + exterqual + log(grlivarea) +
  kitchenqual + garagcars + neighborhood, data = house)
```

```
summary(bestmodel2)
```

```
##
```

```
## Call:
```

```
## lm(formula = log(saleprice) ~ overallqual + exterqual + log(grlivarea) +
##   kitchenqual + garagecars + neighborhood, data = house)
##
## Residuals:
##      Min        1Q    Median
## -0.97098 -0.07887  0.01184
## [ reached getOption("max.print") -- omitted 2 entries ]
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## [ reached getOption("max.print") -- omitted 30 rows ]
## ---
## Signif. codes:  0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
## Residual standard error: 0.1567 on 1430 degrees of freedom
## Multiple R-squared:  0.8492, Adjusted R-squared:  0.8462
## F-statistic: 277.7 on 29 and 1430 DF,  p-value: < 2.2e-16
```

exterqual becomes insignificant once we take the log of the response variable

```
bestmodel3 <- lm(log(saleprice)~overallqual + log(grlivarea) +
  kitchenqual + garagecars + neighborhood, data = house)
summary(bestmodel3)$r.squared
```

```
## [1] 0.8488445
```

Check for influence points


```
infm <- influence.measures(bestmodel3)
which(apply(infm$inf,1,any)) #influential observations
```

```
## 2 4 18
## 2 4 18
## [ reached getOption("max.print") -- omitted 134 entries ]
```

```
summary(infm)
```


```
## Potentially influential observations of
##   lm(formula = log(saleprice) ~ overallqual + log(grlivarea) +      kitchenqual + garagecars + neigh
##
##      dfb.1_ dfb.ovrl dfb.lg() dfb.ktch dfb.grgc dfb.nghB dfb.ngBD dfb.ngBS
##      dfb.nghbrhdClrC dfb.nghbrhdCllC dfb.nghC dfb.nghE dfb.nghG dfb.nIDO
##      dfb.ngMV dfb.nghM dfb.ngNA dfb.ngNR dfb.nNPV dfb.ngNH dfb.nNWA
##      dfb.ngOT dfb.nghbrhdSw dfb.ngSW dfb.nghbrhdSm dfb.ngSB dfb.nSWI
##      dfb.nghT dfb.nghV dffit  cov.r  cook.d hat
## [ reached getOption("max.print") -- omitted 137 rows ]
```

```
plot(rstudent(bestmodel3) ~ hatvalues(bestmodel3))
```

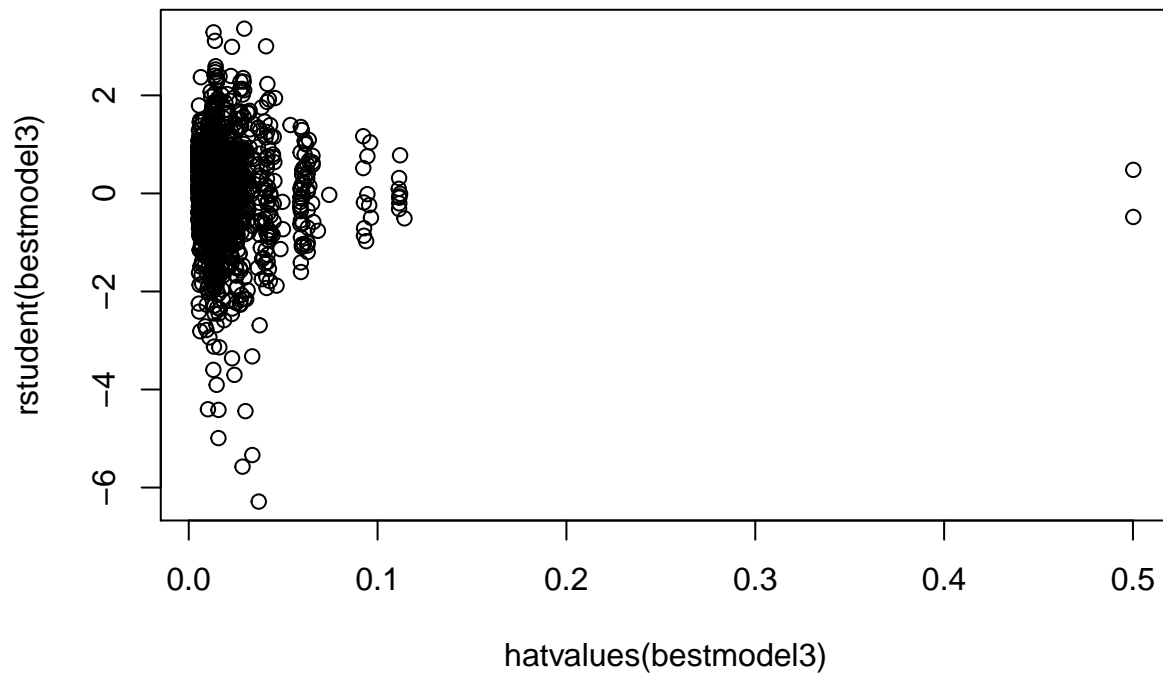

```
#install.packages("olsrr")
suppressMessages(library(olsrr))
influence <- ols_dffits_plot(bestmodel3)
```

Influence Diagnostics for log(saleprice)

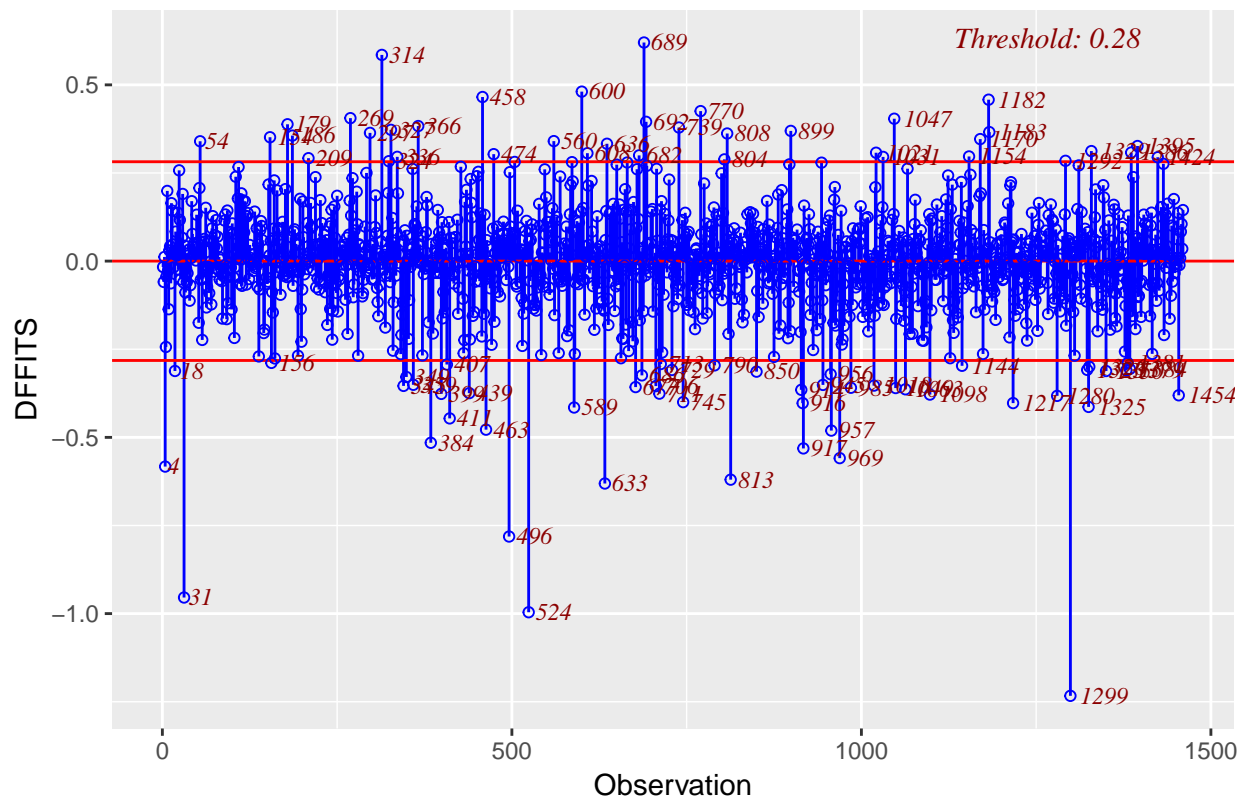

Let's examine Observation # 1299, and 524

```
house[1299,] %>% View()
house[542,] %>% View()

bestmodel4 <- lm(log(saleprice)~overallqual + log(grlivarea) +
  kitchenqual + garagecars + neighborhood, data = house[c(-1299,-542),])
summary(bestmodel4)$r.squared
```

```
## [1] 0.8530995
```

By just removing two points, our Adjusted R-squared went from 0.8458869 to 0.8502211

Let's see what happens if we simply remove the observations.

```
influenceindex <- unlist(influence$outliers[1])

bestmodelnoinfluence <- lm(log(saleprice)~overallqual + log(grlivarea) +
  kitchenqual + garagecars + neighborhood, data = house[-influenceindex,])
summary(bestmodelnoinfluence)$r.squared
```

```
## [1] 0.8889236
```

We see that our Adjusted R-squared went from 0.8502211 to 0.8866905 after removing ALL the influence points.

```
house2 <- house
house2[influenceindex,]$saleprice <- NA
house2$saleprice <- kNN(house2, variable = "saleprice", k = k)$saleprice
```

```
## Warning in gowerD(don_dist_var, imp_dist_var, weights = weightsx,
## numericalX, : NAs introduced by coercion
```

```
## Warning in gowerD(don_dist_var, imp_dist_var, weights = weightsx,
## numericalX, : NAs introduced by coercion
```

```
## Warning in gowerD(don_dist_var, imp_dist_var, weights = weightsx,
## numericalX, : NAs introduced by coercion
```

```
## Warning in gowerD(don_dist_var, imp_dist_var, weights = weightsx,
## numericalX, : NAs introduced by coercion
```

```
bestmodelimputeinfluence <- lm(log(saleprice)~overallqual + log(grlivarea) +
  kitchenqual + garagecars + neighborhood, data = house2)
summary(bestmodelimputeinfluence)$r.squared
```

```
## [1] 0.866407
```

Let's try our model with all of the relevant variables. First, we notice that the R squared improves by taking the log of saleprice, lotarea, grlivarea and the square root of bsmtfinsf1. We also notice that housestyle and masvnrtype is no longer significant so we remove them.

```
model31var <- lm(log(saleprice) ~ log(lotarea) +
  sqrt(bsmtfinsf1)+log(grlivarea)+., data = house)
summary(model31var)$r.squared
```

```
## [1] 0.9255936
```

Accounting for outliers in the full model through imputation

```
model31varimpute <- lm(log(saleprice) ~ log(lotarea) +
  sqrt(bsmtfinsf1)+log(grlivarea)+., data = house2)
summary(model31varimpute)$r.squared
```

```
## [1] 0.923607
```

We can try removing the outliers, which improved the R squared by a lot. Now, we can test some interaction terms.

```
model31varremove <- lm(log(saleprice) ~ log(lotarea) +
  sqrt(bsmtfinsf1)+log(grlivarea)+., data = house2[-influenceindex,])
summary(model31varremove)$r.squared
```

```
## [1] 0.9469088
```

I remove some variables found to be insignificant.

```
house3 <- house2 %>% select(-condition2,-roofmatl,-garagetypel,-poolarea,-remodel)
```

Remove exterqual

```
house4 <- house3 %>% select(-exterqual)
```

FINAL MODEL

I test the multicollinearity, significance of variables in the model, normality for our final model.

```
endmodel <- lm(log(saleprice) ~ log(lotarea) +
  sqrt(bsmtfinsf1)+log(grlivarea) + . -
  lotarea - bsmtfinsf1 - grlivarea,
  data = house4[-influenceindex,])
vif(endmodel)
```

```
##                      GVIF Df GVIF^(1/(2*Df))
## log(lotarea)         2.454861 1          1.566800
## [ reached getOption("max.print") -- omitted 23 rows ]
```

```
options(max.print=999)
summary(endmodel)
```

```
##
## Call:
## lm(formula = log(saleprice) ~ log(lotarea) + sqrt(bsmtfinsf1) +
##     log(grlivarea) + . - lotarea - bsmtfinsf1 - grlivarea, data = house4[-influenceindex,
##     ])
##
## Residuals:
##      Min       1Q   Median       3Q      Max
## -0.37097 -0.04956  0.00242  0.05213  0.34034
##
## Coefficients:
##              Estimate Std. Error t value Pr(>|t|)
## (Intercept)    6.975e+00  1.090e-01  63.999 < 2e-16 ***
## log(lotarea)    9.534e-02  7.768e-03  12.275 < 2e-16 ***
## sqrt(bsmtfinsf1) 4.981e-03  3.238e-04  15.383 < 2e-16 ***
## log(grlivarea)  4.584e-01  1.581e-02  28.996 < 2e-16 ***
```

```
## neighborhoodBrDale -6.989e-02 3.586e-02 -1.949 0.051482 .
## neighborhoodBrkSide -8.722e-04 2.997e-02 -0.029 0.976786
## neighborhoodClearCr 3.361e-02 3.367e-02 0.998 0.318384
## neighborhoodCollgCr -5.904e-03 2.625e-02 -0.225 0.822088
## neighborhoodCrawfor 1.202e-01 3.051e-02 3.939 8.62e-05 ***
## neighborhoodEdwards -7.077e-02 2.834e-02 -2.497 0.012656 *
## neighborhoodGilbert -9.594e-03 2.788e-02 -0.344 0.730840
## neighborhoodIDOTRR -8.905e-02 3.337e-02 -2.669 0.007704 **
## neighborhoodMeadowV -7.746e-02 3.486e-02 -2.222 0.026442 *
## neighborhoodMitchel -3.302e-02 2.929e-02 -1.127 0.259840
## neighborhoodNames -2.774e-02 2.737e-02 -1.014 0.310966
## neighborhoodNoRidge 6.854e-02 3.052e-02 2.246 0.024890 *
## neighborhoodNPkVill 3.474e-03 3.923e-02 0.089 0.929444
## neighborhoodNridgHt 8.628e-02 2.731e-02 3.159 0.001619 **
## neighborhoodNWAmes -3.035e-02 2.847e-02 -1.066 0.286500
## neighborhoodOldTown -7.253e-02 2.933e-02 -2.472 0.013543 *
## neighborhoodSawyer 7.942e-04 2.896e-02 0.027 0.978128
## neighborhoodSawyerW -2.200e-02 2.826e-02 -0.778 0.436435
## neighborhoodSomerst 6.144e-02 2.649e-02 2.319 0.020543 *
## neighborhoodStoneBr 1.185e-01 3.336e-02 3.553 0.000394 ***
## neighborhoodSWISU -4.328e-02 3.429e-02 -1.262 0.207104
## neighborhoodTimber 2.582e-03 2.973e-02 0.087 0.930826
## neighborhoodVeenker 1.816e-02 4.149e-02 0.438 0.661642
## condition1 -6.237e-02 8.700e-03 -7.169 1.25e-12 ***
## housestyle -2.119e-02 8.011e-03 -2.646 0.008249 **
## overallqual 5.538e-02 3.509e-03 15.781 < 2e-16 ***
## overallcond 3.705e-02 2.729e-03 13.576 < 2e-16 ***
## masvnrtype -1.518e-02 7.595e-03 -1.998 0.045887 *
## masvnrarea 5.105e-05 2.120e-05 2.408 0.016185 *
## bsmtexposure 5.005e-02 9.667e-03 5.178 2.59e-07 ***
## bsmtfinsf2 7.966e-05 1.662e-05 4.793 1.83e-06 ***
## bsmtunfsf 6.728e-05 9.757e-06 6.896 8.29e-12 ***
## heatingqc 2.437e-02 6.208e-03 3.926 9.09e-05 ***
## bedroomabvgr -1.295e-02 4.229e-03 -3.062 0.002246 **
## kitchenabvgr -5.529e-02 1.282e-02 -4.312 1.74e-05 ***
## kitchenqual 4.114e-02 5.649e-03 7.283 5.58e-13 ***
## functional 7.798e-02 1.082e-02 7.208 9.50e-13 ***
## garagecars 4.742e-02 4.780e-03 9.921 < 2e-16 ***
## wooddecksf 7.994e-05 2.142e-05 3.731 0.000199 ***
## salecondition 4.426e-02 8.798e-03 5.030 5.57e-07 ***
## soldminusbuilt -2.112e-03 2.101e-04 -10.050 < 2e-16 ***
## summertime 1.784e-02 4.905e-03 3.638 0.000285 ***
## newtype 1.042e-01 1.323e-02 7.881 6.74e-15 ***
## ---
```

```
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
##
```

```
## Residual standard error: 0.08875 on 1324 degrees of freedom
## Multiple R-squared: 0.9439, Adjusted R-squared: 0.9419
## F-statistic: 484 on 46 and 1324 DF, p-value: < 2.2e-16
```


```
ks.test(endmodel$residuals, pnorm, mean(endmodel$residuals),
        sd(endmodel$residuals))
```

```
##
```

```
## One-sample Kolmogorov-Smirnov test
```



```
##
## data: endmodel$residuals
## D = 0.036643, p-value = 0.05036
## alternative hypothesis: two-sided
qqnorm(endmodel$residuals); qqline(endmodel$residuals)
```

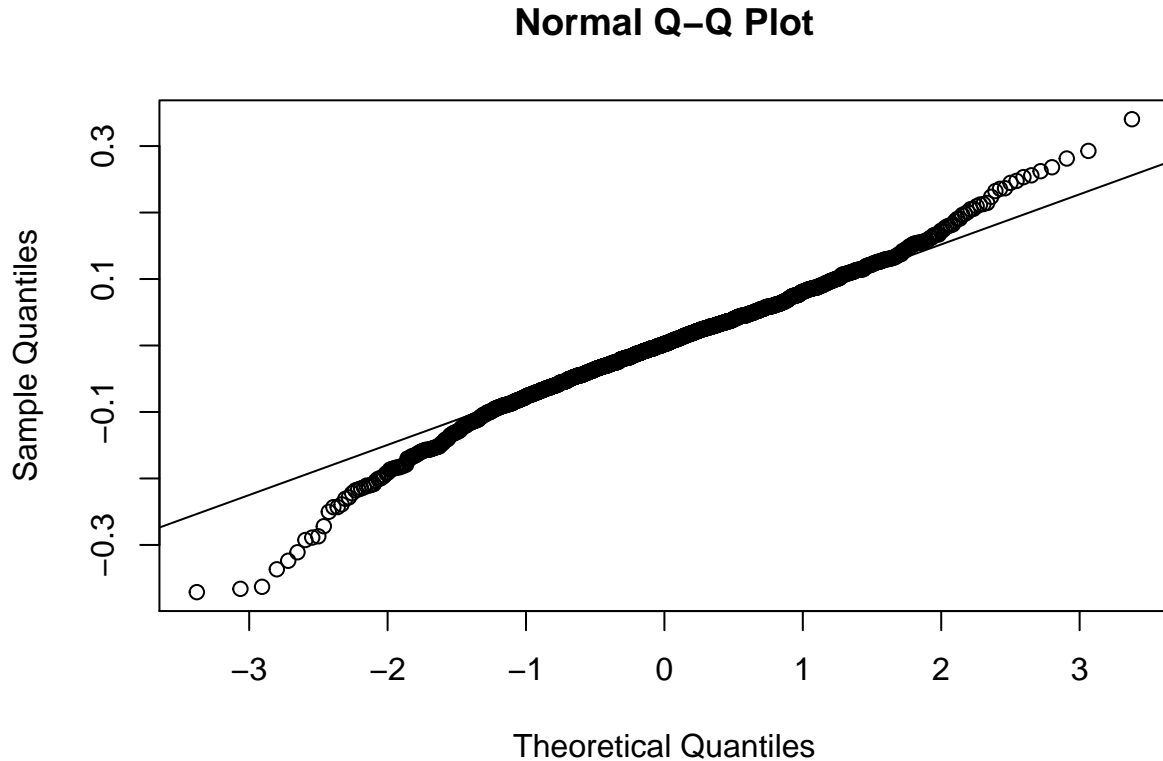

Checking with LASSO if any variables to remove. Although LASSO recommends to delete `bsmtunsf` and `bedroomabvgr`, removing them lowers the R squared so I will keep them. Many of the neighborhoods are in fact significant so I will leave the non-significant levels in the model anyway.

```
lassorefactor <- function(){

  x <- model.matrix(saleprice ~ ., data = house4)[,-1]
  y <- house$saleprice
  train <- sample(1:nrow(x), nrow(x) / 2)
  test <- (-train)
  y.train <- y[train]
  y.test <- y[test]
  grid.lambda <- 10^seq(10, -2, length = 100)
  lasso.model <- glmnet(x, y, alpha = 1, lambda = grid.lambda)
  set.seed(1)
  cv.out <- cv.glmnet(x[train,], y.train, alpha = 1)
  best.lambda <- cv.out$lambda.min
  lasso.pred <- predict(lasso.model, s = best.lambda, newx = x[test,])
  mspe.lasso <- mean((lasso.pred - y.test)^2)
  final.model <- glmnet(x, y, alpha = 1, lambda = best.lambda)
  c <- coef(final.model)
  ind <- which(c==0)
  variables <- row.names(c)[ind]
  return(variables)
```

```
}
```

```
lassorefactor()
```

```
## [1] "neighborhoodBlueste" "neighborhoodBrkSide" "neighborhoodClearCr"
## [4] "neighborhoodCollgCr" "neighborhoodGilbert" "neighborhoodIDOTRR"
## [7] "neighborhoodMeadowV" "neighborhoodMitchel" "neighborhoodNAMES"
## [10] "neighborhoodNPkVill" "neighborhoodNWAmes" "neighborhoodSawyer"
## [13] "neighborhoodSawyerW" "neighborhoodSomerset" "neighborhoodSWISU"
## [16] "neighborhoodTimber" "masvnrtype" "bsmtfinsf2"
## [19] "bsmtunfsf" "bedroomabvgr" "salecondition"
```

Thus, our final model includes the following variables:

```
names(house4)
```

```
## [1] "lotarea" "neighborhood" "condition1" "housestyle"
## [5] "overallqual" "overallcond" "masvnrtype" "masvnrarea"
## [9] "bsmtexposure" "bsmtfinsf1" "bsmtfinsf2" "bsmtunfsf"
## [13] "heatingqc" "grlivarea" "bedroomabvgr" "kitchenabvgr"
## [17] "kitchenqual" "functional" "garagecars" "wooddecksf"
## [21] "salecondition" "saleprice" "soldminusbuilt" "summertime"
## [25] "newtype"
```

```
signif_var <- house4 %>% select(-neighborhood) %>%
  sapply(function(x) abs(cor(x,house4$saleprice)))
```

```
signif_var[signif_var >= 0.5]
```

```
## overallqual grlivarea kitchenqual garagecars saleprice
## 0.8131930 0.7019635 0.6832550 0.6635628 1.0000000
## soldminusbuilt
## 0.5646160
```

```
summary(lm(log(saleprice)~log(grlivarea) +kitchenqual +garagecars + soldminusbuilt + overallqual, data = house4))
```

```
##
```

```
## Call:
```

```
## lm(formula = log(saleprice) ~ log(grlivarea) + kitchenqual +
## garagecars + soldminusbuilt + overallqual, data = house4)
```

```
##
```

```
## Residuals:
```

```
## Min 1Q Median 3Q Max
## -0.72437 -0.08816 0.00840 0.09265 0.50301
```

```
##
```

```
## Coefficients:
```

```
## Estimate Std. Error t value Pr(>|t|)
## (Intercept) 8.3094361 0.0983140 84.52 <2e-16 ***
## log(grlivarea) 0.3975474 0.0155102 25.63 <2e-16 ***
## kitchenqual 0.0795455 0.0081666 9.74 <2e-16 ***
## garagecars 0.0741018 0.0070731 10.48 <2e-16 ***
## soldminusbuilt -0.0022851 0.0001722 -13.27 <2e-16 ***
## overallqual 0.0823895 0.0047551 17.33 <2e-16 ***
```

```
## ---
```

```
## Signif. codes: 0 '***' 0.001 '**' 0.01 '*' 0.05 '.' 0.1 ' ' 1
```

```
##
```

```
## Residual standard error: 0.1476 on 1454 degrees of freedom
```

```
## Multiple R-squared:  0.8389, Adjusted R-squared:  0.8383
## F-statistic: 1514 on 5 and 1454 DF,  p-value: < 2.2e-16
```

Part I: Explanatory Modeling

TASK 1

The five most relevant features that are most relevant in determining a house's sale price are `overallqual`, `grlivarea`, `kitchenqual`, `garagecars`, and `soldminusbuilt`. The fifth variable, `soldminusbuilt` is equal to `yearsold - yearbuilt`.

TASK 2

```
morty<- read_csv("Morty.txt", col_types = cols())
```

```
## Warning: Missing column names filled in: 'X1' [1]
```

Function to transform TEST DATA accordingly. Please run the function `transform()` and provide the data frame to the argument

```
transform <- function(df){
  names(df) <- tolower(names(df))

  df[is.na(df)] <- "None"
  df$soldminusbuilt <- (df$yrsold - df$yearbuilt)
  df$summertime <- (df$mosold %in% 5:7) * 1
  df$newtype <- (df$saletype == 'New') * 1

  df %<>% select(intersect(names(df), names(house4)))

  df$condition1 <- (df$condition1 == "Artery" |
    df$condition1 == "Feedr" | df$condition1 == "RR Ae")*1

  df$housestyle <- (df$housestyle == "2Story" |
    df$housestyle == "2.5Fin")*1

  df$masvnrtype <- (df$masvnrtype != "None") * 1
  df$bsmtexposure <- (df$bsmtexposure == "Gd") * 1

  df$heatingqc <- as.numeric(factor(df$heatingqc,
    levels = c("Po", "Fa", "TA", "Gd", "Ex"), labels = 1:5))

  df$kitchenqual <- as.numeric(factor(df$kitchenqual,
    levels = c("Po", "Fa", "TA", "Gd", "Ex"), labels = 1:5))

  df$functional <- (df$functional == "Typ") * 1
  df$salecondition <- (df$salecondition == "Normal") * 1
```

```

  return(df)
}
morty2 <- transform(morty)

```

morty2 is our transformed data. Note that it only has 25 variables

```

confmorty <- exp(predict(endmodel, morty2, interval = "confidence", level = 0.95))
confmorty %>% knitr::kable()

```

	fit	lwr	upr
	184739.7	173389	196833.6

```

morty_stat <- as.numeric(unlist(morty2))

```

```
## Warning: NAs introduced by coercion
```

```

names(morty_stat) <- names(morty2)
mean_stat <- sapply(house4, function(x) round(mean(x)))

```

```
## Warning in mean.default(x): argument is not numeric or logical: returning
## NA
```

```

morty_stat

```

```

##      lotarea  neighborhood  condition1  housestyle  overallqual
##      14115      NA          0          0          5
##      overallcond  masvnrtype  masvnrarea  bsmtexposure  bsmtfinsf1
##      5          0          0          0          732
##      bsmtfinsf2  bsmtunfsf  heatingqc  grlivarea  bedroomabvgr
##      0          64          5          1362          1
##      kitchenabvgr  kitchenqual  functional  garagecars  wooddecksf
##      1          3          1          2          40
##      salecondition  saleprice  soldminusbuilt  summertime  newtype
##      1          143000          16          0          0

```

```

mean_stat

```

```

##      lotarea  neighborhood  condition1  housestyle  overallqual
##      10517      NA          0          0          6
##      overallcond  masvnrtype  masvnrarea  bsmtexposure  bsmtfinsf1
##      6          0          103          0          444
##      bsmtfinsf2  bsmtunfsf  heatingqc  grlivarea  bedroomabvgr
##      47          567          1          1515          3
##      kitchenabvgr  kitchenqual  functional  garagecars  wooddecksf
##      1          4          1          2          94
##      salecondition  saleprice  soldminusbuilt  summertime  newtype
##      1          179378          37          0          0

```

```

(improve <- house4 %>% select(-neighborhood, -saleprice, -soldminusbuilt) %>% sapply(function(x) abs(co

```

```

##      overallqual  grlivarea  kitchenqual  garagecars  masvnrarea
##      0.81319300  0.70196347  0.68325498  0.66356282  0.48261046
##      heatingqc  masvnrtype  bsmtfinsf1  newtype  wooddecksf
##      0.45069412  0.40311867  0.38828646  0.38105085  0.31656892
##      bsmtexposure  housestyle  bsmtunfsf  lotarea  condition1
##      0.28015224  0.26116978  0.23805450  0.20966584  0.18606670

```

```
## bedroomabvgr salecondition kitchenabvgr functional overallcond
## 0.16361002 0.15844047 0.14065425 0.12616236 0.10969565
## summertime bsmtfinsf2
## 0.03825775 0.02125635
```

overallqual and kitchenqual are in the top 3 for correlation with saleprice. grlivarea is difficult/nearly impossible to improve so we will move on to the next variable. masvnrarea and heatingqc are fairly close. We see that Morty already has the highest heatingqc possible so masvnrarea should be considered.

Conclusion: Morty should try to improve the overallqual, which is the overall material and finish of the house. This may mean repainting some areas on the house to make it look nicer. Morty currently has a rating of 5 out 10 (average rating is 6 out of 10) so there is definitely room for improvement. Next, Morty should improve kitchenqual, which is kitchen quality. Maybe, there can be some remodeling done or fixing anything that is either old, or possibly broken. Morty has a rating of 3 out of 5 compared to the average rating of 4 out of 5. Finally, he can increase masvnrarea. He currently does not have a masonry veneer so he can consider building one because he might be able to make a profit from it.

We believe that Morty can sell his house for a *maximum* of 196,833.6. The 95 % confidence interval goes from 184,739.7 to 196,833.6 with an average of 173,389.

Part II Predictive Modeling

Ordinary Least Squares

```
set.seed(1)
train <- sample(nrow(house)*.8)
test <- (-train)
housetrain <- house4[train,]
housetest <- house4[test,]

OLS_train <- lm(log(saleprice) ~ log(lotarea) +
               sqrt(bsmtfinsf1)+log(grlivarea) + . -
               lotarea - bsmtfinsf1 - grlivarea,
               data = housetrain[-influenceindex,])
OLS_predict <- exp(predict(OLS_train, housetest,
                          interval = "prediction", level = 0.95, type = "response"))
prettyNum(mean((OLS_predict[,1] - housetrain$saleprice)^2), big.mark = ",")
```

```
## [1] "10,670,105,697"
```

```
GLS_train <- glm(log(saleprice) ~ log(lotarea) +
                sqrt(bsmtfinsf1)+log(grlivarea) + . -
                lotarea - bsmtfinsf1 - grlivarea,
                data = housetrain[-influenceindex,])
GLS_predict <- exp(predict(GLS_train, housetest,
                          interval = "prediction", level = 0.95, type = "response"))
prettyNum(mean((GLS_predict[,1] - housetrain$saleprice)^2), big.mark = ",")
```

```
## [1] "10,670,105,697"
```

Define the function to generate models for ridge, lasso and elastic net

```
model_func <- function(input_data, input_alpha){
  set.seed(1)
  x <- model.matrix(saleprice ~ ., data = input_data)[-1]
```

```

y <- house$saleprice
train <- sample(nrow(house)*.8)
test <- (-train)
y.train <- y[train]
y.test <- y[test]
grid.lambda <- 10^seq(10, -2, length = 100)
model.train <- glmnet(x[train, ], y.train, alpha = input_alpha, lambda = grid.lambda)
set.seed(1)
cv.out <- cv.glmnet(x[train,], y.train, alpha = input_alpha)
best.lambda <- cv.out$lambda.min
pred <- predict(model.train, s = best.lambda, newx = x[test,])
mspe <- mean((pred - y.test)^2)
final.model <- glmnet(x, y, alpha = input_alpha, lambda = best.lambda)
c <- coef(final.model)
return(c(mspe, final.model))
}

```

Ridge regression model, λ set at 0

```

ridge_result <- model_func(house4,0)
ridge_mspe <- ridge_result[1]
prettyNum(ridge_mspe, big.mark = ",")

```

```

##
## "1,769,352,685"

```

lasso regression model, lambda set at 1

```

lasso_result <- model_func(house4,1)
lasso_mspe <- lasso_result[1]
prettyNum(lasso_mspe, big.mark = ",")

```

```

##
## "1,880,105,933"

```

elastic net regression, lambda set at 0.5

```

elastic_result <- model_func(house4,0.5)
elastic_mspe <- elastic_result[1]
prettyNum(elastic_mspe, big.mark = ",")

```

```

##
## "1,875,864,966"

```

λ is chosen to determine whether we are performing Ridge ($\lambda = 0$), Lasso ($\lambda = 1$), Elastic Net ($\lambda = 0.5$). The tuning parameters in the respective models is chosen via cross validation after trying 100 different ones.

```

help(cv.glmnet)

```

Justification

Our ridge model performed the best and has the lowest MSPE. This makes sense, given that our data is very sparse, containing many zeros.

```
countzero <- function(x){
  sum(x==0)
}
sapply(house4, function(x) countzero(x))
```

```
##      lotarea  neighborhood  condition1  housestyle  overallqual
##      0        0            1320        1007        0
## overallcond  masvnrarea  masvnrarea  bsmtexposure  bsmtfinsf1
##      0        872        869        1326        467
## bsmtfinsf2  bsmtunfsf  heatingqc  grlivarea  bedroomabvgr
##      1293        118        719        0        6
## kitchenabvgr  kitchenqual  functional  garagecars  wooddecksf
##      1        0        100        81        761
## salecondition  saleprice  soldminusbuilt  summertime  newtype
##      262        0        64        769        1338
```

Many of these are boolean variables, but we can see that `masvnrarea`, `bsmtfinsf`, `bsmtfinsf2`, and `bsmtunfsf` all have zeros. We chose all of these variables because we found them to be statistically significant in our model.

```
house4 %>% select(-neighborhood) %>% sapply(function(x) abs(cor(x, house4$saleprice))) %>% sort(decreas
```

```
##      saleprice  overallqual  grlivarea  kitchenqual  garagecars
##      1.00000000  0.81319300  0.70196347  0.68325498  0.66356282
## soldminusbuilt  masvnrarea  heatingqc  masvnrtype  bsmtfinsf1
##      0.56461597  0.48261046  0.45069412  0.40311867  0.38828646
##      newtype  wooddecksf  bsmtexposure  housestyle  bsmtunfsf
##      0.38105085  0.31656892  0.28015224  0.26116978  0.23805450
##      lotarea  condition1  bedroomabvgr  salecondition  kitchenabvgr
##      0.20966584  0.18606670  0.16361002  0.15844047  0.14065425
##      functional  overallcond  summertime  bsmtfinsf2
##      0.12616236  0.10969565  0.03825775  0.02125635
```

Some variables have more impact than others but nevertheless they are statistically significant in our model so we keep them. Three of these variables are generated from other variables. We created `summertime` partly because of common sense and after plotting the distribution of houses being sold by month, we saw a peak in the summer months. This makes sense practically because people tend to have more time during the summer and thus are more likely to buy a house. Secondly, we created `soldminusbuilt` because we felt that the difference between `yearsold` and `yearbuilt` is more useful together rather than seperately. The third variable we created is a boolean for `saletype` to indicate a house that was “just constructed and sold”, which from a common sense perspective, can make the house go much higher. Many of the variables are condensed into smaller levels. Many levels have very few observations so we feel they are not significant enough to have their own level. This helps to prevent overfitting when predicting new values. We chose to not have too many variables in our model to also prevent overfitting. We confirmed the validity of our variables through LASSO regression. Lasso didn’t really eliminate any variables, which supports the statistical signifiacnce of our predictors.

Exploratory Data Analysis

```
p1 <- house4 %>% ggplot(aes(x=grlivarea, y = saleprice,
  color = factor(kitchenqual))) + geom_point(alpha = 0.5) +
  xlab("Above grade (ground) living area square feet") +
  ylab("Price of the house") + scale_y_continuous(label=scales::comma) +
  labs(colour = "Kitchen Quality") +
  theme(legend.title = element_text(size = 10, face = "bold"))
p2 <- house4 %>% ggplot(aes(x=log(grlivarea), y = log(saleprice),
```

```

        color = factor(kitchenqual))) + geom_point(alpha = 0.5) +
  xlab("Above grade (ground) living area square feet") +
  ylab("Price of the house") + scale_y_continuous(label=scales::comma) +
  labs(colour = "Kitchen Quality") +
  theme(legend.title = element_text(size = 10, face = "bold"))
library(grid)
library(gridExtra)



```

```

##
## Attaching package: 'gridExtra'
## The following object is masked from 'package:Hmisc':
##
##   combine
## The following object is masked from 'package:dplyr':
##
##   combine

```


```
grid.arrange(p1,p2,ncol=1)
```

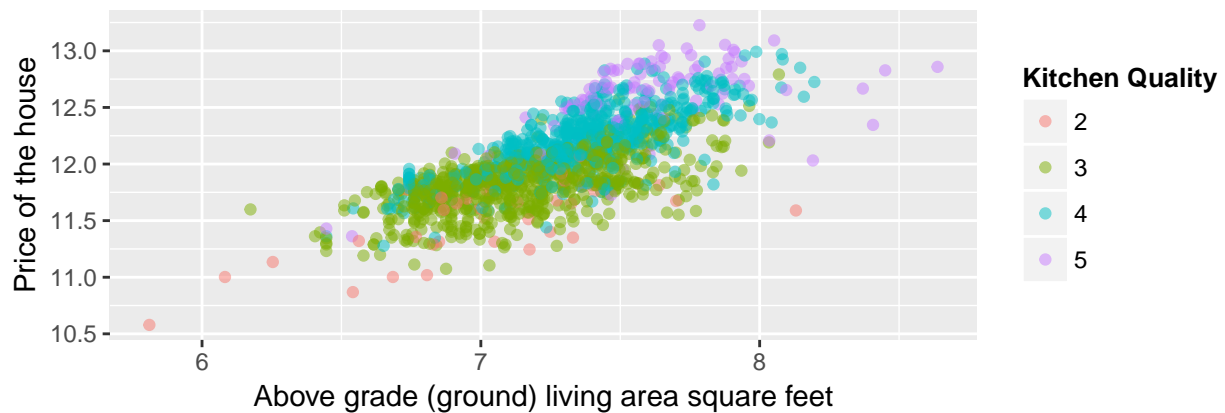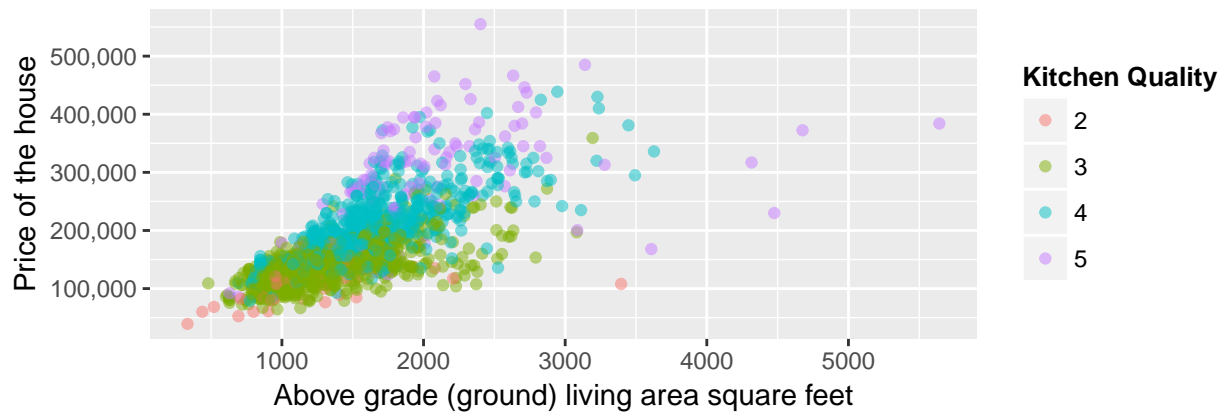

```

house0%>% ggplot(aes(x=yearbuilt, y = saleprice,
                     color = factor(roofstyle))) + geom_point(alpha = 0.5) +
  xlab("Built Year") +
  ylab("Price of the house") + scale_y_continuous(label=scales::comma) +
  labs(colour = "Type of Roof") +
  theme(legend.title = element_text(size = 10, face = "bold"))

```
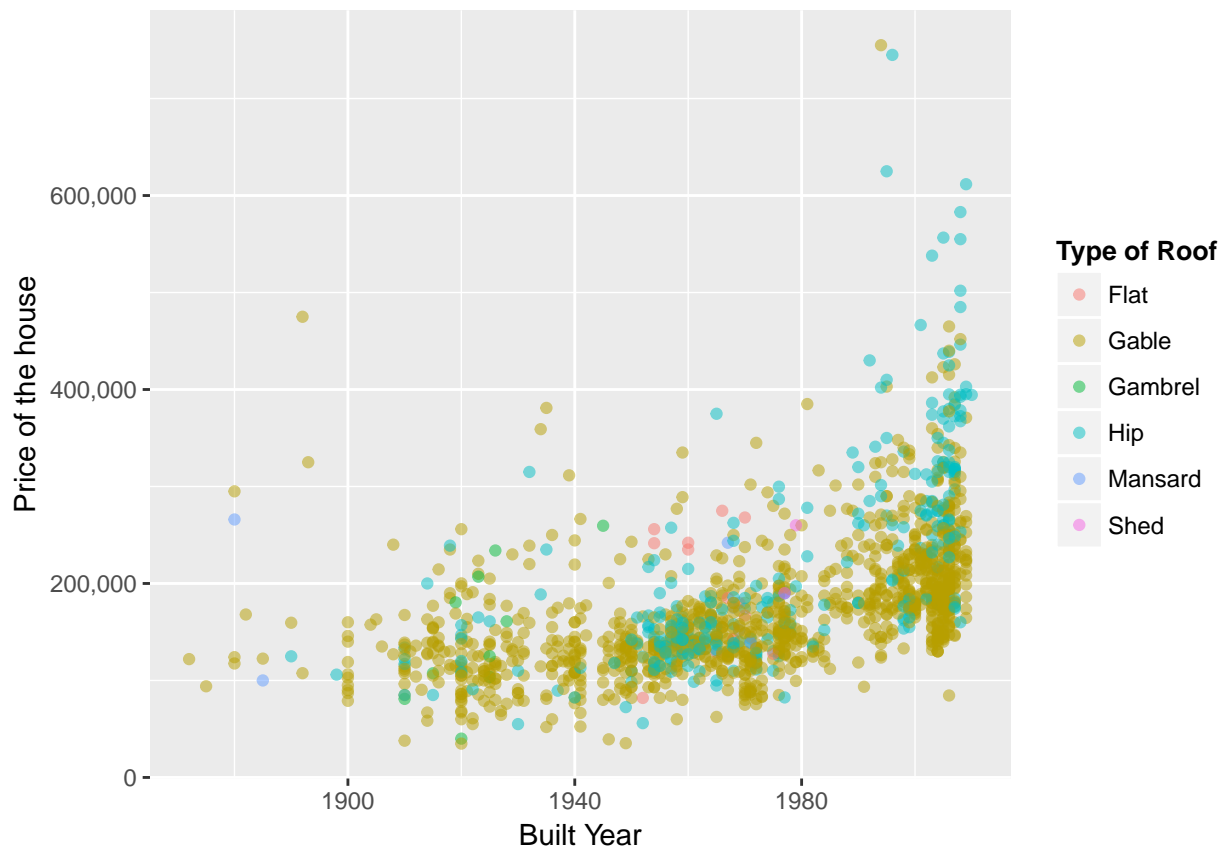
```
ggsave("plot2.png")
```

```
## Saving 6.5 x 4.5 in image
```

```
Getting all of the numeric variables.
```

```
house_numeric <- house4[,sapply(house4,function(x) is.numeric(x))]
```

```
house_numeric %<>% select(saleprice, everything())
```

```
#install.packages("ggcorrplot")
```

```
library(ggcorrplot)
```

```
cor_matrix <- cor(house_numeric)
```

```
ggcorrplot(cor_matrix, type = "lower", outline.col = "white", insig = "blank")
```

