


Box Plots

Noratiqah Mohd Ariff


Basic Box Plot

```
ggplot(birthwt,aes(x=factor(race),y=bwt))+geom_boxplot()
```

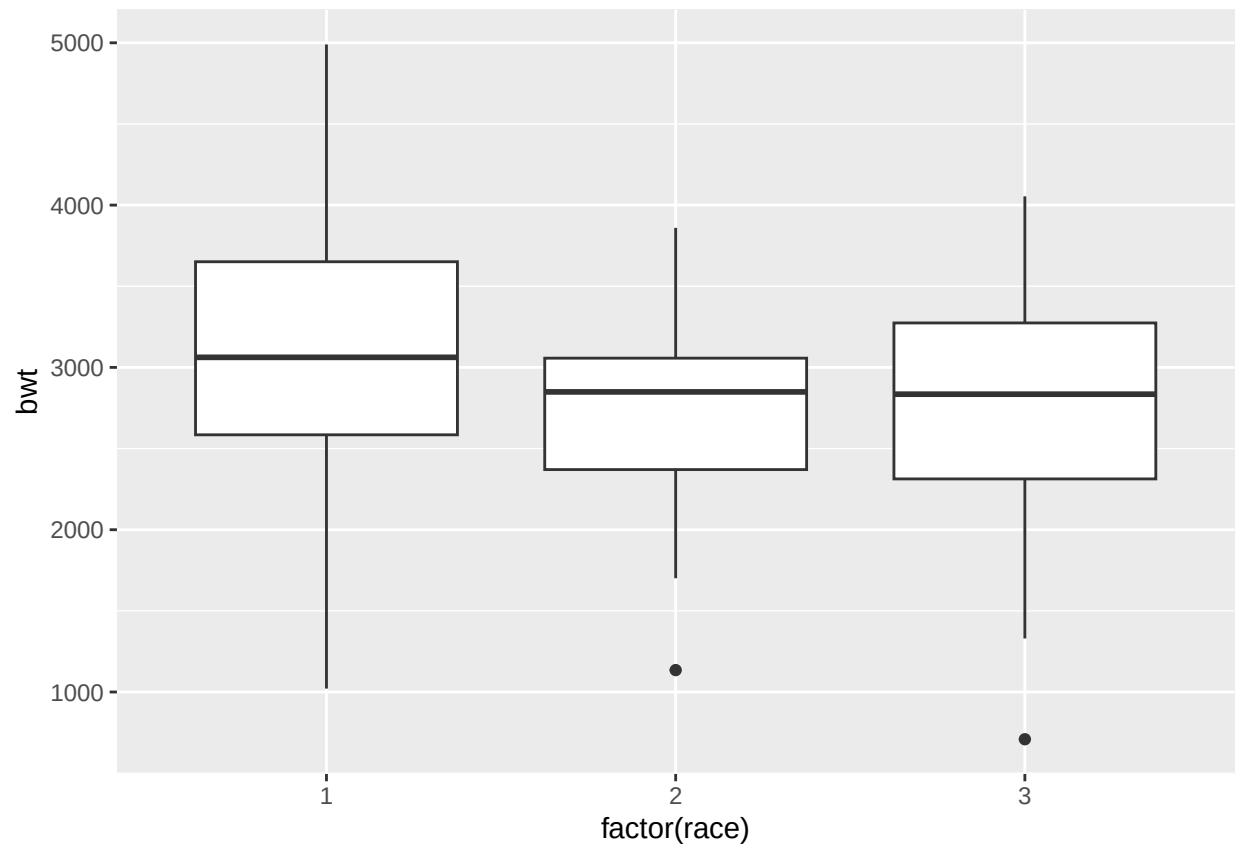


Setting Outliers

```
ggplot(birthwt,aes(x=factor(race),y=bwt))+geom_boxplot(coef=2)
```

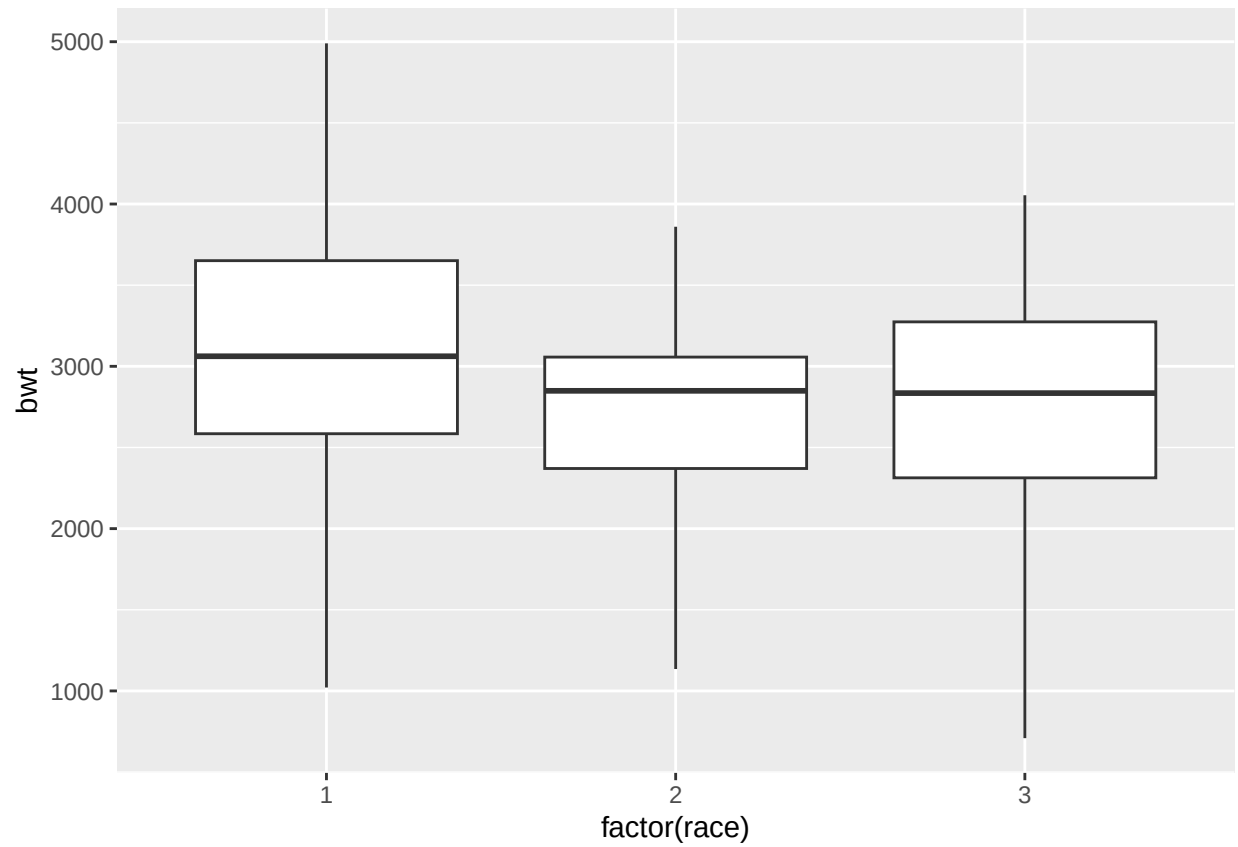


Single Box Plot

```
ggplot(birthwt,aes(x=1,y=bwt))+geom_boxplot()
```

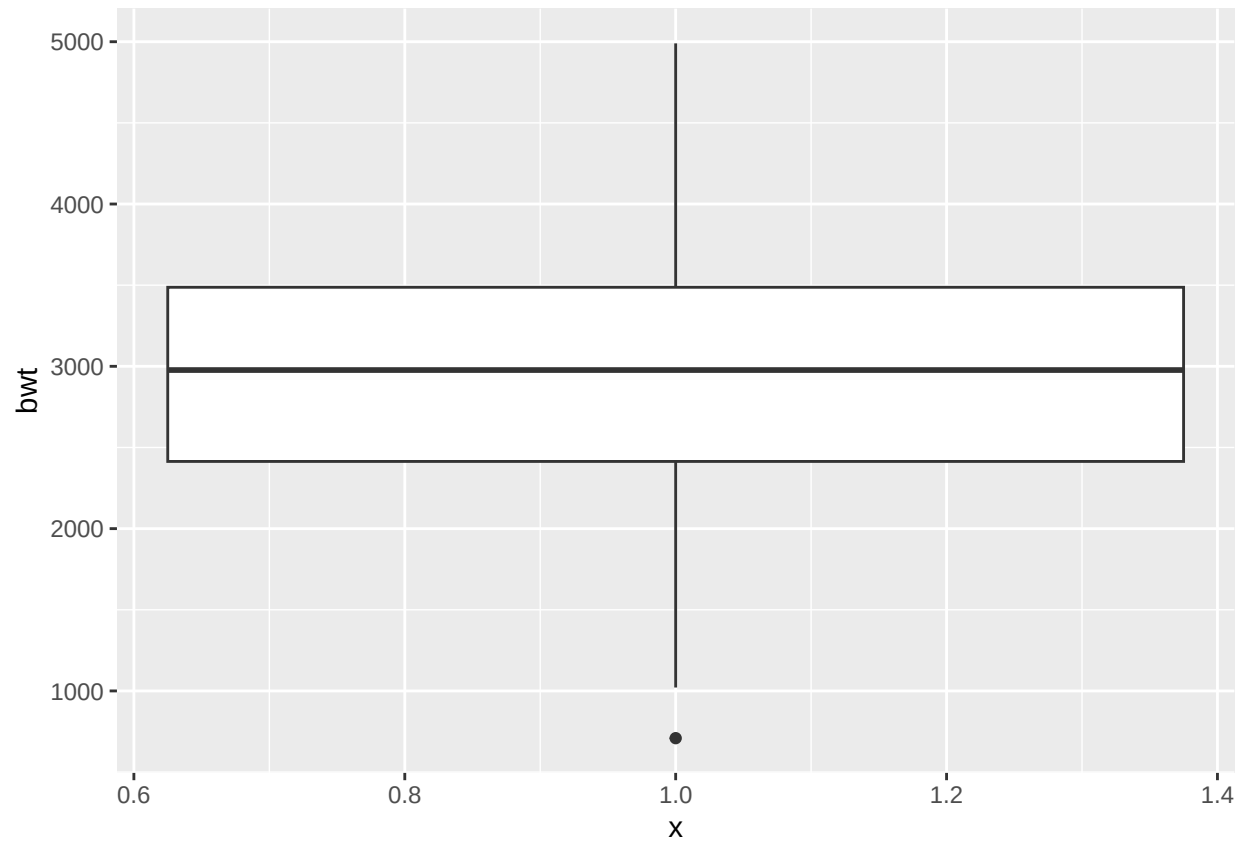


Notched Box Plot

```
ggplot(birthwt,aes(x=factor(race),y=bwt))+geom_boxplot(notch=TRUE)
```

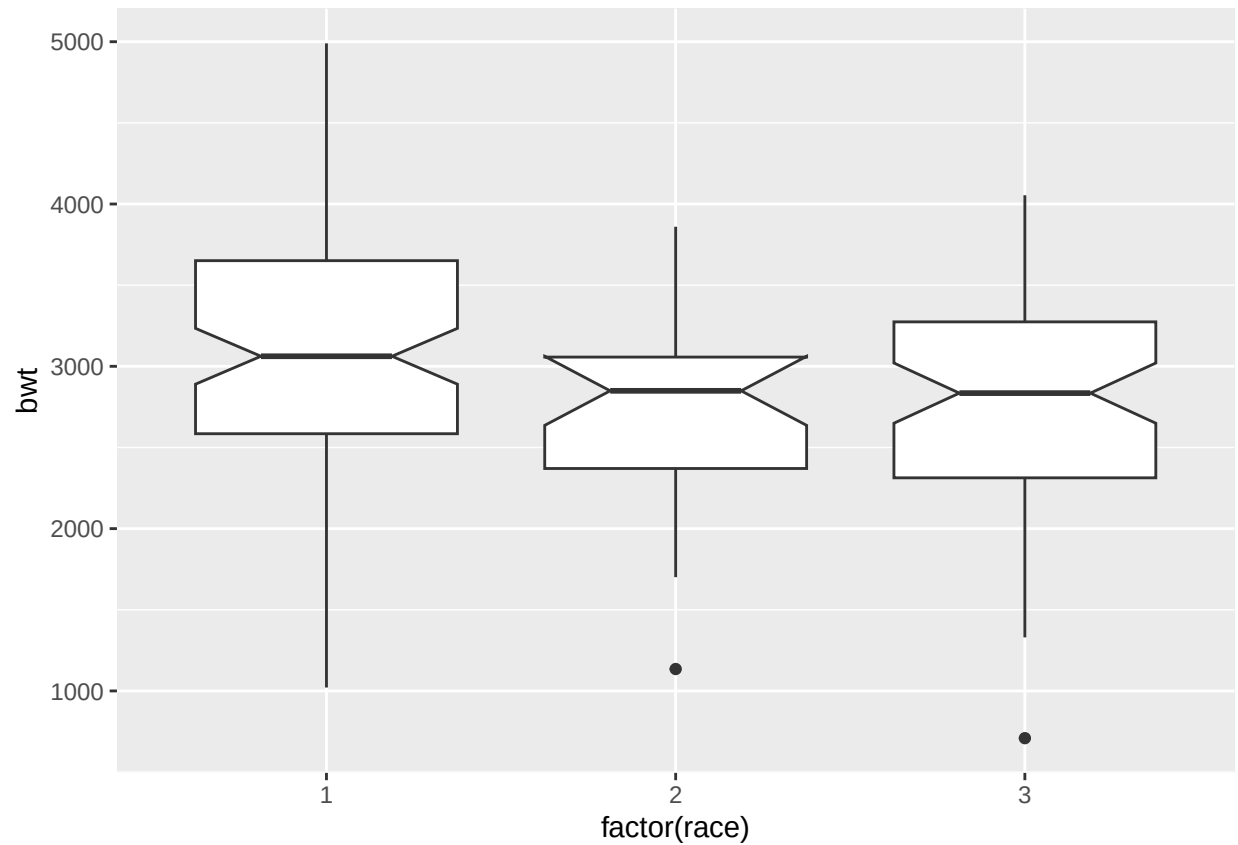


Add Markers for Means

```
ggplot(birthwt,aes(x=factor(race),y=bwt))+  
  geom_boxplot()+  
  stat_summary(fun.y="mean",geom="point",shape=23,size=3,fill="skyblue")
```

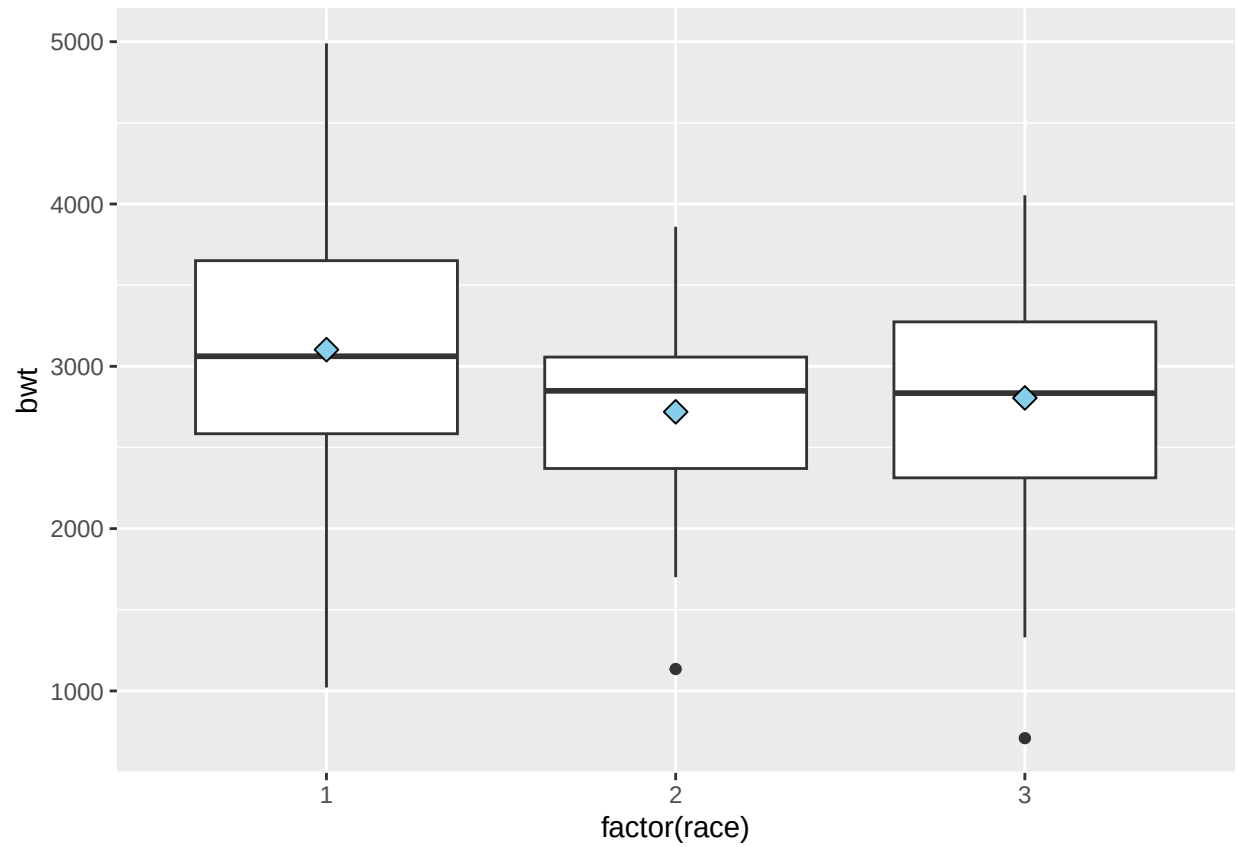


Grouped Box Plots

```
ggplot(birthwt,aes(x=factor(race),y=bwt,fill=factor(smoke)))+  
geom_boxplot()
```

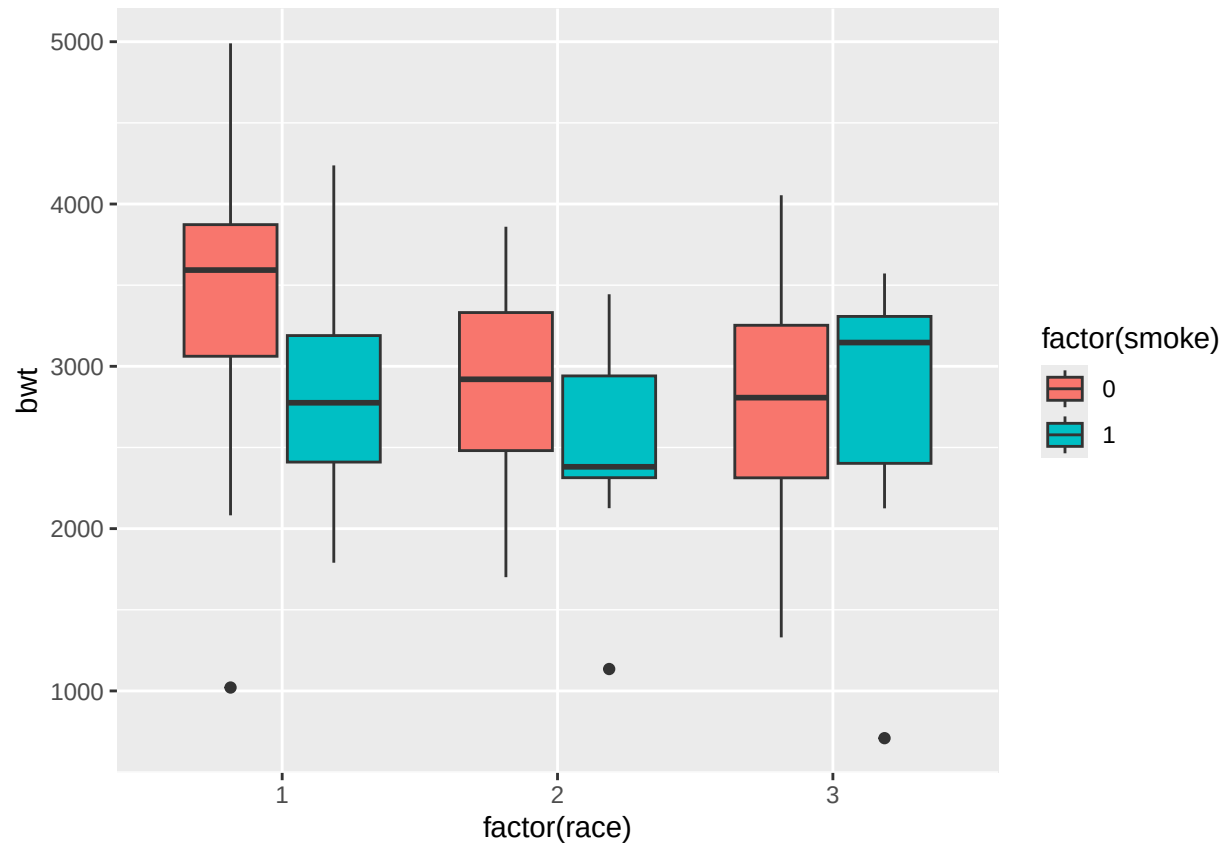

```
ggplot(birthwt,aes(x=factor(race),y=bwt,fill=factor(smoke)))+  
geom_boxplot(width=0.5,position=position_dodge(0.7))
```

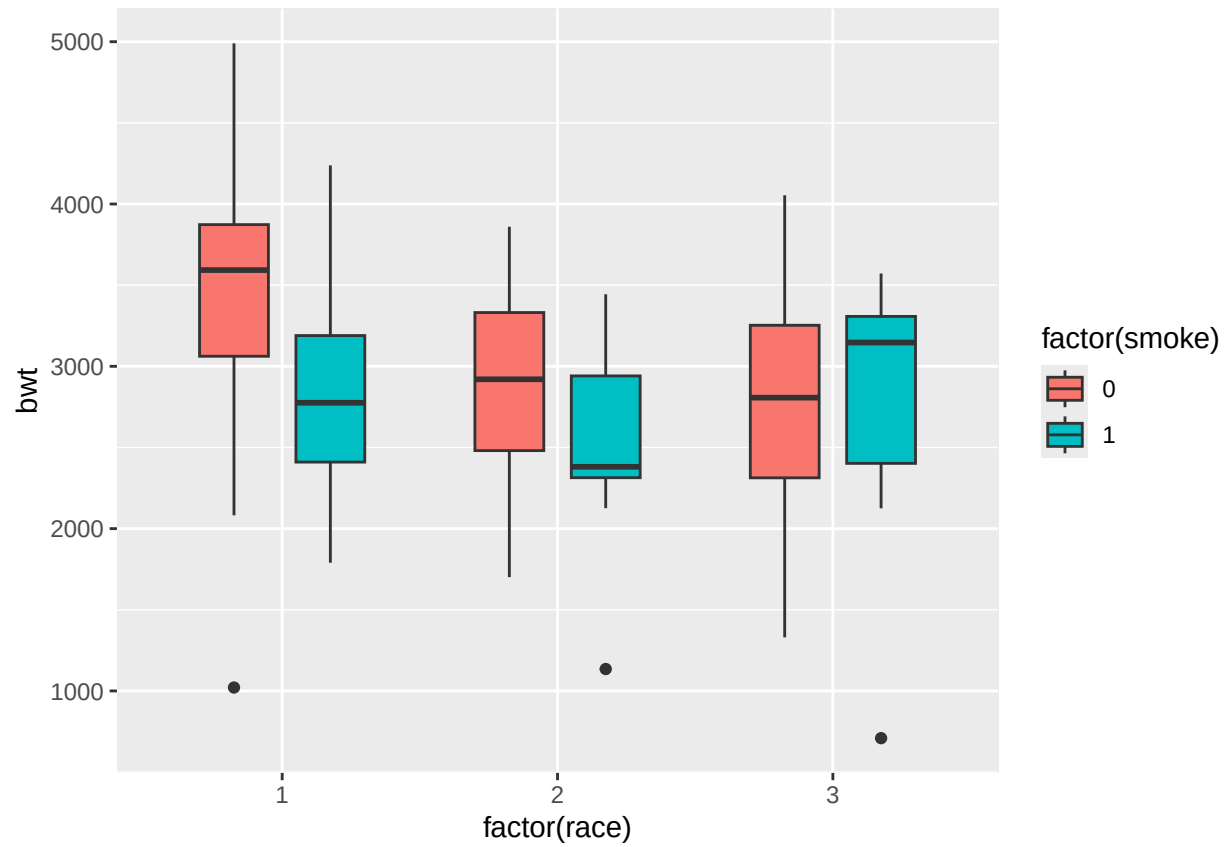

Violion Plots

```
ggplot(birthwt,aes(x=factor(race),y=bwt))+  
geom_violin()
```

