


ROLANDO JR B. GONZALES

BSIT-4 BLOCK 1

COMPILATION LABORATORY


I AM POOR

- void main() => runApp(MyApp()); The main function by itself is the Dart entry point of an application. What makes the Flutter application take the scene is the runApp function called by passing a widget as a parameter, which will be the root widget of the application (the application itself).

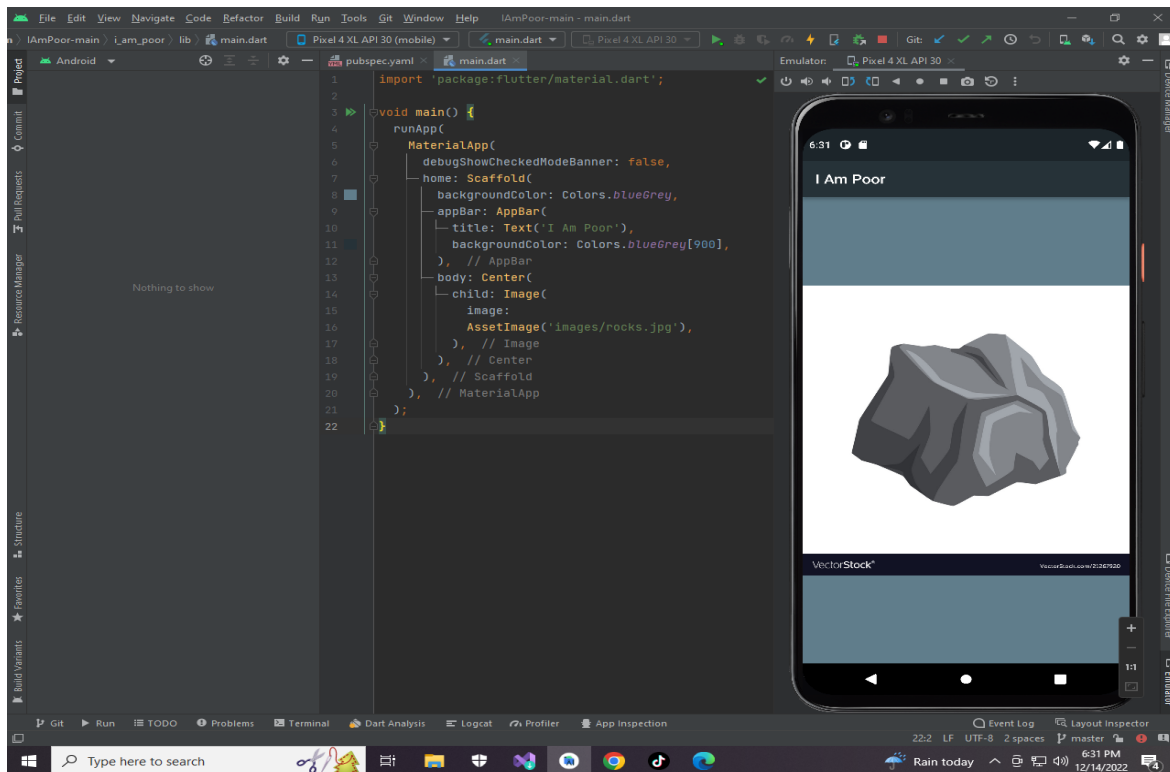


I AM RICH

- An app bar consists of a toolbar and potentially other widgets, such as a TabBar and a FlexibleSpaceBar. App bars typically expose one or more common actions with IconButton which are optionally followed by a PopupMenuButton for less common operations (sometimes called the "overflow menu").

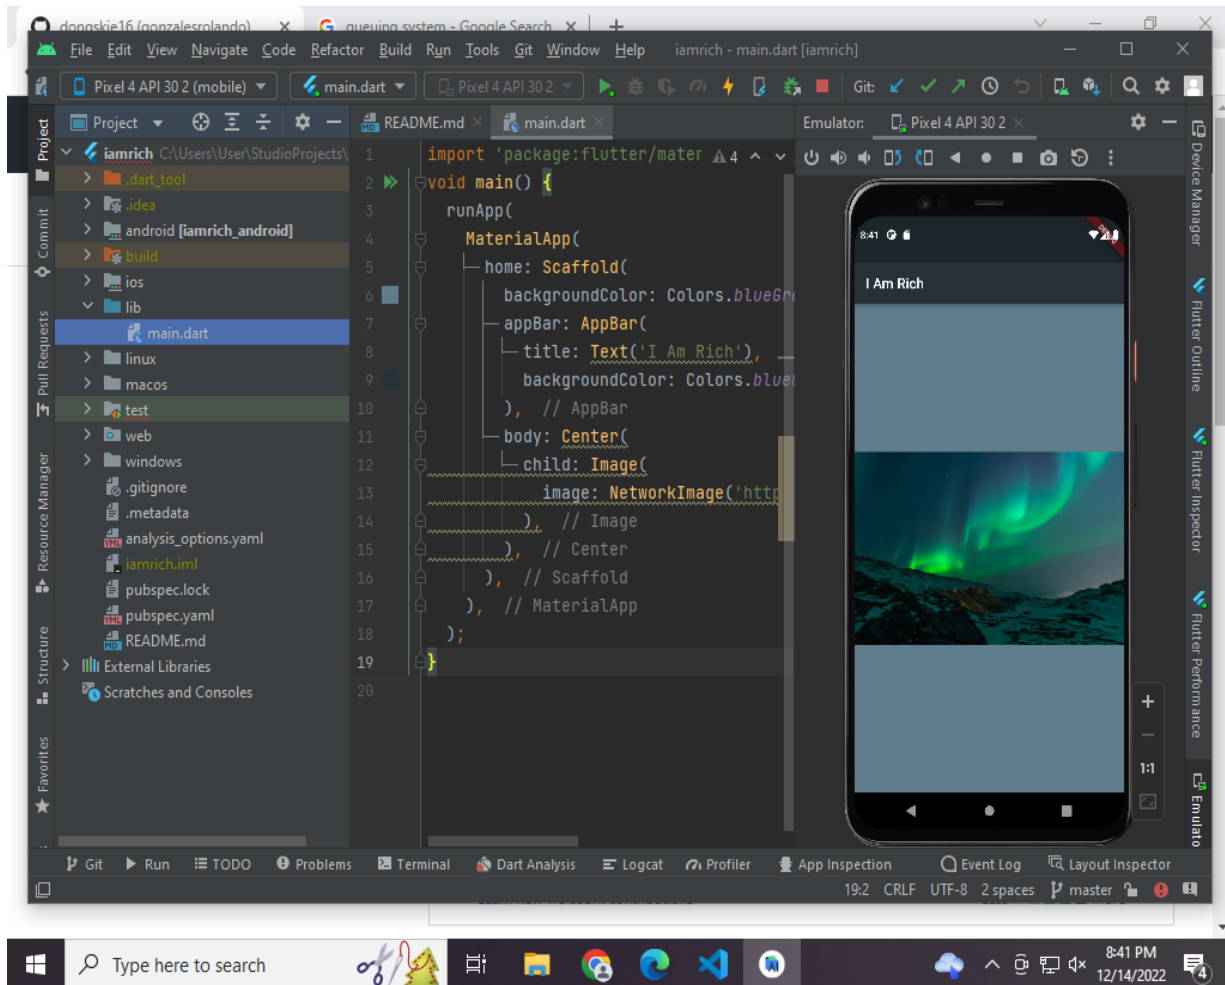

PHILCST QUEUE SYSTEM

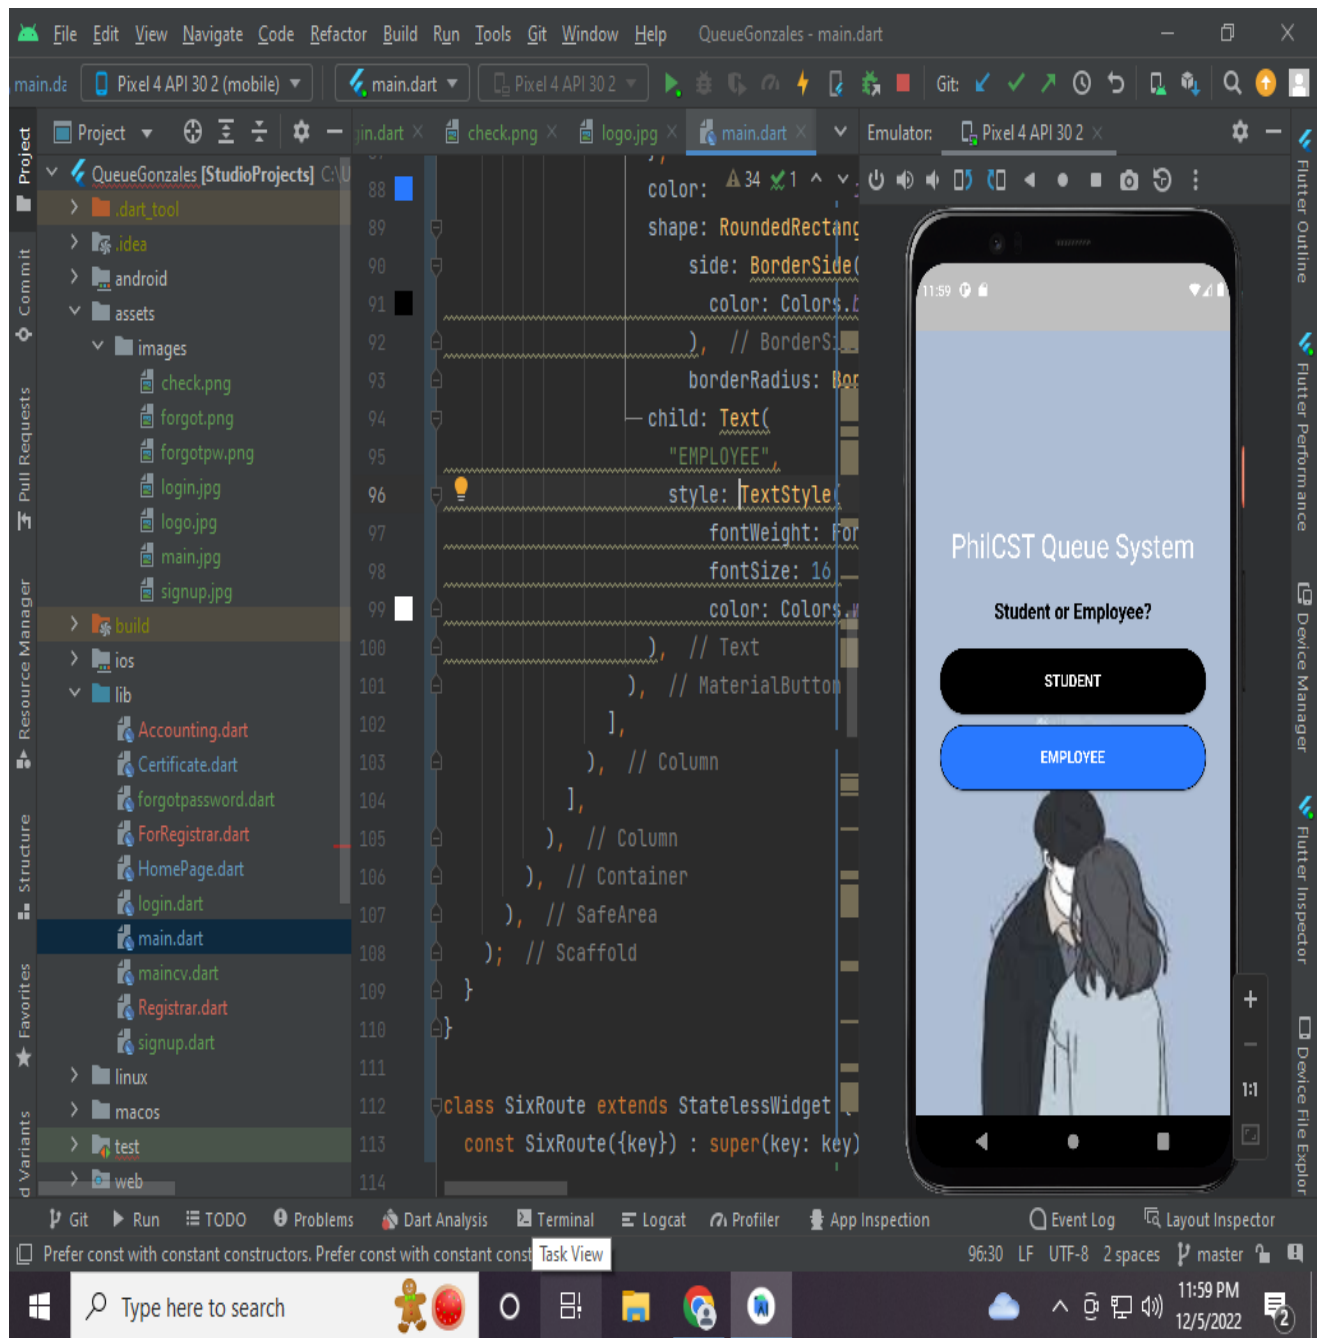

CURRICILUM VITAE

