

# Java Server Pages

**JSP Life Cycle**

**JSP Elements**

**JSP Directives**

**JSP Implicit Objects**

**Techniques:**


**MVC Design Pattern**

**Dynamic DB Connection**

# Review

- **How to deploy the Web Application to Web Server?**
  - File and Directory Structures (WEB-INF and others → **war** file)
  - The Servlet Container, The Servlet Context, The Servlet Config
    - Parameters
- **How to transfer from resources to others with/without data/objects?**
  - **Attributes**
    - Vs. Parameters, Vs. Variables
    - Request, Session, and Context Scope (Memory Segment)
  - **Request Dispatcher**
    - forward, include
    - Vs. response.sendRedirect
  - Break down structure component in building web application
- **Some concepts**
  - **Filter**
    - Filter, Filter Chain, Filter with Wrapper class
    - Vs. Request Dispatcher


# Review

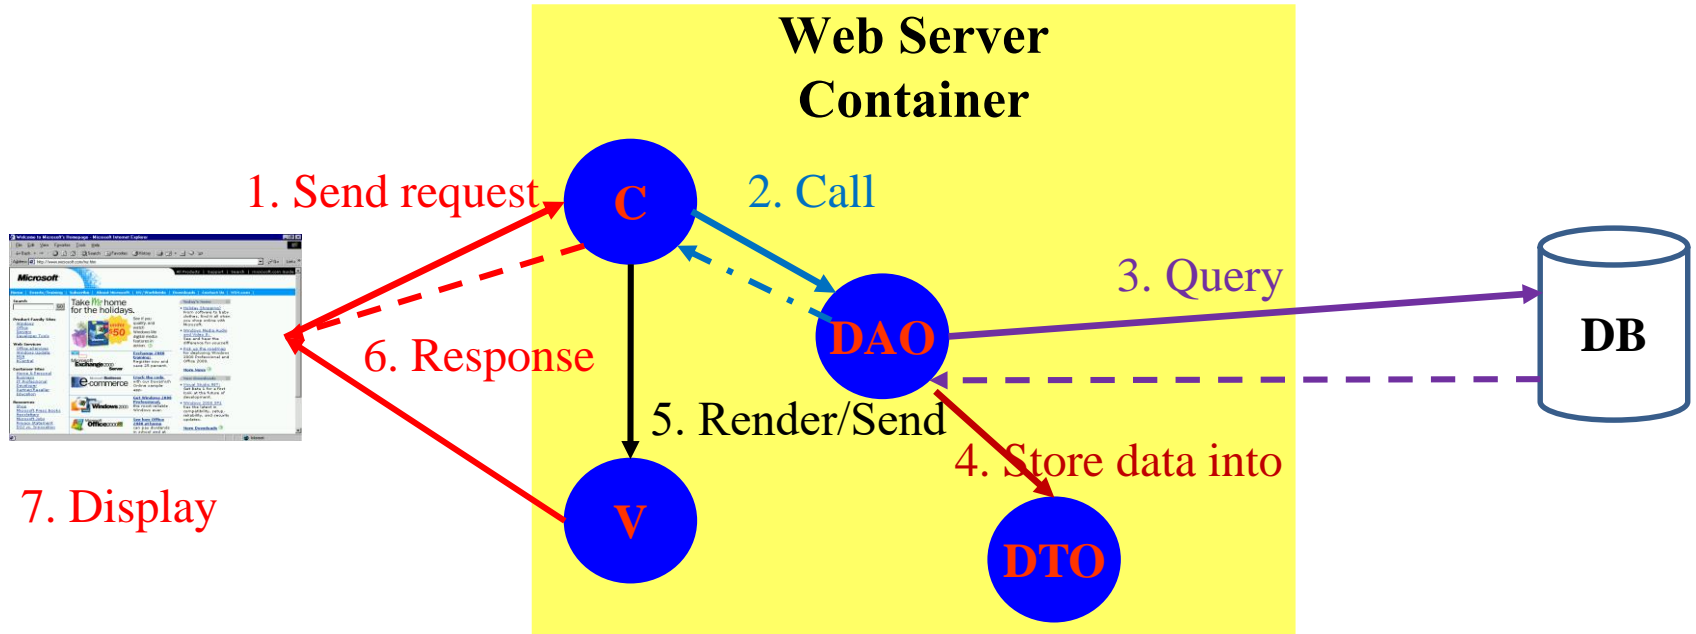

# Objectives

- **How to build web application applying MVC model using Servlet, JSP + Scripting Element**
  - MVC Model
  - JSP vs. Servlet
  - JSP mechanism, syntax
  - How to use JSP combining the Servlets and Java objects
  - How to connect DB using Dynamic connection or DataSource

# Objectives

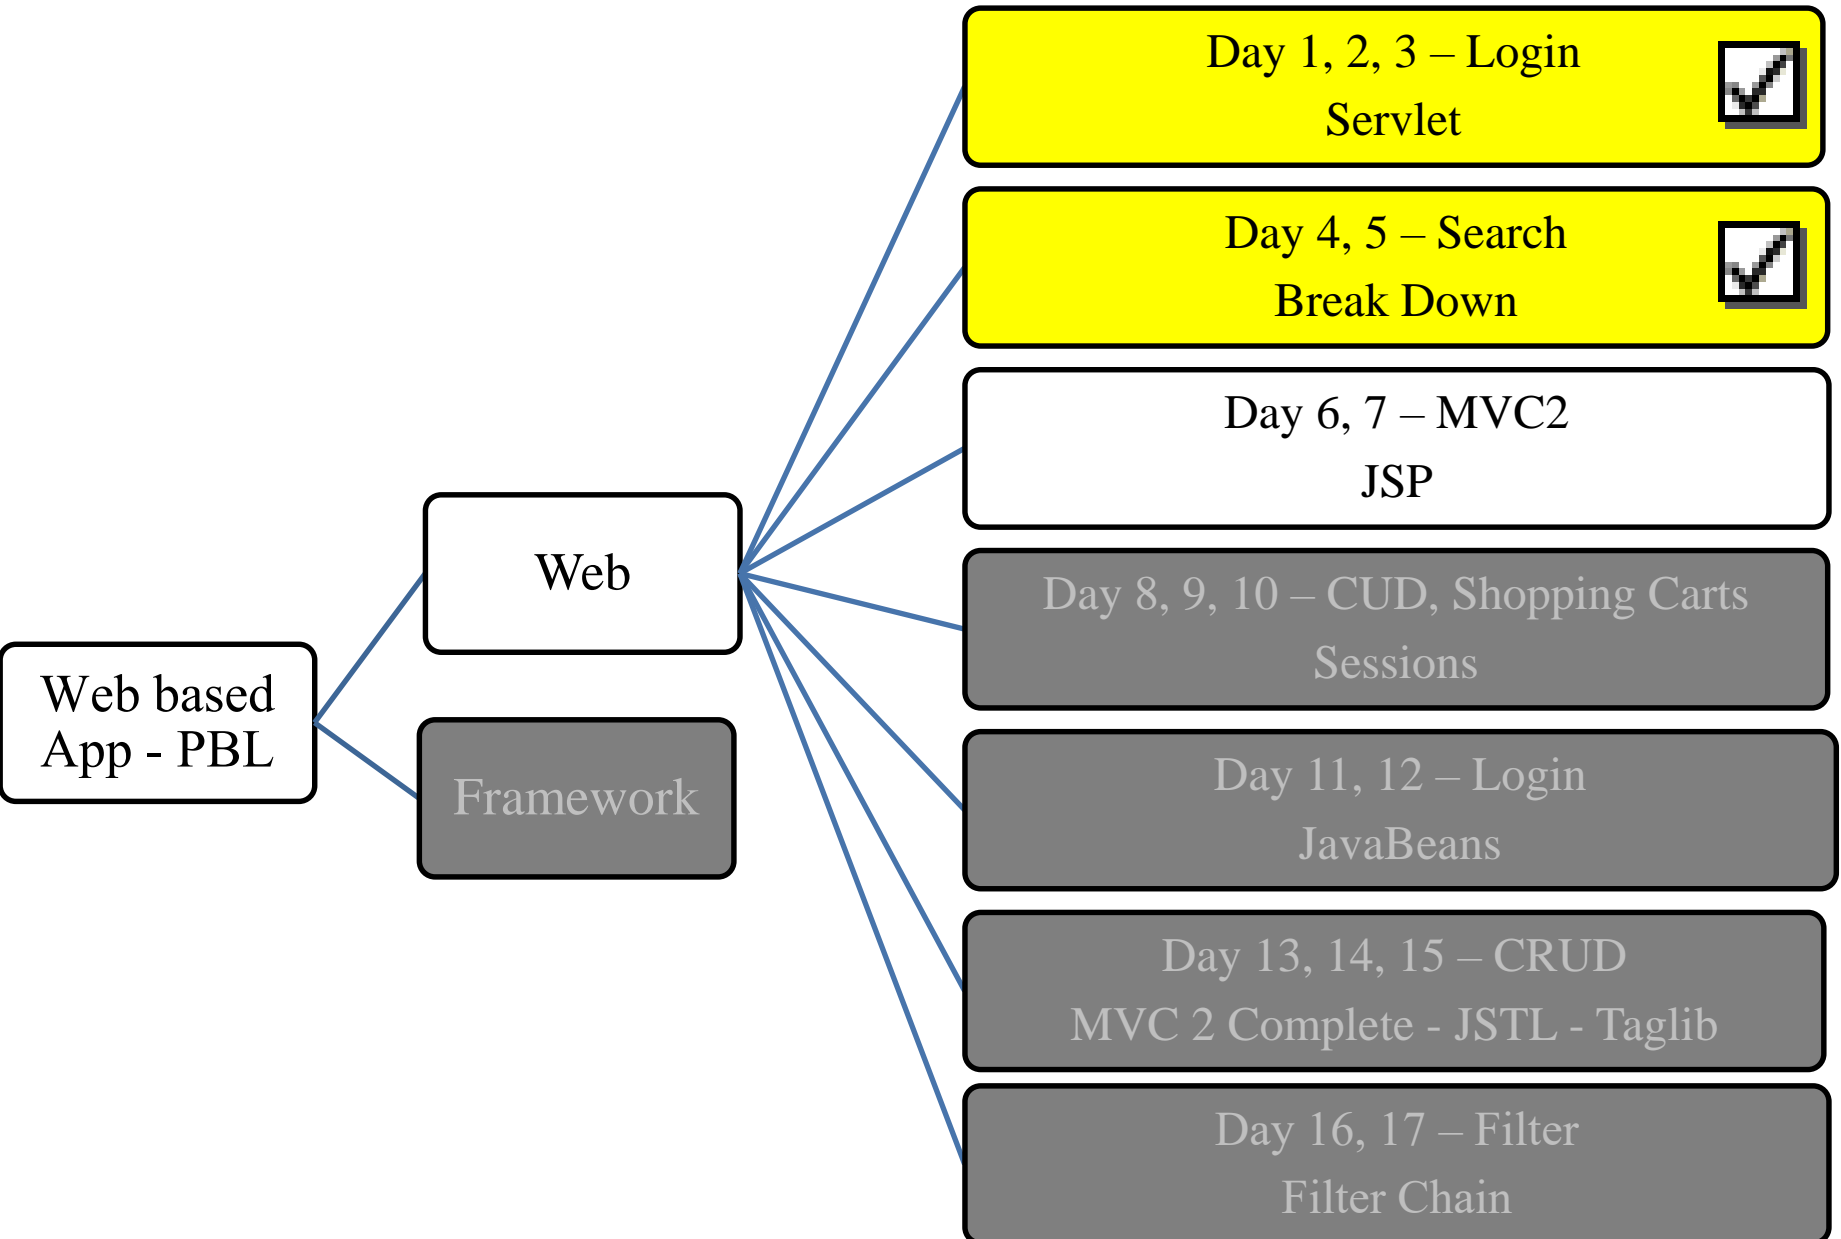

# MVC Design Pattern

## MVC Model 2

**Login - Windows Internet Explorer**

http://localhost:8084/MVCD5criting/

File Edit View Favorites Tools Help

★ Favorites Login

## Login Page

Username

Password

Login Reset

**Invalid - Windows Internet Explorer**

http://localhost:8084/MVCD5criting/ProcessServlet

File Edit View Favorites Tools Help

★ Favorites Invalid

**Invalid username or password!!!!**

[Click here to try again](#)

[Click here to Sign Up](#)

**Home - Windows Internet Explorer**

http://localhost:8084/MVCD5criting/ProcessServlet

File Edit View Favorites Tools Help

★ Favorites Home

Welcome, khanh

## Welcome to DB Servlet

Name

Search

# MVC Design Pattern

## MVC Model 2

Welcome, khanh


### Search Page

Search Value

| No. | Username | Password | Last name    | Role                                |
|-----|----------|----------|--------------|-------------------------------------|
| 1   | IA1161   | 123456   | Class IA1161 | <input type="checkbox"/>            |
| 2   | khanh    | kieu123  | Khanh Kieu   | <input checked="" type="checkbox"/> |
| 3   | SE1161   | 123456   | Class SE1161 | <input type="checkbox"/>            |
| 4   | SE1162   | 123456   | Class Se1162 | <input type="checkbox"/>            |
| 5   | SE1163   | 123456   | Class SE1163 | <input type="checkbox"/>            |

# MVC Design Pattern

## Model – View – Controller

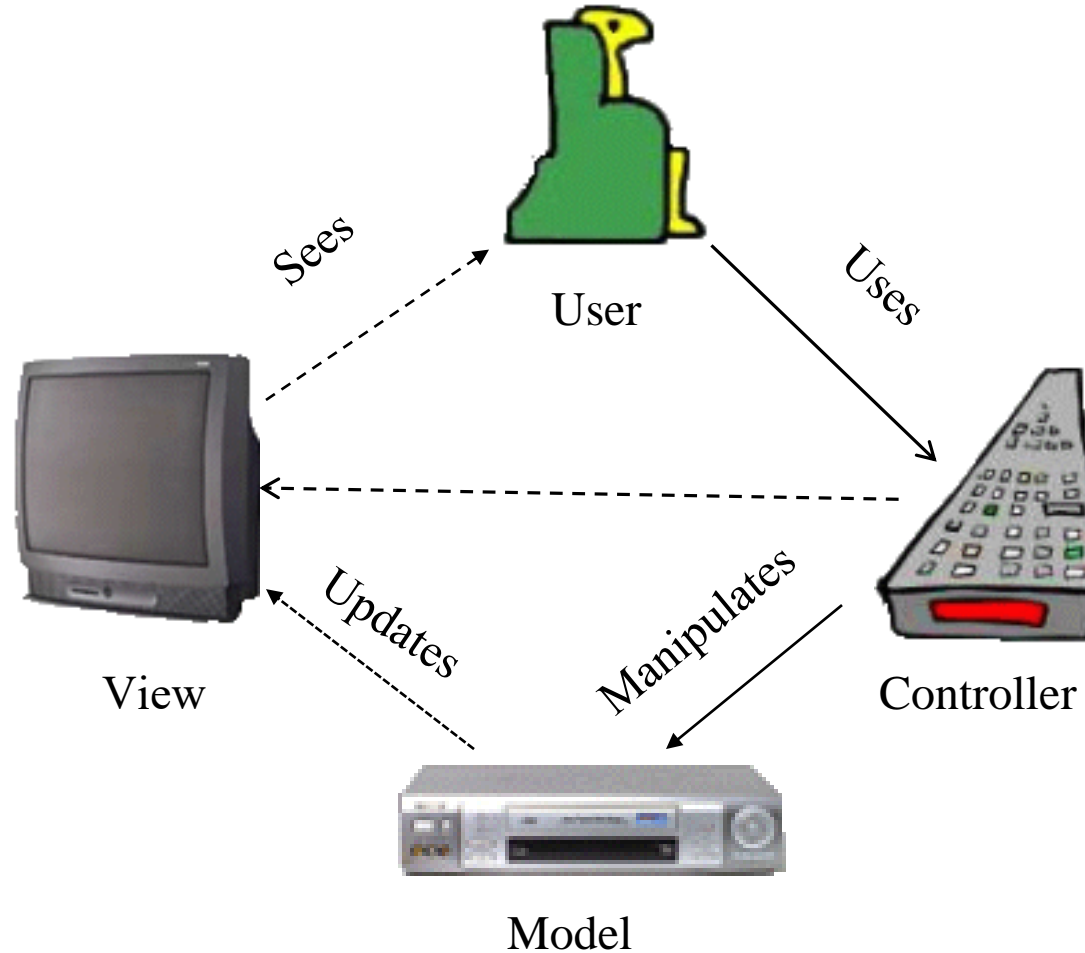


**This is a MVC Model**



# MVC Design Pattern


## Model – View – Controller

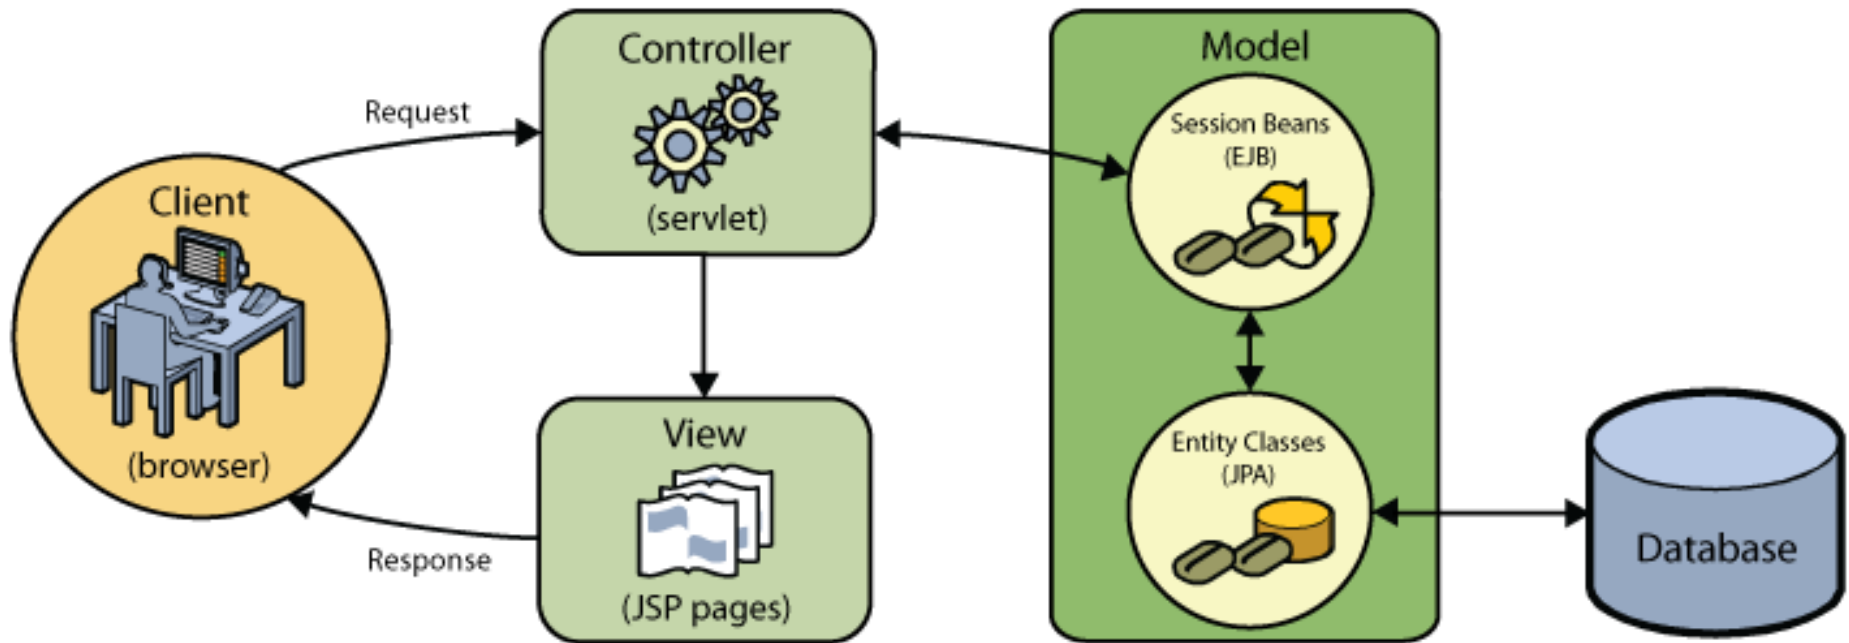

[www.netbeans.org](http://www.netbeans.org)

# MVC Design Pattern

## Model – View – Controller

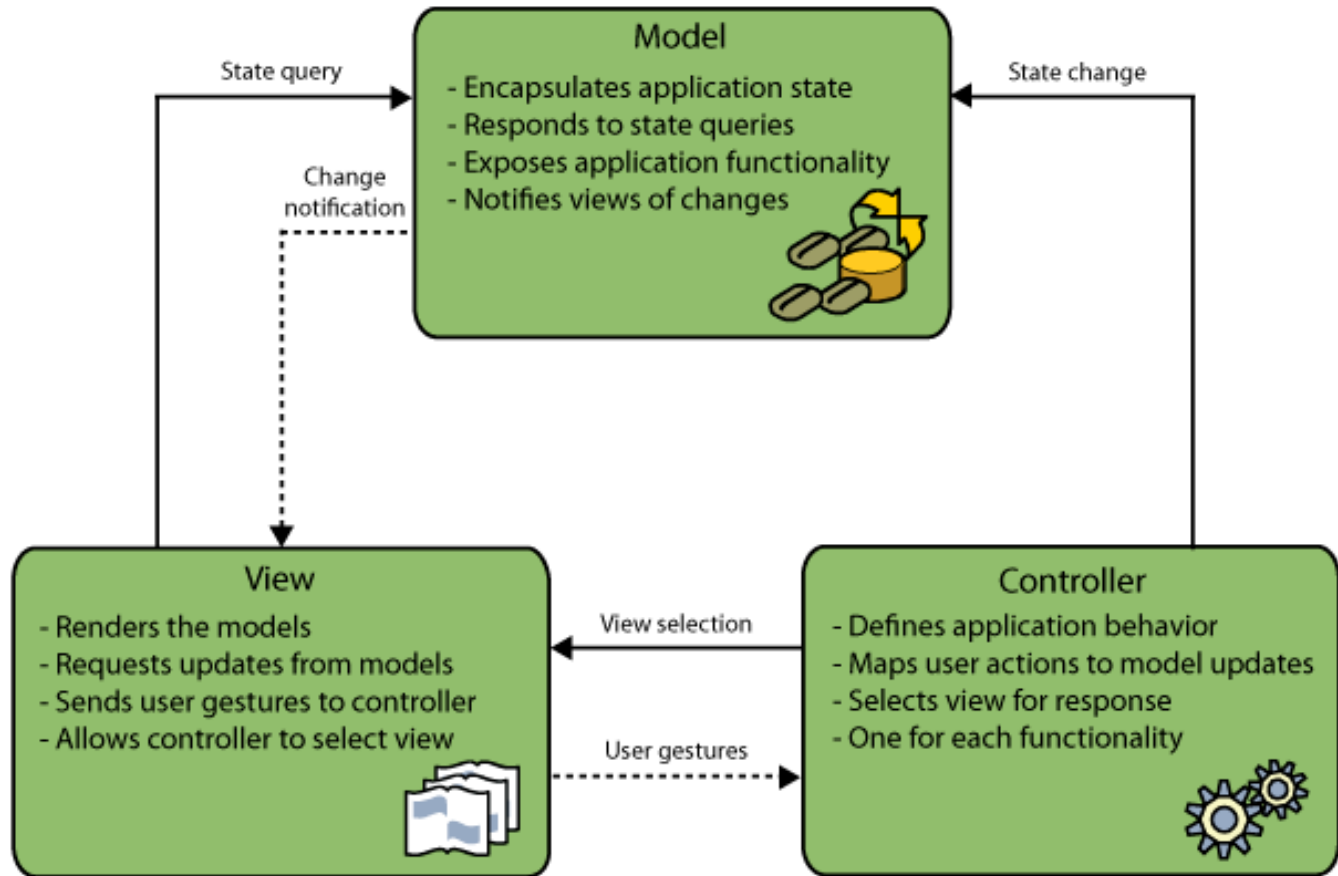


—————▶ = Method Invocations

- - - - -▶ = Events

[www.netbeans.org](http://www.netbeans.org)

# MVC Design Pattern

## No MVC

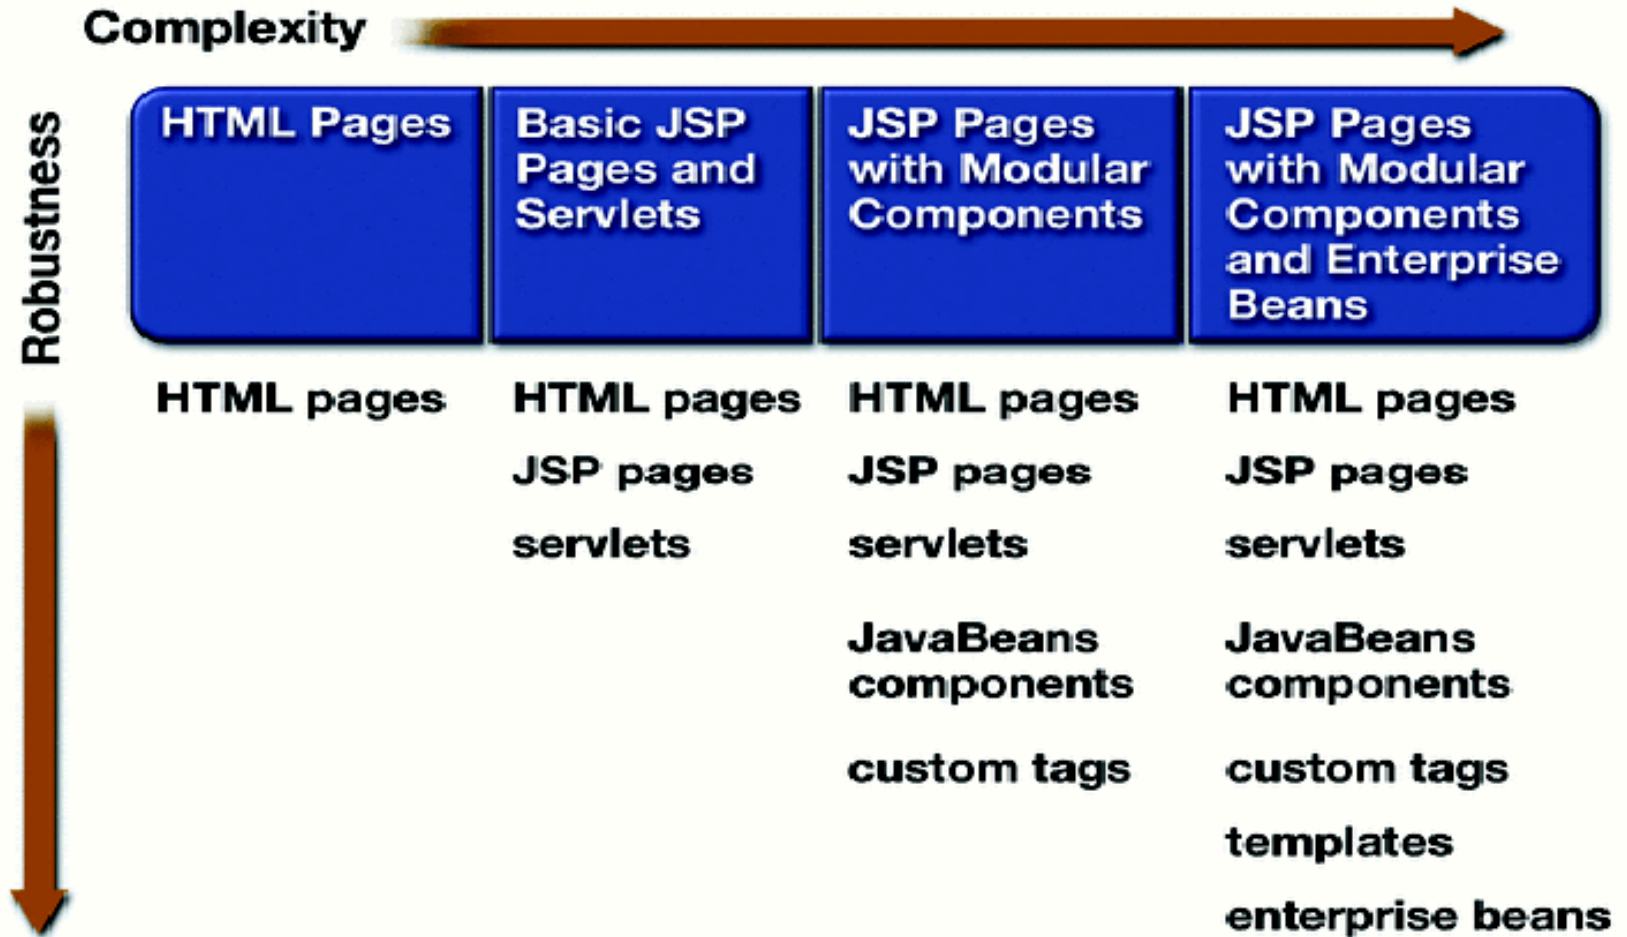


NO MVC

Model 1 Architecture


# MVC Design Pattern

## MVC Model 1

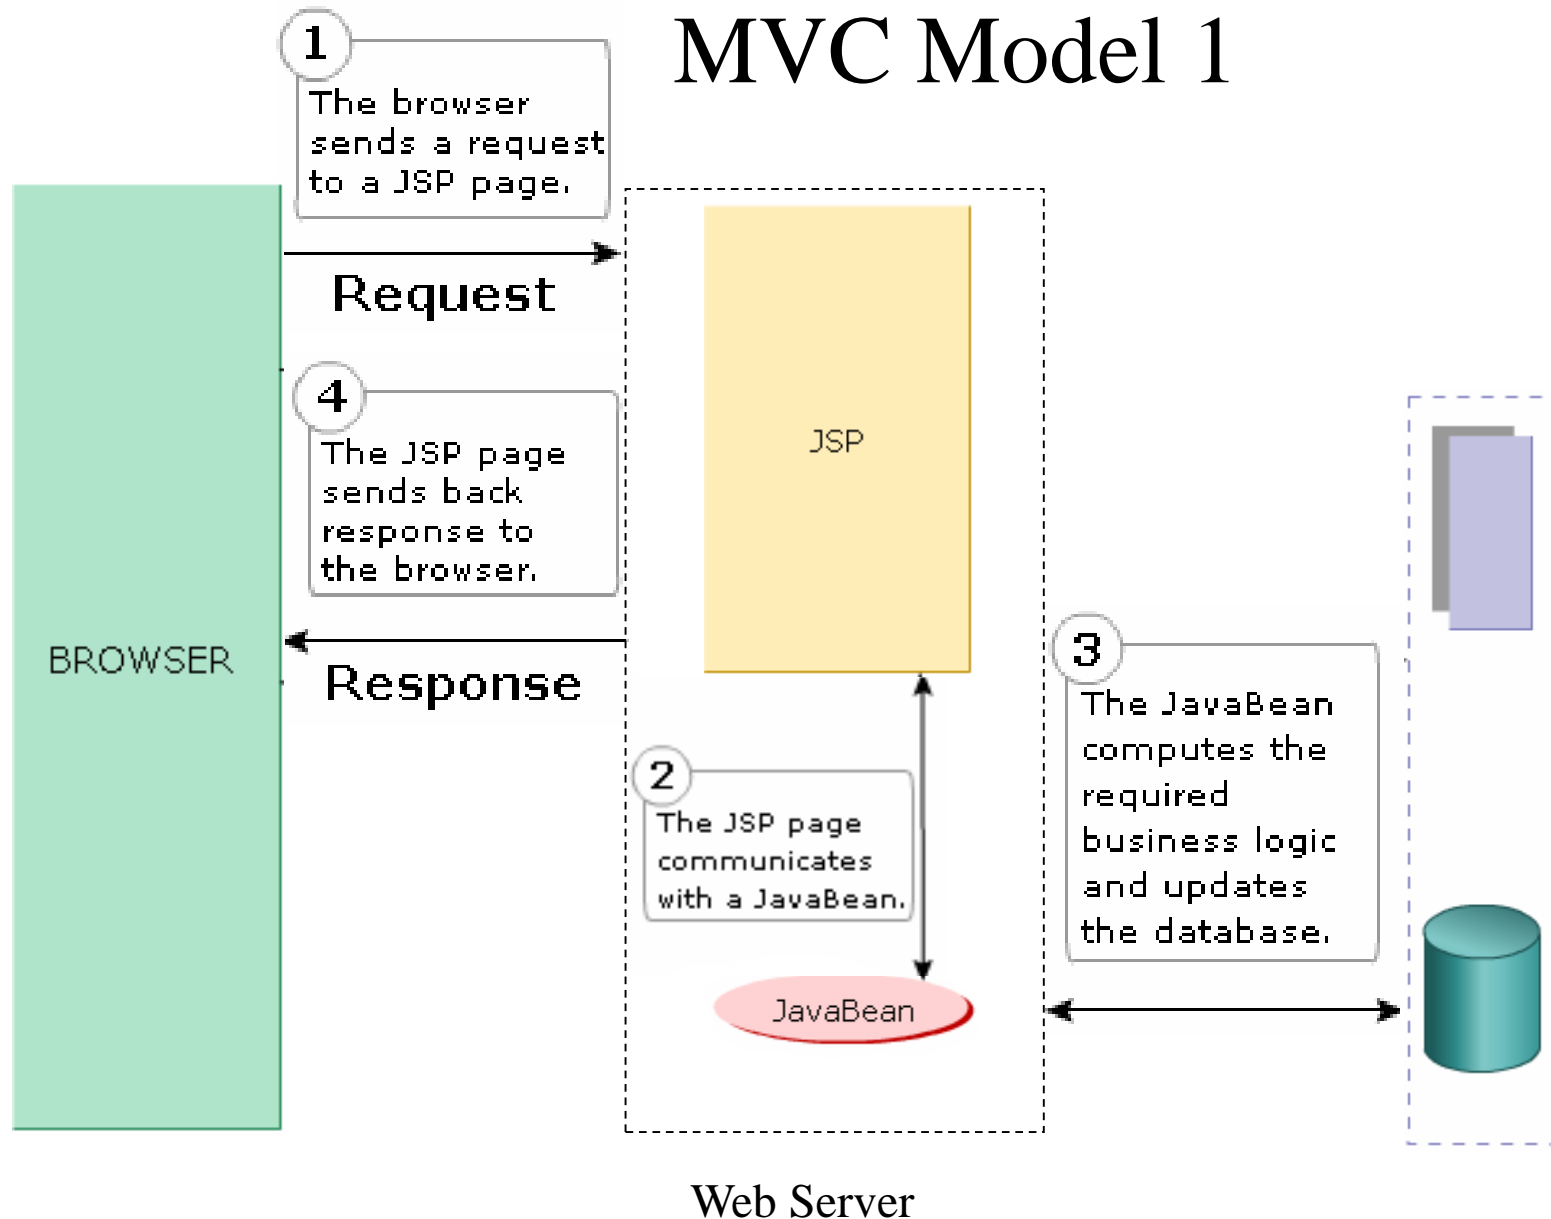

# MVC Design Pattern

## MVC Model 1

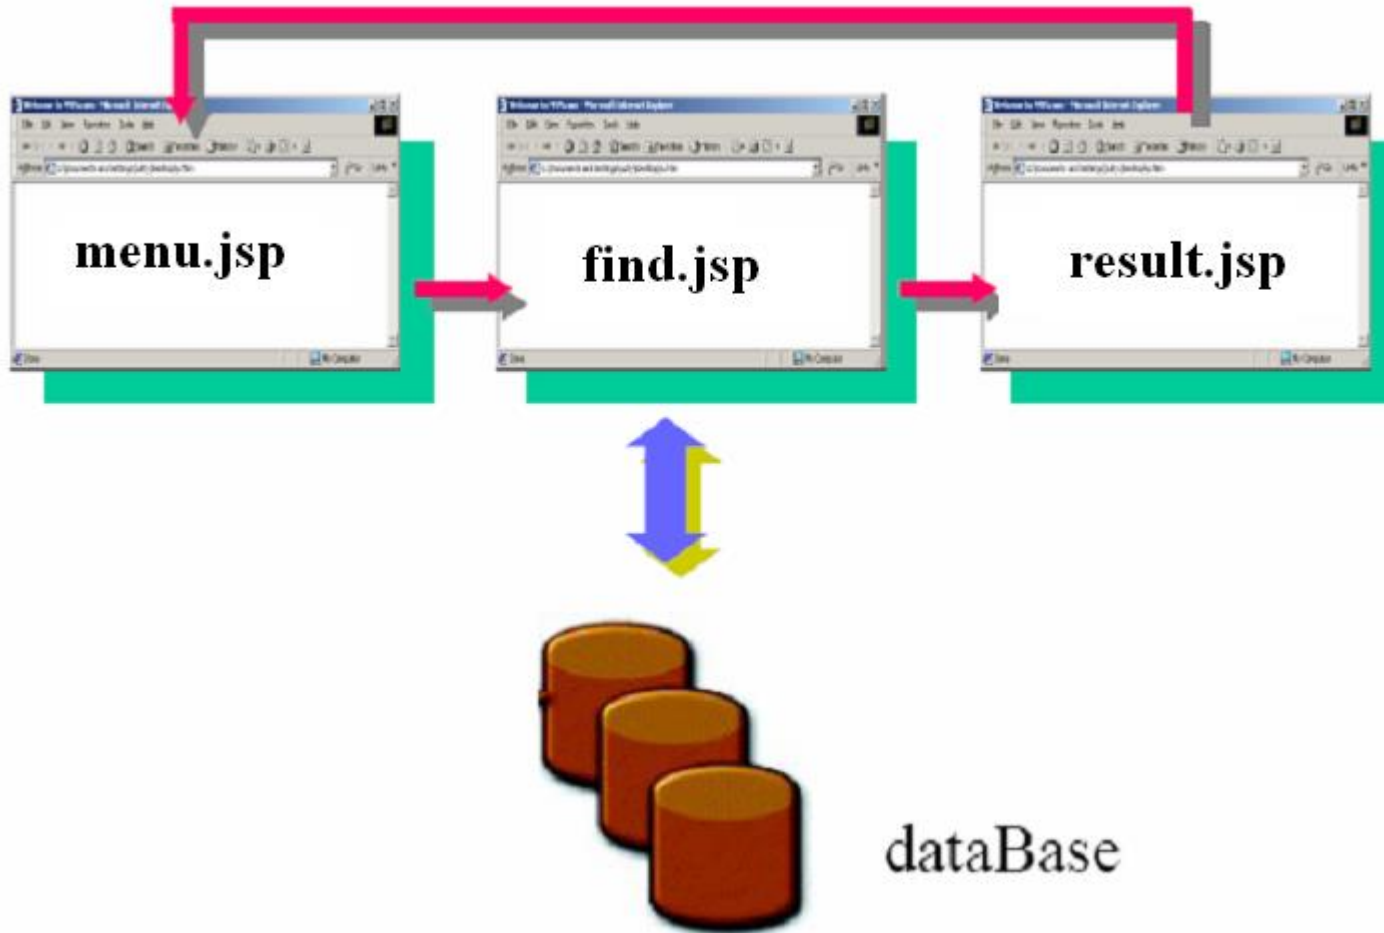

Page-centric application


# MVC Design Pattern

## MVC Model 1 – Example

**Example will be shown in other topic**

# MVC Design Pattern

## MVC Model 1 – Generalization

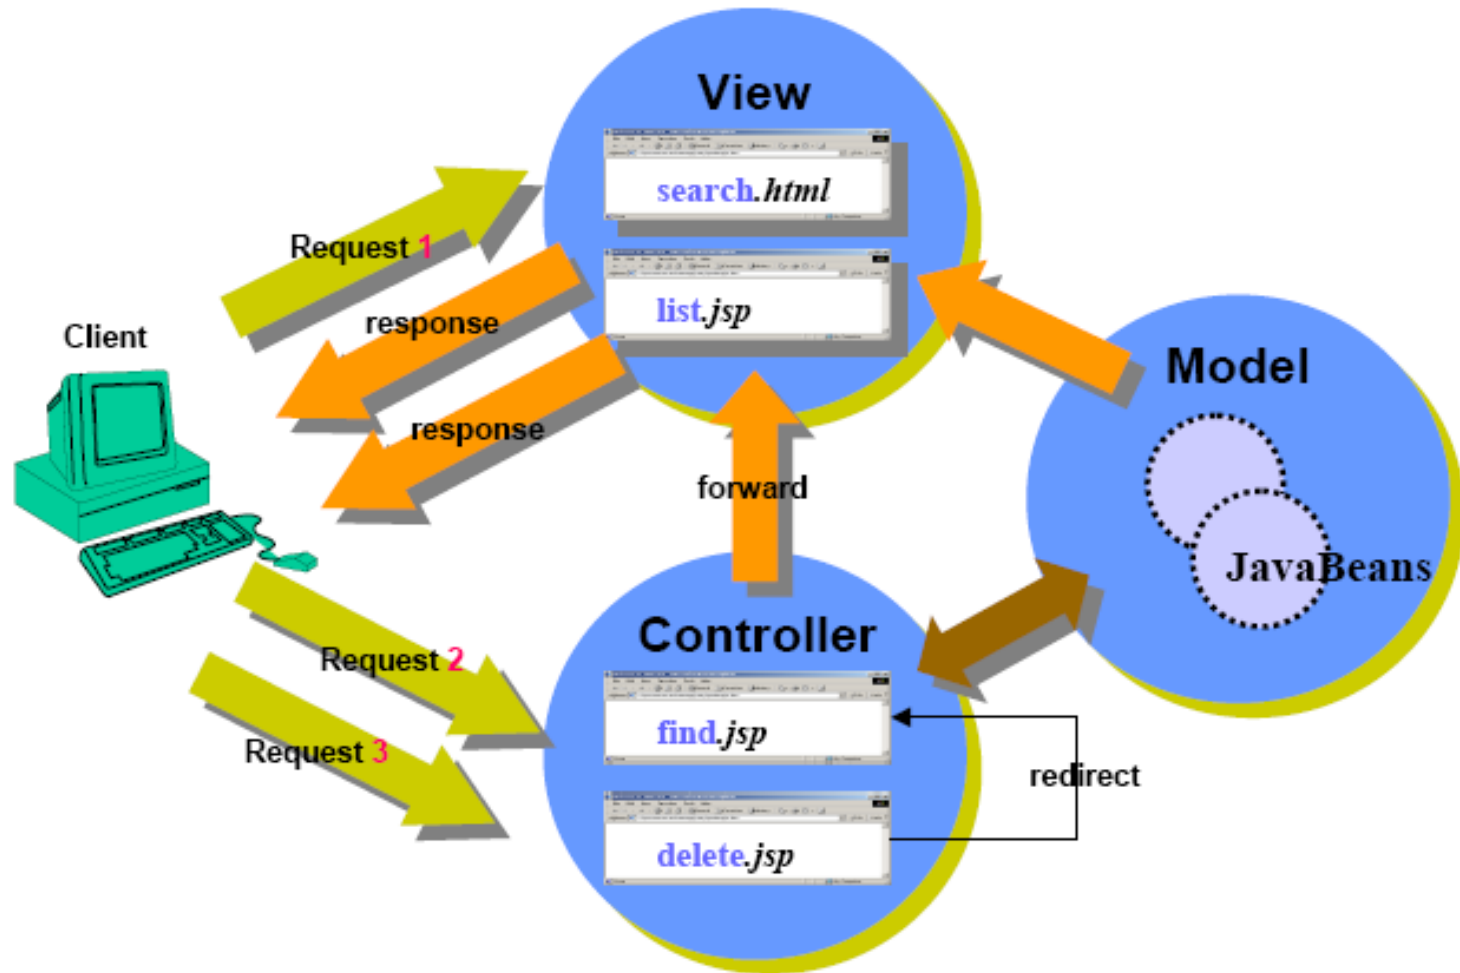

Page-centric Scenario

# MVC Design Pattern


## MVC Model 1 – Generalization

- **Purpose**
  - Separate “business logic” from “presentation logic”
  - Need for **centralized security control** or logging, changes little over time.
  - Apply to applications that have very simple page flow.
- **Advantages**
  - Lightweight design – for **small, static application**
  - Separation of presentation from content
- **Limitations**
  - **Navigation Problem** – Changing name of JSP file must change in many location
  - **Difficult to maintain** an application – large java code being embedded in JSP page
  - **Inflexible**
  - **Performance is not high**
  - **Not scale** up over a period time
  - **Not Suitable for large and complex application**



# MVC Design Pattern

## MVC Model 2

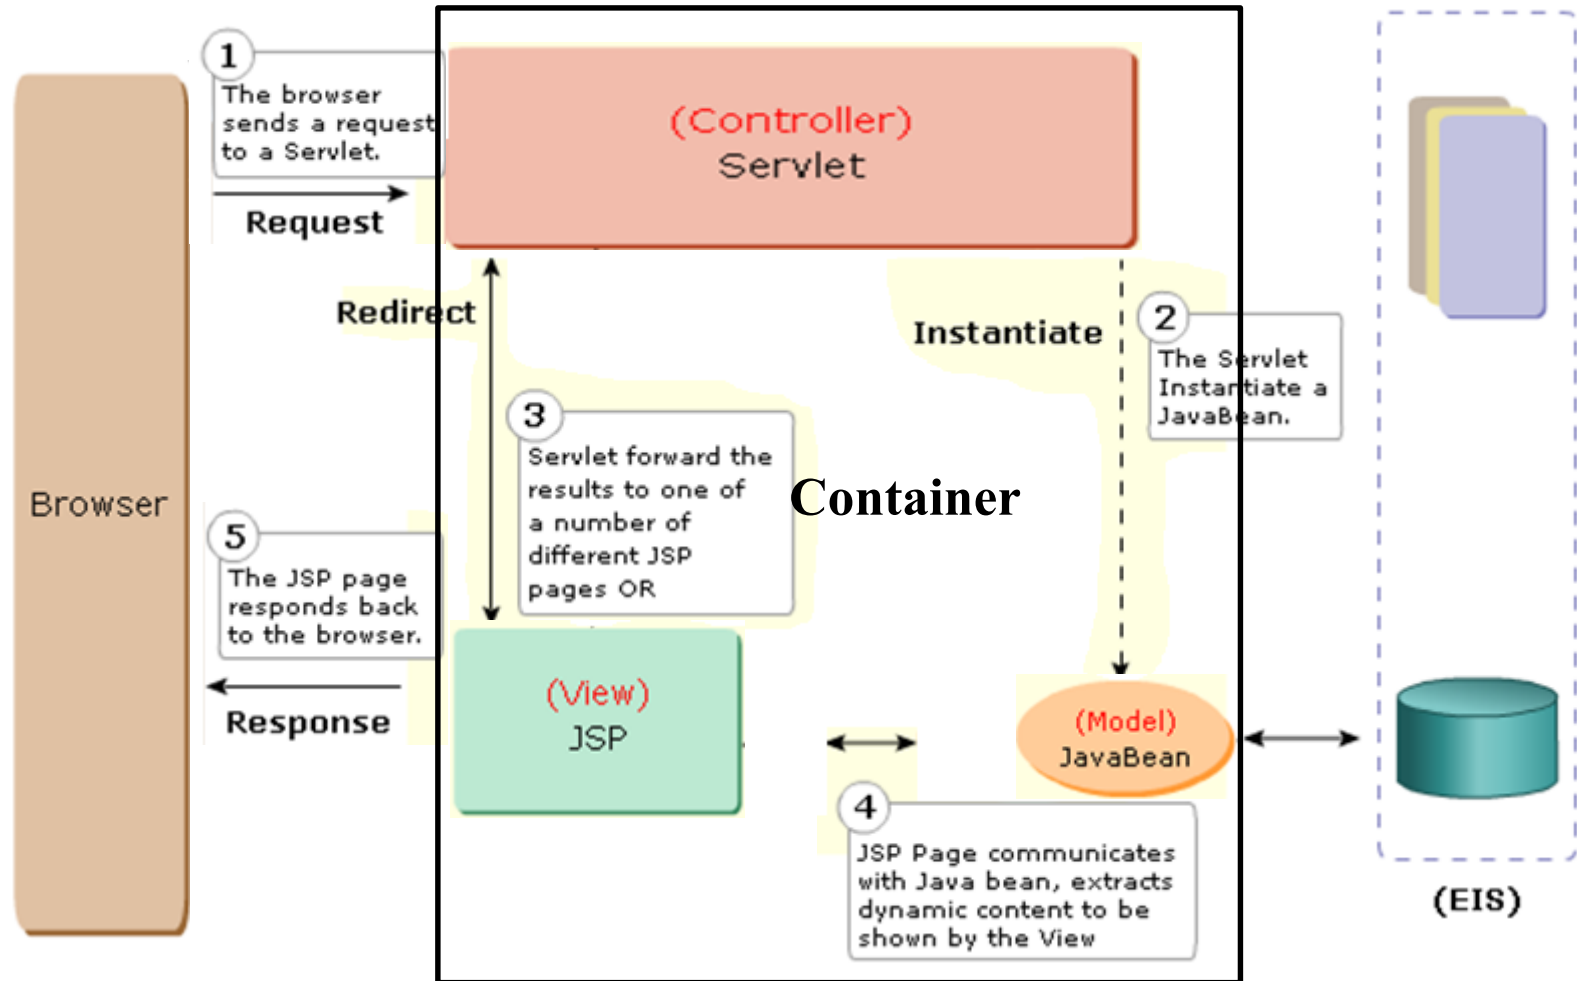


# MVC Design Pattern

## MVC Model 2

- **Separates** the “**Business Logic**” from the “**Presentation Logic**” and has an additional component – a Controller
- **Use Servlet** and **JSP** together
- **JSP pages**
  - Are used only for **presentation**
  - **Retrieve** the **objects** created by the Servlet
  - **Extract dynamic content** for insertion within a template for display
- **Servlet**
  - **Handles** initial **request**, partially **process** the **data**, **set up beans**, **select** suitable business **logic** to handle request , then **forward** the **results** to one of a number of **different JSP pages**
  - **Serves** as a **gatekeeper** provides **common services**, such as authentication authorization, login, error handling, and etc
  - Servlet **serves** as a **central controller** that act as a state machine or an event **dispatcher** to decide upon the appropriate logic to handle the request
  - Act as a **Controller** that controls the way Model and View layer interacts

# MVC Design Pattern

## MVC Model 2 – Generalization

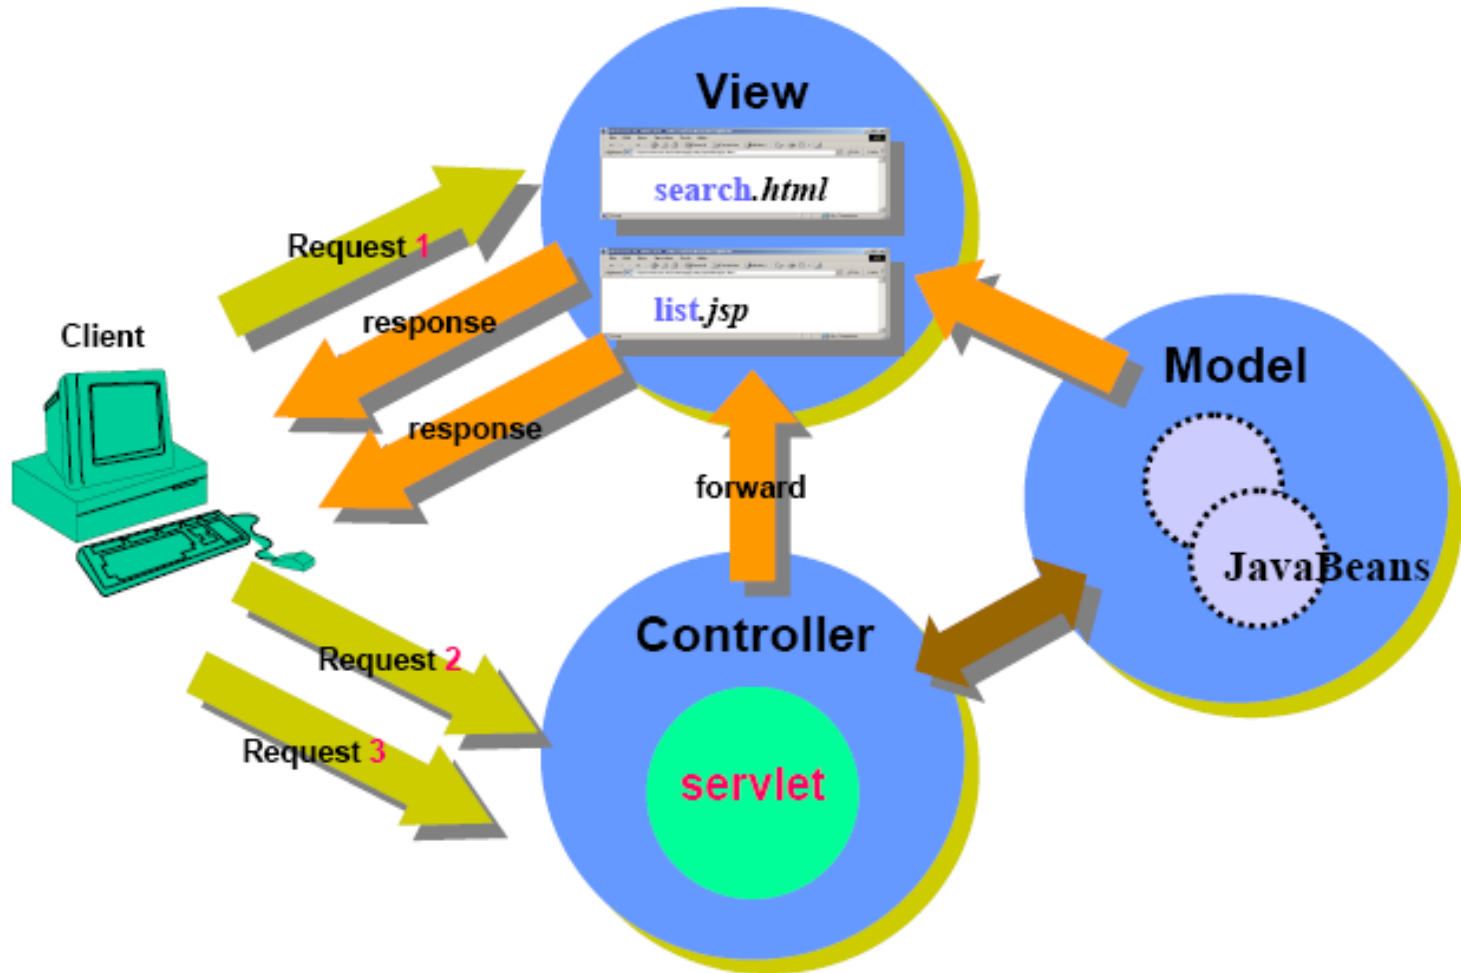

Servlet-centric Scenario

# MVC Design Pattern

## MVC Model 2 – Generalization

- **Purpose**
  - **Separation** of presentation logic and business logic
  - A **Model** represents information specific to a particular domain on which the application operates
  - A **View** is typically a user interface element. A single Model may be presented as multiple views
  - A **controller** component responds to events and processes request and may invoked changes on the Model
- **Advantages**
  - **Easier** to build, maintain and extend
  - Provide **single point** of control (Servlet) for security & logging
  - **Encapsulate** incoming data into a form usable by the backend
  - Can **reusable code**
- **Limitations**
  - Increase Design Complexity

# MVC Design Pattern

## MVC Model 1 & Model 2 Comparison

| Criteria                   | Model 1                                                 | Model 2                                                       |
|----------------------------|---------------------------------------------------------|---------------------------------------------------------------|
| JSP page responsibility    | Processing requests and sending back replies to clients | Are used for the presentation layer                           |
| Servlets responsibility    | N/A                                                     | Are used for processing task                                  |
| Type of Web application    | Simple                                                  | Complex                                                       |
| Nature of Developer's Task | Quick prototyping                                       | Developing an application that can be modified and maintained |
| Who is doing the work?     | View and Controller is developed by the same team       | View and Controller is developed by the different teams       |

# Java Server Pages

## Need for JSP

- Servlet
    - Is a java class that **must be compiled** to **deploy** on server
    - Low level HTML format that does **not focus** on the **presentation logic (very complex)** of the web application
    - Is **not flexible** in modify with editor program
- **Need the replaced** thing that is easily focus on the **presentation logic** and **approaches** the **non-experience** presentation developer

# Java Server Pages

## JSP

- Java Server Page (JSP) is a **server side script language** running web (application) server (Tomcat, Sun, JBoss ...)
- Saved with **.jsp extension**
- A simple, yet powerful Java technology for **creating and maintaining dynamic-content** webs pages (embedded)
- JSP page **are converted** by the web container **into a Servlet instance**
- It focus on the **presentation logic** of the web application
- JSP page **contains HTML tags**
- JSP page contains tags (standard & custom), which are used to generate dynamic content and invoke the operations on Javabeans components and processing requests.
- **A combination of HTML, XML, Servlet** (extends from Servlet), **and Java Code** to create dynamic Web content.

# Java Server Pages

## JSP

- Benefits

- Segregation of the work profiles of a Web designer and a Web developer (**separating presentation logic and content/business/processing logic**)
- Emphasizing Reusable Components (**JavaBeans**)
- Simplified Page Development (**easy to use JSP through tag, flexibility, scalability**)
- Access & instantiate JavaBeans component (**support tag element with get/set functions**)
- High secure

- Choosing Servlet or JSP

- **Servlet** are well suited for **handling binary data dynamically**
  - Ex: for uploading files or for creating dynamic images, since they **need not contain any display logic**
- **JSP** is **easy to create the presentation logic with dynamic generated data** combine template and **do not compile before executing or running time**



# Java Server Pages

## JSP – Example

- **Simple JSP page** displays current date.

```
<html>
```

```
<head>
```

```
<title>A simple date</title>
```


```
</head>
```

```
<body>
```

The time on the server is `<%= new java.util.Date() %>`

```
</body>
```

```
</html>
```

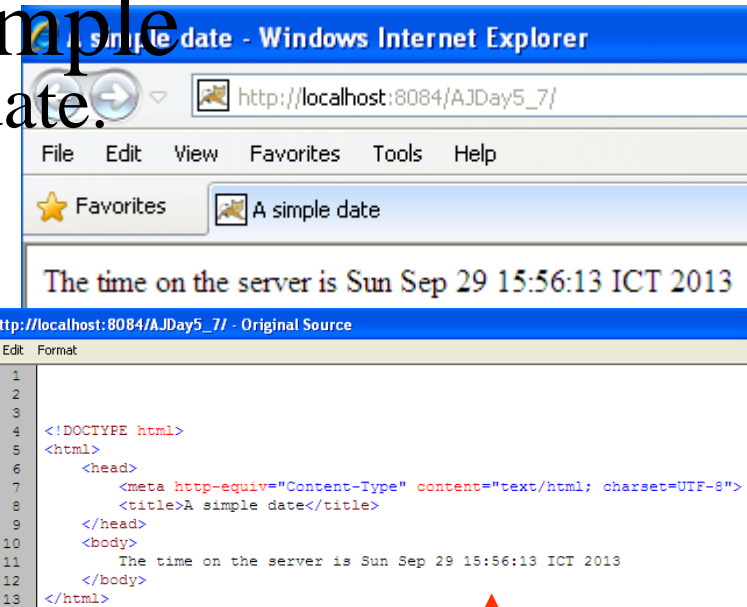

[View Source](#)

- Server processes JSP components converting static data on **HTML** which can be displayed by Web browser
- To testing JSP page, the JSP page should be copied to the **ROOT** of web server – Tomcat

# Java Server Pages

## JSP – In Nature

Applying the compile function on file to check JSP file

```

01
62 out.write("\\n");
63 out.write("\\n");
64 out.write("\\n");
65 out.write("<!DOCTYPE html>\\n");
66 out.write("<html>\\n");
67 out.write("    <head>\\n");
68 out.write("        <meta http-equiv=\\\"Content-Type\\\" content=\\\"text/
69 out.write("        <title>A simple date</title>\\n");
70 out.write("    </head>\\n");
71 out.write("    <body>\\n");
72 out.write("        The time on the server is ");
73 out.print( new java.util.Date());
74 out.write("\\n");
75 out.write("    </body>\\n");
76 out.write("</html>\\n");
77 out.write("\\n");

```

public void  
\_jspService(HttpServletRequest  
request request,  
HttpServletResponse  
response)  
throws  
java.io.IOException,  
ServletException {

# Java Server Pages

## JSP – In Nature

- When the JSP page is requested to server, the JSP page is converted to java file as **filename\_jsp.java** (**filename.jsp**)
- The filename\_jsp.java file is **compiled** if it is correct syntax
- **Ex:**
  - Omit the “)” of Date function in the simpleDate.jsp
  - Correct above mistake, run the file, then checking the result at
    - C:\Documents and Settings\LoggedUser\Application Data\NetBeans\7.4\apache-tomcat-7.0.41.0\_base\work\Catalina\localhost
    - C:\Users\LoggedUser\AppData\Roaming\NetBeans\7.4\apache-tomcat-7.0.41.0\_base\work\Catalina\localhost

```
Z:\LapTrinh\Servlet\AJ\AJDay5_7\build\generated\src\org\apache\jsp\index_jsp.java:55: error: ')' expected
```

```
    out.print( new java.util.Date( );
                        ^
```

```
1 error
```

```
1 warning
```

```
Z:\LapTrinh\Servlet\AJ\AJDay5_7\nbproject\build-impl.xml:949: The following error occurred while executing this line:
```

```
Z:\LapTrinh\Servlet\AJ\AJDay5_7\nbproject\build-impl.xml:941: The following error occurred while executing this line:
```

```
Z:\LapTrinh\Servlet\AJ\AJDay5_7\nbproject\build-impl.xml:321: Compile failed; see the compiler error output for details.
```

```
BUILD FAILED (total time: 2 seconds)
```

# Java Server Pages

## JSP

```

Source History
4      Author      : Trong Khanh
5      --%>
6
7      <%@page contentType="text/html" pageEncoding="UTF-8"%>
8      <!DOCTYPE html>
9      <html>
10     <head>
11         <meta http-equiv="Content-Type" content="text/html; charset=UTF-8"%>
12         <title>A simple date</title>
13     </head>
14     <body>
15         The time on the server is <%= new Date() %>
16     </body>
17 </html>
    
```

Apache Tomcat/7.0.34 - Error report - Windows Internet Explorer

http://localhost:8084/AJDay5\_7/

File Edit View Favorites Tools Help

★ Favorites Apache Tomcat/7.0.34 - Error report

### HTTP Status 500 - Unable to compile class for JSP

---

**type** Exception report

**message** Unable to compile class for JSP:

**description** The server encountered an internal error that prevented it from fulfilling this request.

**exception**

```
org.apache.jasper.JasperException: Unable to compile class for JSP:


An error occurred at line: 15 in the jsp file: /index.jsp
Date cannot be resolved to a type

12:         <title>A simple date</title>
13:     </head>
14:     <body>
15:         The time on the server is <%= new Date() %>
16:     </body>
17: </html>
18: 
```

Stacktrace:


# Java Server Pages

## JSP Life Cycle

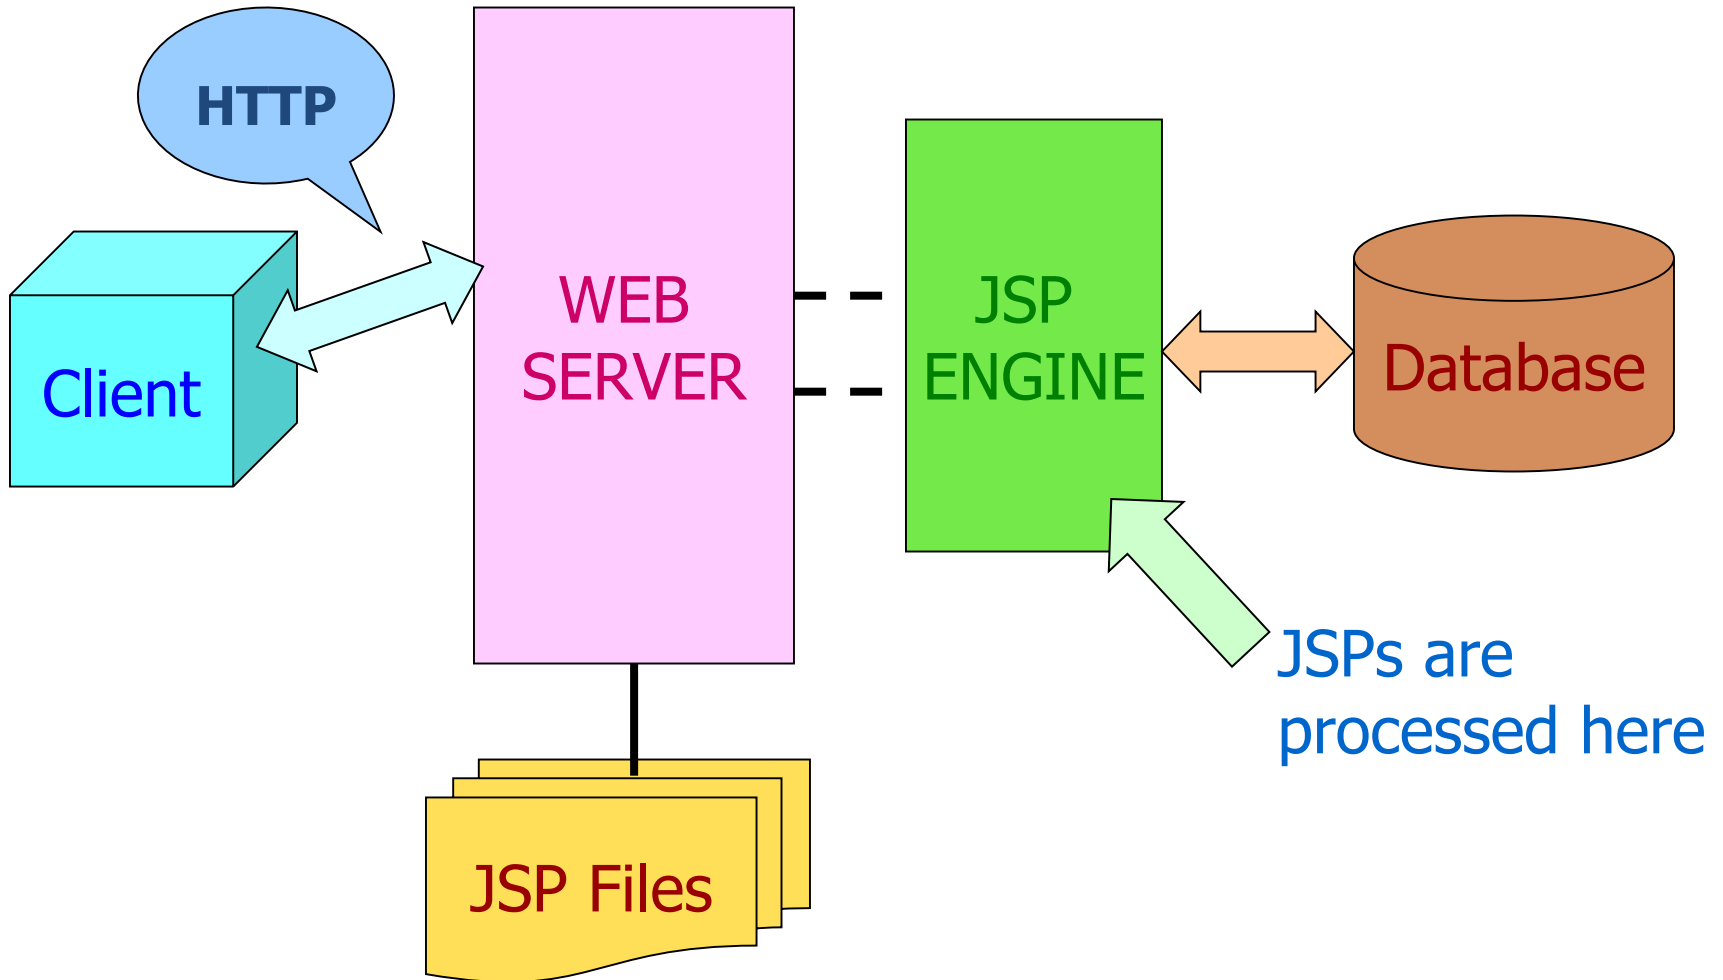


# Java Server Pages

## JSP Life Cycle

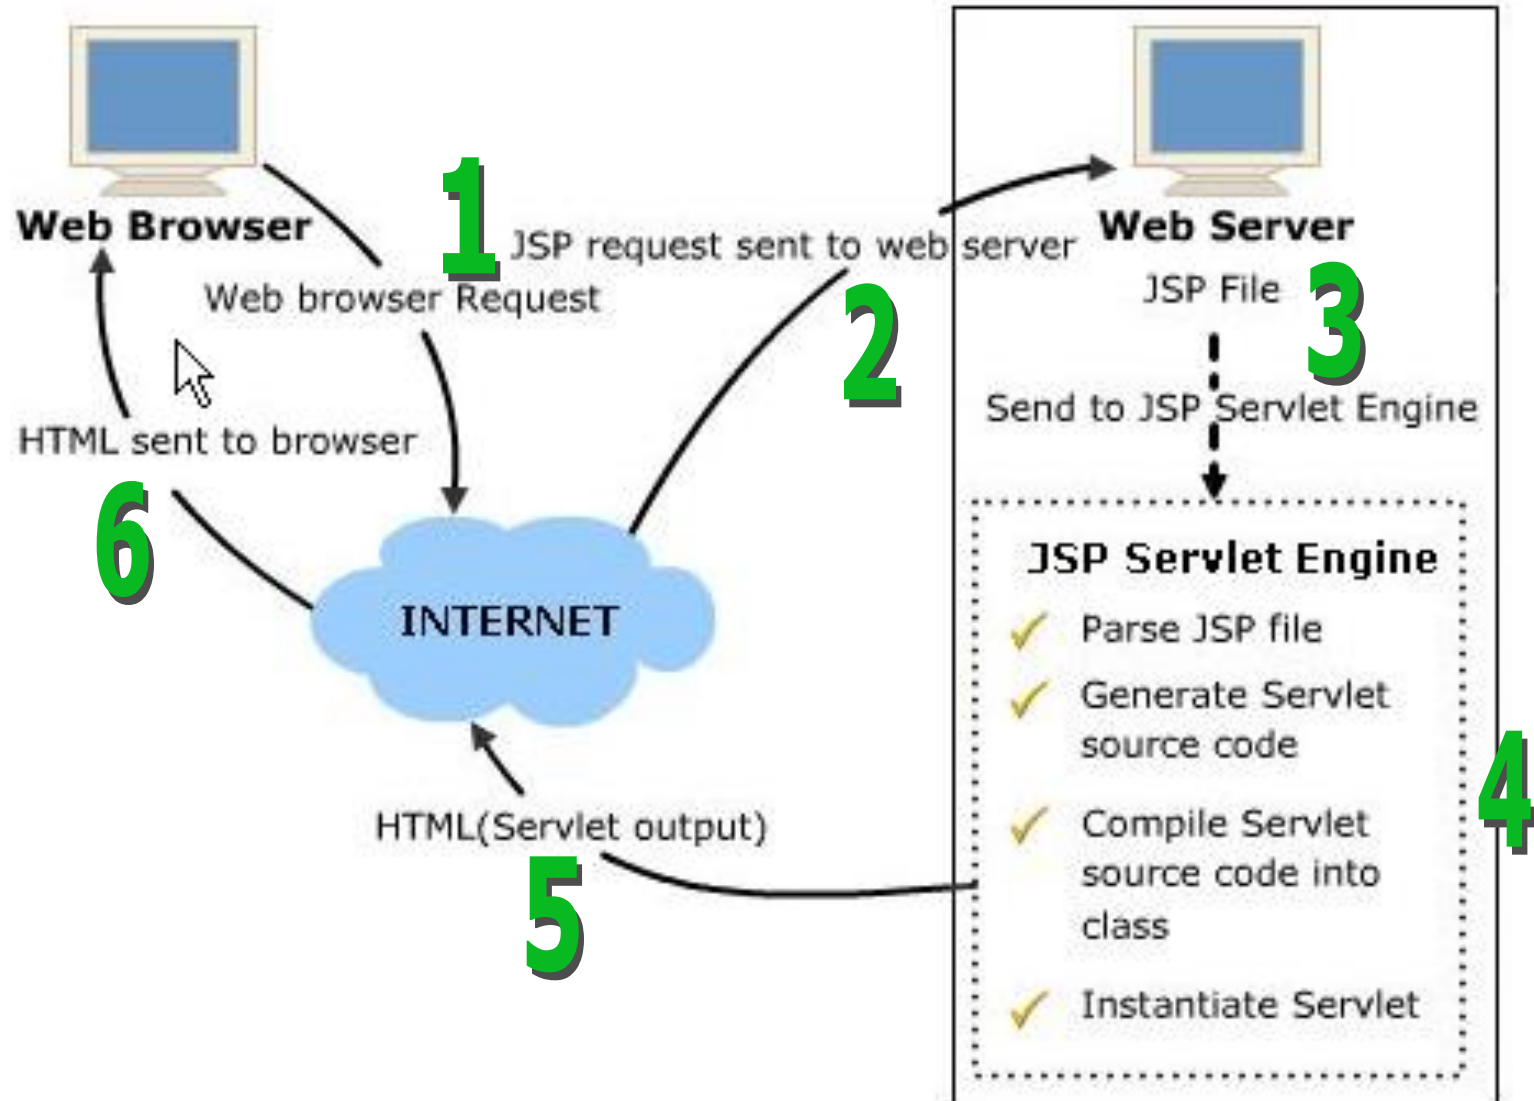

# Java Server Pages

## JSP Life Cycle

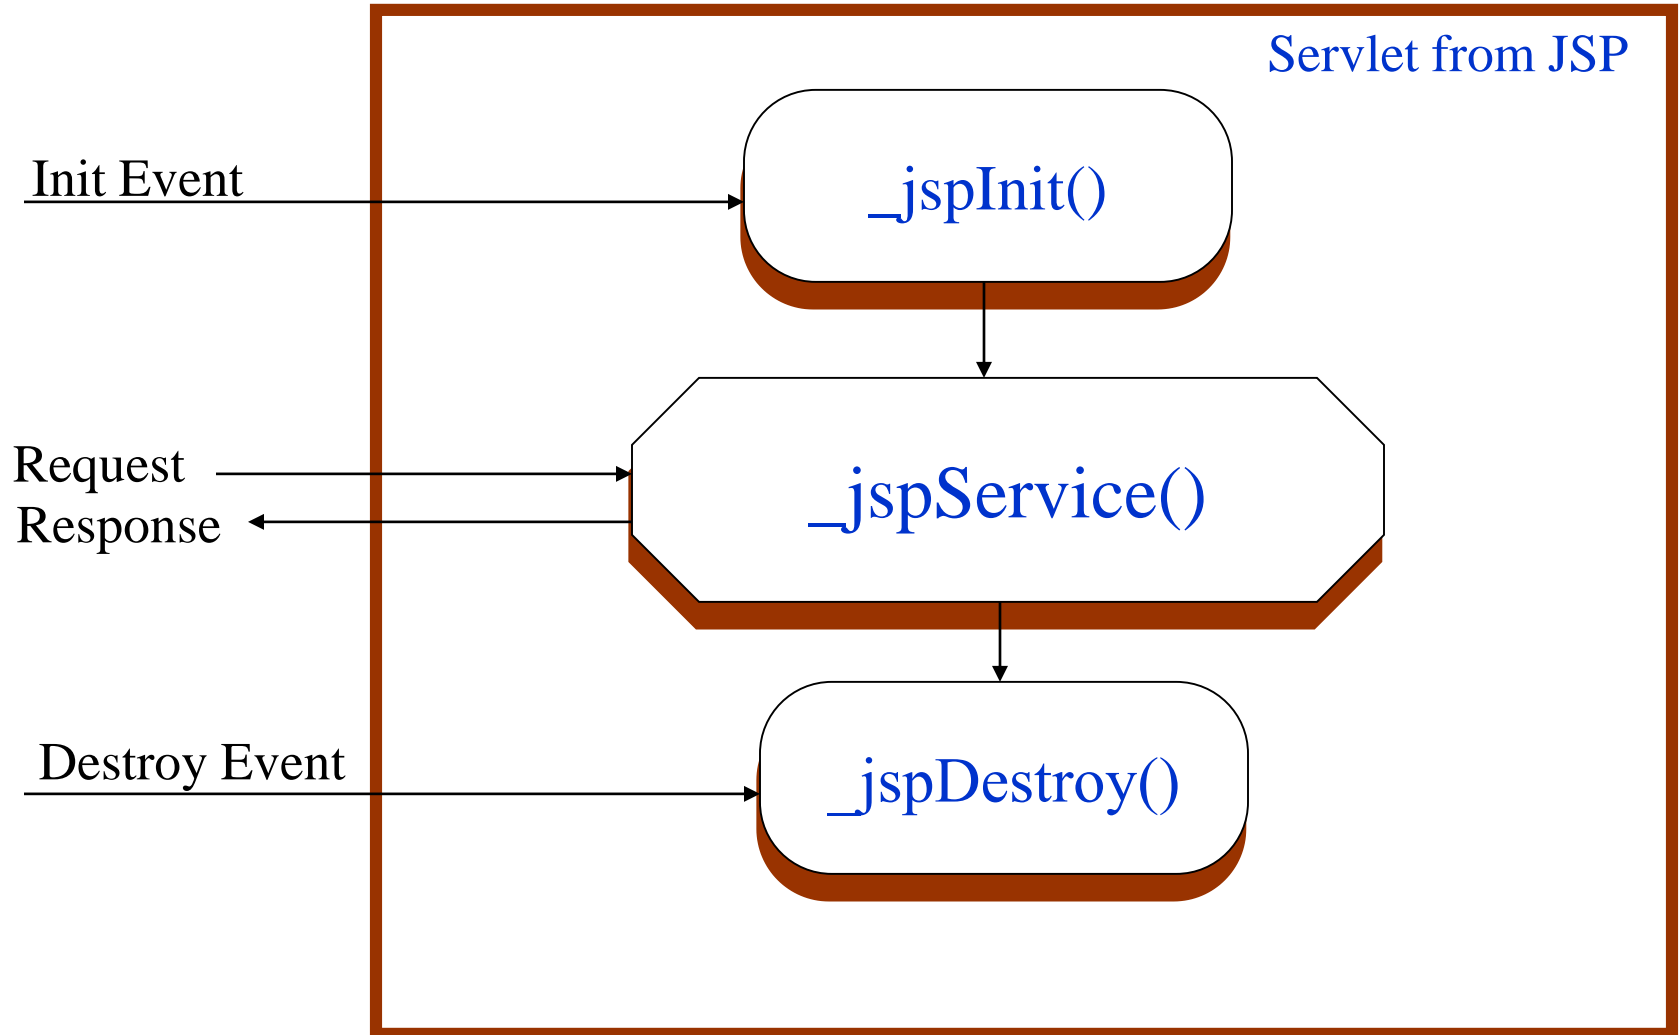

# JSP Elements

## JSP Tags

- Tags
  - Interface
  - Functional
  - Encapsulation
  - A tag starts with “<” and ends with “>”.
  - The tags contain body and attributes.
- The 4 types of JSP tags
  - Comment
  - Directives
  - Scripting elements
  - Standard actions



# JSP Elements

## Comments

- Are used for **documenting** JSP code
- Should **not be visible** to the client
- **Explains** the functioning of the code
- Comments **are ignored by the servlet** during compilation
- A JSP page contains **03 types** comments as JSP, HTML, and scripting
  - **HTML comments**
    - Are passed to resulting HTML documents
    - Are not visible in the output but the end user can view them.
  - **JSP comments**
    - The browser cannot view these comments as a part of the source code
    - Are ignored by the JSP to scriptlet translator.
  - **Scripting language comments**
    - Are written scriptlets in a JSP page.
    - The comment should be in the same comment syntax used for scripting language.
    - Are not visible in the output of the JSP page

# JSP Elements

## Comments

- Syntax
  - **JSP comments:** `<%-- comments --%>`
  - Ex: `<%-- a JSP comment --%>`
  - **HTML comments:** `<!-- comments -->`
  - Ex: `<!-- a HTML comment -->`
  - **Scripting language comment**
    - `<%/* comments */%>`
    - `<%// comments %>`
    - Ex: `<%//It's is a variable declaration %>`

# JSP Elements

## Scripting Elements

- A way of **performing server-side operations** in a JSP page
- Enable the **code to be directly embedded** in a JSP page
- **Insert** Java code into the JSP page
- **Declarations:**
  - Defines the **variables and methods** for a JSP page
  - Are **inserted** into the servlet, **outside** the `_jspservice()` method
  - Are used in **combination** with scriptlets and expressions to display an output.
  - A **single** declaration tag can be used to **define multiple variables**
  - **Syntax:** `<%! Declaration; %>`
  - **Ex:** `<%! String s = "Aptech"; %>`

# JSP Elements

## Scripting Elements

- **Scriptlets**

- Is used to embed Java code, which is **inserted into the `_jspService()` method** of the servlet within an HTML code
- Refers to **code blocks** executed for every request (a **fragment codes**)
- Are used to add complex data to an HTML form
- **Syntax:** `<% scriptlet %>`
- **Ex:** `<% for (int i =0 ; i<n; i++){  
System.out.println(i + “.This is scriptlets.”); } %>`

- **Expressions**

- Can be used to **display individual variables or the result** of some calculation
- Contains a Java statement whose value will **be evaluated** and **inserted** into the generated web page
- Refers to **single line codes** executed for every request.
- Provides **dynamic output generation and the result** is converted into a string
- Evaluates at HTTP request
- A declaration block is enclosed between delimiters.
- **Syntax:** `<%= expression %>`
- **Ex:** `<%= i %>`

# JSP Directives

## Directives

- **Controls the structure of the servlet** by sending messages from the JSP page to the JSP container.
- The **scope** of directives is the **entire JSP file**
- JSP uses directives for **controlling the processing** of JSP pages.
- **Do not produce any output** and **inform the JSP engine** about the **actions** to be performed on the JSP page
- **Specify scripting language used**
  - **Ex:** `<%@ page language = "java" ...%>`
- **Denote the use of custom tags library (taglib)**
  - **Ex:** `<%@ taglib uri = "c:\..." prefix = "abc" %>`
- **Include the contents of another JSP page into the current page**
  - **Ex:** `<%@ include file = "c:\..." %>`
- **Include Java file to Java packages list.**
  - **Ex:** `<%@ page .... import = "java.util.*, java.lang.*" %>`
- **Error handle in JSP page** and JSP page is caught errors (isErrorPage).
  - **Ex:** `handle error <%@ page ... errorpage = "/error.jsp" ... %>`  
`process error <%@ page isErrorPage = "true" %>`

# Page Directives

- Is used **to define and manipulate** a number of important attributes that affect the entire JSP page
- Is written **at the beginning** of a JSP page
- A JSP page can contain any number of page directives. All directives in the page are processed together during translation and result is applied together to the JSP page
- Syntax:** `<% @ page attributes %>`

| Attributes          | Descriptions                                                                                                                                                        |
|---------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>language</b>     | <b>Define</b> the <b>scripting language</b> used in the page. Default value is Java                                                                                 |
| <b>extends</b>      | Change the content of the servlet that is generated                                                                                                                 |
| <b>import</b>       | <b>Include</b> Java files to the Java package import list. Separating uses commas                                                                                   |
| <b>session</b>      | <b>Specify</b> if the JSP page takes part in a HTTP session. Default value is true                                                                                  |
| <b>buffer</b>       | <b>Specify</b> the size of the page <b>buffer</b> . Default value is 8KB                                                                                            |
| <b>autoflush</b>    | <b>Flush</b> the page buffer is filled. Default value is true                                                                                                       |
| <b>isThreadSafe</b> | <b>Define the safety level</b> of threads in the page. The JSP engine queues the requests sent for processing when the value is set to false. Default value is true |
| <b>info</b>         | <b>Describe</b> the page                                                                                                                                            |
| <b>errorPage</b>    | <b>Define</b> the page to display <b>errors occurring</b> in the JSP page                                                                                           |
| <b>isErrorPage</b>  | <b>Indicate</b> the <b>current</b> JSP page if contains the path another error page of JSP                                                                          |
| <b>contentType</b>  | <b>Set the content type</b> or MIME type and character encoding for JSP. Default value is text/html                                                                 |

# JSP Directives

## Include & Taglib Directives

- **Include**

- Is used to **physically include** the contents of another file sending to the server. The included file can be a HTML or JSP
- Identify the file through the local URL
- A single JSP file can include multiple include directives
- **Syntax:** `<%@ include file = "URL" %>`

- **Taglib**

- Enables the **use of custom tags** in the JSP page
- Access to all the objects that are available for a JSP page
- Extend the functionality of a JSP page one after the other
- The TLD – Tag Library Descriptor is identified through the URI – Uniform Resource Identifier and prefix describes the prefix string used to define the custom tag
- **Syntax:** `<%@ taglib uri = "URL" prefix = "name" %>`

# Example

`<% @ page import="java.util.Date" %>`

**Directives - page**

`<html>`

`<head>`

`<title>First JSP program</title>`

`</head>`

**HTML Comments**

`<body>`

**Scriptlet**

`<!-- myFirstProgram.jsp -->`

`<% out.println("Hello there!"); %><br>`

`<%= "Current date is " + new Date() %>`

`<%-- end Program --%>`

**Expression**

`</body>`


**JSP Comments**

`</html>`



# JSP Elements

## Example

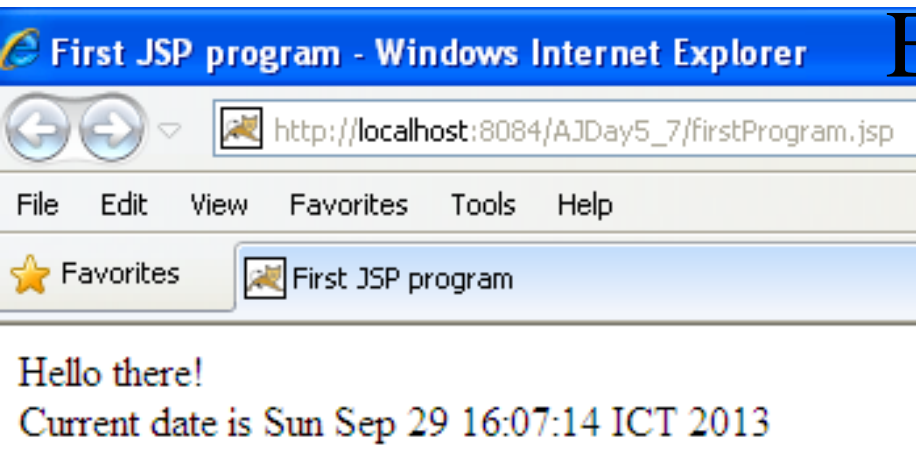

# JSP Elements

## Example

- **Main (main.jsp) file**

```
<html>
<head>
  <title>Directive Includes JSP program</title>
</head>
<body>
  <%-- include use directives --%>
  Current date is
  <% @ include file = "myDate.jsp" %>
</body>
</html>
```

**JSP Comments**



**Directives - include**

**Directives - page**

- **Include (myDate.jsp) file**

```
<% @ page import="java.util.Date" %>
<html>
<head>
  <title>Date JSP program</title>
</head>
<body>
  <%= new Date().toLocaleString() %>
</body>
</html>
```

**Expression**

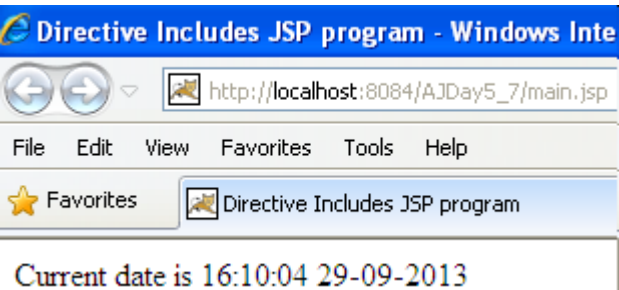

```

1  C:\Documents and Settings\Trong Khanh\Application Data\NetBeans\7.2.1\apache-tomcat-7.0.27.0_base\work\Catalina\localhost\AJDay5_7\org\apache\jsp
2
3
4  <!DOCTYPE html>
5  <html>
6      <head>
7          <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
8          <title>Directive Includes JSP program</title>
9      </head>
10     <body>
11
12         Current date is
13
14
15
16
17  <!DOCTYPE html>
18  <html>
19      <head>
20          <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
21          <title>Date JSP program</title>
22      </head>
23      <body>
24          16:10:04 29-09-2013
25      </body>
26  </html>
27
28  </body>
29  </html>

```

# JSP Elements

## Example

```
main_jsp.java x
Source History
70 out.write("\n");
71 out.write("<!DOCTYPE html>\n");
72 out.write("<html>\n");
73 out.write("    <head>\n");
74 out.write("        <meta http-equiv=\"Content-Type\" content=\"text/html;");
75 out.write("        <title>Directive Includes JSP program</title>\n");
76 out.write("    </head>\n");
77 out.write("    <body>\n");
78 out.write("        \t");
79 out.write("\n");
80 out.write("        \tCurrent date is\n");
81 out.write("        \t");
82 out.write("\n");
83 out.write("\n");
84 out.write("\n");
85 out.write("\n");
86 out.write("<!DOCTYPE html>\n");
87 out.write("<html>\n");
88 out.write("    <head>\n");
89 out.write("        <meta http-equiv=\"Content-Type\" content=\"text/html;");
90 out.write("        <title>Date JSP program</title>\n");
91 out.write("    </head>\n");
92 out.write("    <body>\n");
93 out.write("        ");
94 out.print( new Date().toLocaleString() );
95 out.write("\n");
96 out.write("    </body>\n");
97 out.write("</html>\n");
```

# JSP Elements Example

```
<h1>JSP Life Cycle Demo</h1>
```

```
<%!
    int num;
    public void jspInit() {
        System.out.println("jspInit is invoked!!!");
        num = 10;
    }

    public void jspDestroy() {
        System.out.println("jspDestroy is invoked!!!!");
        num = 0;
    }

    public int add (int n) {
        System.out.println("add is called!!!");
        num += n;

        return num;
    }
%>
```

**jspInit**





**Declarations**

**jspDestroy**

```
Init number <%= num %><br/>
```

```
<% out.print("Result of add is " + add(5)); %>
```

# JSP Elements Example

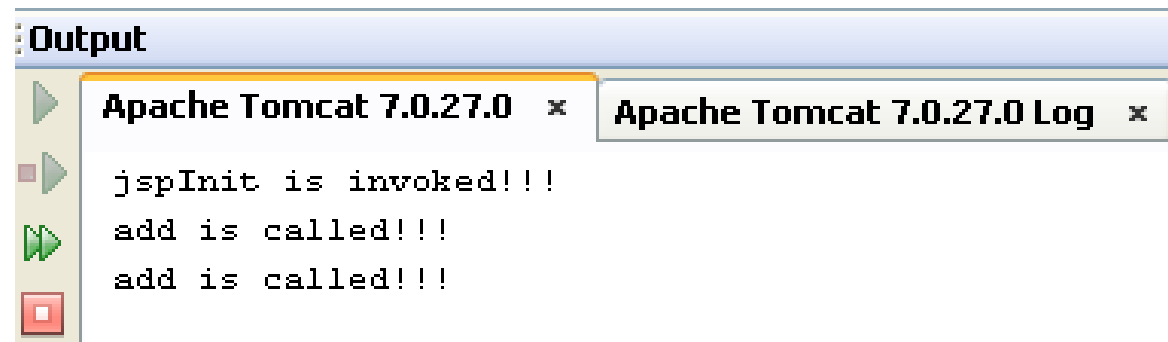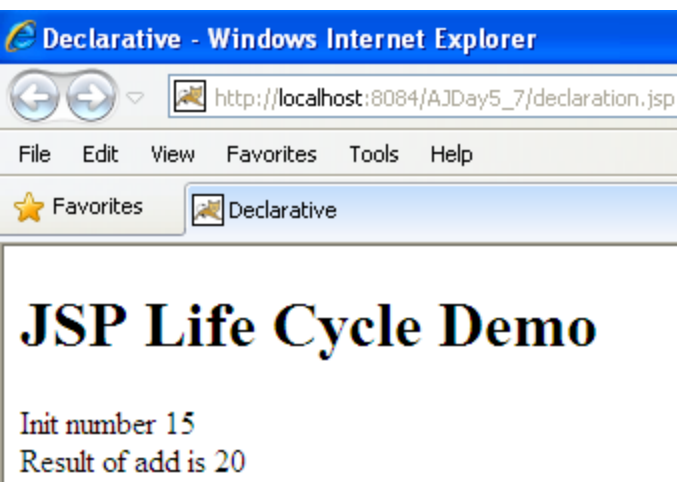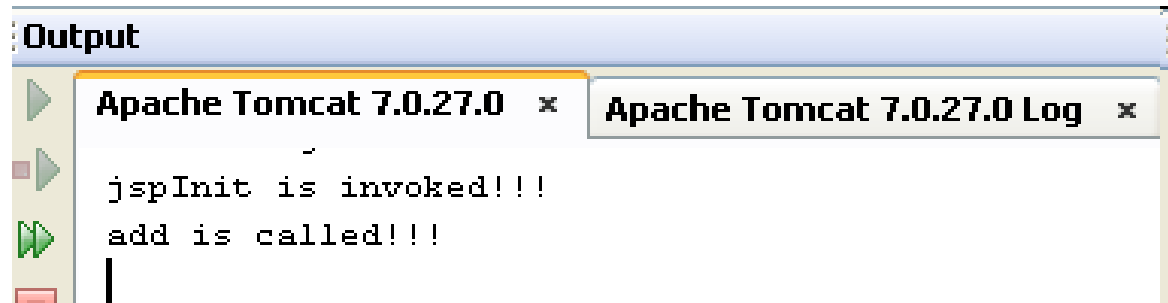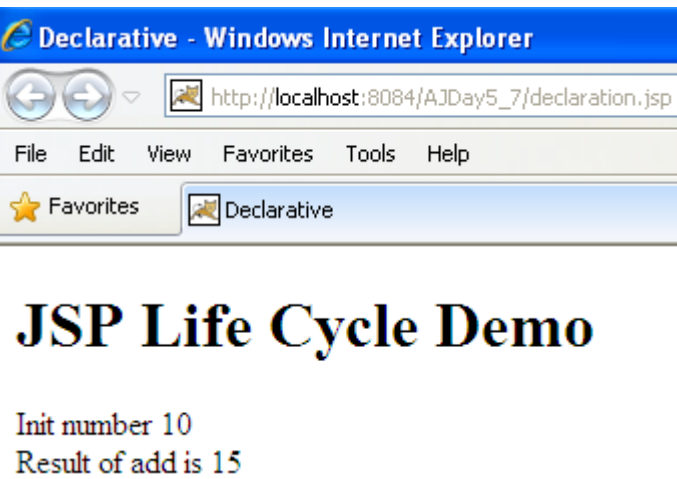


# JSP Elements

## Example

**Output**

Apache Tomcat 7.0.27.0 x Apache Tomcat 7.0.27.0 Log x AJDay5\_7 (run) x

```
jspInit is invoked!!!
add is called!!!
add is called!!!
jspDestroy is invoked!!!!
thg 10 31, 2013 8:54:21 CH org.apache.catalina.startup.HostConfig checkResources
INFO: Undeploying context [/AJDay5_7]
```

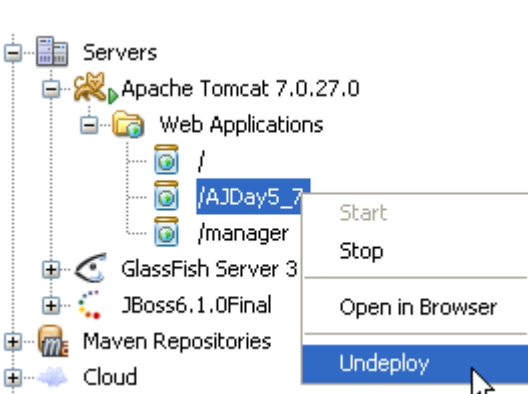

**Output**

Apache Tomcat 7.0.27.0 x Apache Tomcat 7.0.27.0 Log x AJDay5\_7 (run) x

```
jspInit is invoked!!!
add is called!!!
add is called!!!
jspDestroy is invoked!!!!
thg 10 31, 2013 8:54:21 CH org.apache.catalina.startup.HostConfig checkResources
INFO: Undeploying context [/AJDay5_7]
```

**Clean and Build Application**

```



scriptletExpression.jsp
8  <!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
9    <http://www.w3.org/TR/html4/loose.dtd">
10
11 <html>
12   <head>
13     <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
14     <title>Complex Expression Example</title></head>
15   <%
16       String bgColor = request.getParameter("bgColor");
17       boolean hasExplicitColor;
18       if (bgColor != null) {
19         hasExplicitColor = true;
20       } else {
21         hasExplicitColor = false;
22         bgColor = "white";
23       }
24   %>
25   <body bgcolor="<%= bgColor%>">
26     <center>
27       <h1>Color Testing</h1>
28     <%
29       if (hasExplicitColor) {
30         out.println("Explicit color: " + bgColor);
31       } else {
32         out.println("Using default color");
33       }
34     %>
35   </center>
36 </body>
37 </html>

```

Expression!!!

- Run jsp page without parameters
- Run with parameters as yellow, blue, red ...



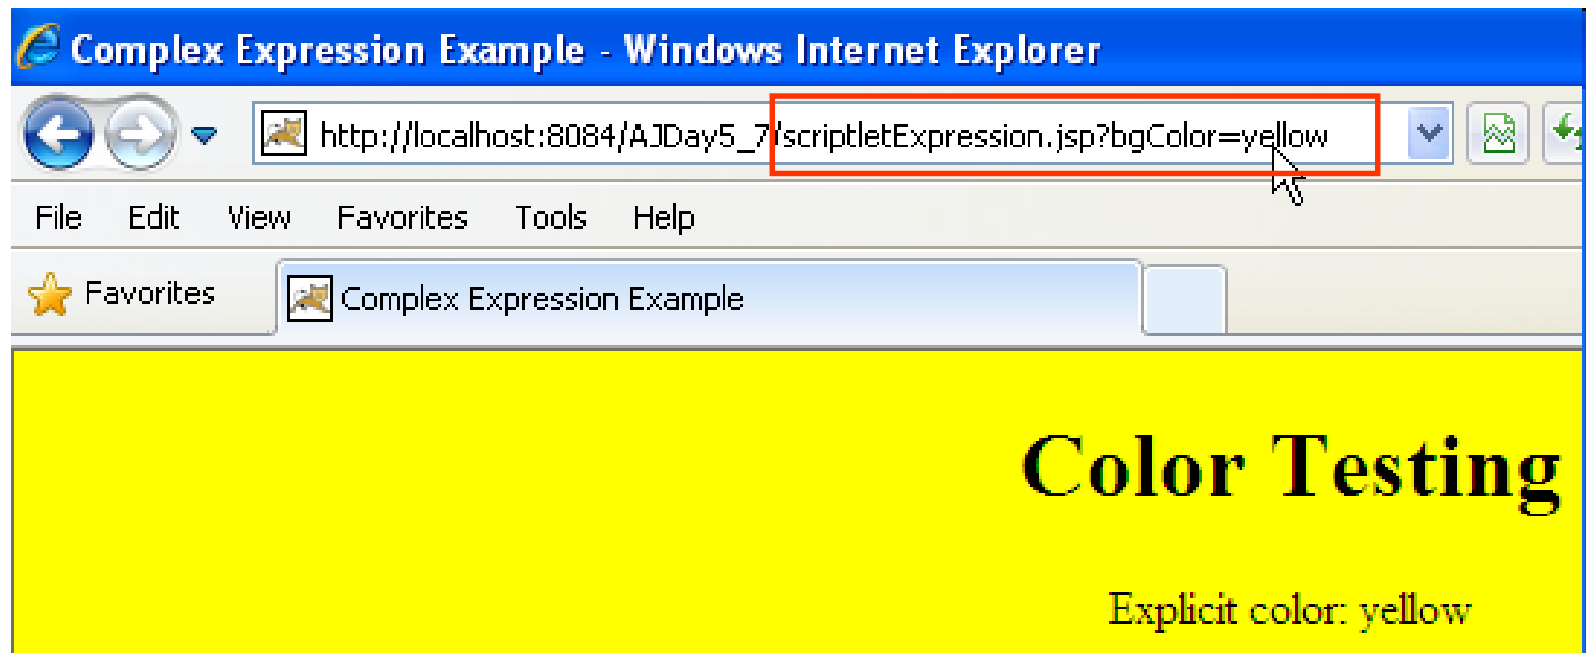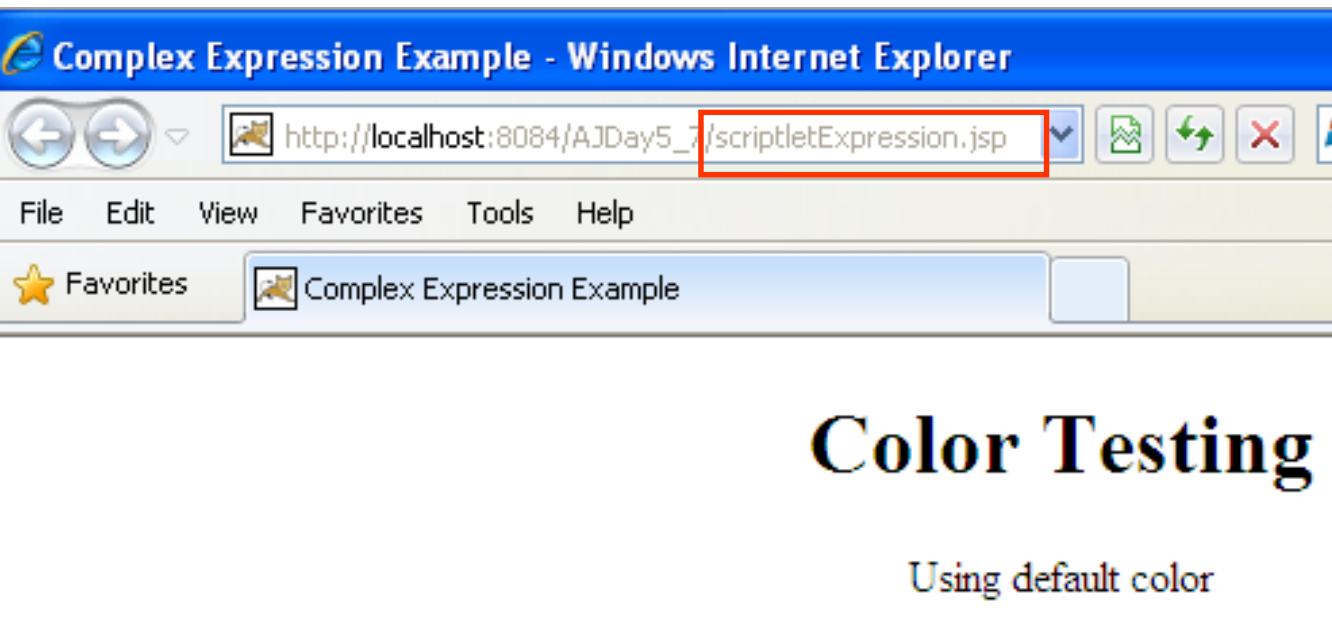

# JSP Elements

## Example – Exception

```

14      <title>Scripting</title>
15  </head>
16  <body>
17      <h1>Scripting Demo</h1>
18      <%
19          String s = "declaration";
20
21          public void test() {
22              System.out.println("This is a test function!!!");
23          }
24      %>
25
26      <%
27          String s = "scriptlet";
28
29          public void test1() {
30              System.out.println("This is a function in scriptlet");
31          }
32      %>
33  </body>
34  </html>

```

Z:\LapTrinh\Servlet\AJ\AJDay5\_7\build\generated\src\org\apache\jsp\testDemo\_jsp.java:68: error: illegal start of expression

```

public void test1() {
^

```

Z:\LapTrinh\Servlet\AJ\AJDay5\_7\build\generated\src\org\apache\jsp\testDemo\_jsp.java:68: error: illegal start of expression

```

public void test1() {
^

```

Z:\LapTrinh\Servlet\AJ\AJDay5\_7\build\generated\src\org\apache\jsp\testDemo\_jsp.java:68: error: ';' expected

```

public void test1() {
^

```

# JSP Elements

## Example – Exception

```

<body>
  <h1>Scripting Demo</h1>
<%!
  String s = "declaration";

  public void test() {
    System.out.println("This is a test function!!!");
  }
%>

  <%
    String s = "scriptlet";
  %>
</body>

```

```

testDemo_jsp.java x
7   public final class testDemo_jsp extends org.apache.jasper.runtime.HttpJspBase
8       implements org.apache.jasper.runtime.JspSourceDependent {
9       String s = "declaration";
10
11       public void test() {
12           System.out.println("This is a test function!!!");
13       }
14
15       private static final JspFactory _jspxFactory = JspFactory.getDefaultFactory();
16
17       public void _jspService(HttpServletRequest request, HttpServletResponse response)
18           throws java.io.IOException, ServletException {
19
20           out.write("    <body>\n");
21           out.write("        <h1>Scripting Demo</h1>\n");
22           out.write("    ");
23           out.write("\n");
24           out.write("\n");
25           out.write("\n");
26           out.write("    ");
27
28           String s = "scriptlet";
29
30           out.write("\n");
31           out.write("    </body>\n");
32           out.write("</html>\n");
33
34           <%= s %> . out.print( s );
35       }
36   }
37   catch (Throwable t) {

```

# JSP Implicit Objects

## Implicit Objects

- **Does not initialize or declare**
- **Are loaded** by the Web Container **automatically and maintains** them in a JSP page (**Available for scriptlets or expressions**)
- Created using directives and accessible according to the **specified scopes**
- The names of the implicit objects **are reserved words** of JSP
- The scopes for the IB in JSP page including **page, request, session, and application**
- **Access dynamic content** using JavaBeans
- **Syntax: `ImplicitObject.method(params)`**
- **Types of Implicit Objects**
  - *Input & Output Objects*
    - The objects control page input and output
    - Are request, response and out
  - *Scope Communication Objects*: provide access to all objects available in the given scope
  - *Servlet Objects*
    - Provides information about the page context
    - Processes request objects from a client and sends the response objects back to the client

# JSP Implicit Objects

- Types of Implicit Objects (cont)
  - The Error Objects
    - The object handles errors in a JSP page (exception)
    - Can access this object by declaring your JSP page as an error page  
`<%@page isErrorPage="true" %>`

| Object      | Class / Interface                                                |
|-------------|------------------------------------------------------------------|
| page        | javax.servlet.jsp.HttpJspPage – variable synonym for this object |
| config      | javax.servlet.ServletConfig                                      |
| request     | javax.servlet.http.HttpServletRequest                            |
| response    | javax.servlet.http.HttpServletResponse                           |
| out         | javax.servlet.jsp.JspWriter                                      |
| session     | javax.servlet.http.HttpSession                                   |
| application | javax.servlet.ServletContext                                     |
| pageContext | javax.servlet.jsp.PageContext                                    |
| exception   | java.lang.Throwable                                              |

# JSP Implicit Objects

## Input & Output Objects

| Objects  | Descriptions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                     |
|----------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| request  | <ul style="list-style-type: none"> <li>- Refer to the current request made by the client that is being processed by JSP container. The container passed the request IB to JSP page as a parameter to the <code>_jspService()</code>.</li> <li>- Implement the <b><code>javax.servlet.http.HttpServletRequest</code></b> interface</li> <li>- <b>Syntax:</b> <code>request.method(params)</code></li> <li>- <b>Scope:</b> request</li> <li>- <b>Ex:</b> <code>request.getParameter("username");</code></li> </ul> |
| response | <ul style="list-style-type: none"> <li>- Refers the result that is returned to the user after a JSP processed</li> <li>- Implement the <b><code>javax.servlet.http.HttpServletResponse</code></b> interface</li> <li>- <b>Syntax:</b> <code>response.method(params)</code></li> <li>- <b>Scope:</b> page</li> <li>- <b>Ex :</b> <code>response.addCookie(cookie)</code></li> </ul>                                                                                                                               |
| out      | <ul style="list-style-type: none"> <li>- Represent the output stream for the JSP page (send to client)</li> <li>- Implement the <b><code>javax.servlet.jsp.JspWriter</code></b> interface (the buffer size is supported by Servlet)</li> <li>- <b>Syntax:</b> <code>out.method(params)</code></li> <li>- <b>Scope:</b> page</li> <li>- <b>Ex:</b> <code>out.println("output stream")</code></li> </ul>                                                                                                           |

# JSP Implicit Objects

## Input & Output Objects – Example


```

1  <%--...--%>
6
7  <%@page contentType="text/html" pageEncoding="UTF-8"%>
8  <!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
9      "http://www.w3.org/TR/html4/loose.dtd">
10
11 <html>
12 <head>
13     <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
14     <title>Implicit Object</title>
15 </head>
16 <body>
17
18     <h1>Request - Response - Out Object</h1>
19
20     <%
21         response.setDateHeader ("Expires", 0);
22         response.setHeader ("Pragma", "no-cache");
23         if (request.getProtocol ().equals ("HTTP/1.1")) {
24             response.setHeader ("Cache-Control", "no-cache");
25             out.println ("<b>The protocol used is:</b> " + request.getProtocol ());
26         }
27     %>
28 </body>
</html>

```

# JSP Implicit Objects

## Input & Output Objects – Example

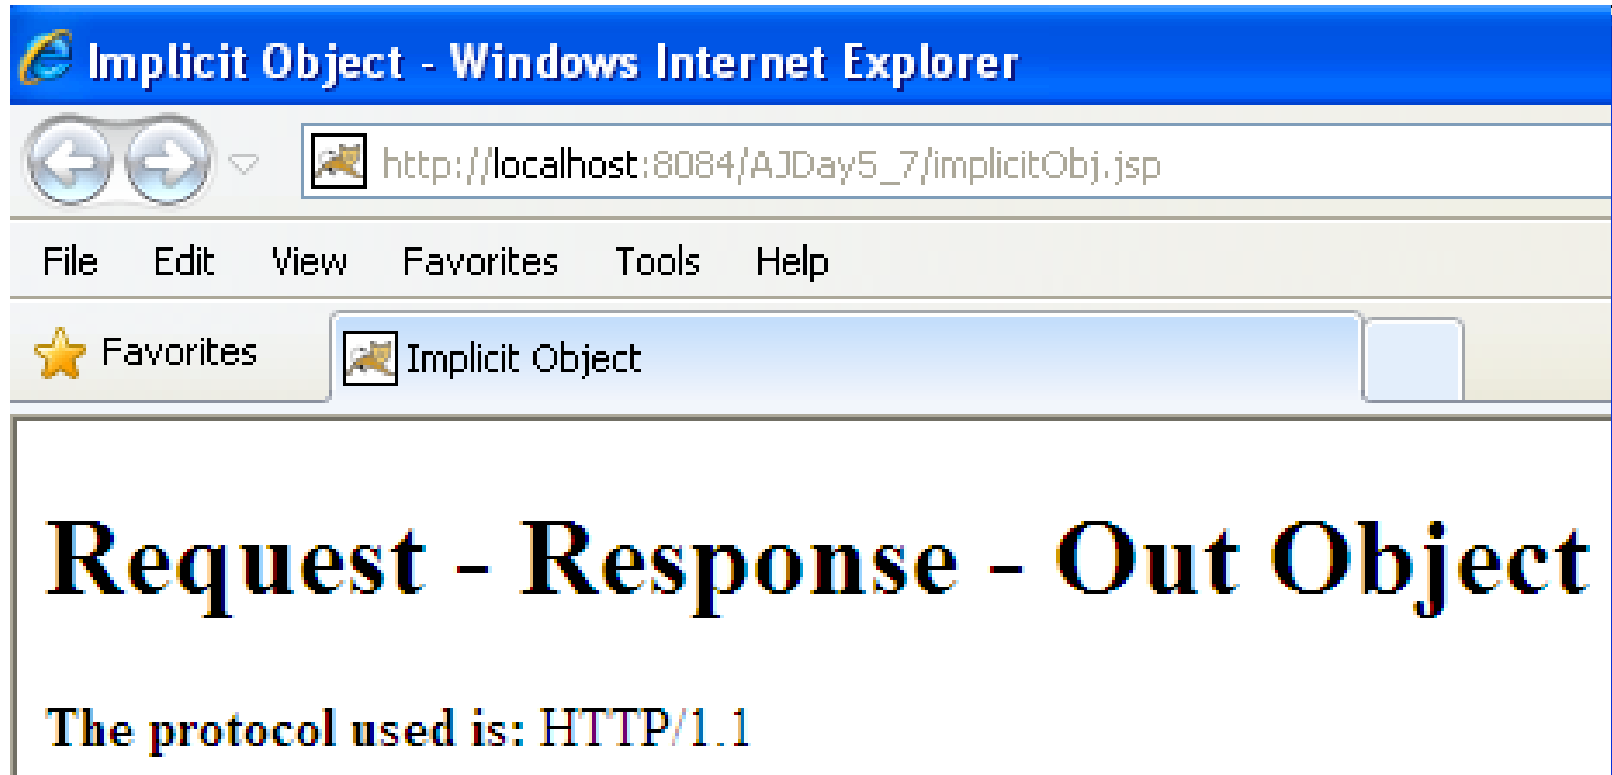




# JSP Implicit Objects

## Scope Communication Objects

| Objects     | Descriptions                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| session     | <ul style="list-style-type: none"><li>- Specify data and store information in the current session.</li><li>- Implement the <b>javax.servlet.http.HttpSession</b> interface</li><li>- <b>Syntax:</b> session.method(params)</li><li>- <b>Scope:</b> session</li><li>- <b>Ex:</b> session.setAttribute("username", "Aptech");</li></ul>                                                                                                          |
| application | <ul style="list-style-type: none"><li>- Represent the application of the required JSP page and represent the servlet context about Web Application in which it is running.</li><li>- Implement the <b>javax.servlet.ServletContext</b> interface</li><li>- <b>Syntax:</b> application.method(params)</li><li>- <b>Scope:</b> application</li><li>- <b>Ex:</b> application.setAttribute("username", "Aptech");</li></ul>                        |
| pageContext | <ul style="list-style-type: none"><li>- An instance of Pages (<b>javax.jsp.PageContext</b>)</li><li>- Enable access to the JSP page and the attributes associated with that page</li><li>- provides following fields to find the scope or specify the scope of the objects (PAGE, REQUEST, SESSION, and APPLICATION)</li><li>- <b>Syntax:</b> pageContext.method(params)</li><li>- <b>Ex:</b> pageContext.getAttributes("username");</li></ul> |

# JSP Implicit Objects

## Scope Communication Objects – Example

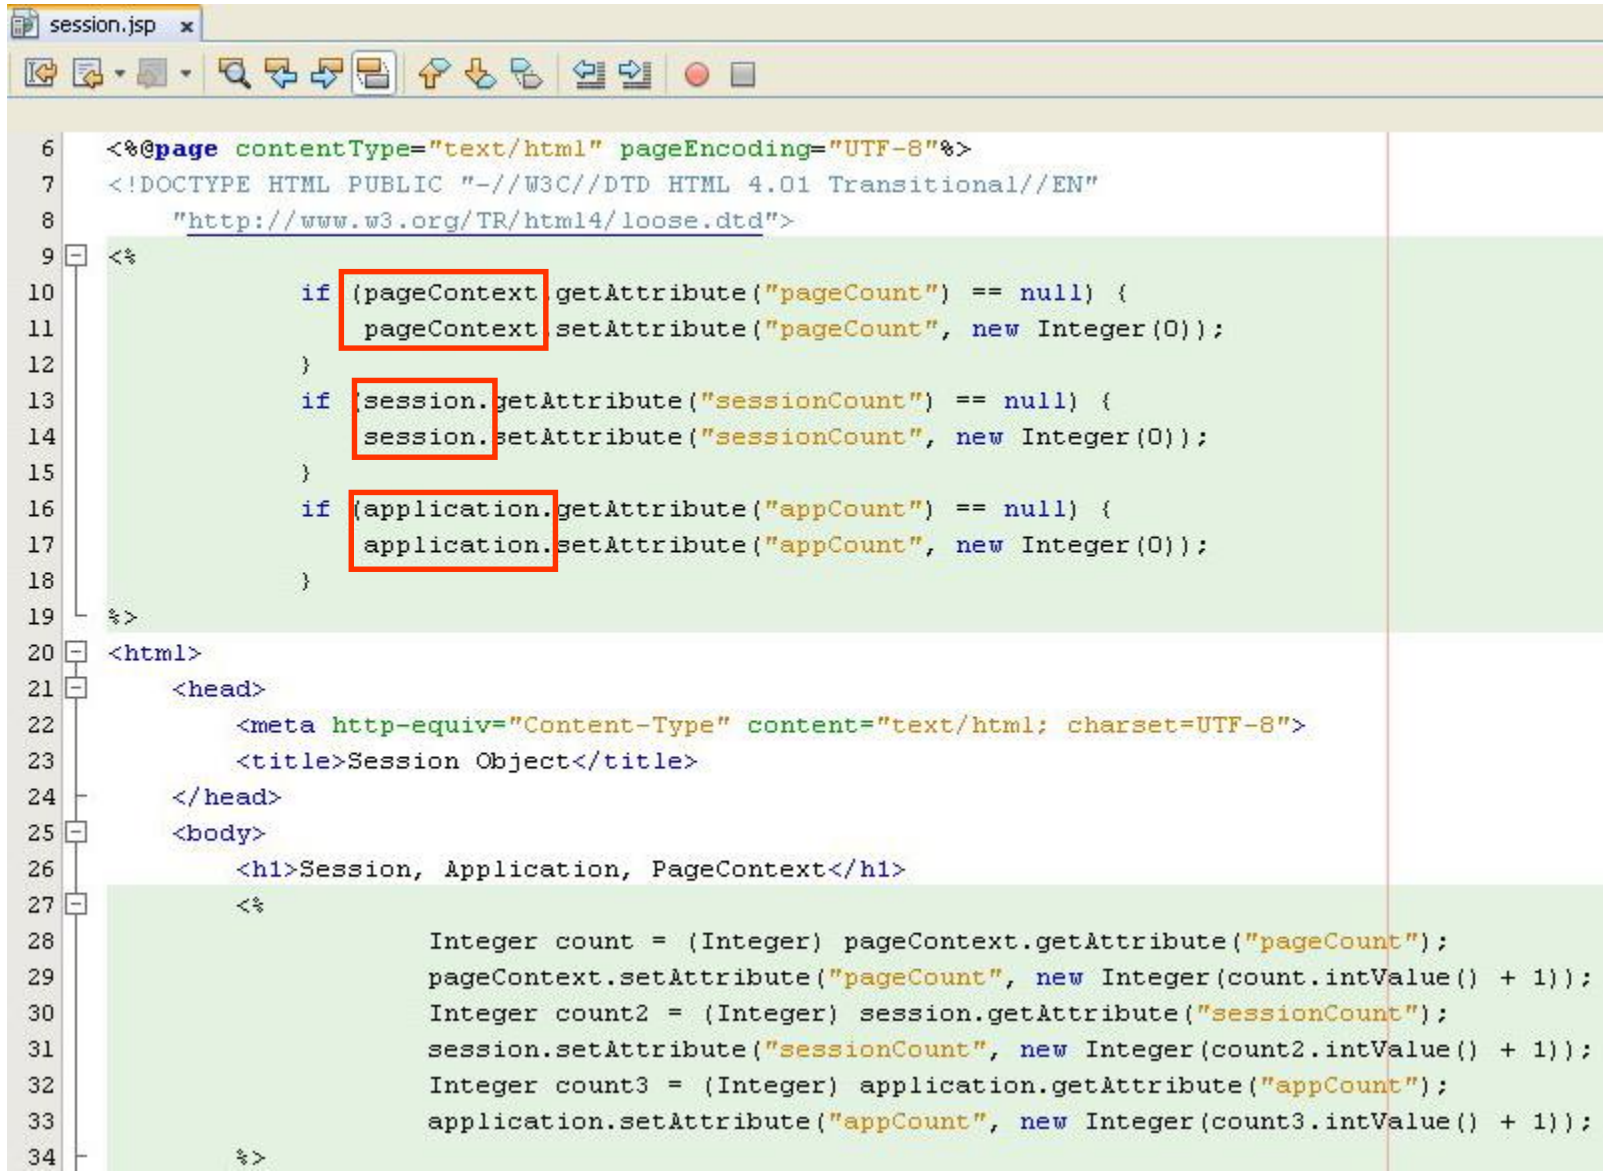

```

6  <%@page contentType="text/html" pageEncoding="UTF-8"%>
7  <!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
8    "http://www.w3.org/TR/html4/loose.dtd">
9  <%
10      if (pageContext.getAttribute("pageCount") == null) {
11          pageContext.setAttribute("pageCount", new Integer(0));
12      }
13      if (session.getAttribute("sessionCount") == null) {
14          session.setAttribute("sessionCount", new Integer(0));
15      }
16      if (application.getAttribute("appCount") == null) {
17          application.setAttribute("appCount", new Integer(0));
18      }
19  %>
20  <html>
21  <head>
22      <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
23      <title>Session Object</title>
24  </head>
25  <body>
26      <h1>Session, Application, PageContext</h1>
27      <%
28          Integer count = (Integer) pageContext.getAttribute("pageCount");
29          pageContext.setAttribute("pageCount", new Integer(count.intValue() + 1));
30          Integer count2 = (Integer) session.getAttribute("sessionCount");
31          session.setAttribute("sessionCount", new Integer(count2.intValue() + 1));
32          Integer count3 = (Integer) application.getAttribute("appCount");
33          application.setAttribute("appCount", new Integer(count3.intValue() + 1));
34      %>

```


# JSP Implicit Objects

## Scope Communication Objects – Example

```


35 <b>Page Count =</b>
36 <%= pageContext.getAttribute("pageCount") %><br/>
37
38 <b>Session Count =</b>
39 <%= session.getAttribute("sessionCount") %><br/>
40
41 <b>Application Count =</b>
42 <%= application.getAttribute("appCount") %><br/>
43
44 <b>Time =</b>
45 <%= new java.sql.Time(System.currentTimeMillis()) %><br/>
46 </body>
47 </html>

```

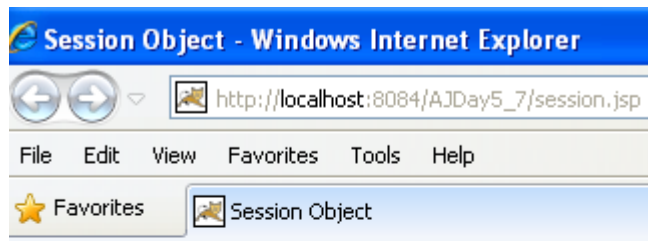

### Session, Application, PageContext

Page Count = 1  
 Session Count = 1  
 Application Count = 1  
 Time = 16:33:58

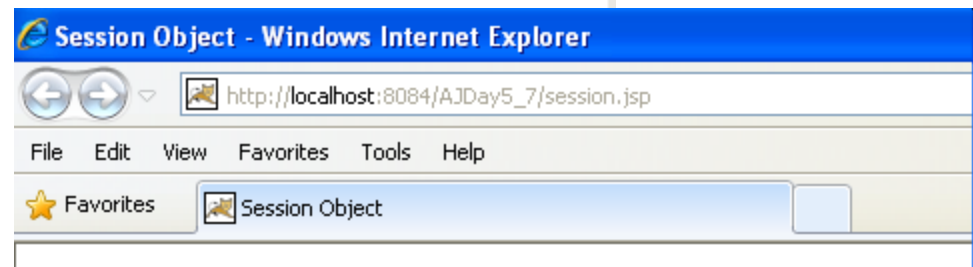

### Session, Application, PageContext

Page Count = 1  
 Session Count = 2  
 Application Count = 2  
 Time = 16:34:26


# JSP Implicit Objects

## Servlet Objects

| Objects | Descriptions                                                                                                                                                                                                                                                                                                                                                                         |
|---------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| page    | <ul style="list-style-type: none"><li>- Represents the servlets and the initialization parameters of the servlet are stored in the config IB</li><li>- Use “this” reference and the page IB represents it.</li><li>- Implements the <b>javax.lang.object</b> interface</li><li>- <b>Syntax:</b> <b>&lt;%@ page info = “information” %&gt;</b></li><li>- <b>Scope:</b> page</li></ul> |
| config  | <ul style="list-style-type: none"><li>- Represent the configuration of the servlet data</li><li>- Implement the <b>javax.Servlet.ServletConfig</b> interface</li><li>- Access objects through config.getInitParameter(“par”)</li><li>- <b>Scope:</b> page</li></ul>                                                                                                                  |

# JSP Implicit Objects


## Servlet Objects – Example

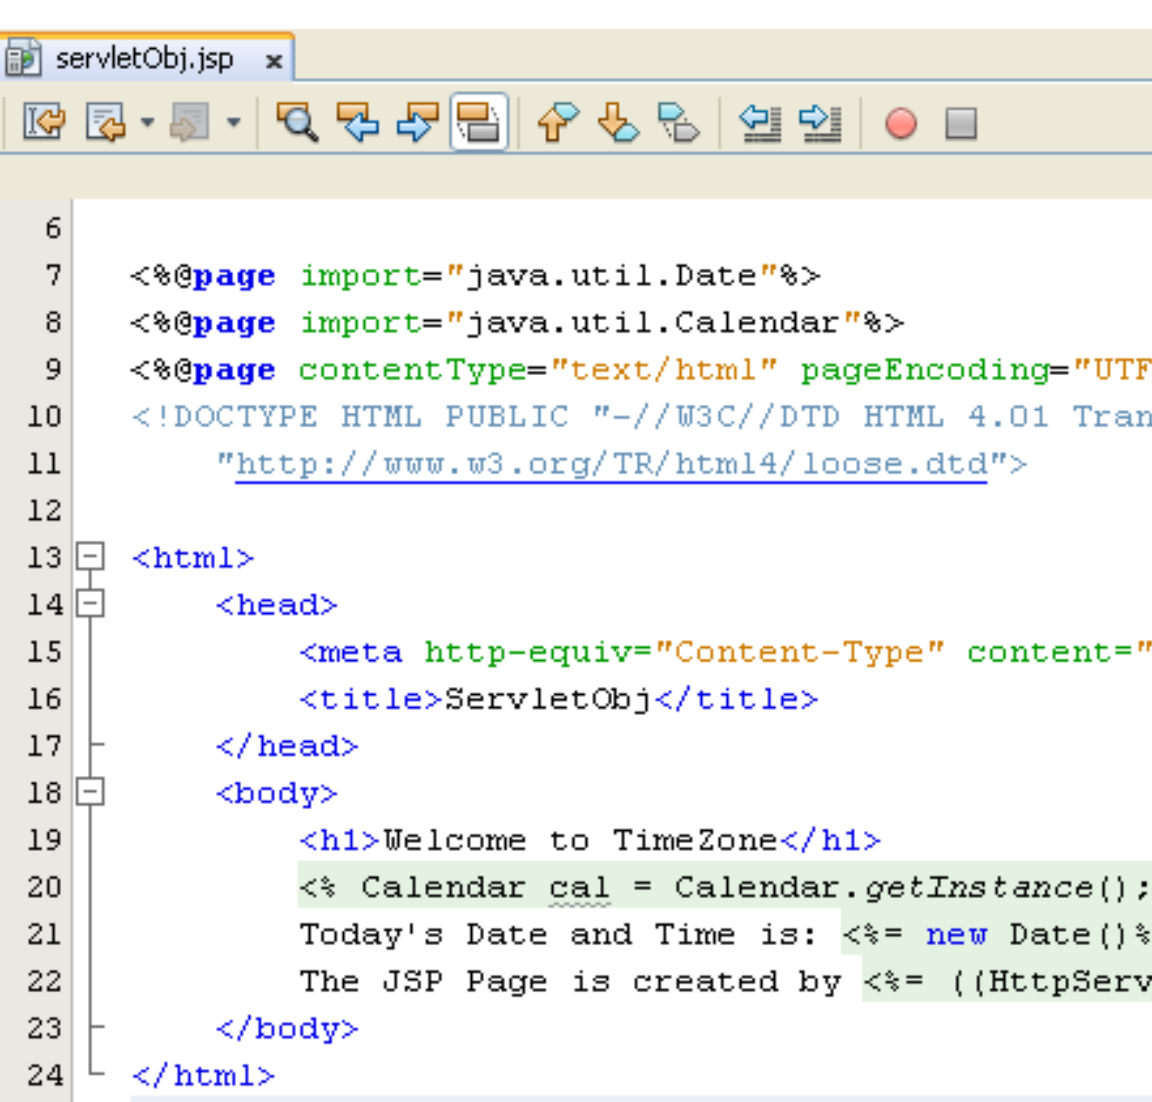

```

6
7 <%@page import="java.util.Date"%>
8 <%@page import="java.util.Calendar"%>
9 <%@page contentType="text/html" pageEncoding="UTF-8"%>
10 <!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional"
11    "http://www.w3.org/TR/html4/loose.dtd">
12
13 <html>
14 <head>
15     <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
16     <title>ServletObj</title>
17 </head>
18 <body>
19     <h1>Welcome to TimeZone</h1>
20     <% Calendar cal = Calendar.getInstance();%>
21     Today's Date and Time is: <%= new Date()%><br/>
22     The JSP Page is created by <%= ((HttpServlet) page).getServletInfo()%><br/>
23 </body>
24 </html>

```

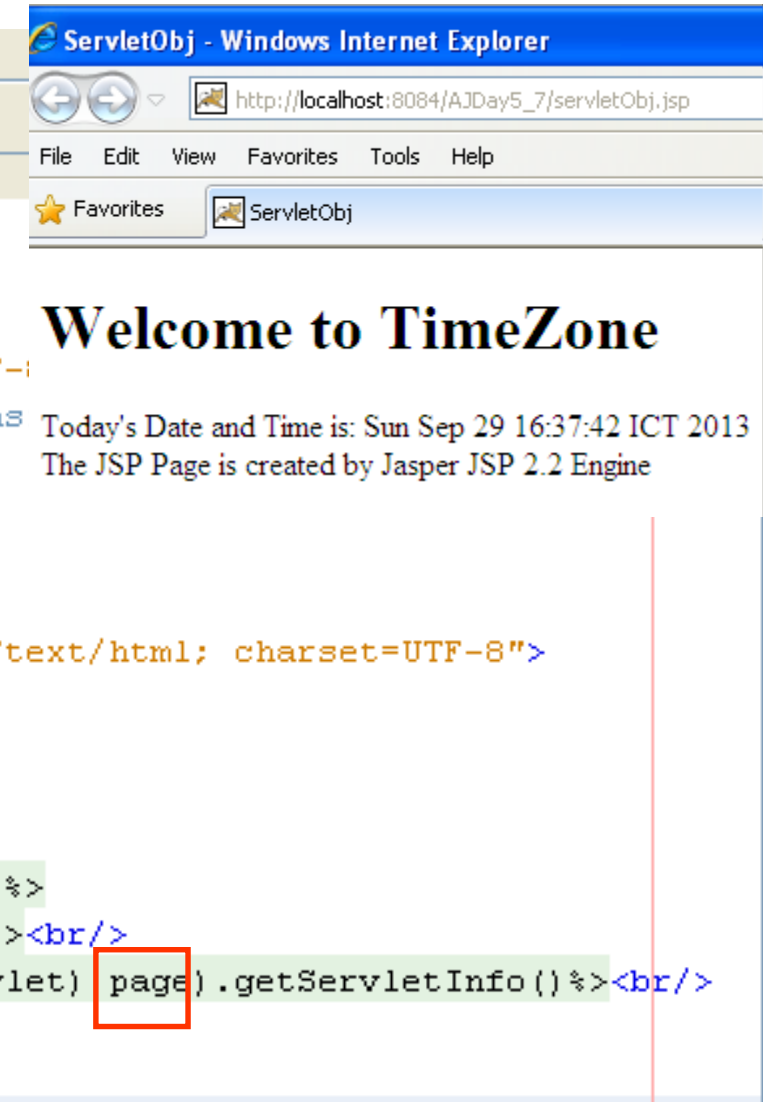

ServletObj - Windows Internet Explorer

http://localhost:8084/AJDay5\_7/servletObj.jsp

File Edit View Favorites Tools Help

★ Favorites ServletObj

## Welcome to TimeZone

Today's Date and Time is: Sun Sep 29 16:37:42 ICT 2013  
The JSP Page is created by Jasper JSP 2.2 Engine

# JSP Implicit Objects

## Error Objects

| Objects   | Descriptions                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
|-----------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| exception | <ul style="list-style-type: none"><li>- Refer to the runtime exception in an error page</li><li>- Is available only on pages that are assigned as error page using the <b>isErrorPage</b> attribute of the page directive.</li><li>- Implement the <b>javax.lang.Throwable</b> interface</li><li>- <b>Exception</b> methods are supported<ul style="list-style-type: none"><li>+ <b>getMessage()</b> : return the error message associated with the exception</li><li>+ <b>toString()</b> : Return a string with the class name of the exception within the error message.</li><li>+ <b>printStackTrace()</b>: prints the execution stack in effect when the exception was thrown to the designated output stream</li></ul></li></ul> |

# JSP Implicit Objects

## Error Objects – Example

- A JSP page traps errors occurred

```
<%@ page errorPage="error.jsp" %>
```

```
<html>
```

```
<head> <title>Tag Example</title> </head>
```

```
<body>
```

```
<%! String name; %>
```

```
<%      name = request.getParameter("name");
```

```
    if(name==null) name="World"; %>
```

```
<h1>Hello, <%= name %></h1>
```

```
<% out.println("<H1>Hello " + name + "</H1>"); %>
```

```
<% int num=Integer.parseInt("a"); %> </body>
```

```
</html>
```




# JSP Implicit Objects

## Error Objects – Example

```

1  <%--...--%>
6
7  <%@page contentType="text/html" pageEncoding="UTF-8"%>
8  <!DOCTYPE HTML PUBLIC "-//W3C//DTD HTML 4.01 Transitional//EN"
9    "http://www.w3.org/TR/html4/loose.dtd">
10 <%@page isErrorPage="true" %>
11 <html>
12 <head>
13     <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
14     <title>Error</title>
15 </head>
16 <body>
17     <h1>Error occurs</h1>
18     <font color="red"><%= exception.toString() %></font>
19 </body>
20 </html>
    
```

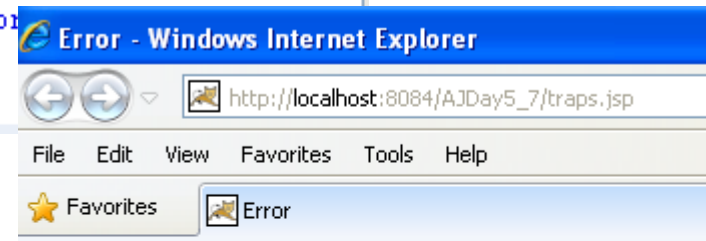

**Error occurs**

java.lang.NumberFormatException: For input string: "a"



# Summary


- **How to build web application applying MVC model using Servlet, JSP + Scripting Element**
  - JSP vs. Servlet
  - JSP mechanism, syntax
  - MVC Model
  - How to use JSP combining the Servlets and Java objects
  - How to connect DB using Dynamic connection or DataSource

Q&A

# Next Lecture

- **How to write CUD Web Application**
  - Session Tracking Techniques
  - Manipulate DB Techniques in Web Application
  - Break down structure component in building web application
- **Techniques: Error Handling in Servlets**
  - Reporting Errors
  - Logging Errors
  - Users Errors vs. System Errors

# Next Lecture

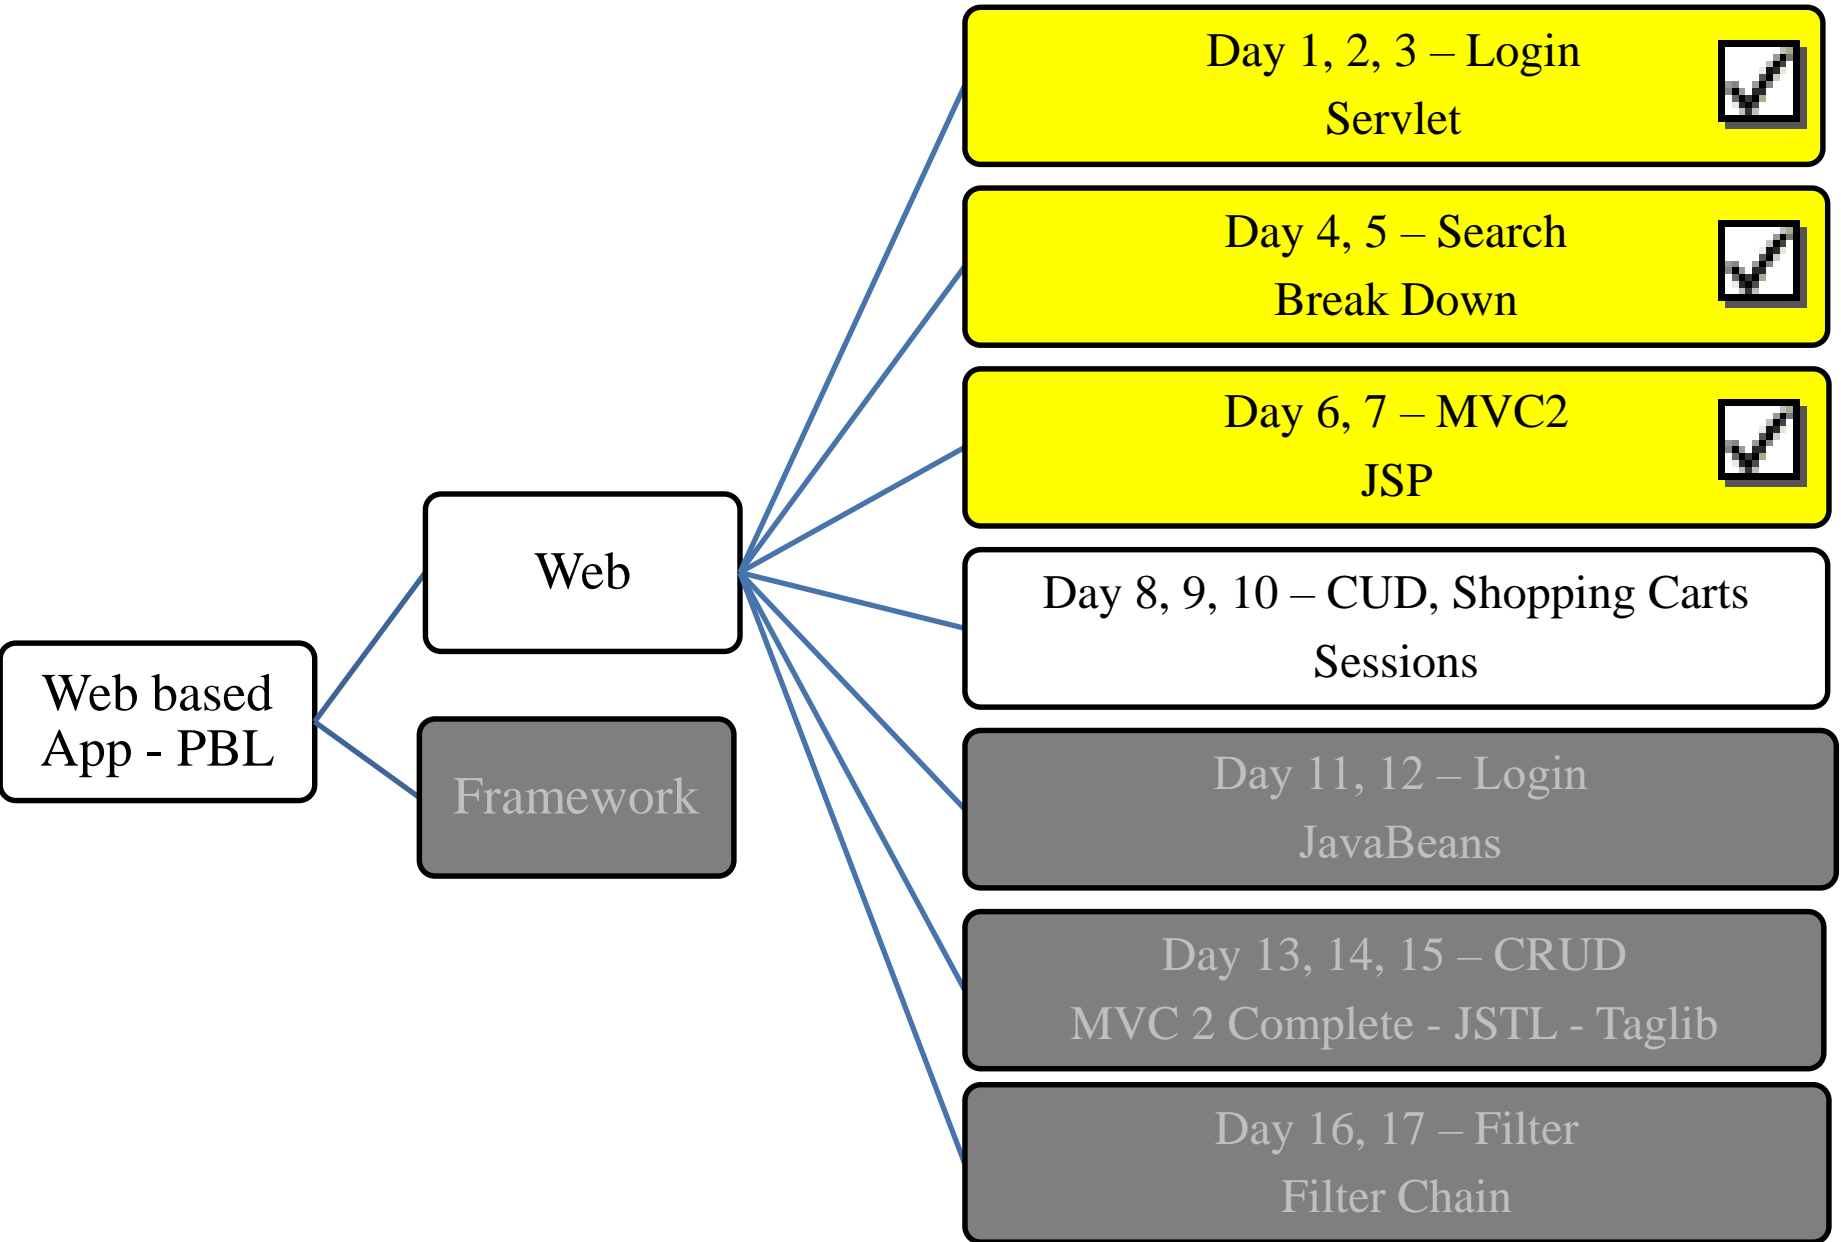

# Appendix – MVC Design Pattern

## Model – View – Controller

- **Main concern** of MVC is to **separate** the **data (model)** and the **user interface (view)**
  - Helps the developer **changing** to the **user interface** can be made **without affecting** the **underlying data** handling logic.
  - The data can be **reorganized without changing** the user interface.
- **Separation** is **achieved** by introducing an **controller** component
  - **Controller** is an **intermediate component**
  - Controller **defines** as how the **user interface** should **react** to a **user input**

## Model – View – Controller

- **Model**

- Contains only the pure application data (it **contains no logic** describing how to **present the data to a user**)
- Models **data** and **behavior behind** business process
- Manages information (**access, modify, and represent application's data**) and notifies observers whenever the information changes
- Maps Real-World Entities (**implement business logic, workflow**)
- **Performing DB Queries**
- **Calculating Business Process**
- **Encapsulates Domain Logic** (a Java Object – **Java Bean**) which are independent of Presentation

- **View**

- Obtains data from model & presents the model's data to the user
- **Represents** Output/Input of the application (**GUI – JSP & HTML ...**)
- **Display** results of Business Logic
- Free Access to Model, but should not change the state of the model.
- **Reads** Data from Model – Using Query Methods

## Model – View – Controller

- **Controller**

- Serves **logical connection** between user's interaction and the **business process**
- It **receives** and **translates** input to request on model or view
- **Input from user** and instructs the model and view to perform action
- **Responsible** for making decision among multiple presentation
- **Maps** the end-user action to the application response
- Is **responsible** for **calling** methods on the model that changes the state of the model
- **Updates the state of the Model and generates one or more views (servlets)**

- **Evolution of MVC Architecture**

- NO MVC
- MVC Model 1 [**Page-centric**] – JSP Model 1
- MVC Model 2 [**Servlet-centric**] – JSP Model 2

## Model – View – Controller

- **Relationships** between components
  - **View and Controller:** Controller is responsible for creating or selecting view
  - **Model and View**
    - View depends on Model
    - If a change is made to the model then there might be required to make parallel changes in the view
  - **Model and Controller**
    - Controller depends on model
    - If a change is made to the model then there might be required to make parallel changes in the Controller
- **Logical Layers** in Web application
  - **Model** [Business Process Layer]
  - **View** [Presentation Layer]
  - **Controller** [Control Layer]



## MVC Model 1

- Composed of a **series of interrelated JSP pages**
- **JSP page handles** the entire request processing mechanism
  - Extract the HTTP request parameters
  - Invoke the business logic (through Java Beans)
  - Process the business logic
  - Handle the HTTP session
- JSP page **responsible** for **displaying** the **output** to the client
  - There is no extra Servlet involved in the process.
- **A page centric architecture (Business process logic and control decisions are hard coded inside JSP pages)**
- Next page selection is determined by **hyperlink** or **action** of submitting a form. **Ex:**
  - `<a href="find.jsp"> Search </a>`
  - `<form action="find.jsp"> ... </form>`



# Appendix


## Create the JSP Page on NetBeans

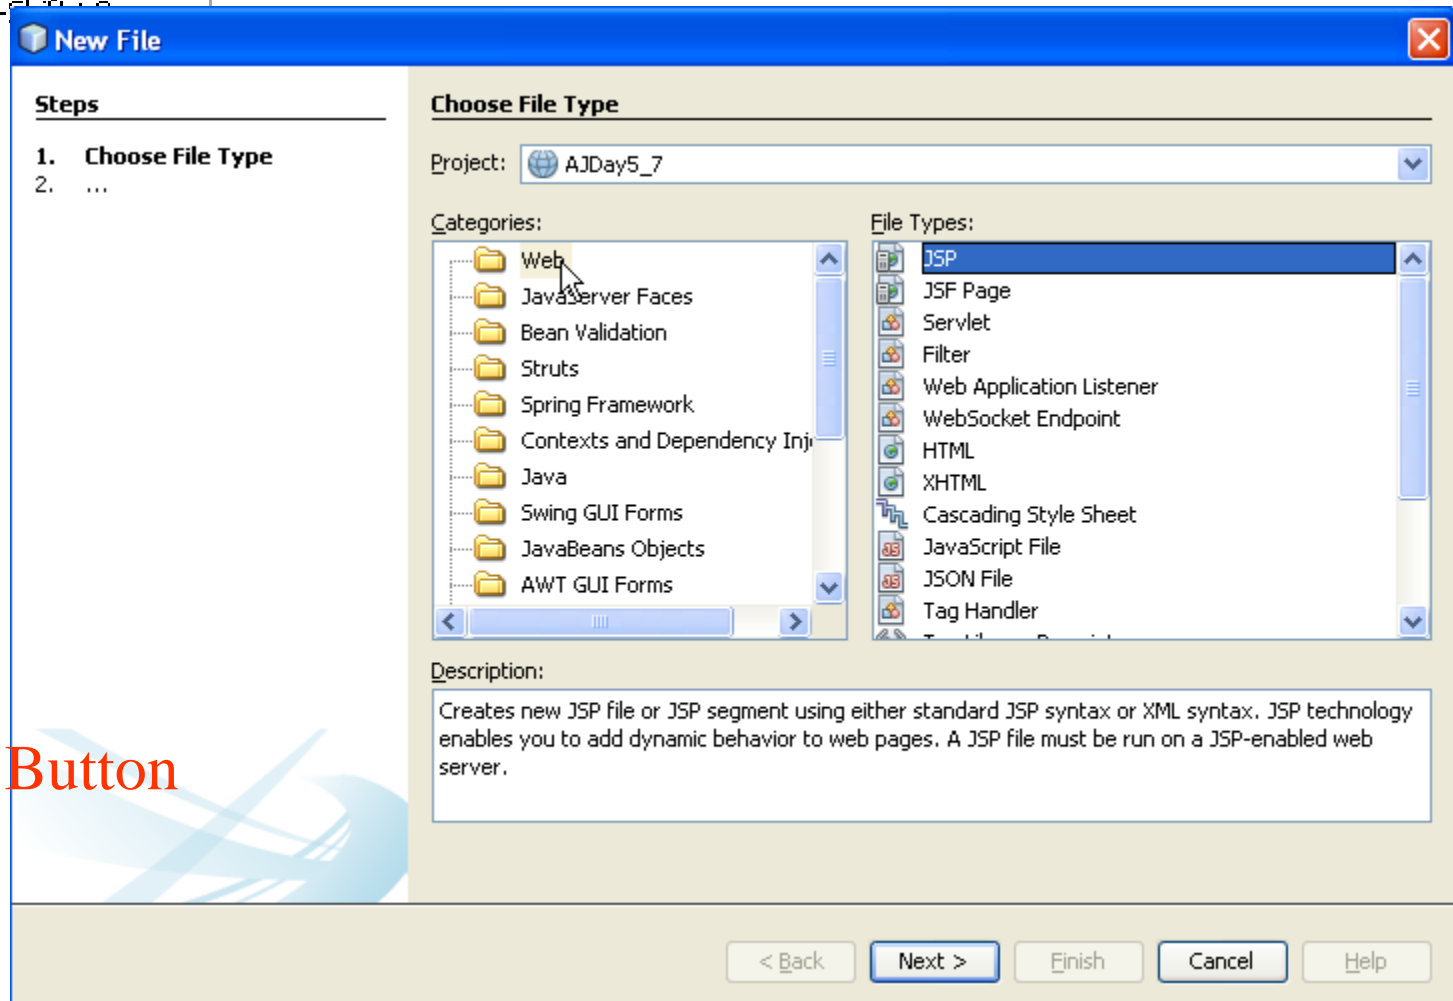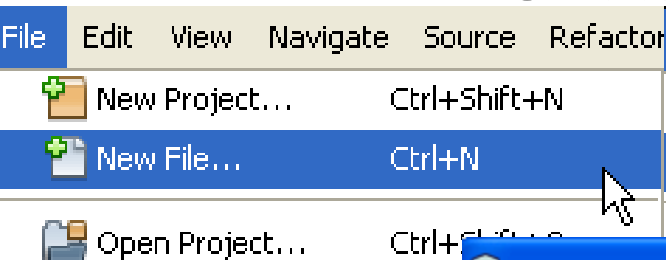

- Click Next Button

# Appendix

## Create the JSP Page on NetBeans

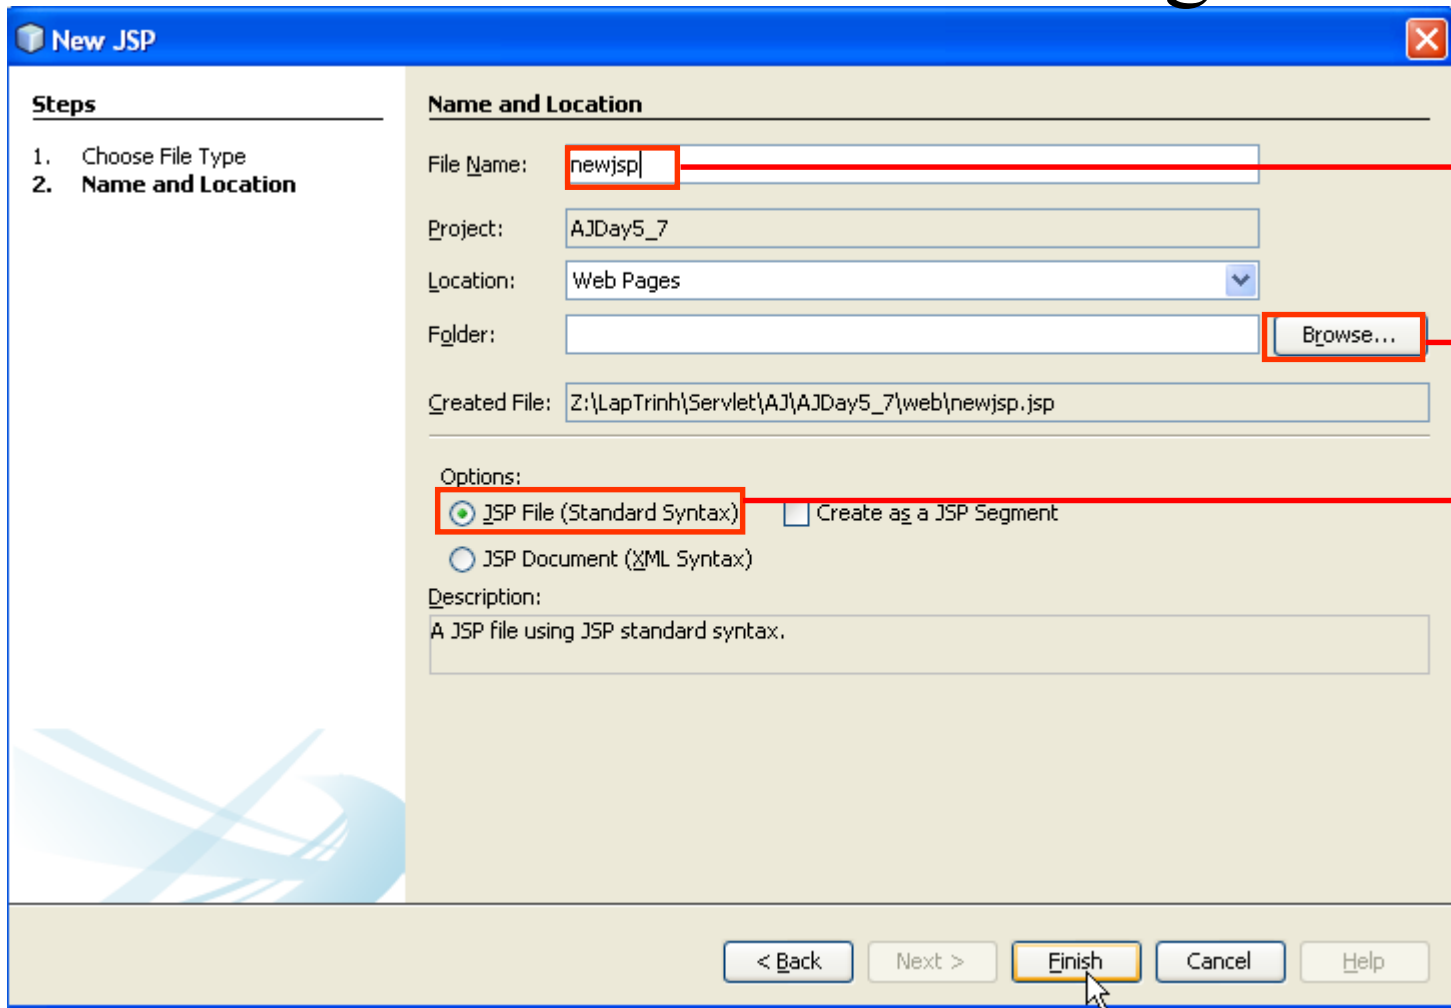

The image shows the 'New JSP' dialog box in NetBeans. The 'Steps' pane on the left indicates the current step is 'Name and Location'. The 'Name and Location' section contains the following fields: 'File Name' with 'newjsp' entered, 'Project' with 'AJDay5\_7', 'Location' with 'Web Pages', and an empty 'Folder' field with a 'Browse...' button. The 'Created File' field shows the path 'Z:\LapTrinh\Servlet\AJ\AJDay5\_7\web\newjsp.jsp'. The 'Options' section has two radio buttons: 'JSP File (Standard Syntax)' (selected) and 'JSP Document (XML Syntax)'. There is also a checkbox for 'Create as a JSP Segment'. The 'Description' field contains the text 'A JSP file using JSP standard syntax.' At the bottom, there are buttons for '< Back', 'Next >', 'Finish' (highlighted with a mouse cursor), 'Cancel', and 'Help'.

Fill your file name without .jsp


Locate the directory store jsp file in current project

Using JSP File

- Click **Finish** Button

# Appendix

## Create the JSP Page on NetBeans

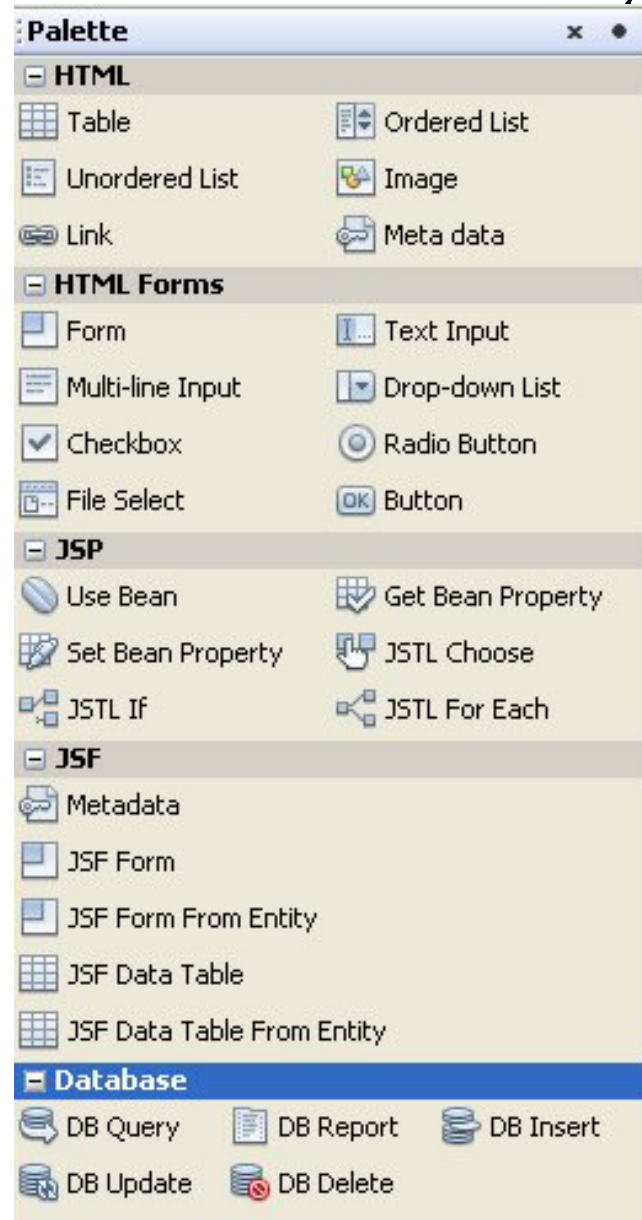

# Java Server Pages

## JSP Life Cycle

- **Translation**


- A servlet code to implement JSP tags is automatically generated, complied and loaded into the servlet container.

- **jspInit()** method is invoked when the JSP page is **initialized** and **requested**

- The **\_jspService()** method corresponds to the body of the JSP page and is **defined automatically** by the JSP container and **never** be **defined** by the JSP page


- The **jspDestroy()** method is invoke when the JSP page is going to be **destroyed (requested again)**

- **Notes:** the servlet must implement the **javax.servlet.jsp.HttpJspPage** interface

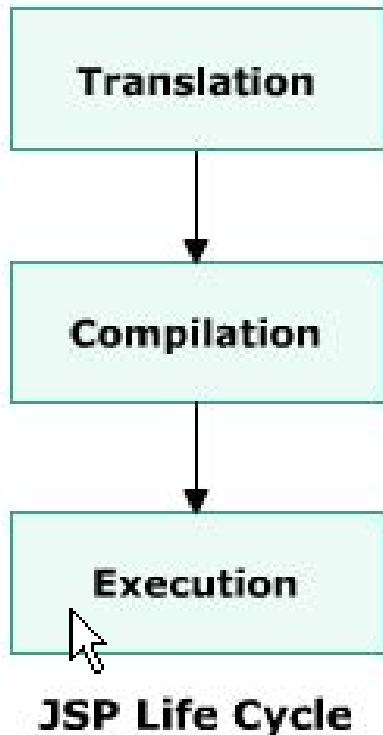

# Java Server Pages

## JSP Life Cycle

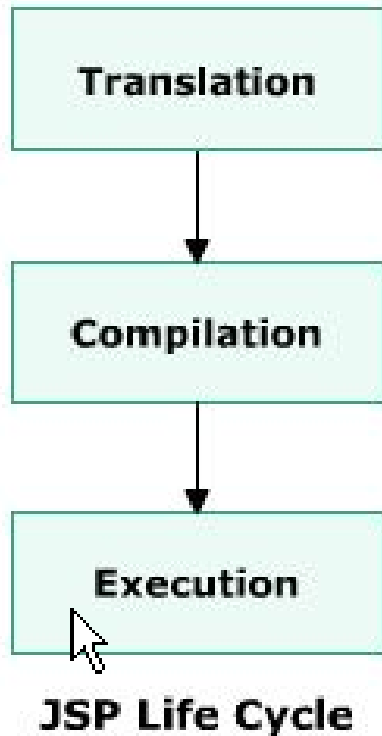

- **Compilation**

- The JSP page is automatically compiled and executed again by JSP/ Servlet Engine

- **Execution**

- Is carried out with the help of page directives controlling various execution parameters and are used for buffering output and handling errors

# JSP Elements

## Overview

- Enables to **create dynamic JSP pages**
- The JSP server **translates** and **executes** JSP elements

| Elements                 | Description                                                              |
|--------------------------|--------------------------------------------------------------------------|
| <b>Root</b>              | Classifies standard elements and attributes of namespaces in tag library |
| <b>Comment</b>           | Used in JSP file documentation                                           |
| <b>Declaration</b>       | Declares variables and methods in a scripting language page.             |
| <b>Expression</b>        | Includes expression in a scripting language page                         |
| <b>Scriptlet</b>         | Includes code fragment in a scripting language page                      |
| <b>Text</b>              | Includes data and text                                                   |
| <b>include Directive</b> | Includes content of one JSP page into the current JSP page               |




# JSP Elements

## Overview

| Elements                       | Description                                                                                        |
|--------------------------------|----------------------------------------------------------------------------------------------------|
| <b>page Directive</b>          | Defines attribute of JSP page and passes processing information about JSP page to JSP container    |
| <b>taglib Directive</b>        | Defines custom tags in JSP page                                                                    |
| <b>&lt;jsp:param&gt;</b>       | Adds value of parameter to a request sent to another JSP page using <jsp:include> or <jsp:forward> |
| <b>&lt;jsp:forward&gt;</b>     | Forwards request from a client to the Web server                                                   |
| <b>&lt;jsp:include&gt;</b>     | Includes the output from one file into the other                                                   |
| <b>&lt;tagPrefix:name&gt;</b>  | Accesses the functions of custom tags                                                              |
| <b>&lt;jsp:setProperty&gt;</b> | Sets the value of a Java Bean                                                                      |
| <b>&lt;jsp:getProperty&gt;</b> | Includes the bean property and value into the result set                                           |
| <b>&lt;jsp:plugin&gt;</b>      | Uses a plugin to execute an applet or Bean                                                         |
| <b>&lt;jsp:useBean&gt;</b>     | Sets the location and initializes the bean with a specific name and scope                          |

# MVC Design Pattern

## MVC Model 2

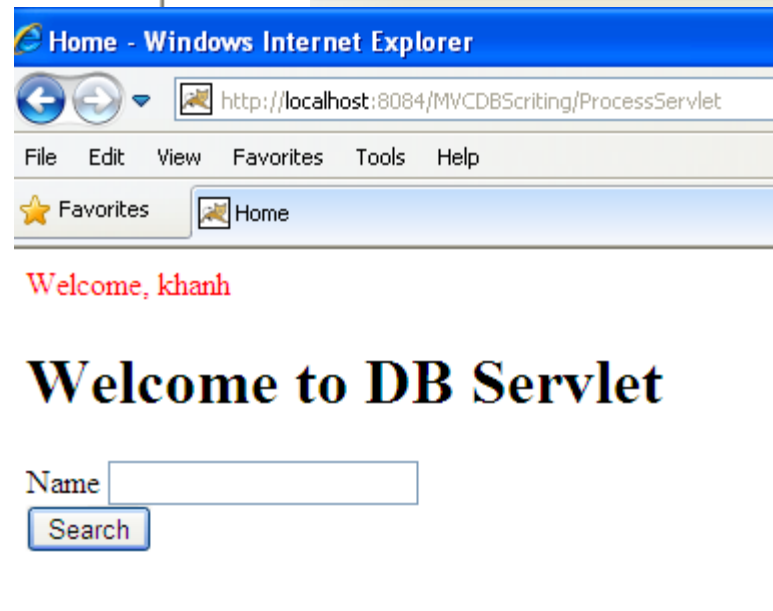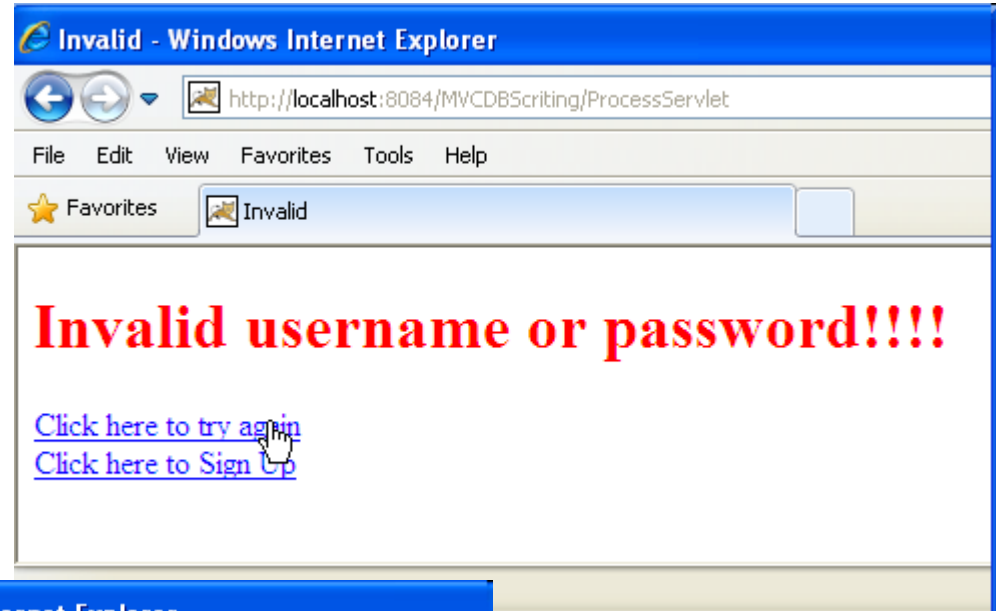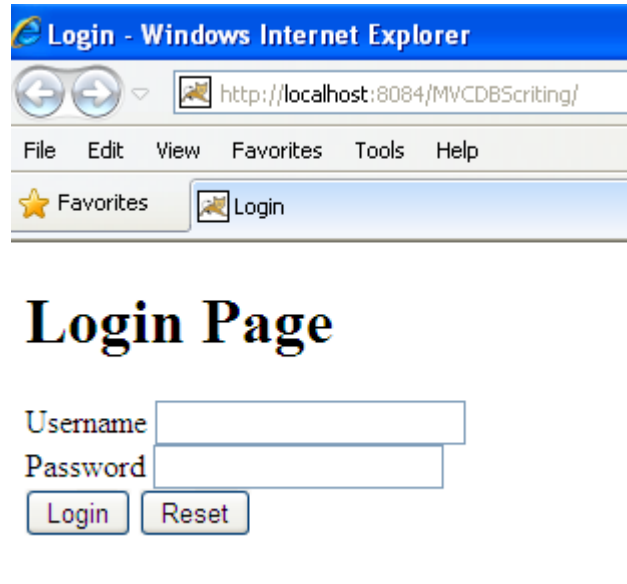



# MVC Design Pattern

## MVC Model 2

Welcome, khanh

### Search Page

Search Value

| No. | Username | Password | Last name    | Role                                |
|-----|----------|----------|--------------|-------------------------------------|
| 1   | IA1161   | 123456   | Class IA1161 | <input type="checkbox"/>            |
| 2   | khanh    | kieu123  | Khanh Kieu   | <input checked="" type="checkbox"/> |
| 3   | SE1161   | 123456   | Class SE1161 | <input type="checkbox"/>            |
| 4   | SE1162   | 123456   | Class Se1162 | <input type="checkbox"/>            |
| 5   | SE1163   | 123456   | Class SE1163 | <input type="checkbox"/>            |

# MVC Design Pattern

## MVC Model 2

```

LoginServlet.java x
Source History
23  * @author kieukhanh
24  */
25  public class LoginServlet extends HttpServlet {
26
27      // private final String searchPage = "search.html";
28      private final String searchPage = "search.jsp";
29      private final String invalidPage = "invalid.html";
30
31      /** Processes requests for both HTTP <code>GET</code> and <code>POST</code> requests
32      */
33      protected void processRequest(HttpServletRequest request, HttpServletResponse response)
34          throws ServletException, IOException {
35          response.setContentType("text/html;charset=UTF-8");
36          PrintWriter out = response.getWriter();
37          try {
38              String username = request.getParameter("txtUsername");
39              String password = request.getParameter("txtPassword");
40
41              RegistrationDAO dao = new RegistrationDAO();
42              boolean result = dao.checkLogin(username, password);
43
44              String url = invalidPage;
45
46              if (result) {
47                  url = searchPage;
48              }
49              response.sendRedirect(url);
50          } catch (NamingException ex) {
51              ex.printStackTrace();
52          } catch (SQLException ex) {
53              ex.printStackTrace();
54          }
55      }
56  }

```

# MVC Design Pattern

## MVC Model 2

```

SearchServlet.java x
Source History
24  * @author kieukhanh
25  */
26  @WebServlet(name = "SearchServlet", urlPatterns = {"/SearchServlet"})
27  public class SearchServlet extends HttpServlet {
28  //     private final String searchPage = "search.html";
29  private final String searchPage = "search.jsp";
30  //     private final String showSearchResult = "ShowSearchResultServlet";
31  private final String showSearchResult = "search.jsp";
32
33  /** Processes requests for both HTTP <code>GET</code> and <code>POST</code>
42  protected void processRequest(HttpServletRequest request, HttpServletResponse
43  throws ServletException, IOException {
44      response.setContentType("text/html;charset=UTF-8");
45      PrintWriter out = response.getWriter();
46
47      String url = searchPage;
48      String searchValue = request.getParameter("txtSearchValue");
49
50      try {

```

# MVC Design Pattern

## MVC Model 2

```

search.jsp x
Source History
Created on : Jan 13, 2017, 1:14:40 PM
4      Author      : kieuokhanh
5      --%>
6
7      <%@page import="sample.registration.RegistrationDTO"%>
8      <%@page import="java.util.List"%>
9      <%@page contentType="text/html" pageEncoding="UTF-8"%>
10     <%@taglib uri="http://java.sun.com/jsp/jstl/core" prefix="c"%>
11     <!DOCTYPE html>
12     <html>
13     <head>
14         <meta http-equiv="Content-Type" content="text/html; charset=UTF-8">
15         <title>Search</title>
16     </head>
17     <body>
18         <h1>Search Page</h1>
19         <form action="SE1162Servlet">
20             Search Value <input type="text" name="txtSearchValue"
21                             value="" /><br/>
22             <input type="submit" value="Search" name="btAction" />
23         </form>
24
25         <br/>
26     <%
27         String searchValue = request.getParameter("txtSearchValue");
28
29         if (searchValue != null) {
30             List<RegistrationDTO> result =
31                 (List<RegistrationDTO>) request.getAttribute("SEARCHRESULT");
32

```

# MVC Design Pattern

## MVC Model 2

```

33 if (result != null) {
34     %>
35     <table border="1">
36         <thead>
37             <tr>
38                 <th>No.</th>
39                 <th>Username</th>
40                 <th>Password</th>
41                 <th>Lastname</th>
42                 <th>Role</th>
43             </tr>
44         </thead>
45         <tbody>
46             <%
47                 int count = 0;
48                 for (RegistrationDTO dto : result) {
49                     %>
50                     <tr>
51                         <td>
52                             <%= ++count %>
53                         </td>
54                         <td>
55                             <%= dto.getUsername() %>
56                         </td>
57                         <td>
58                             <%= dto.getPassword() %>
59                         </td>
60                         <td>
61                             <%= dto.getLastname() %>
62                         </td>

```

# MVC Design Pattern


## MVC Model 2

```

63 <td>
64     <%= dto.isRole() %>
65 </td>
66 </tr>
67 <%
68     }
69 %>
70 </tbody>
71 </table>
72
73 <%
74     } else {
75         %>
76         <h2>No record is matched!!!</h2>
77     <%
78     }
79     } //end if search Value
80 <%>
81 </body>
82 </html>
  
```

# MVC Design Pattern

## MVC Model 2

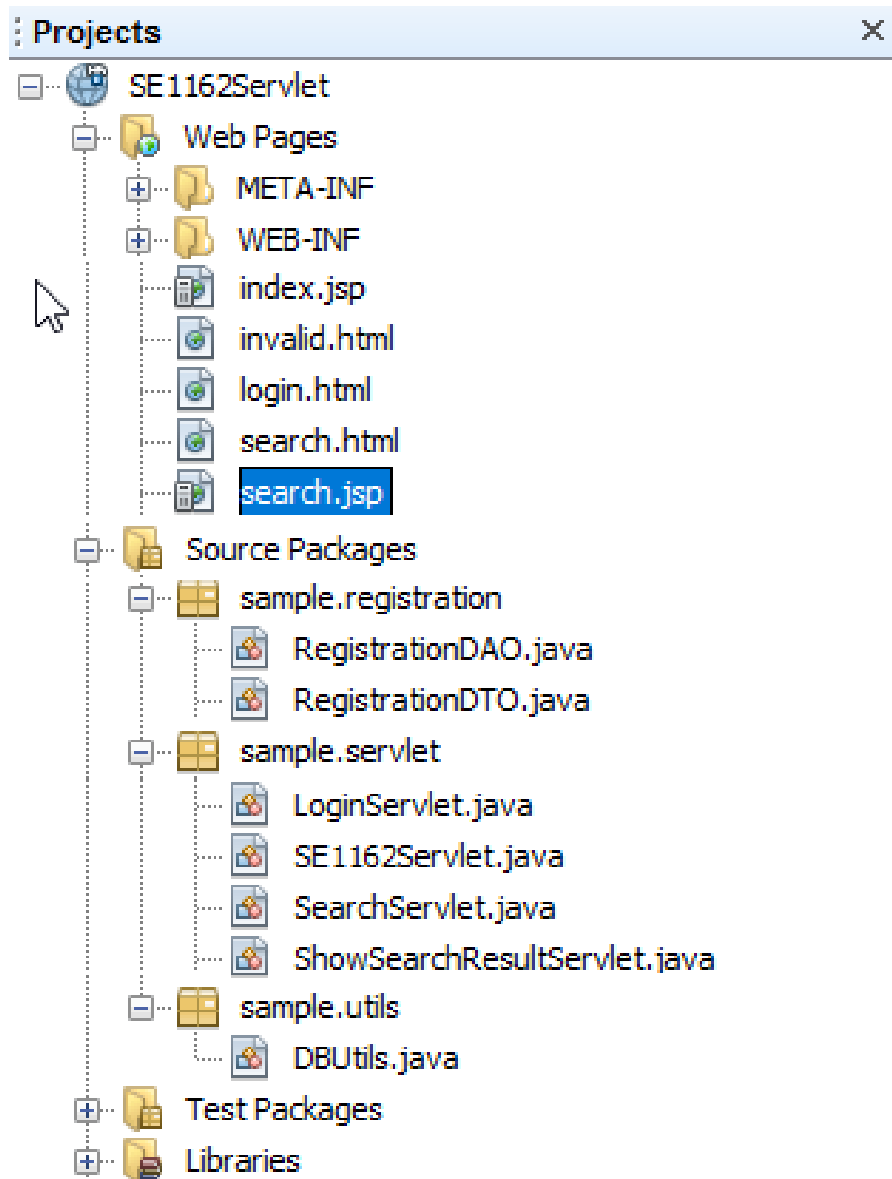

# Appendix

## Data Source



- Java EE applications use **DataSource** objects when they **access relational databases** through the JDBC API
  - A DataSource object **works with** a **JNDI** naming service
  - After it is registered with a JNDI naming service, an application can **use** the JNDI API to **access** that **DataSource** object
- A DataSource has a **set of properties** that **identify** and **describe** the **real-world data source** that it represents
  - A **DataSource XML descriptor** that contains **essential information**, such as the name of the underlying JDBC driver, database URL, the name of the database, and the network protocol, connection pooling properties, and so on
  - A DataSource **alias** is a **logical name mapped** to the name of a **real DataSource** available in the system. It specified in the name element begins with a namespace scope
    - `java:comp/env/`, the **datasource** will be **available** for the component in which it is **defined**, such as a servlet, EJB, or application client component
  - The **DataSource** alias is used in **application** code to **connect** to the underlying data source



# Appendix

## Dynamic DB Connection


- Adding and modify the web.xml as following

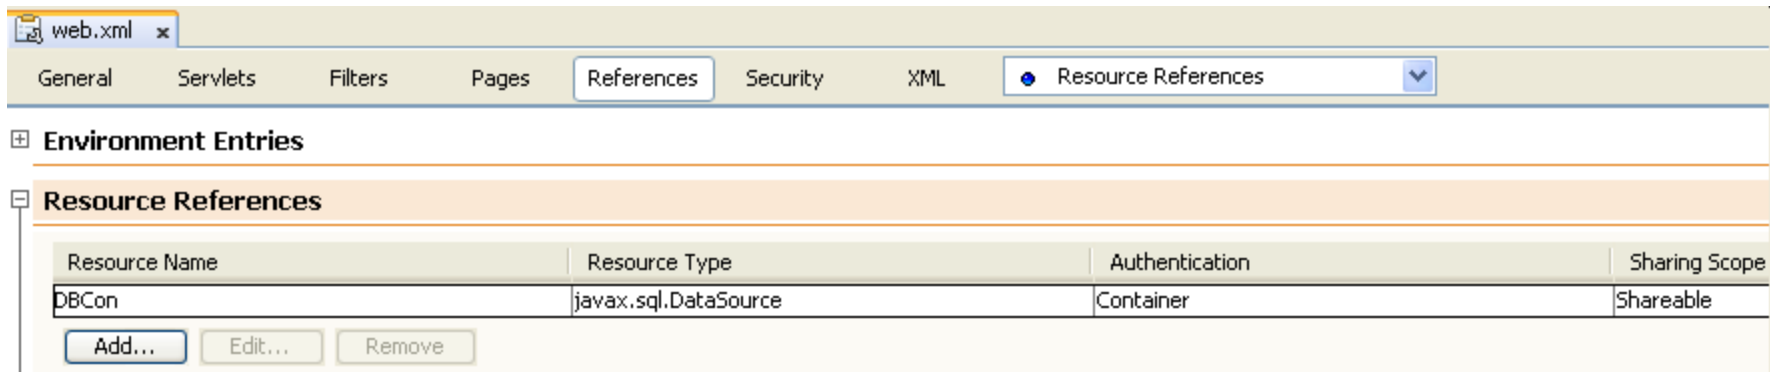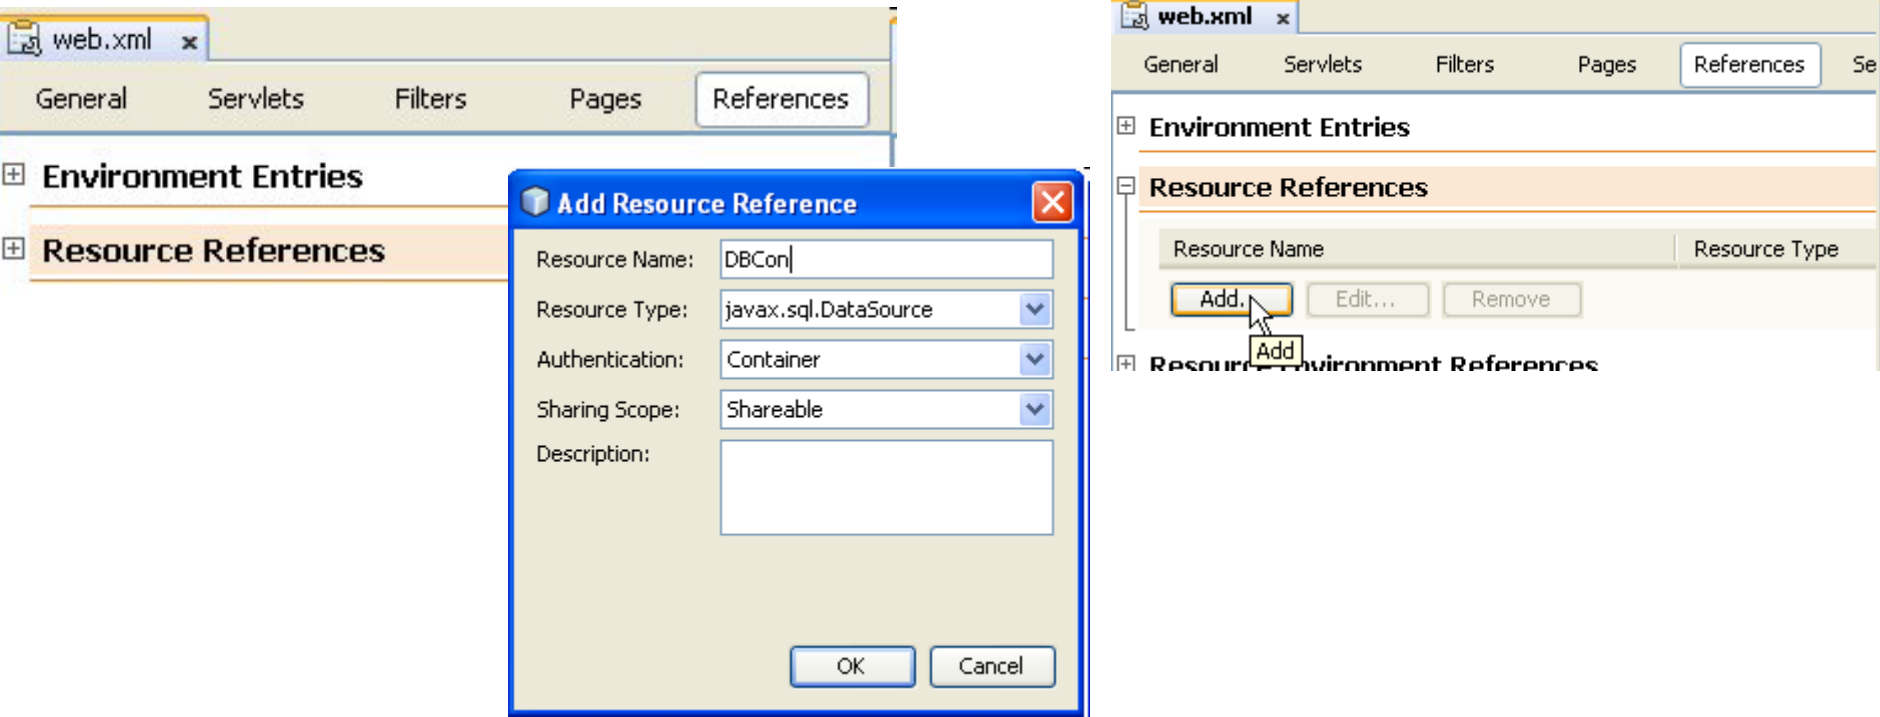

# Appendix

## Dynamic DB Connection

- Adding and modify the **web.xml** as following

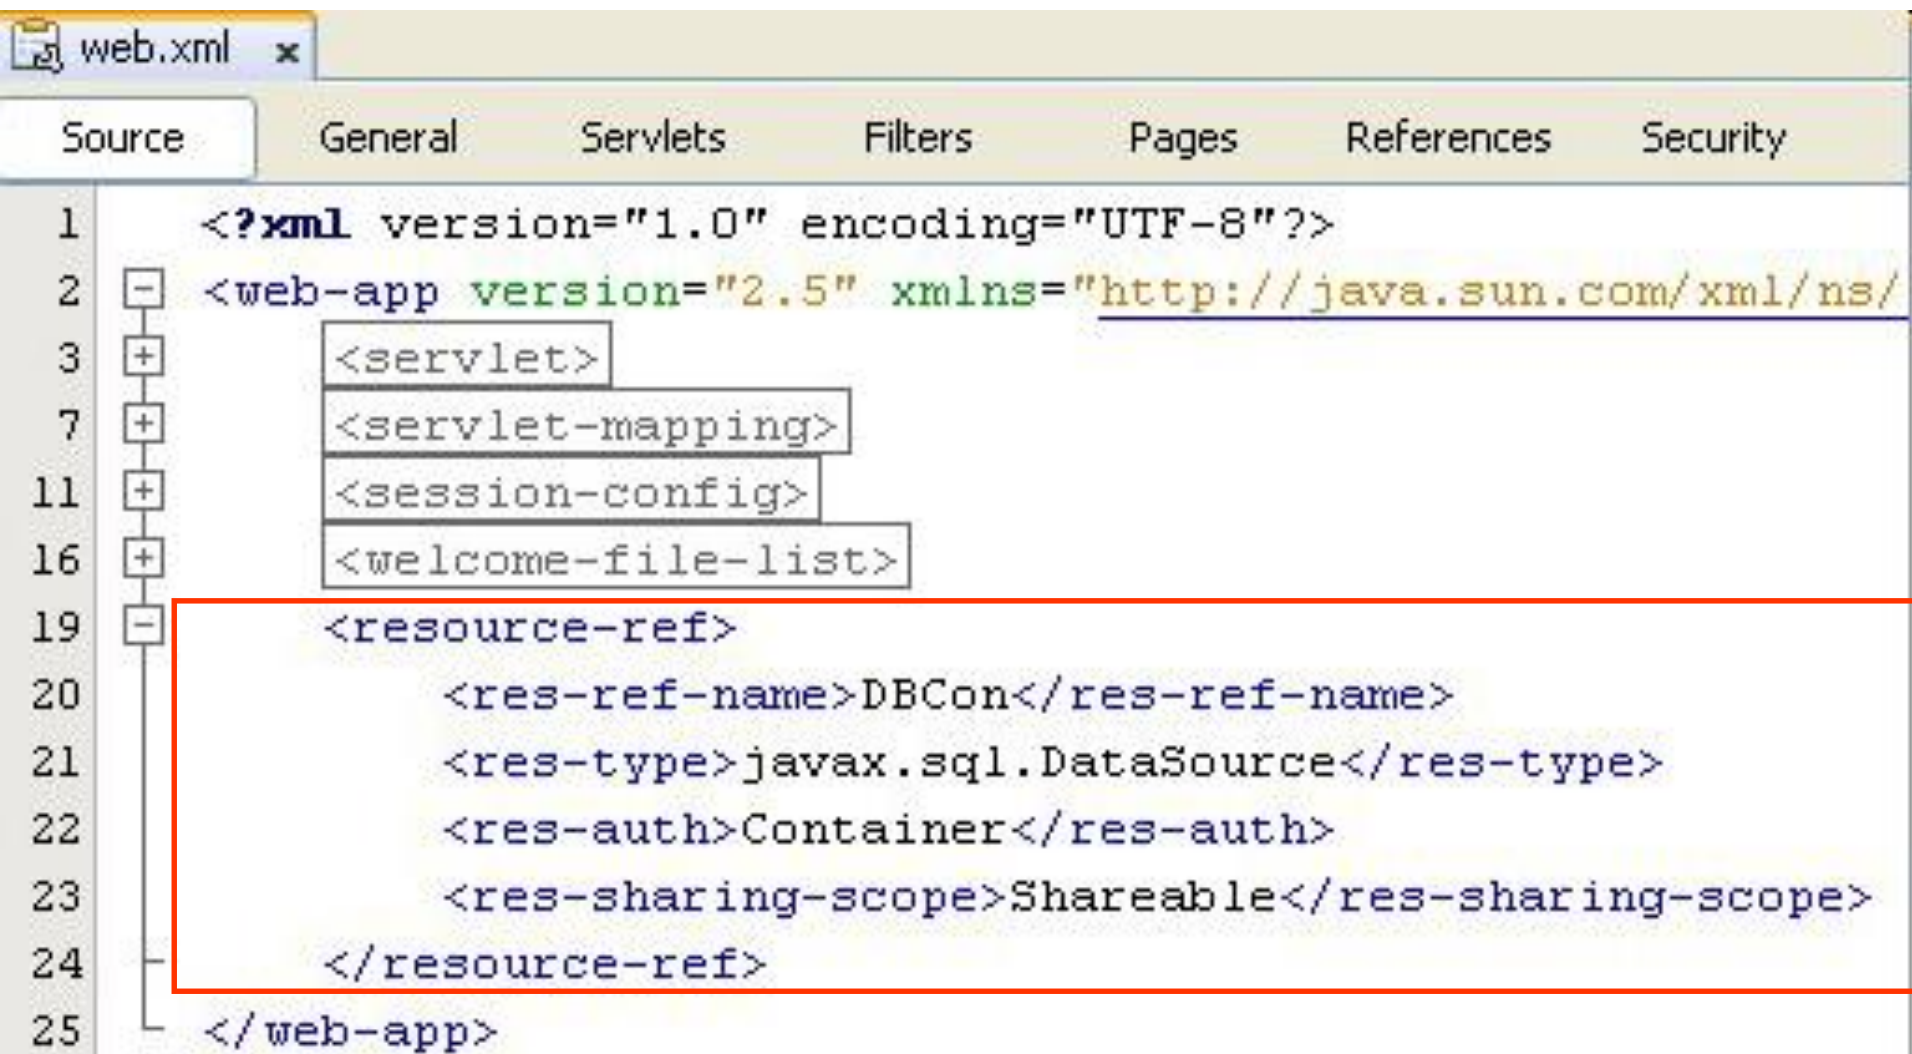

The screenshot shows an IDE window titled 'web.xml' with tabs for Source, General, Servlets, Filters, Pages, References, and Security. The Source tab is active, displaying the XML code. A red box highlights the newly added <resource-ref> element between lines 19 and 24.


```

1  <?xml version="1.0" encoding="UTF-8"?>
2  <web-app version="2.5" xmlns="http://java.sun.com/xml/ns/
3      <servlet>
7      <servlet-mapping>
11     <session-config>
16     <welcome-file-list>
19     <resource-ref>
20         <res-ref-name>DBCon</res-ref-name>
21         <res-type>javax.sql.DataSource</res-type>
22         <res-auth>Container</res-auth>
23         <res-sharing-scope>Shareable</res-sharing-scope>
24     </resource-ref>
25 </web-app>
  
```

# Appendix

## Dynamic DB Connection

- Adding and modify the **context.xml** in the **META-INF** directory as following

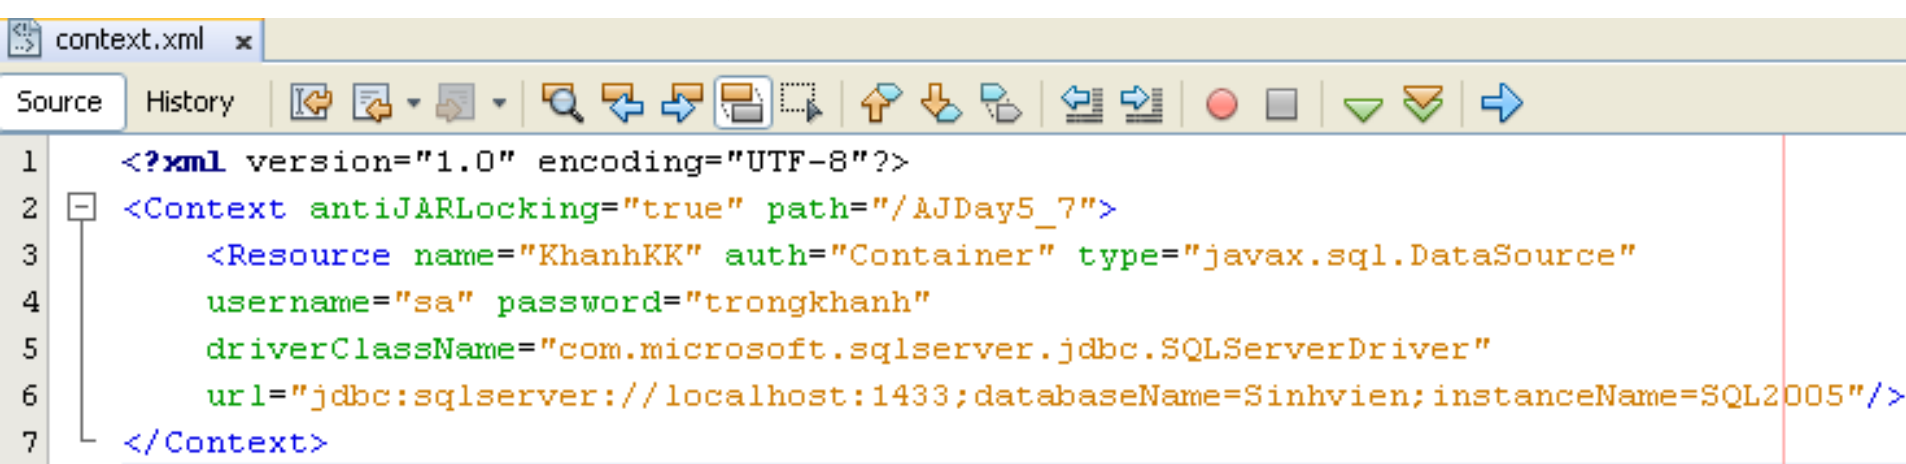

```

1  <?xml version="1.0" encoding="UTF-8"?>
2  <Context antiJARLocking="true" path="/AJDay5_7">
3      <Resource name="KhanhKK" auth="Container" type="javax.sql.DataSource"
4          username="sa" password="trongkhanh"
5          driverClassName="com.microsoft.sqlserver.jdbc.SQLServerDriver"
6          url="jdbc:sqlserver://localhost:1433;databaseName=Sinhvien;instanceName=SQL2005"/>
7  </Context>
  
```

- Implement code to use

```

Context ctx = new InitialContext();
Context envCtx = (Context) ctx.lookup("java:comp/env");
DataSource ds = (DataSource) envCtx.lookup("DBCon");
Connection con = ds.getConnection();
  
```