

ESA 收斂曲線對照


決策器對照 (ESA vs ESA-UCB vs ESA-TS) 與代理模型對照 (RBF_hpo vs 簡單RBF)

資料來源 : ts_ucb_full_matrix_10seed.csv / a1_only 消融重新產生的乾淨對照數據


方案一：ESA(Q-learning) vs ESA-UCB vs ESA-TS (1/2)

— ESA (Q-learning) — ESA-UCB — ESA-TS


Ackley · 30D

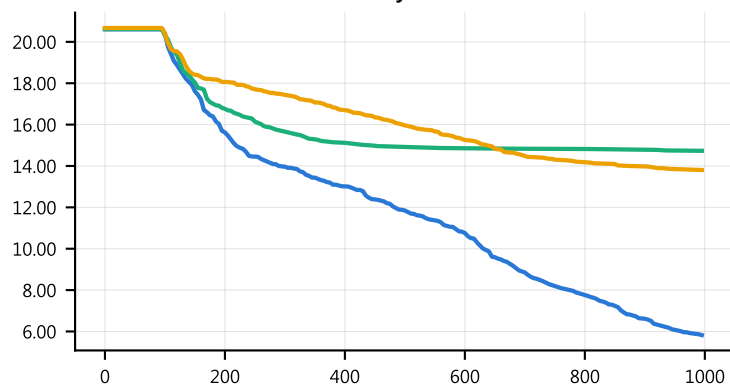


Ackley · 50D

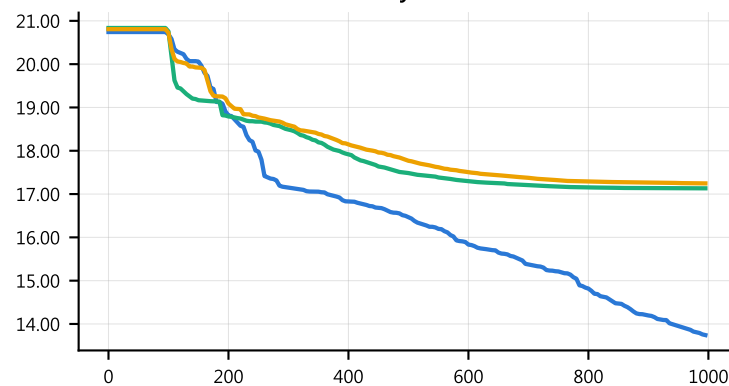


Ackley · 100D

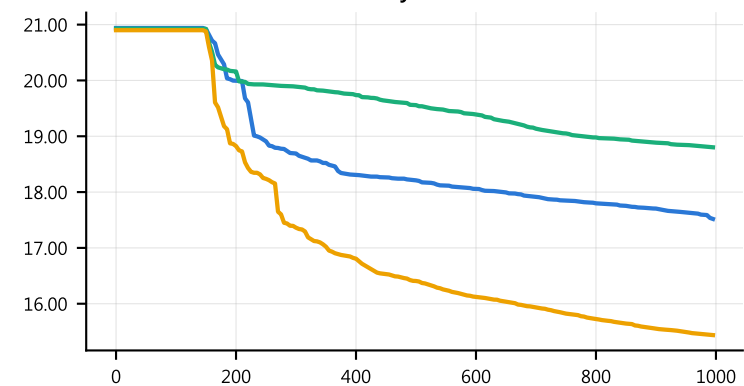


Ellipsoid · 30D

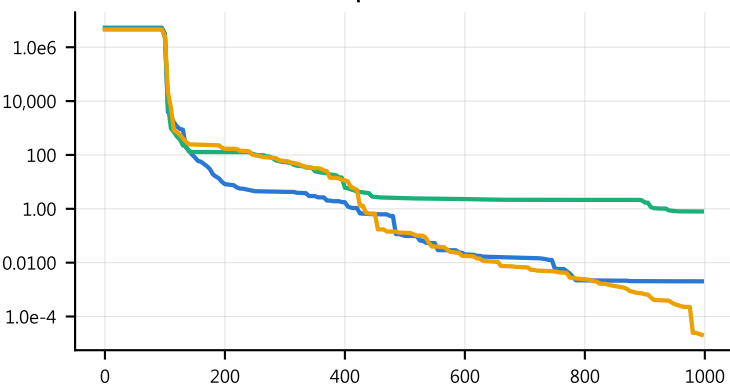


Ellipsoid · 50D

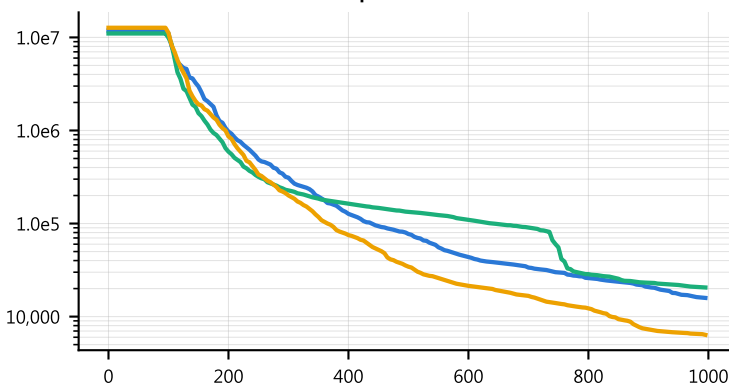


Ellipsoid · 100D

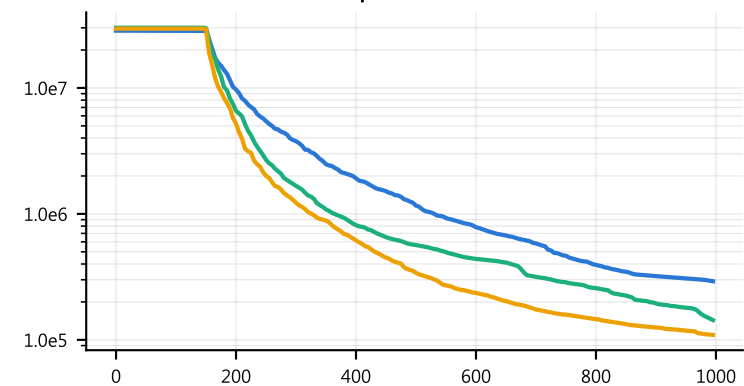


Griewank · 30D

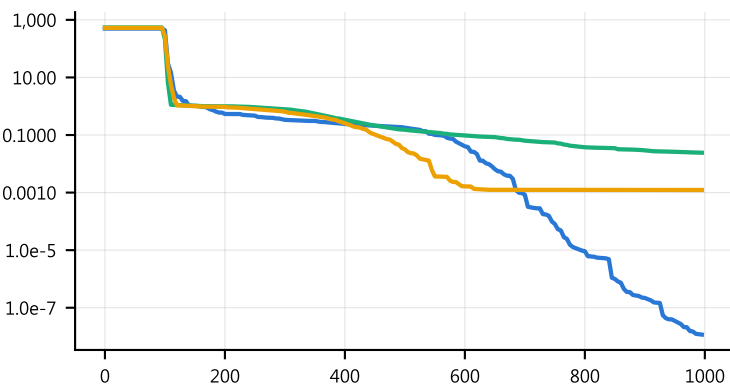

Griewank · 50D

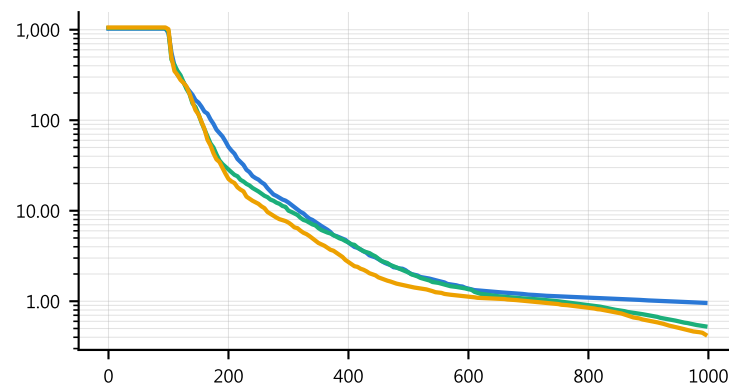


Griewank · 100D

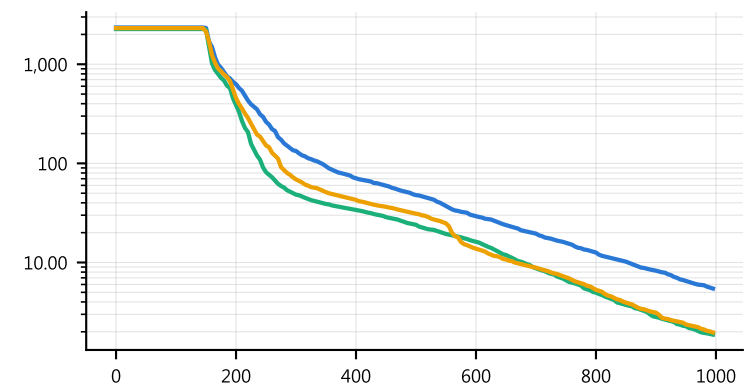


方案一：ESA(Q-learning) vs ESA-UCB vs ESA-TS (2/2)

ESA (Q-learning) ESA-UCB ESA-TS


RHC1 · 30D

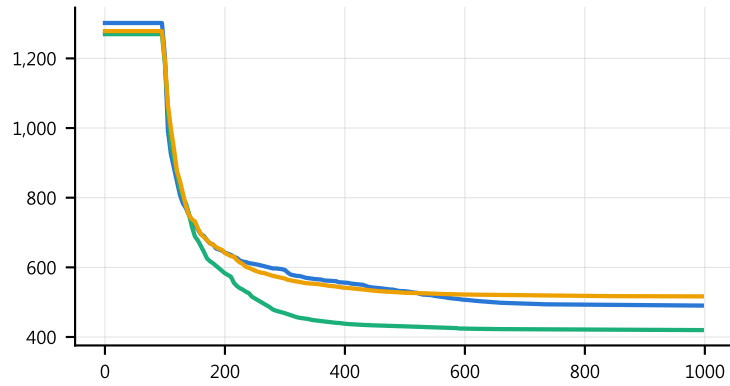


RHC1 · 50D

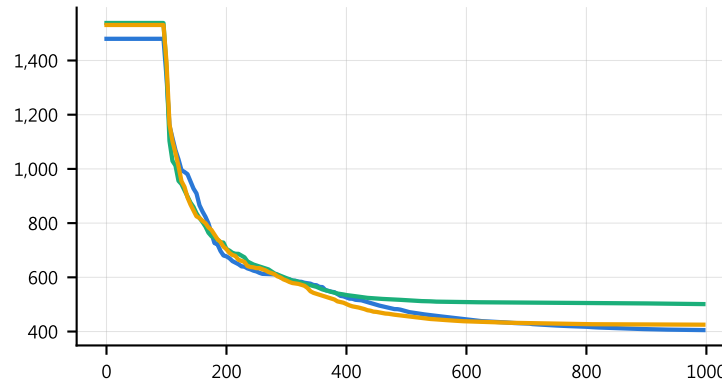


RHC2 · 30D

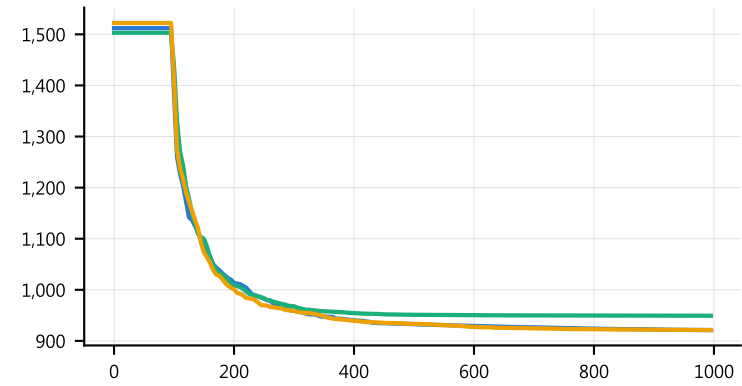


RHC2 · 50D

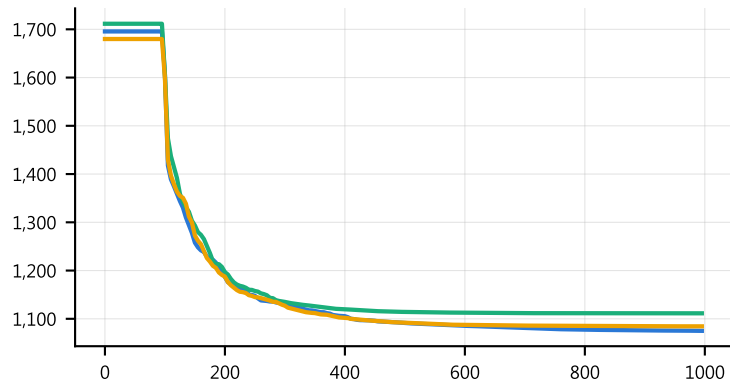


Rosenbrock · 30D

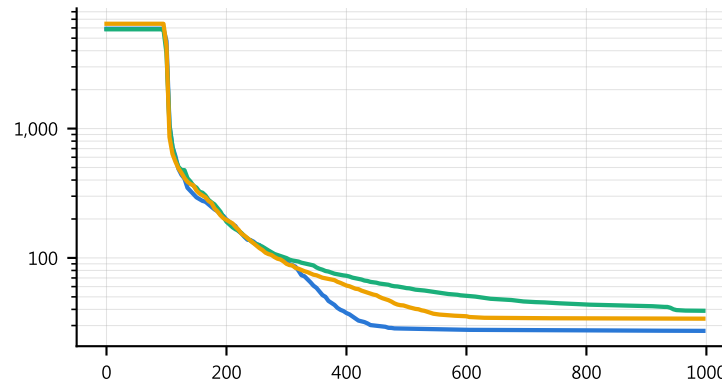


Rosenbrock · 50D

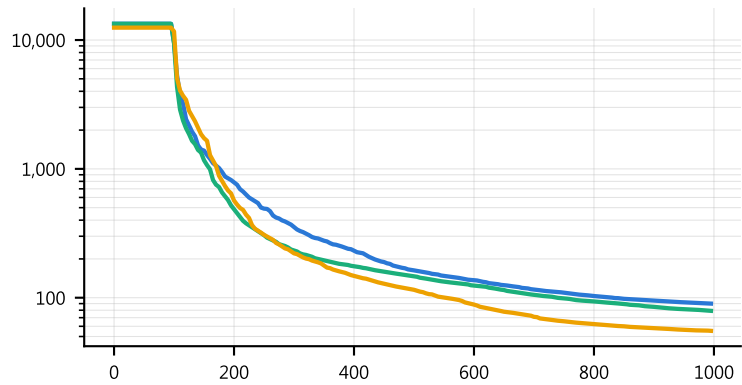


Rosenbrock · 100D

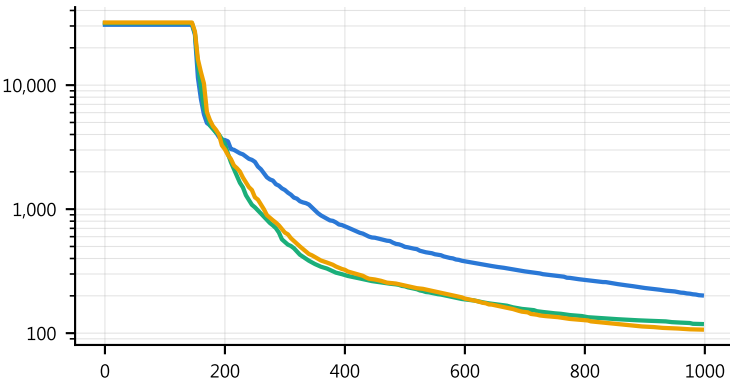

SRR · 30D

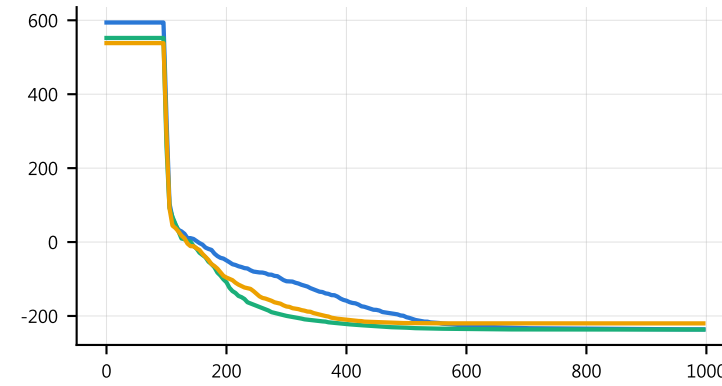


SRR · 50D

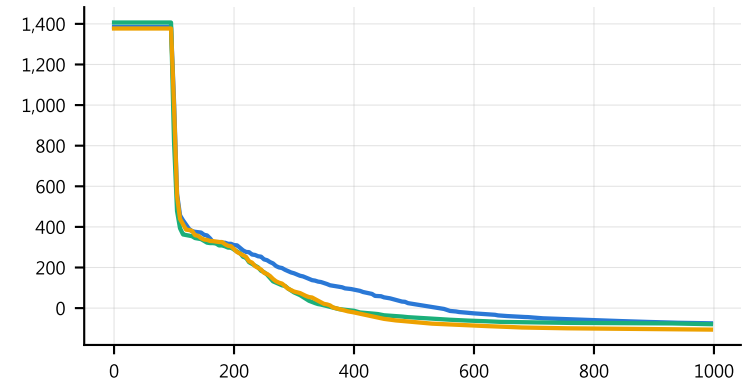


方案二：RBF_hpo vs 簡單RBF (a1_only 消融 · 30D)

簡單RBF (無HPO/無馬氏距離) RBF_hpo (LOOCV+多項式尾項)


Ellipsoid · 30D

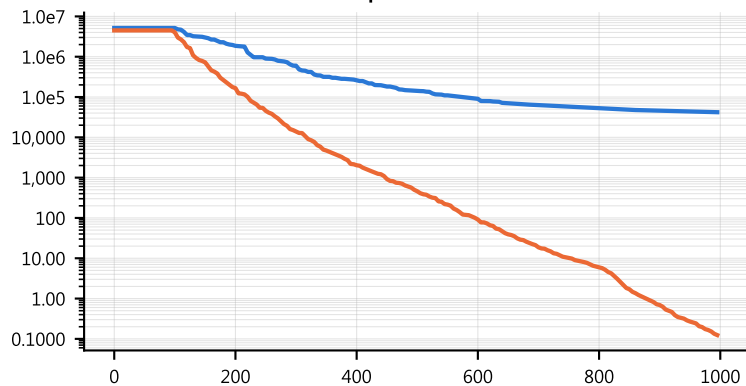


Rosenbrock · 30D

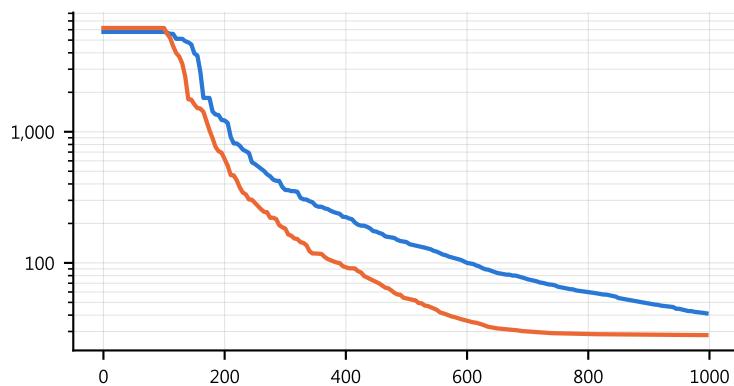


Ackley · 30D

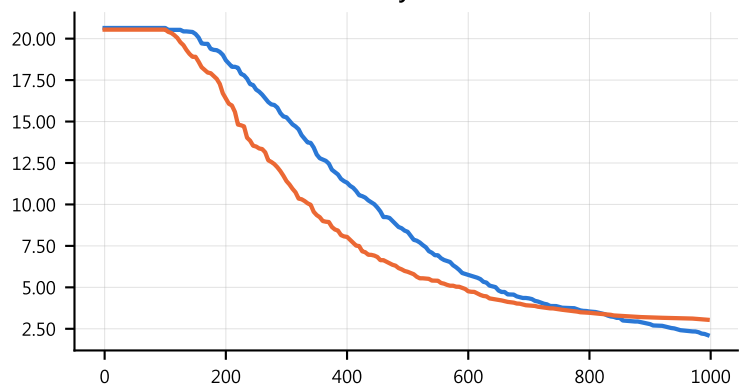


Griewank · 30D

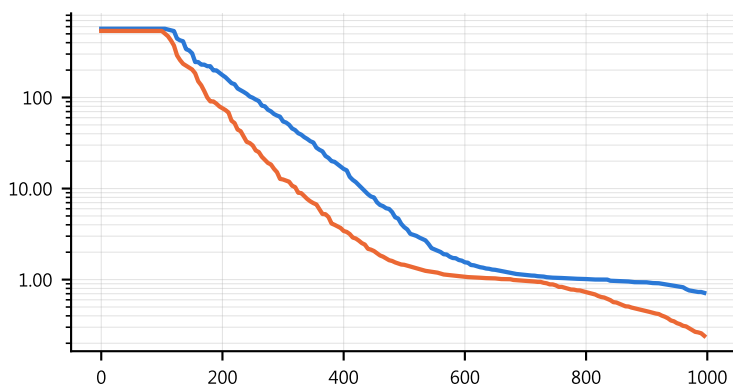

SRR · 30D

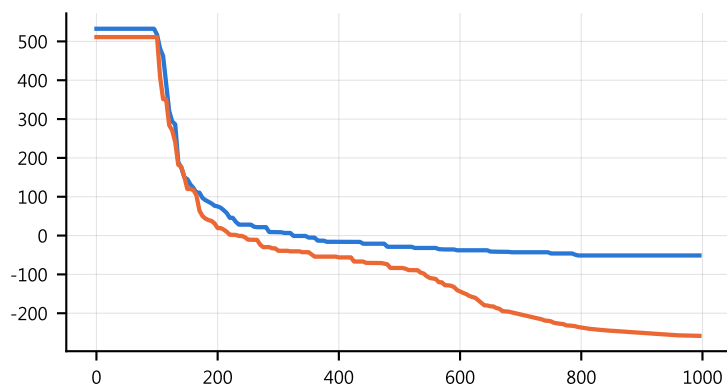

RHC1 · 30D

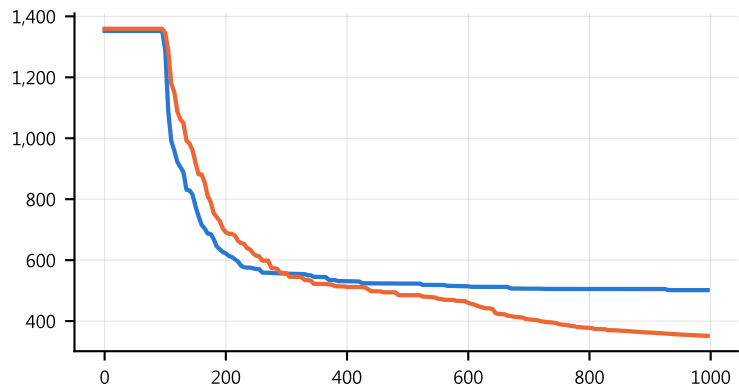

RHC2 · 30D

