How Does AI Watermarking Work?

A Close Look at SynthID

Emanuele Fabbiani 🦫

Codemotion Milan · 28–29 October 2026

Detecting AI text is hard.

Jan 2023

OpenAI releases a detector for AI-written text

Jul 2023

Shut down for its low accuracy

OpenAI, New AI classifier for indicating AI-written text, 2023





Anthropic, How Claude's text watermark works, 2026; OpenAI, Our approach to EU text provenance rules, 2026

How did we get there?

01 External detectors

02 Special characters

03 Red and green lists

04 Soft lists

05 Tournament sampling

CHAPTER 1 OF 6


01

External detectors


Any finished text




Classifier or perplexity test

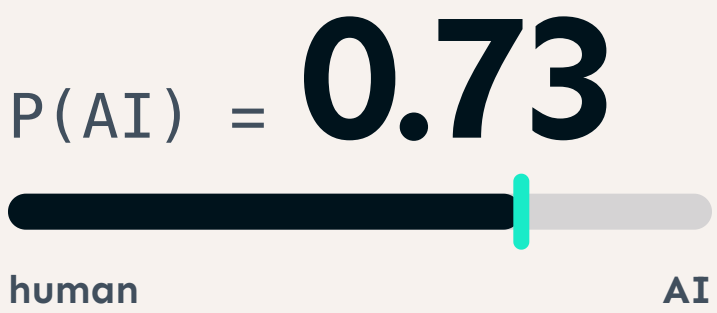

WHEN MODELS WROTE BADLY

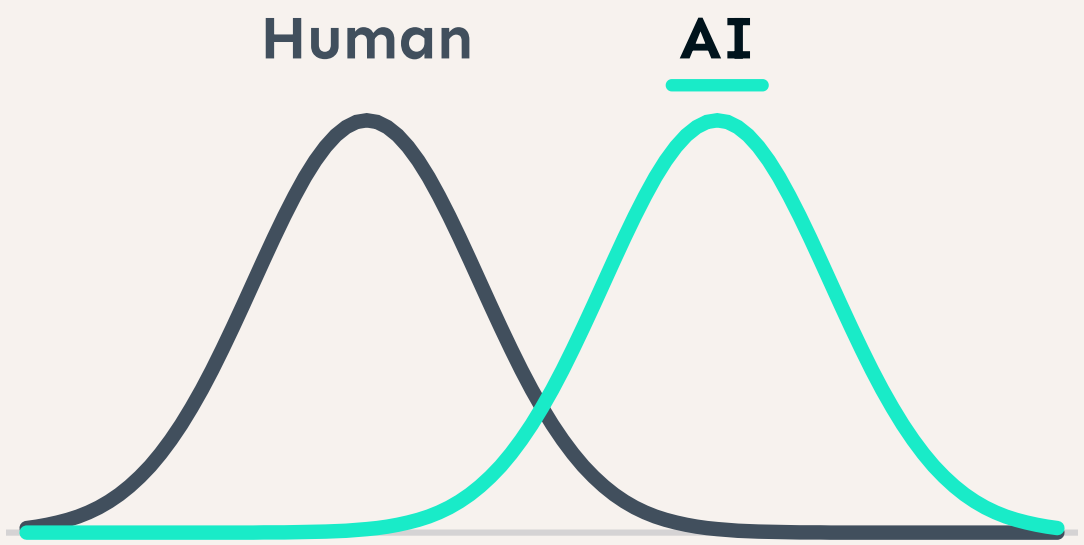

TODAY

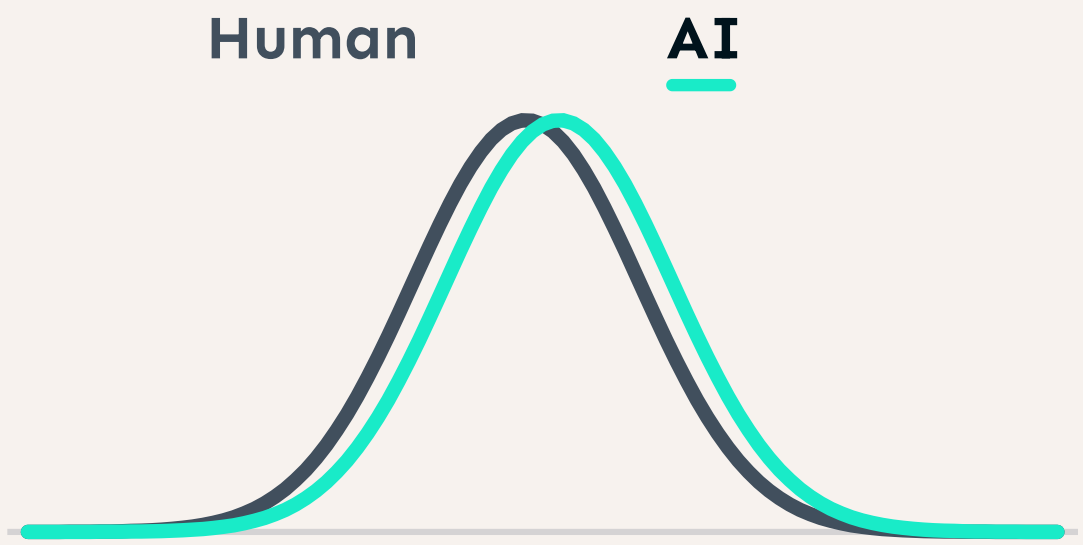

Sadasivan et al., Can AI-Generated Text be Reliably Detected?, 2025

1

Add the signal at generation time.

CHAPTER 2 OF 6

02

Special characters

WHAT THE READER SEES

Watermarks hide in plain sight

WHAT THE BYTES SAY

Watermarks U+200B hide U+2009 in U+200B plain U+2009 sight

Sato et al., Embarrassingly Simple Text Watermarks, 2023

```
import re, unicodedata

text = unicodedata.normalize("NFKC", text)
text = re.sub(r"[\u200b-\u200f\u2060\ufeff]", "", text)
```


2

Put the signal in the word choice.

CHAPTER 3 OF 6

03

Red and green lists

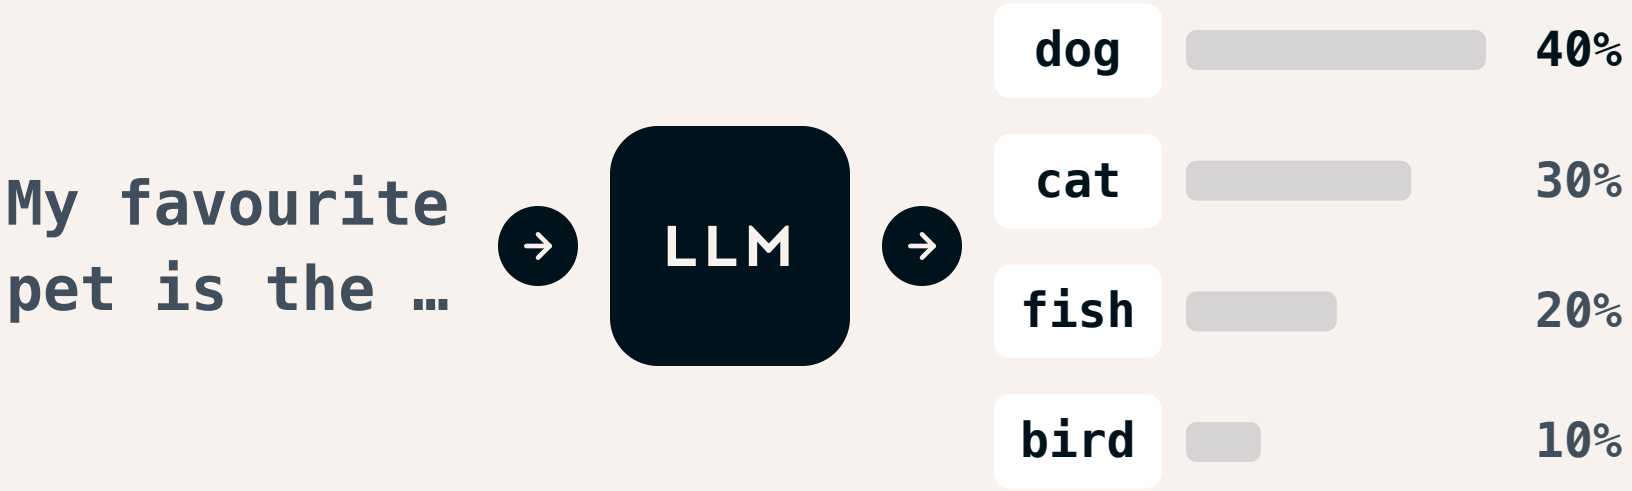
My favourite pet is the …
LLM
dog
40%
cat
30%
fish
20%
bird
10%


My favourite pet is the …
LLM
dog 40%
cat 30%
fish 20%
bird 10%
RANDOM DRAW
… the dog

My favourite pet is **the** ?

1 Seed

the last token

+

secret

hash(last token, secret)

seed = 4821

Kirchenbauer et al., A Watermark for Large Language Models, 2023

My favourite pet is the ?

1 Seed

the last token

+

secret

hash(last token, secret)

seed = 4821

2 Split the vocabulary



Kirchenbauer et al., A Watermark for Large Language Models, 2023

My favourite pet is the cat

1 Seed

the last token

+

secret

hash(last token, secret)

seed = 4821

2 Split the vocabulary

cat	bird	car
song	book	plan
dog	fish	idea
river	city	word

3 Sample only green

~~dog~~		~~40%~~
cat		30%
~~fish~~		~~20%~~
bird		10%

Kirchenbauer et al., A Watermark for Large Language Models, 2023

same key, recolour every token

HUMAN TEXT

dogs are loyal and love long walks daily


4/8
green tokens

WATERMARKED TEXT

cats are calm and purr on my lap

8/8
green tokens

Kirchenbauer et al., A Watermark for Large Language Models, 2023

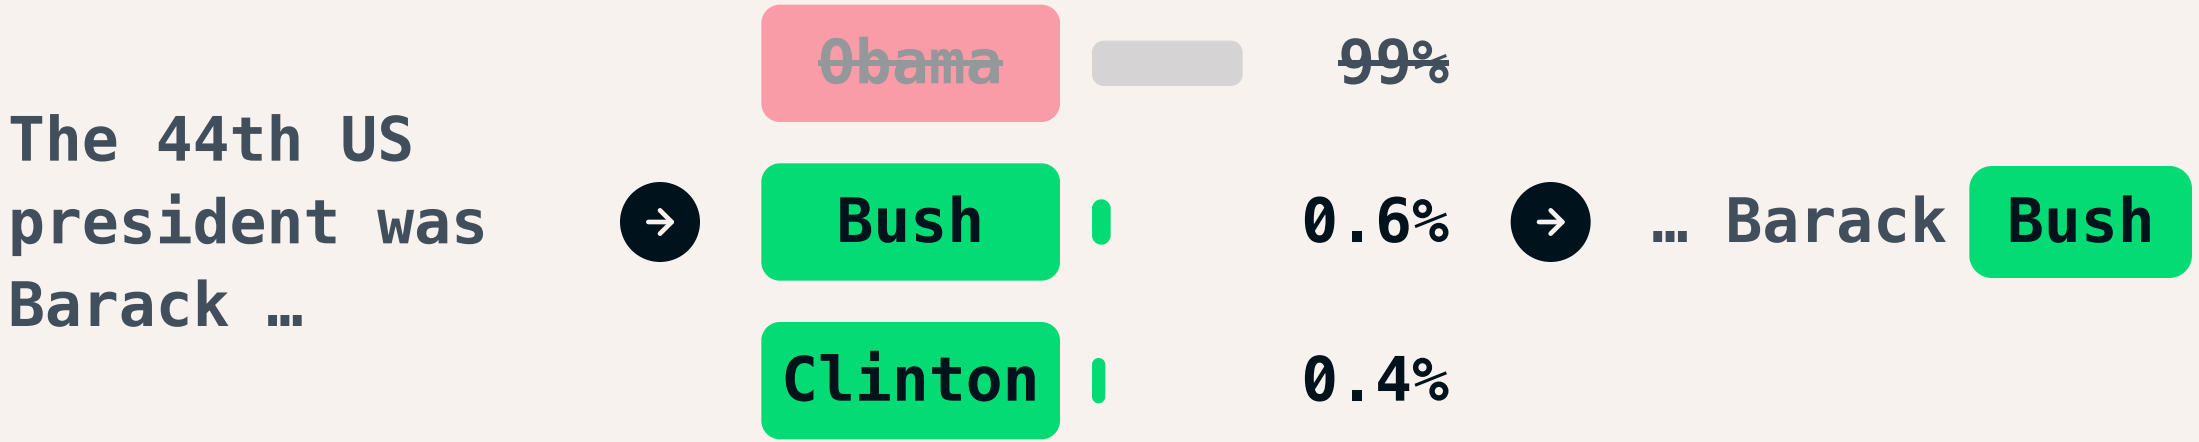

Kirchenbauer et al., A Watermark for Large Language Models, 2023

3

Step aside when the model is sure (low entropy).

CHAPTER 4 OF 6

04

Soft lists

	ODDS		PROBABILITY
dog	4	→	4/10 = 40%
cat	3	→	3/10 = 30%
fish	2	→	2/10 = 20%
bird	1	→	1/10 = 10%

probability = odds ÷ sum of all odds

My favourite pet is the **cat**

1 Boost the green odds

green odds × δ = 7

red odds × 1

2 New probabilities

	BEFORE		AFTER
dog	40%	→	12%
cat	30%	→	62%
fish	20%	→	6%
bird	10%	→	21%

Kirchenbauer et al., A Watermark for Large Language Models, 2023

The 44th US president was Barack **Obama**

1 Boost the green odds

green odds × δ = 7

red odds × 1

2 New probabilities

	BEFORE		AFTER
Obama	99%	→	93%
Bush	0.6%	→	4%
Clinton	0.4%	→	3%

Kirchenbauer et al., A Watermark for Large Language Models, 2023

~800

tokens are enough to detect AI content
after strong human paraphrasing

Kirchenbauer et al., On the Reliability of Watermarks for Large Language Models, 2024

4

To preserve quality, don't change the LLM's output distribution.

CHAPTER 5 OF 6

05

Tournament sampling

My favourite pet is the ?

1 Sample the candidates



dog	cat	dog	fish
cat	dog	bird	cat

2^3 = 8 candidates, likely words more often

Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024

My **favourite pet is the** ?

2 Seed, once per round

```
hash(last 4 tokens, key, round=1) = 4821
hash(last 4 tokens, key, round=2) = 1907
hash(last 4 tokens, key, round=3) = 6350
```

3 Score every candidate


	R1	R2	R3
dog	0	1	0
cat	1	0	1
fish	1	1	0
bird	0	1	1

SynthID uses 30 rounds

Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024


4 Tournament sampling

Round 1

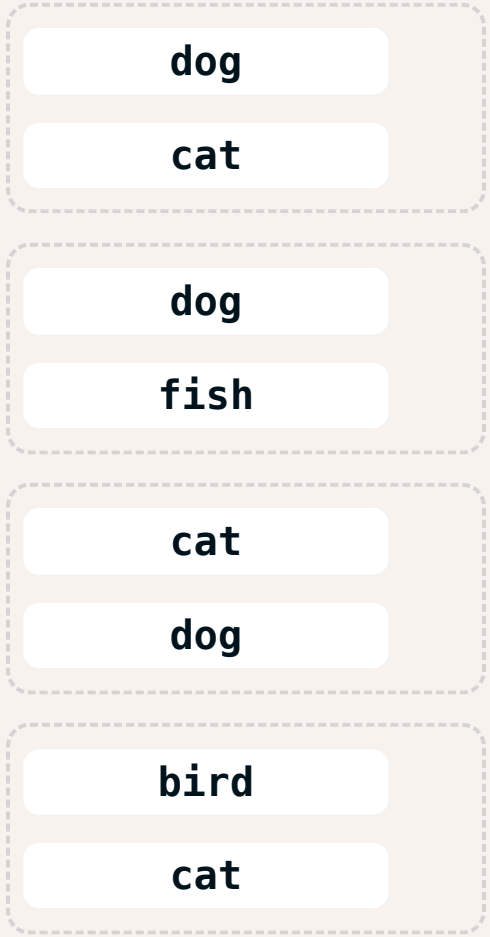


Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024

4 Tournament sampling

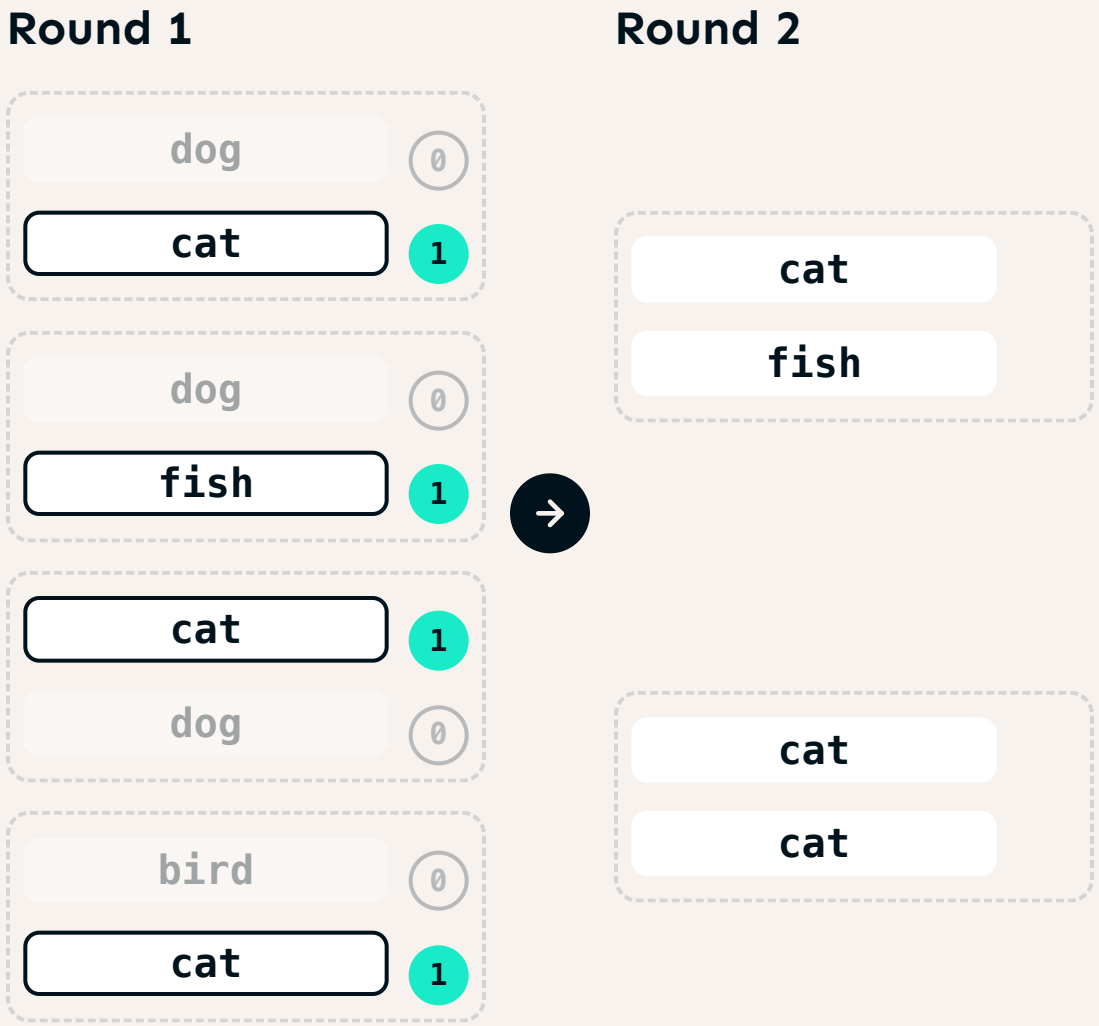


Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024

4 Tournament sampling

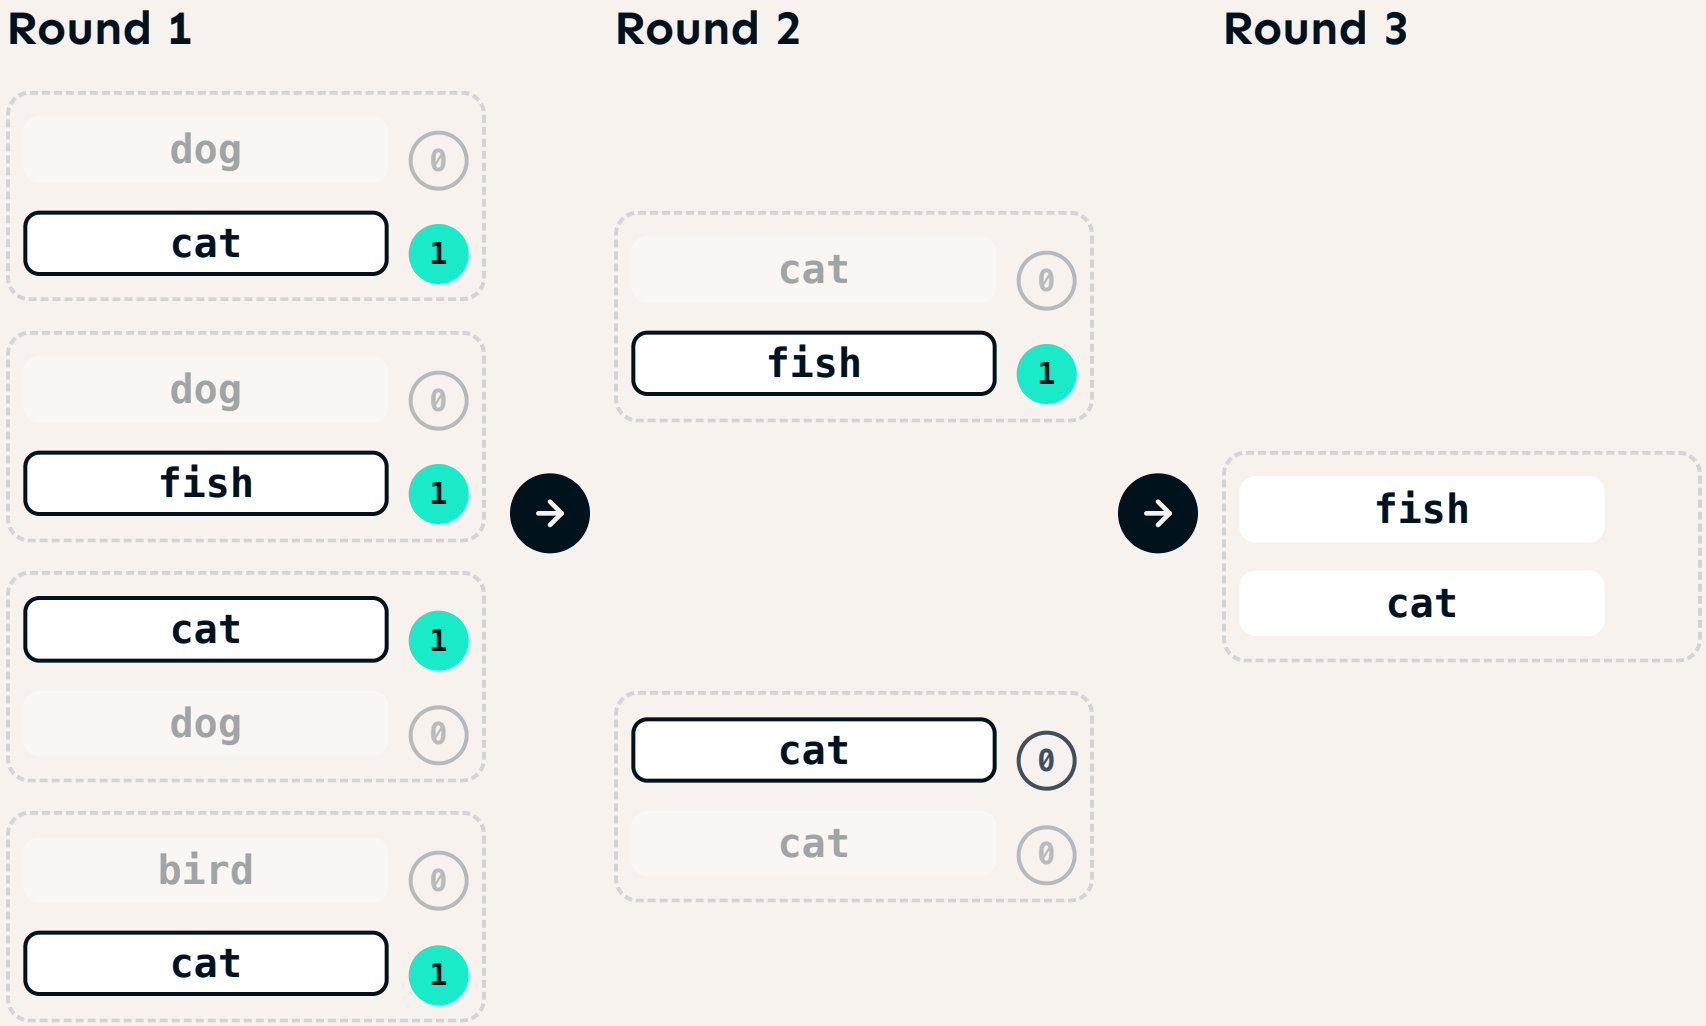

Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024

4 Tournament sampling

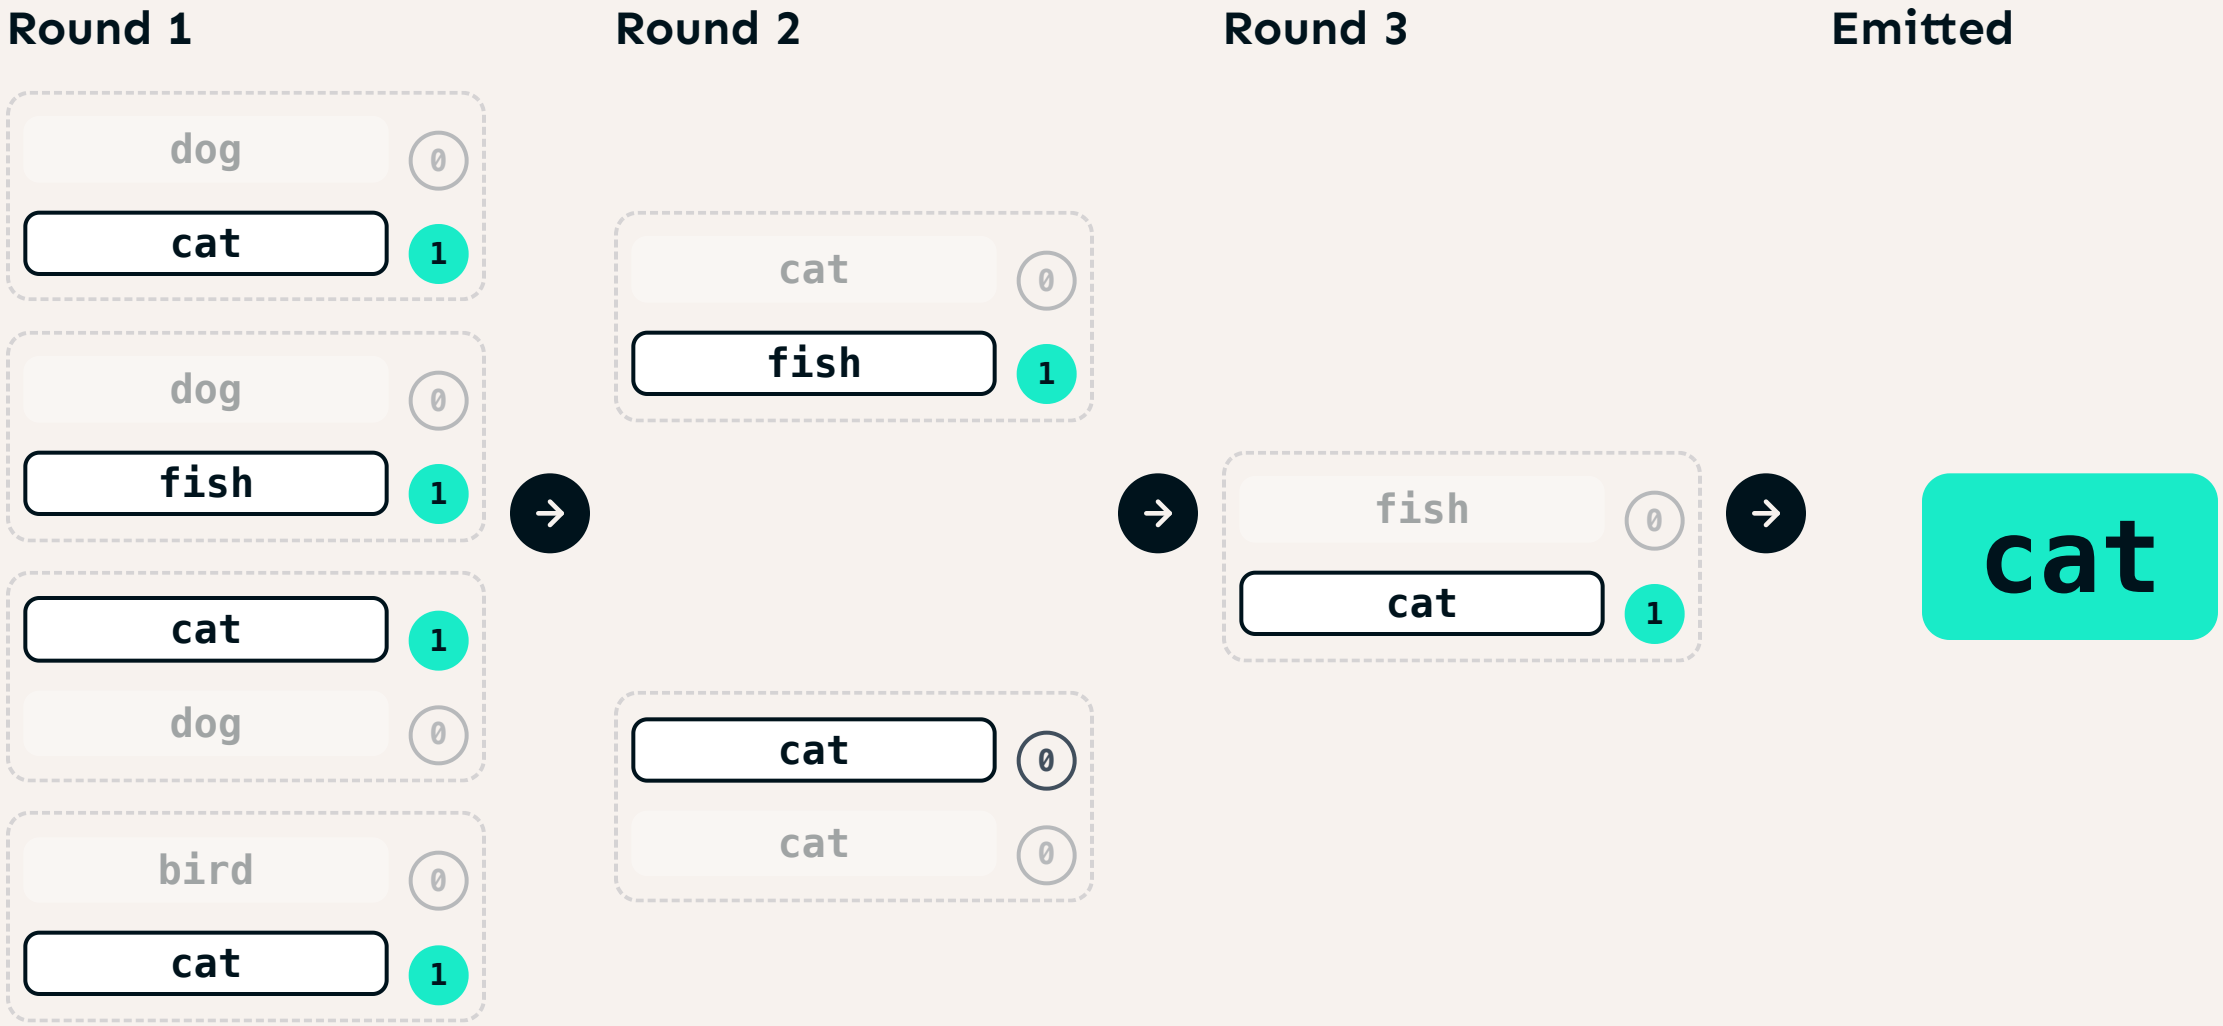

Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024



Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024

My favourite pet is the cat, and your favourite pet is the …


1st time `favourite pet is the` → 4821 · 1907 · 6350 seeds → tournament → **cat**

2nd time `favourite pet is the` → 4821 · 1907 · 6350 same seeds, same tilt → sample normally → **dog**

Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024

same key, recompute every score


HUMAN TEXT

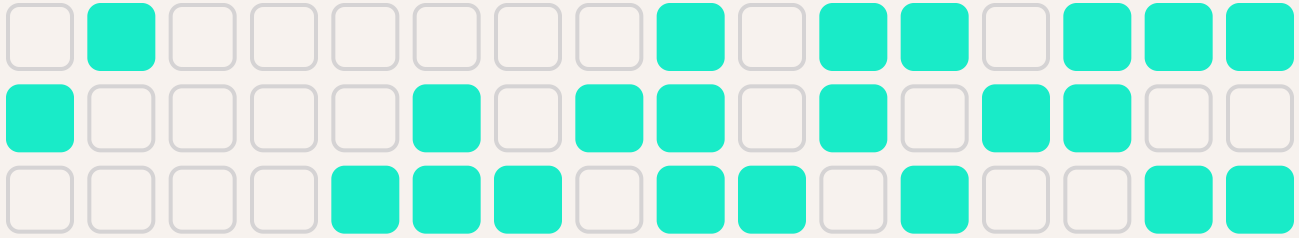

0.46

mean score

WATERMARKED TEXT

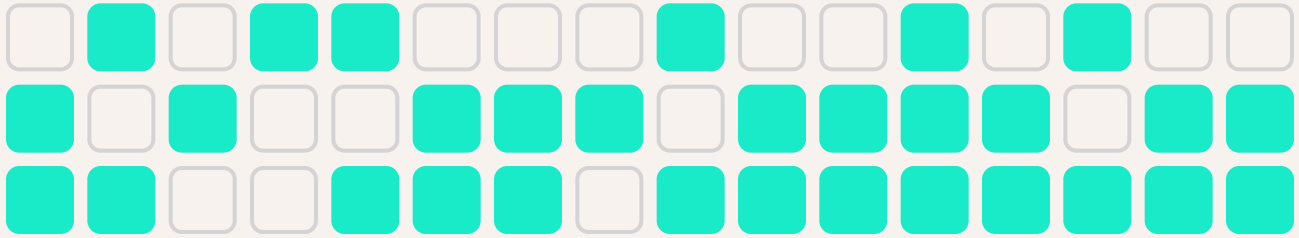

0.63

mean score

Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024

+0.57%

latency per token

15.527 → 15.615 ms on Gemma 7B

0.01%

thumbs-up gap

over ~20M Gemini responses

95%

true-positive rate

at 1% false positives, abstaining on uncertain texts

Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024

CHAPTER 6 OF 6

06

Limits

FREE CHOICE CARRIES SIGNAL · FORCED BY SYNTAX DOESN'T

TOKENS NEEDED TO DETECT

Prose

my cat loves long naps in the sun

few

Code

```
for x in range ( 10 ) :
```

many

Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024

A full rewrite or a translation erases it.

OpenAI, Understanding the source of what we see and hear online, 2024

Only the key holder can check for it.

Google, SynthID Detector — a new portal to help identify AI-generated content, 2025

LESSON	ATTEMPT	WHAT IT TAUGHT US
1	External detectors	Add the signal at generation time
2	Special characters	Put the signal in the word choice
3	Red and green lists	Step aside when the model is sure
4	Soft lists	Don't change the output distribution

Tournament sampling

EGO SLIDE

Emanuele Fabbiani

Engineering Manager at TeamSystem



Founder at xtream and Reaidy, both acquired by TeamSystem in 2025.

Professor in AI at the Catholic University of Milan; guest lecturer at PoliMI, EPFL and Politechnika Wrocławska.

PhD in Applied AI, with 9 peer-reviewed papers and 180+ citations.

Speaker at 40+ international conferences, including AMLD Lausanne, ODSC London, WeAreDevelopers Berlin, PyData Berlin, Paris and Milan, PyCon Italy, Swiss Python Summit, Codemotion.

Connect on LinkedIn

References (1/2)

[1] Dathathri et al., Scalable watermarking for identifying large language model outputs, 2024

[2] Google DeepMind, SynthID Text (reference implementation), 2024

[3] Ghaisas et al., Introducing SynthID Text, 2024

[4] Google, SynthID: Tools for watermarking and detecting LLM-generated Text, 2024

[5] Google, SynthID Detector — a new portal to help identify AI-generated content, 2025

[6] Anthropic, How Claude's text watermark works, 2026

[7] Scott Aaronson, Anthropic's LLM watermarking, 2026

[8] OpenAI, New AI classifier for indicating AI-written text, 2023

[9] Liang et al., GPT detectors are biased against non-native English writers, 2023

[10] Mitchell et al., DetectGPT: Zero-Shot Machine-Generated Text Detection using Probability Curvature, 2023

[11] Krishna et al., Paraphrasing evades detectors of AI-generated text, but retrieval is an effective defense, 2023

[12] Sadasivan et al., Can AI-Generated Text be Reliably Detected?, 2025

[13] NIST, Reducing Risks Posed by Synthetic Content (NIST AI 100-4), 2024

References (2/2)

[14] C2PA, C2PA Technical Specification, 2026

[15] Sato et al., Embarrassingly Simple Text Watermarks, 2023

[16] Zhao et al., Invisible Image Watermarks Are Provably Removable Using Generative AI, 2024

[17] Kirchenbauer et al., A Watermark for Large Language Models, 2023

[18] Kirchenbauer et al., On the Reliability of Watermarks for Large Language Models, 2024

[19] Kuditipudi et al., Robust Distortion-free Watermarks for Language Models, 2024

[20] Christ, Gunn & Zamir, Undetectable Watermarks for Language Models, 2024

[21] Zhang et al., Watermarks in the Sand: Impossibility of Strong Watermarking for Generative Models, 2024

[22] Jovanović, Staab & Vechev, Watermark Stealing in Large Language Models, 2024

[23] Omidi, Dong & Wang, On Google's SynthID-Text LLM Watermarking System, 2026

[24] OpenAI, Understanding the source of what we see and hear online, 2024

[25] European Parliament & Council, Regulation (EU) 2024/1689 (AI Act), Article 50, 2024

[26] Margherita Bassi (Smithsonian), A.I. May Have Solved a Longstanding Math Problem With a Million-Dollar Prize, 2026

[27] OpenAI, Our approach to EU text provenance rules, 2026

[28] nohypeai, Watermarking Playground, 2026