


(b) Test phase of FSL_T

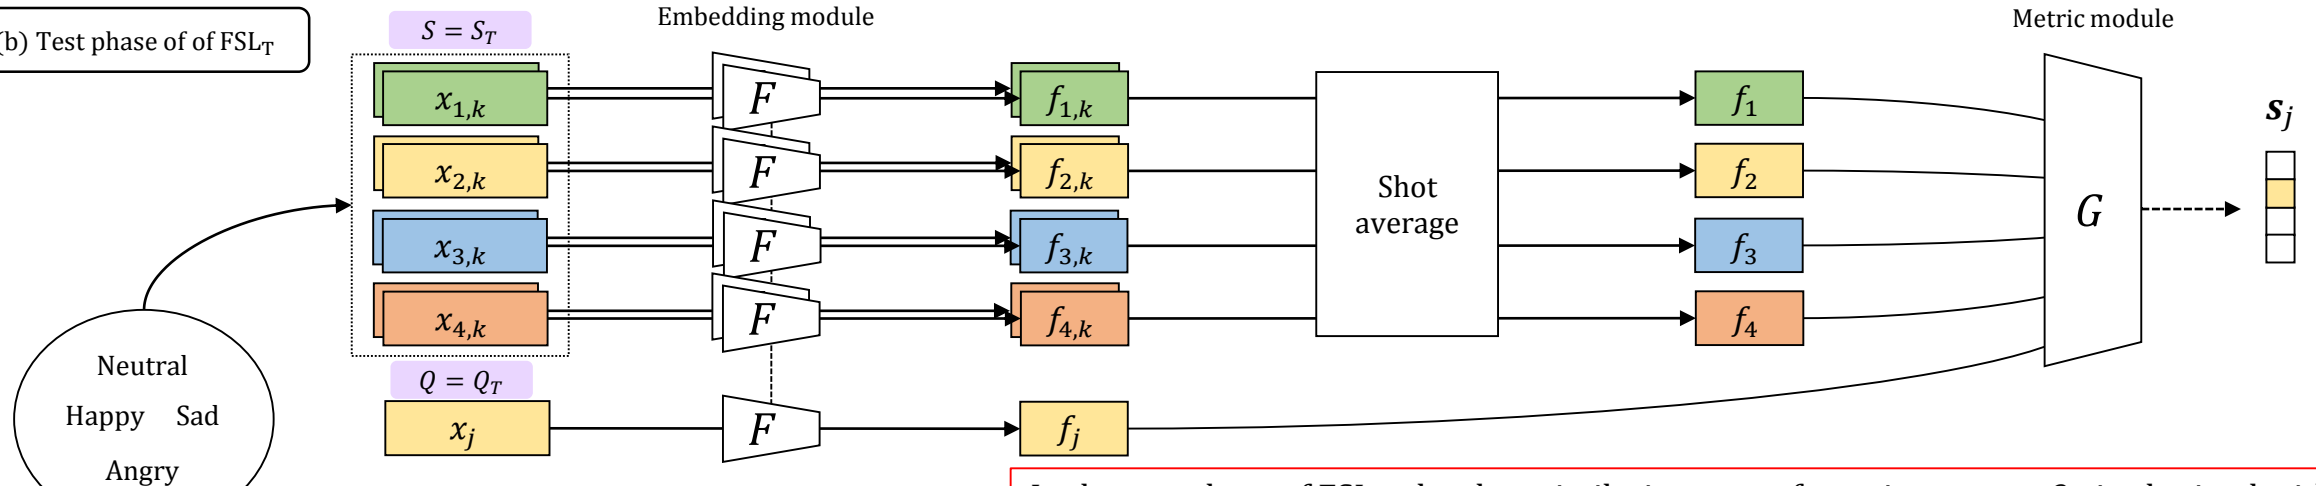

In the test phase of FSL_T, the class similarity vector for a given query Q_T is obtained with a labeled support set S_T using trained F and G . Only one support set is used for a query assuming that only a limited number of labeled target domain samples are available.