


Front end and Back end

- ▶ **Front end / Client-side**
 - ▶ HTML, CSS and Javascript
 - ▶ [Asynchronous](#) request handling and [AJAX](#)
- ▶ **Back end / Server-side**
 - ▶ [Node.js](#), [PHP](#), [Python](#), [Ruby](#), [Perl](#)
 - ▶ [Compiled languages](#) like [C#](#), [Java](#) or [Go](#)
 - ▶ Various technologies and approaches

▶ https://en.wikipedia.org/wiki/Front_and_back_ends

▶ 2


N-tier Architecture

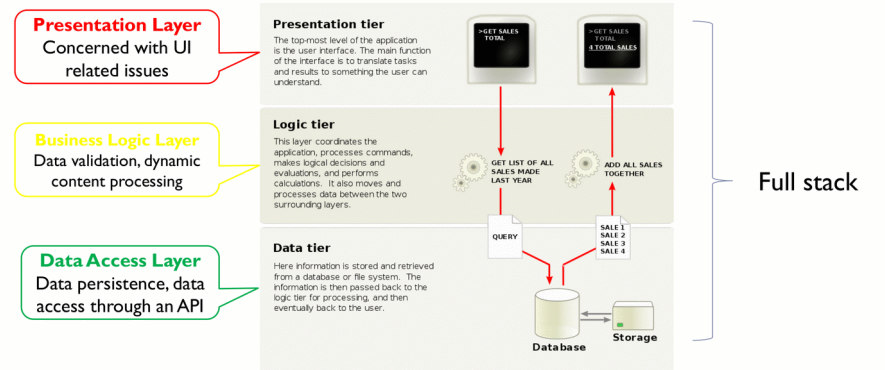


▶ 3

https://en.wikipedia.org/wiki/Multitier_architecture#Three-tier_architecture


Traditional Web Development

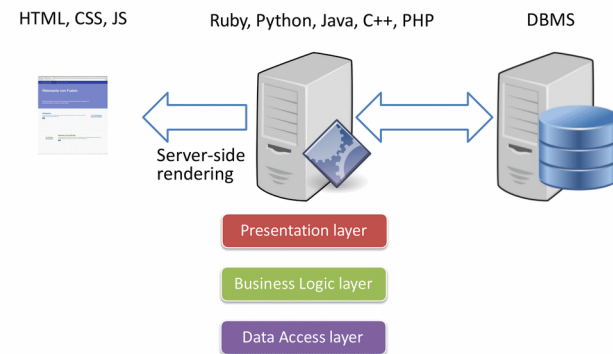

Full Stack JavaScript Development

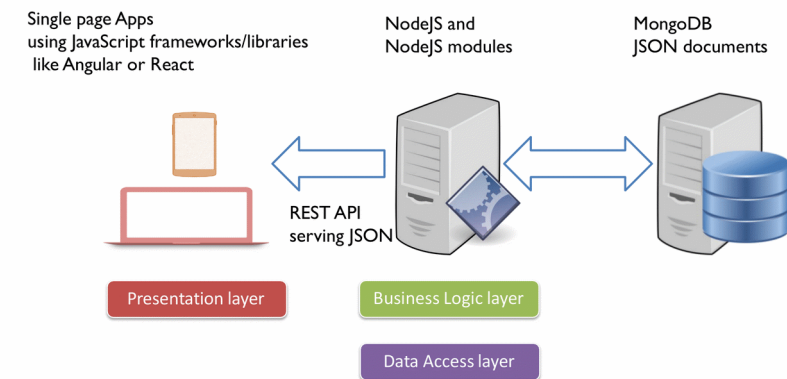

Full Stack Web Development

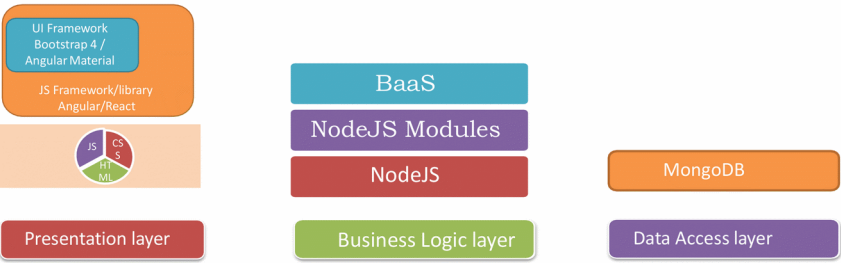

6

Drawbacks of Traditional Web Application Processing Model


- ▶ Handling more and more concurrent client's request is bit tough.
- ▶ When Concurrent client requests increases, then it should use more and more threads, finally they eat up more memory.
- ▶ Sometimes, Client's Request should wait for available threads to process their requests.
- ▶ Wastes time in processing Blocking IO Tasks.

9

Traditional Web Application Processing Model

Multi-Threaded Request-Response

- ▶ If "n" is greater than "m" (Most of the times, its true), then server assigns Threads to Client Requests up to available Threads. After all m Threads are utilized, then remaining Client's Request should wait in the Queue until some of the busy Threads finish their Request-Processing Job and free to pick up next Request.
- ▶ If those threads are busy with Blocking IO Tasks (For example, interacting with Database, file system, JMS Queue, external services etc.) for longer time, then remaining clients should wait longer time.

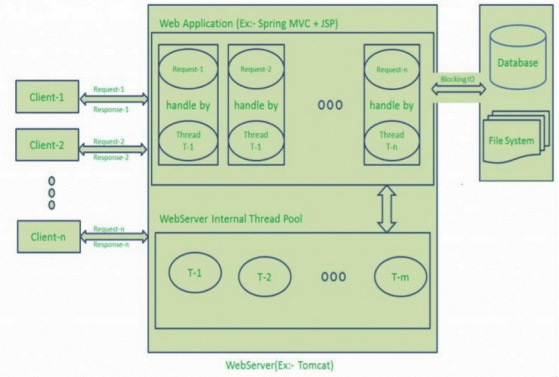

8 <https://www.journaldev.com/7462/node-js-architecture-single-threaded-event-loop>

I/O

- ▶ **I/O:** A communication between CPU and any other process external to the CPU (memory, disk, network).
- ▶ **I/O latency** is defined simply as the time that it takes to complete a single I/O operation.

System Event	Actual Latency	Scaled Latency
One CPU cycle	0.4 ns	1 s
Level 1 cache access	0.9 ns	2 s
Level 2 cache access	2.8 ns	7 s
Level 3 cache access	28 ns	1 min
Main memory access (DDR DIMM)	~100 ns	4 min
Intel® Optane™ DC persistent memory access	~350 ns	15 min
Intel® Optane™ DC SSD I/O	<10 μs	7 hrs
NVMe SSD I/O	~25 μs	17 hrs
SSD I/O	50–150 μs	1.5–4 days
Rotational disk I/O	1–10 ms	1–9 months
Internet call: San Francisco to New York City	65 ms[3]	5 years
Internet call: San Francisco to Hong Kong	141 ms[3]	11 years

10 <https://www.prowesscorp.com/computer-latency-at-a-human-scale/>

I/O needs to be done differently

- ▶ Consider two scenarios in real word:

- ▶ **Movie Ticket**

- ▶ You are in a queue to get a movie ticket. You cannot get one until everybody in front of you gets one, and the same applies to the people queued behind you.

Synchronously

- ▶ **Order Food**

- ▶ You are in a restaurant with many other people. You order your food. Other people can also order their food, they don't have to wait for your food to be cooked and served to you before they can order. In the kitchen restaurant workers are continuously cooking, serving, and taking orders. People will get their food served as soon as it is cooked.

Asynchronously

▶ 11

Blocking vs non-blocking?

```
const add = (a,b)=>{  
  for(let i=0; i<9e27; i++){  
    console.log(a+b);  
  }  
}
```

```
console.log('start');  
const A = add(1,2);  
const B = add(2,3);  
const C = add(3,4);  
console.log('end');
```

Blocking methods execute **synchronously**

```
const add = (a,b)=>{  
  setTimeout(()=>{  
    for(let i=0; i<9e27; i++){  
      console.log(a+b);  
    }, 5000);  
}  
console.log('start');  
const A = add(1,2);  
const B = add(2,3);  
const C = add(3,4);  
console.log('end');
```

non-blocking methods execute **asynchronously**

▶ 12

Why JavaScript?

- ▶ JavaScript designed specifically to be used with an event loop:

- ▶ Anonymous functions, closures.
 - ▶ Only one callback at a time, no need to lock variables.
 - ▶ I/O through event callbacks.

- ▶ The culture of JavaScript is already geared towards **event-driven programming**.

```
puts("Enter your name: ");  
let name = gets();  
gets("Name: " + name);
```


We're taught to demand input
and do nothing until we have it.

```
puts("Enter your name: ");  
gets(function (name) {  
  puts("Name: " + name);  
});
```

Code like this is rejected as too
complicated.

▶ 13

Review: Chrome – Concurrency & the Event Loop

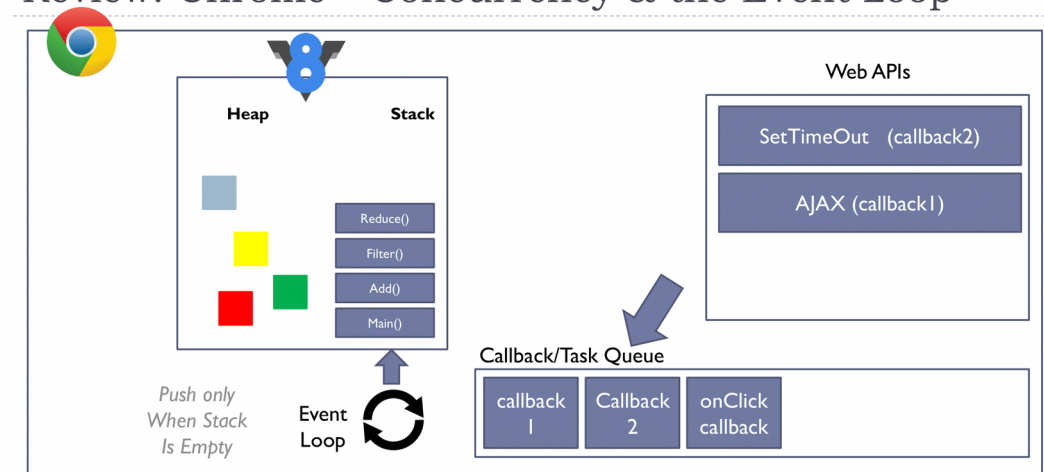


One thing at a time? Not really! If you block the stack, browser can't do the render queue.

▶ 14

Node JS Architecture – Single Threaded Event Loop

- ▶ Node JS Processing model mainly based on Javascript Event based model with Javascript callback mechanism.
- ▶ Node JS Event Loop Picks up those requests one by one.
- ▶ Event Loop pickups Client-1 Request-1
 - ▶ Checks whether Client-1 Request-1 does require any Blocking IO Operations or takes more time for complex computation tasks.
 - ▶ As this request is simple computation and Non-Blocking IO task, does not require separate Thread to process it.
 - ▶ Event Loop process all steps provided in that Client-1 Request-1 Operation (Here Operations means Java Script's functions) and prepares Response-1
 - ▶ Event Loop sends Response-1 to Client-1
- ▶ ...
- ▶ Event Loop pickups Client-n Request-n
 - ▶ Checks whether Client-n Request-n does require any Blocking IO Operations or takes more time for complex computation tasks.
 - ▶ As this request is very complex computation or Blocking IO task, Even Loop does not process this request.
 - ▶ Event Loop picks up Thread T-1 from Internal Thread pool and assigns this Client-n Request-n to Thread T-1
 - ▶ Thread T-1 reads and process Request-n, perform necessary Blocking IO or Computation task, and finally prepares Response-n
 - ▶ Thread T-1 sends this Response-n to Event Loop
- ▶ Event Loop in turn, sends this Response-n to Client-n

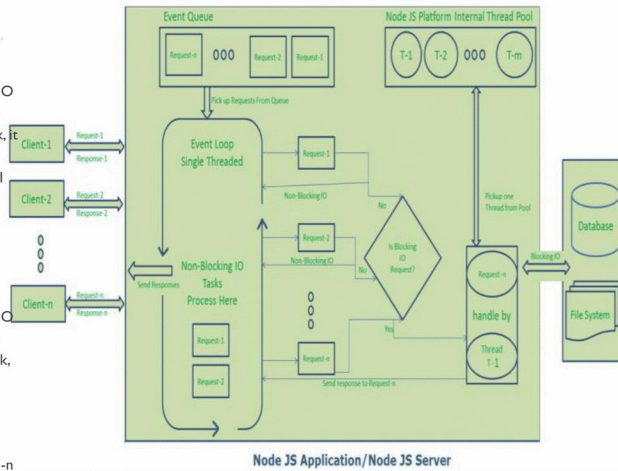

Node JS Architecture

- Single Threaded Event Loop Advantages

- ▶ Handling more and more concurrent client's request is very easy.
- ▶ Even though our Node JS Application receives more and more Concurrent client requests, there is no need of creating more and more threads, because of Event loop.
- ▶ Node JS application uses less Threads so that it can utilize only less resources or memory

▶ 16

Node.js

- ▶ JavaScript runtime built on Chrome V8 JavaScript Engine
- ▶ Server-side JavaScript
- ▶ Allows script programs do I/O in JavaScript
- ▶ Event-driven, non-blocking I/O
- ▶ Single Threaded
- ▶ CommonJS module system
- ▶ Focused on Performance

Setting up Node.js

- ▶ Go to nodejs.org or [download page](#) to download node. After installing Node we will be able to use it using the command line interface.

- ▶ If Node is installed properly, Try this command: `node -v`

```
H:\courses\MSD\cs477\cs477>node -v
v16.3.0
```

- ▶ Hit **Ctrl+C** twice or **Ctrl+D** once to quit Node.

- ▶ Github Node.js: <https://github.com/nodejs/nodejs.org>

▶ 18

▶ 17

Node Versions

- ▶ **Current:** Under active development. Code for the Current release is in the branch for its major version number (for example, [v10.x](#)). Node.js releases a new major version every 6 months, allowing for breaking changes. This happens in April and October every year. Releases appearing each October have a support life of 8 months. Releases appearing each April convert to LTS (see below) each October.
- ▶ **LTS:** Releases that receive Long-term Support, with a focus on stability and security. Every even-numbered major version will become an LTS release. LTS releases receive 18 months of *Active LTS* support and a further 12 months of *Maintenance*. LTS release lines have alphabetically-ordered codenames, beginning with v4 Argon. There are no breaking changes or feature additions, except in some special circumstances.

▶ 19

Node REPL (Read, Eval, Print, Loop)

- ▶ REPL also known as Read Evaluate Print Loop is a programming language environment (basically a console window) that takes single expression as user input and returns the result back to the console after execution.
- ▶ Run JS scripts
 - ▶ `node script.js`
- ▶ Autocomplete your commands
 - ▶ `> (tab) (tab)`
 - ▶ `> global.(tab)`
 - ▶ `> var a = []; a.(tab)`
- ▶ Underscore: Access to last evaluated value
 - ▶ `> Math.random(); _`
- ▶ The Dot (.) commands
 - ▶ `.help, .break, .load, .save, .editor`

▶ 21

Try these commands

Check number of processors that Node can use

```
node -p "os.cpus()"
```

Check the CPU architecture

```
node -p "process.arch"
```

Check V8 version

```
node -p "process.versions.v8"
```

Check V8 heap

```
node -p "v8.getHeapStatistics()"
```

Check the environment variables

```
node -p "process.env"
```

▶ 20

First Program

```
setTimeout(function () { console.log("world"); }, 2000); console.log("hello");
```

hello_world.js

```
% node hello_world.js
```

```
Hello
```

```
// 2 seconds later...
```

```
World
```

Node exits automatically when there is nothing else to do (end of process). Let's change it to never exit, but to keep it in loop!

Node API is not all asynchronous. Some parts of it are synchronous like, for instance, some file operations. Don't worry, they are very well marked: they always end with "Sync". They should only be used when initializing.

▶ 22


The Server Global Environment

- ▶ In Node we run JS on the server so we don't have `window` object. Instead Node provides us with global modules and methods that are automatically created for us (*they aren't part of ECMA specifications*)
 - ▶ `module`
 - ▶ `global` (*The global namespace object*)
 - ▶ `process`
 - ▶ `buffer`
 - ▶ `require`
 - ▶ `setInterval(callback, delay)` and `clearInterval()`
 - ▶ `setTimeout(callback, delay)` and `clearTimeout()`
- ▶ Doc: <https://nodejs.org/api/globals.html>

▶ 23

What's inside Node?

- ▶ **V8**
 - ▶ Google's open source JavaScript engine.
 - ▶ Translates your JS code into machine code
 - ▶ V8 is written in C++.
 - ▶ Read more about how V8 works [here](#).
- ▶ **libuv**
 - ▶ a multi-platform support library with a focus on asynchronous I/O.
 - ▶ Asynchronous file and file system operations
 - ▶ Thread pool
 - ▶ ...
- ▶ **Binding**
 - ▶ A wrapper around a library written in one language and expose the library to codes written in another language so that codes written in different languages can communicate.
- ▶ **Other Low-Level Components**
 - ▶ such as `c-ares`, `http parser`, `OpenSSL`, `zlib`, and etc, mostly written in C/C++.
- ▶ **Application**
 - ▶ here is your code, modules, and Node.js' *built in modules*, written in JS

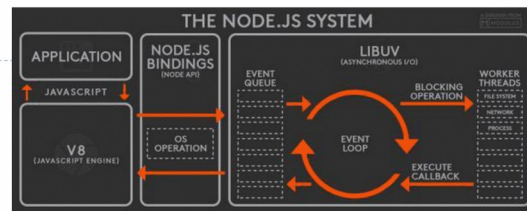


▶ 25 <https://stackoverflow.com/questions/36766696/which-is-correct-node-js-architecture>

Global Scope in Node

- ▶ Browser JavaScript by default puts everything into its `window` global scope.
- ▶ Node.js was designed to behave differently with **everything being local by default**. In case we need to set something globally, there is a `global` object that can be accessed by all modules. (not recommended)
- ▶ The document object that represent DOM of the webpage is nonexistent in Node.js.

▶ 24

JS on the Server

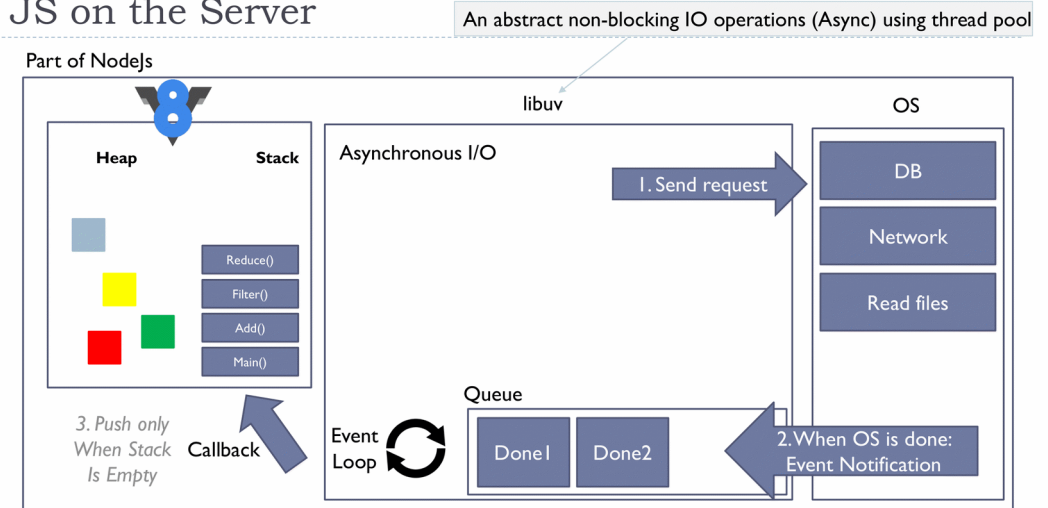

▶ 26

What's the event loop?

The event loop is what allows Node.js to perform non-blocking I/O operations — despite the fact that JavaScript is single-threaded — by offloading operations to the system kernel whenever possible.

— from node.js doc

A loop that picks events from the event queue and pushes their callbacks into the call stack.

Node.js runs using a **single thread**, at least from a Node.js developer's point of view. Under the hood Node uses many threads through **libuv**.

▶ 27

setTimeout vs setImmediate

▶ setTimeout

- ▶ schedules a callback to run after a specific time, the functions are registered in the **timers phase** of the event loop.


▶ setImmediate

- ▶ schedules a callback to run at **check phase** of the event loop after IO events' callbacks.

▶ 29

Event Loop

- ▶ **timers**: this phase executes callbacks scheduled by `setTimeout()` and `setInterval()`.
- ▶ **pending callbacks**: executes I/O callbacks deferred to the next loop iteration.
- ▶ **idle, prepare**: only used internally.
- ▶ **poll**: retrieve new I/O events; execute I/O related callbacks (almost all with the exception of close callbacks, the ones scheduled by timers, and `setImmediate()`); node will block here when appropriate.
- ▶ **check**: `setImmediate()` callbacks are invoked here.
- ▶ **close** callbacks: some close callbacks, e.g. `socket.on('close', ...)`.

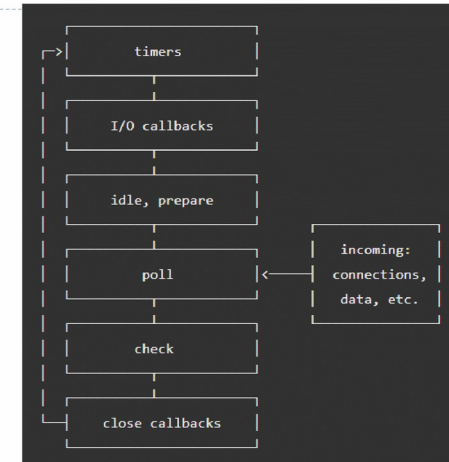

<https://nodejs.org/en/docs/guides/event-loop-timers-and-nexttick/>

▶ 28

process.nextTick(callback)


`process.nextTick()` is not part of the event loop, it adds the callback into the `nextTick` queue. Node processes **all the callbacks** in the `nextTick` queue after the current operation completes and before the event loop continues.

Which means it runs **before** any additional I/O events or timers fire in subsequent ticks of the event loop.

Note: the next-tick-queue is completely drained on each pass of the event loop before additional I/O is processed. As a result, recursively setting `nextTick` callbacks will block any I/O from happening, just like a `while(true)` loop.

▶ 30

process.nextTick(callback)

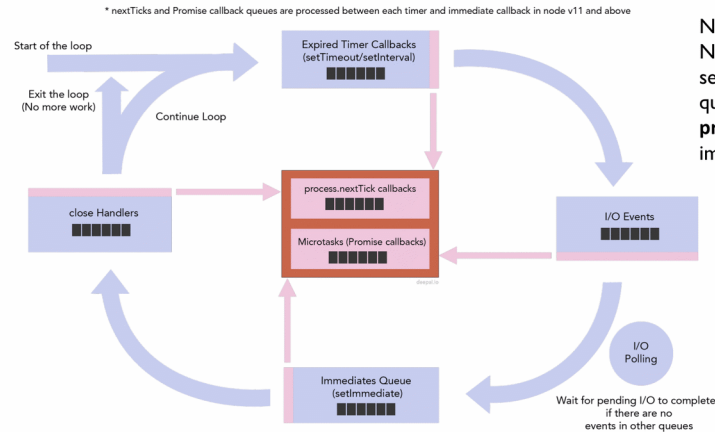

NOTE:
Next tick queue is displayed separately from the other four main queues because it is **not natively provided by the libuv**, but implemented in Node.

31 <https://blog.insiderattack.net/event-loop-and-the-big-picture-nodejs-event-loop-part-1-1cb67a182810>

setTimeout vs setImmediate vs process.nextTick

- ▶ `setTimeout(() => { console.log('timeout'); }, 0);`
- ▶ `setImmediate(() => { console.log('immediate'); });`
- ▶ `process.nextTick(() => console.log('nexttick'));`
- ▶ What's the output of this code and why?

33

process.nextTick(callback)

```
function foo() {  
  console.log('foo');  
}  
process.nextTick(foo);  
console.log('bar');
```

Notice that bar will be printed in the console before foo, as we have delayed the invocation of foo() till the next tick of the event loop. We can get the same result by using setTimeout() this way:

```
setTimeout(foo, 0);  
console.log('bar');
```

However, process.nextTick() is not just a simple alias to setTimeout(fn, 0).

What's the difference and why it's more efficient?

32

Resources

- ▶ [What is a Full Stack developer?](#)
- ▶ [Wait, Wait... What is a Full-stack Web Developer After All?](#)
- ▶ [The Myth of the Full-stack Developer](#)
- ▶ [Multi-tier Architecture](#)
- ▶ [What is the 3-Tier Architecture?](#)
- ▶ <https://www.journaldev.com/7462/node-js-architecture-single-threaded-event-loop>
- ▶ [Nodejs.org](#)
- ▶ [Npmjs.com](#)
- ▶ [Node API Documentation](#)
- ▶ [NPM Documentation](#)
- ▶ [The Node.js Event Loop, Timers, and process.nextTick\(\)](#)

34