


# Lesson 9

## Merge Sort: Collapsing Infinity To a Point

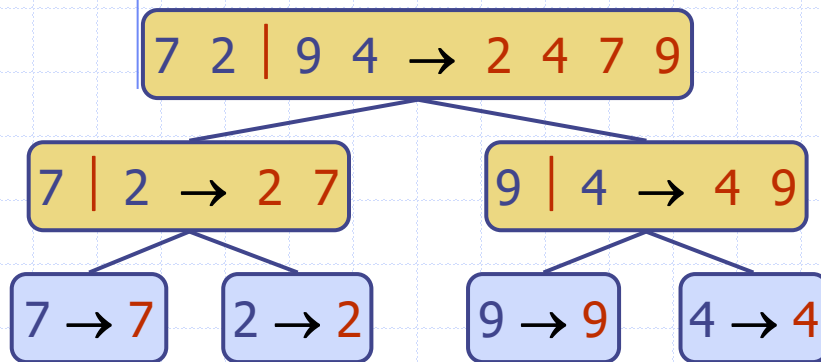

### Wholeness of the Lesson


Merge Sort is a Divide and Conquer sorting algorithm that can sort lists in  $O(n \log n)$  time, even in the worst case. The Divide and Conquer strategy is an example of the simple principle of "Do Less and Accomplish More."

# Divide-and-Conquer

- ◆ **Divide-and conquer** is a general algorithm design strategy:
  - **Divide**: divide the input data  $S$  in two disjoint subsets  $S_1$  and  $S_2$
  - **Recur**: solve the subproblems associated with  $S_1$  and  $S_2$
  - **Conquer**: combine the solutions for  $S_1$  and  $S_2$  into a solution for  $S$
- ◆ The base case for the recursion are typically subproblems of size 0 or 1


# Merge-Sort Tree

- ◆ An execution of merge-sort may be depicted by a binary tree
  - each node represents a recursive call of merge-sort and stores
    - ◆ unsorted sequence before the execution
    - ◆ its partition
    - ◆ sorted sequence at the end of the execution
  - the root is the initial call
  - the leaves are calls on subsequences of size 0 or 1

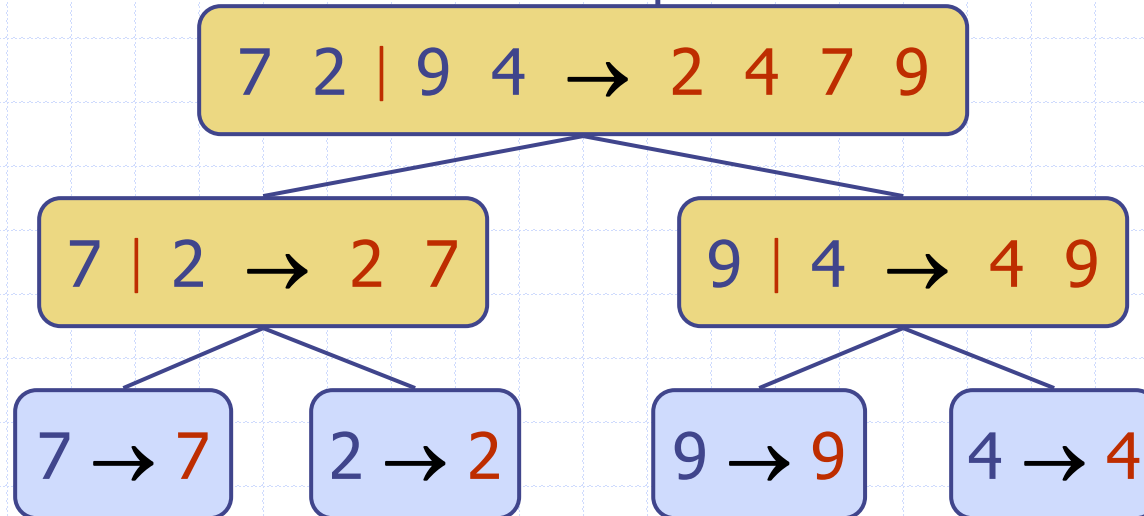


# Partiti

# Partition

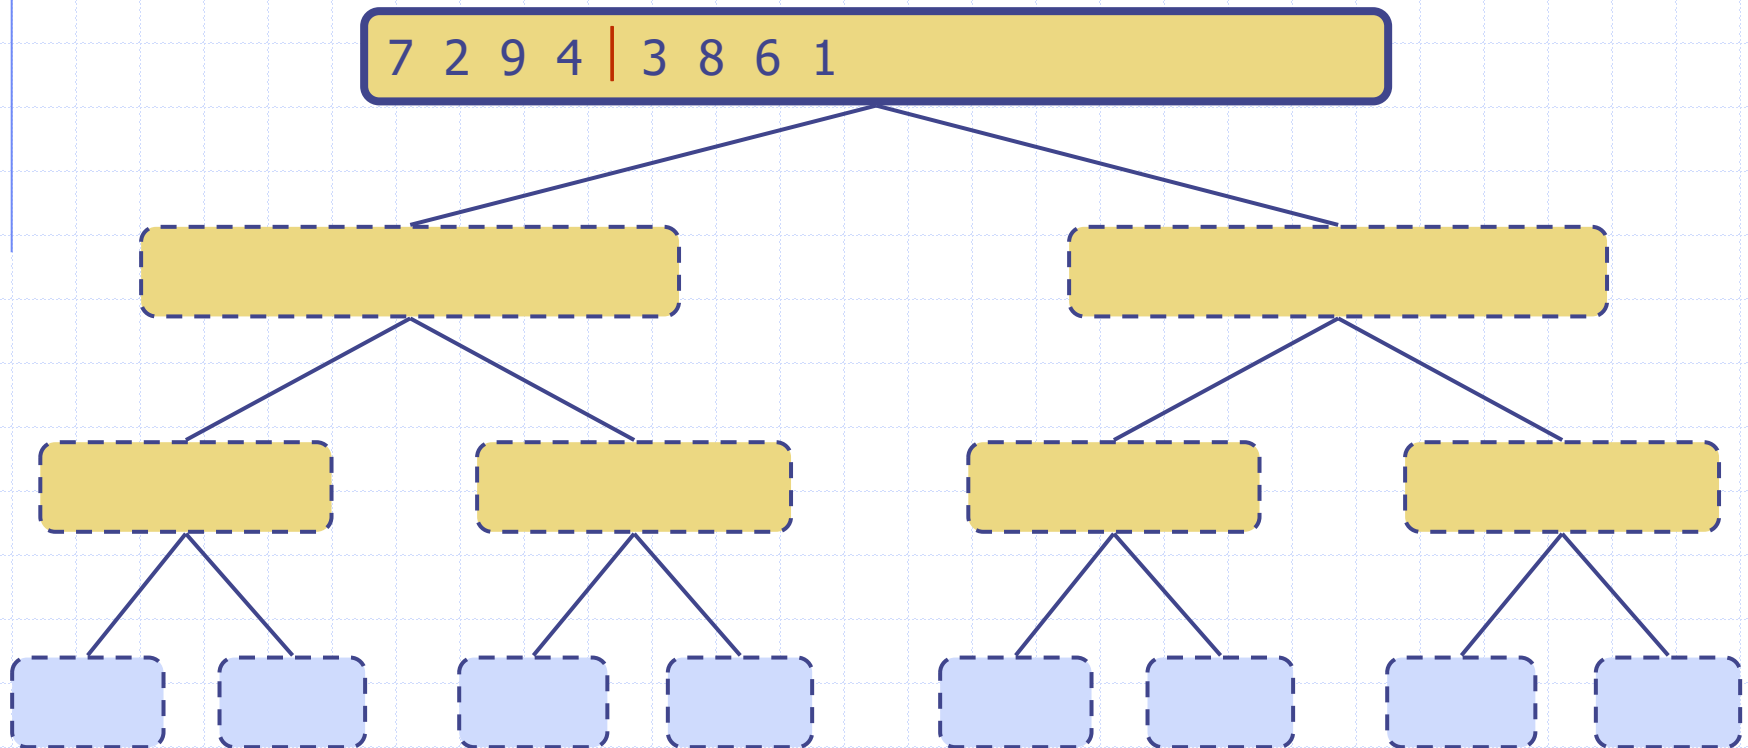


# Execution Example (cont.)

◆ Recursive call, partition

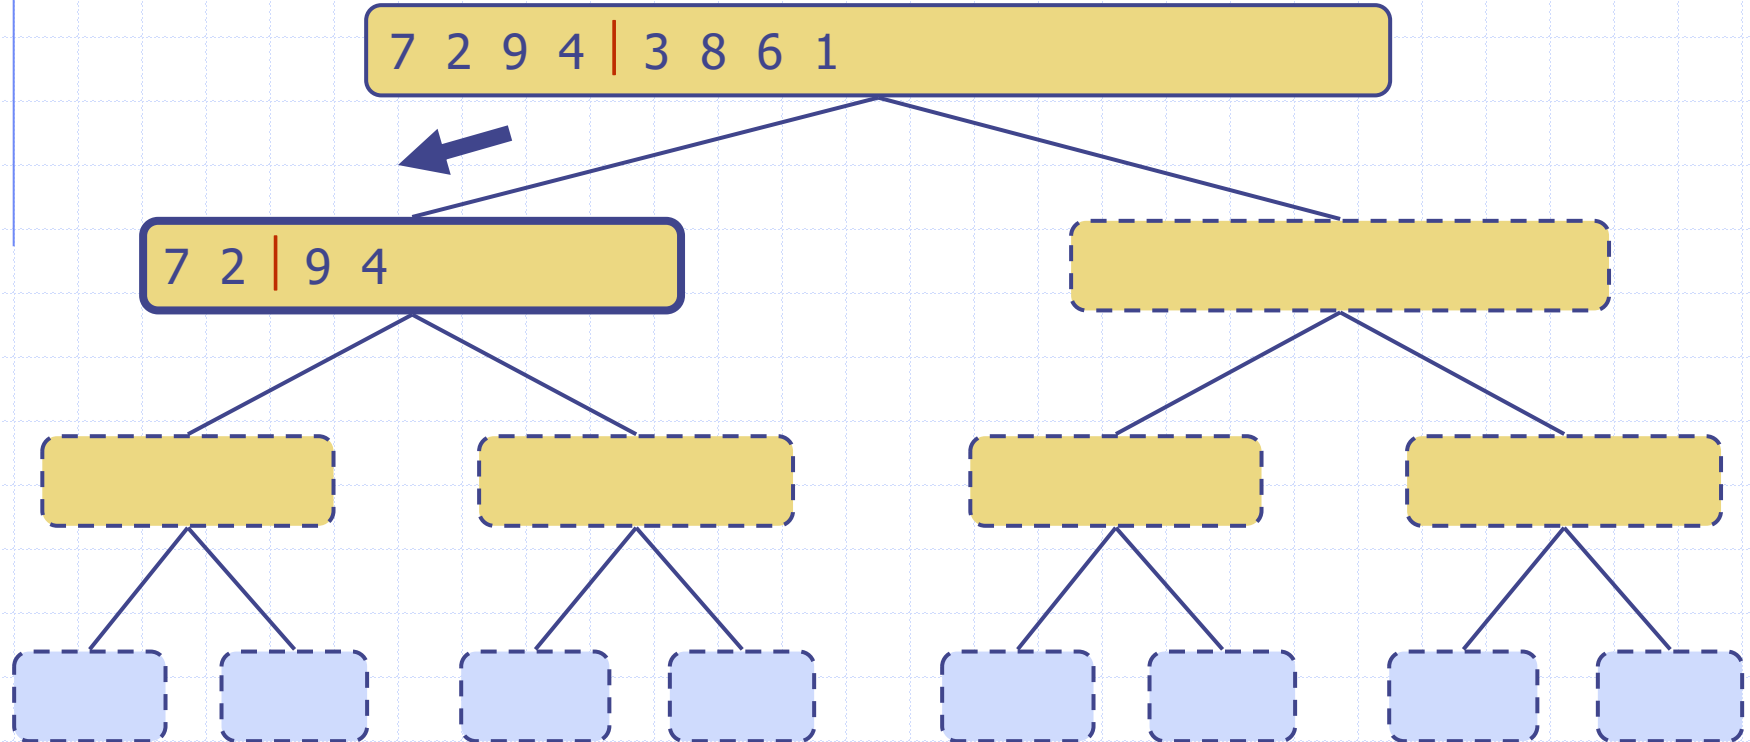


# Execution Example (cont.)

◆ Recursive call, partition

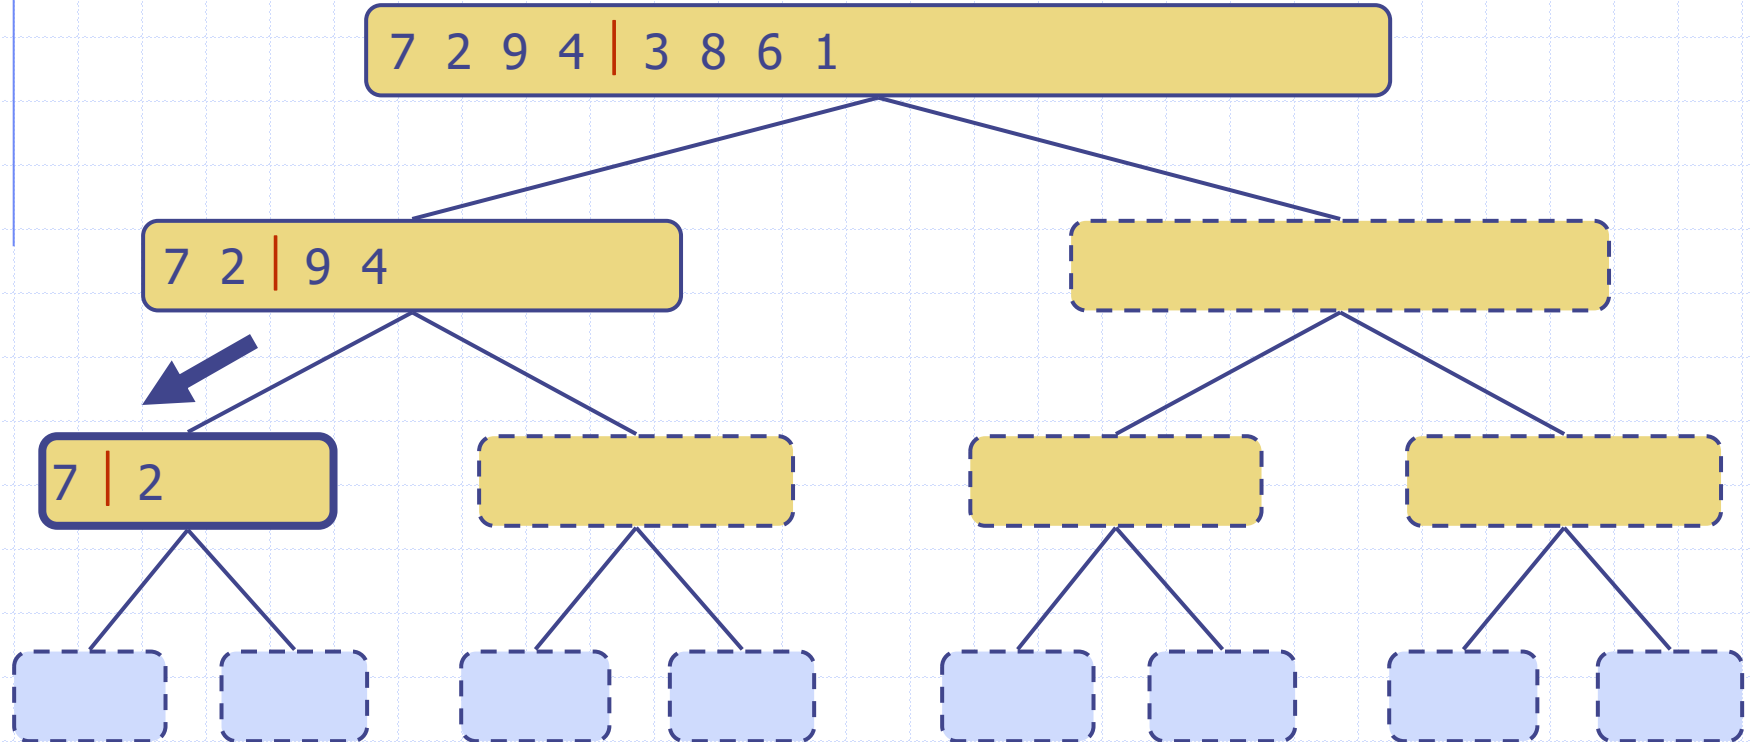


# Execution Example (cont.)

◆ Recursive call, base case

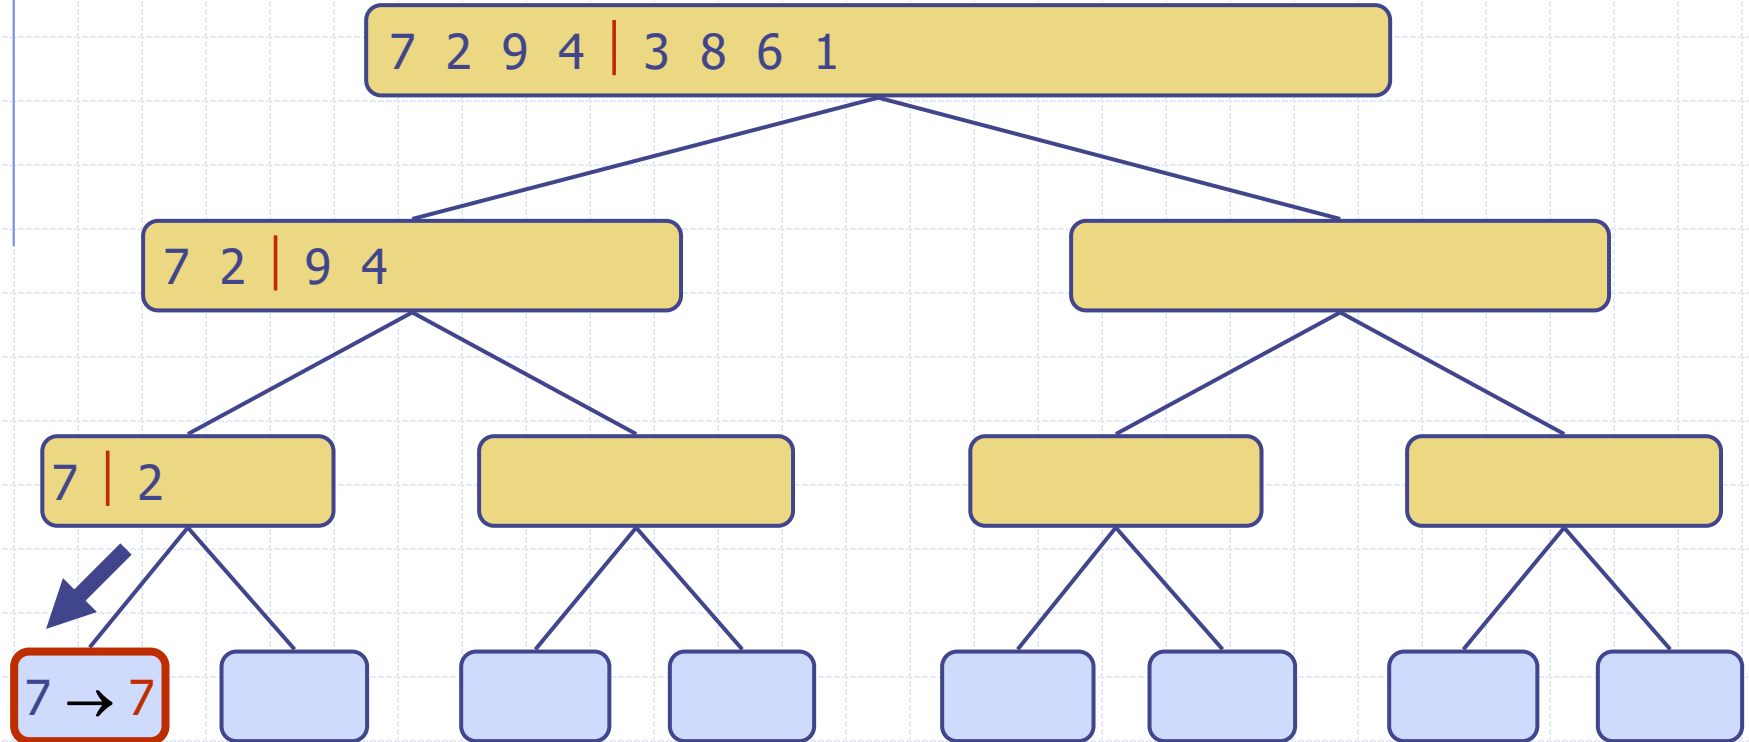

# Execution Example (cont.)


◆ Recursive call, base case

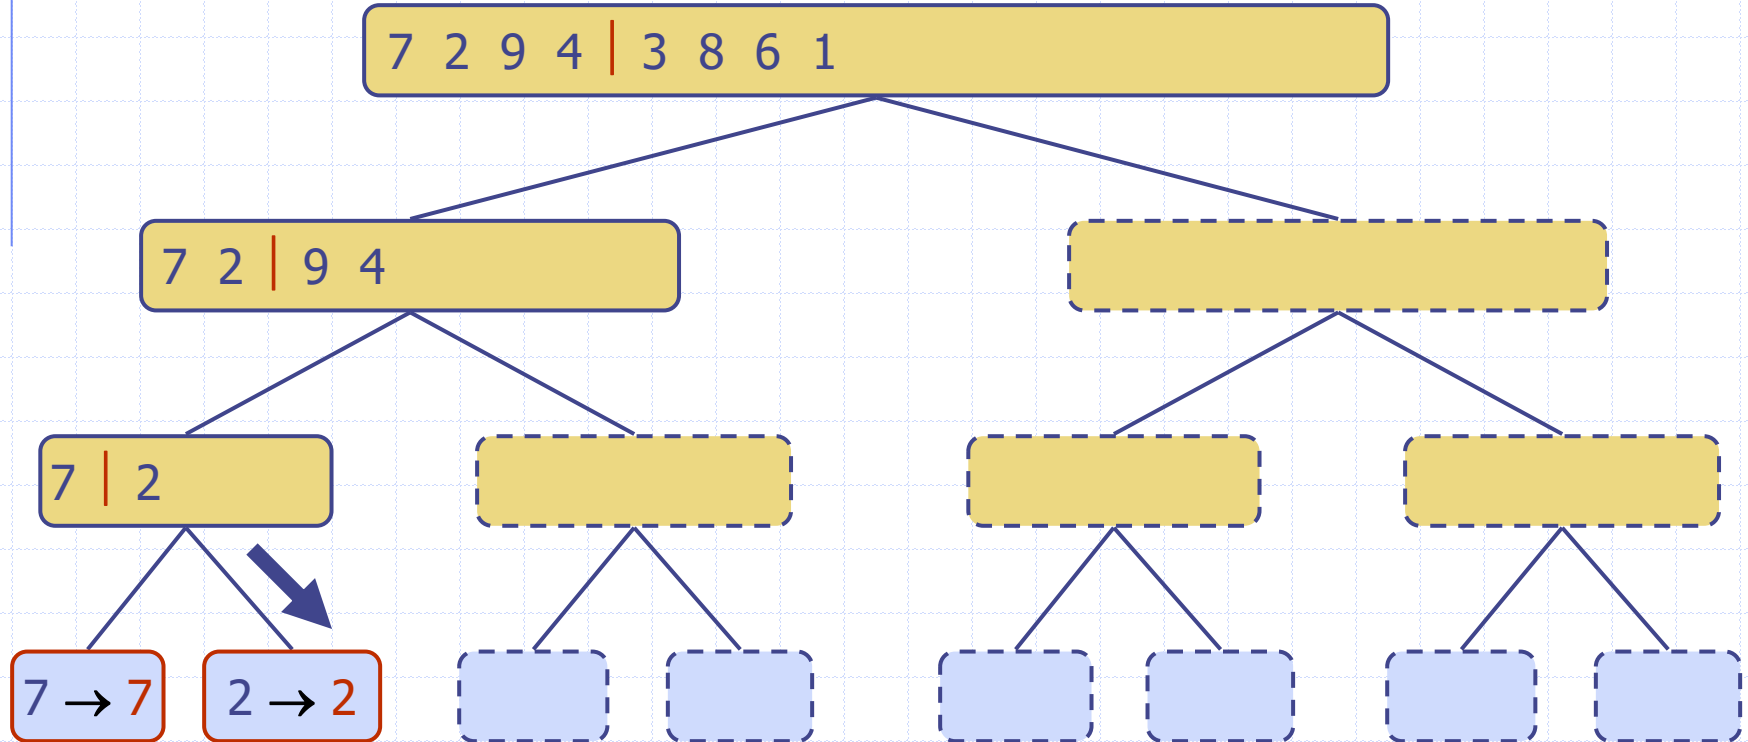




# Execution Example (cont.)

## ◆ Merge

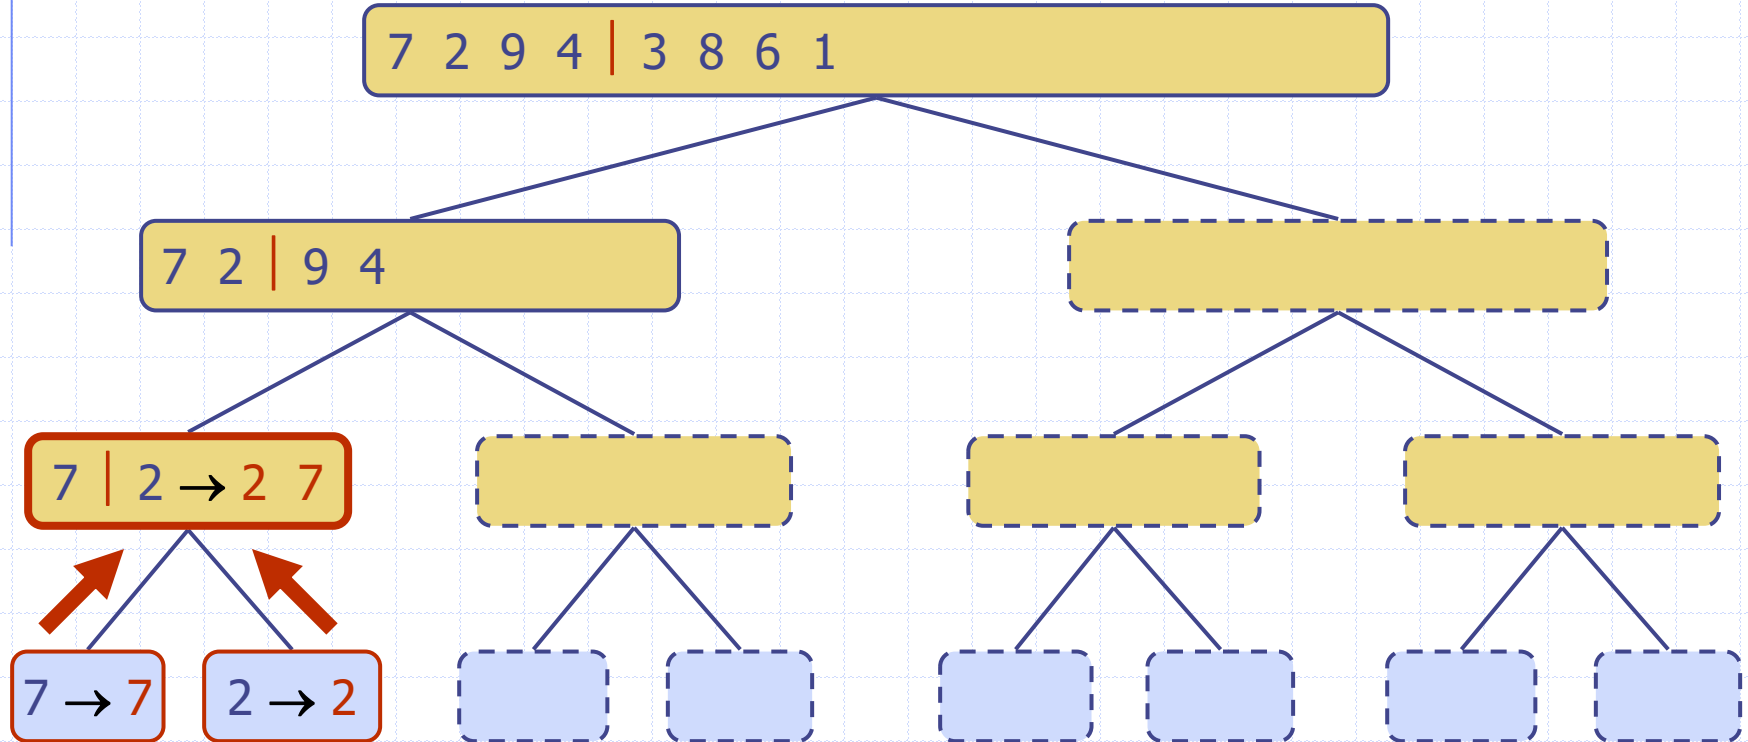


# Execution Example (cont.)

◆ Recursive call, ..., base case, merge

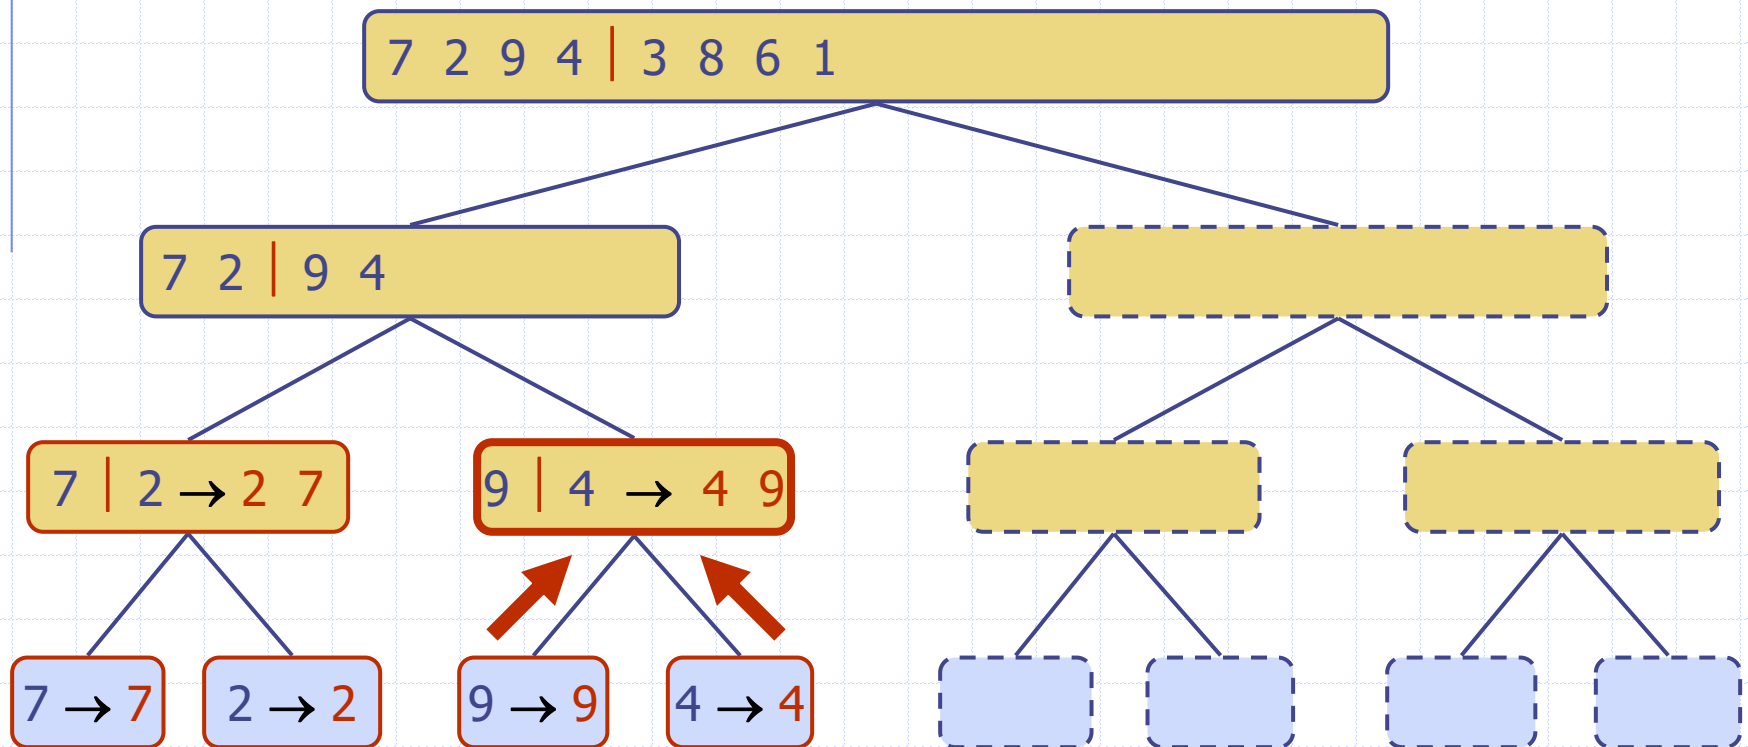


# Execution Example (cont.)

## ◆ Merge

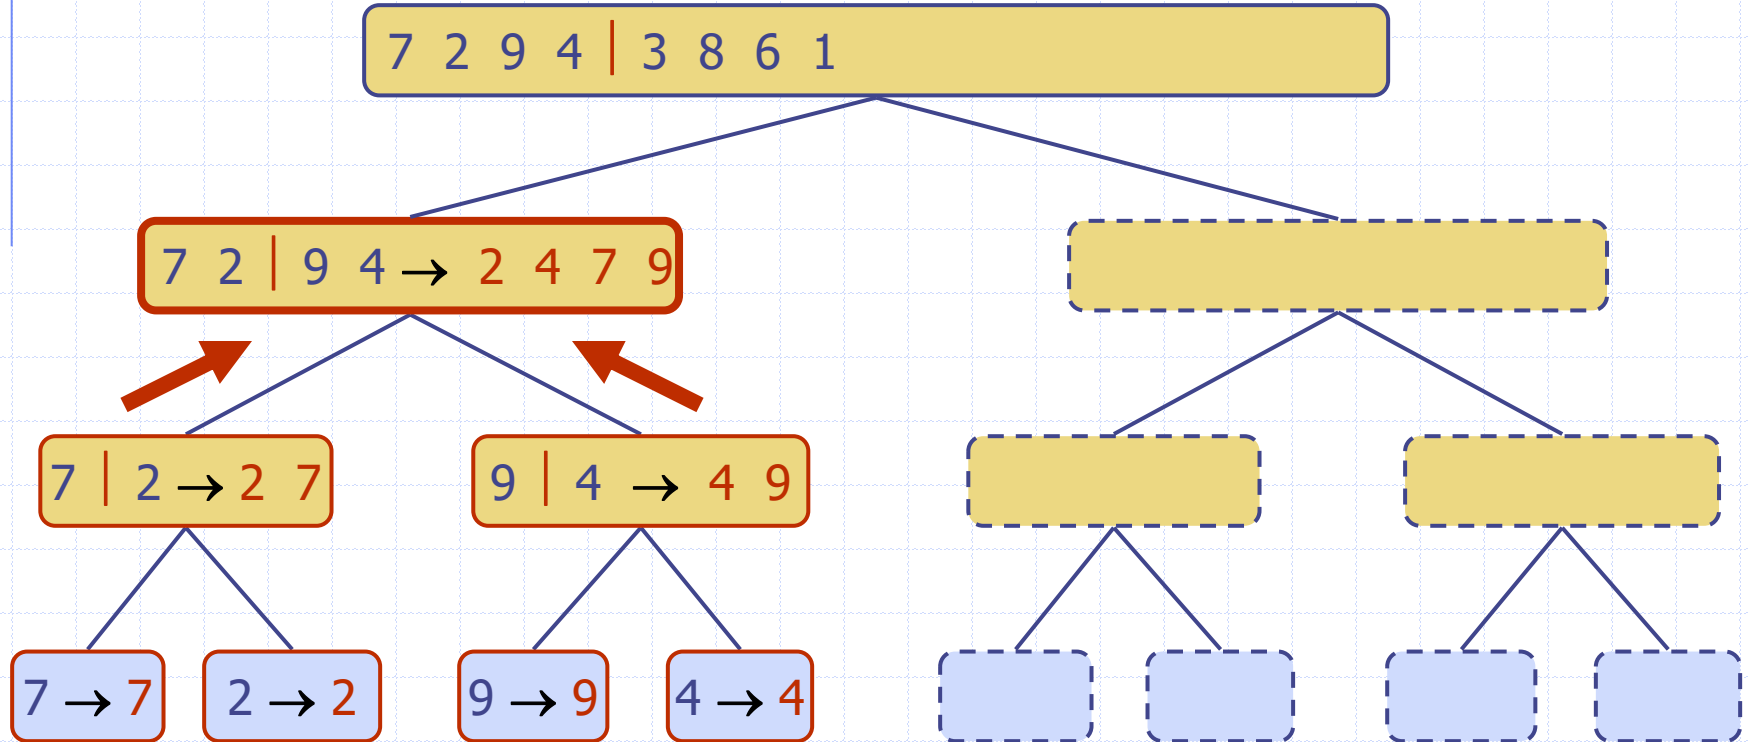


# Execution Example (cont.)

◆ Recursive call, ..., merge, merge

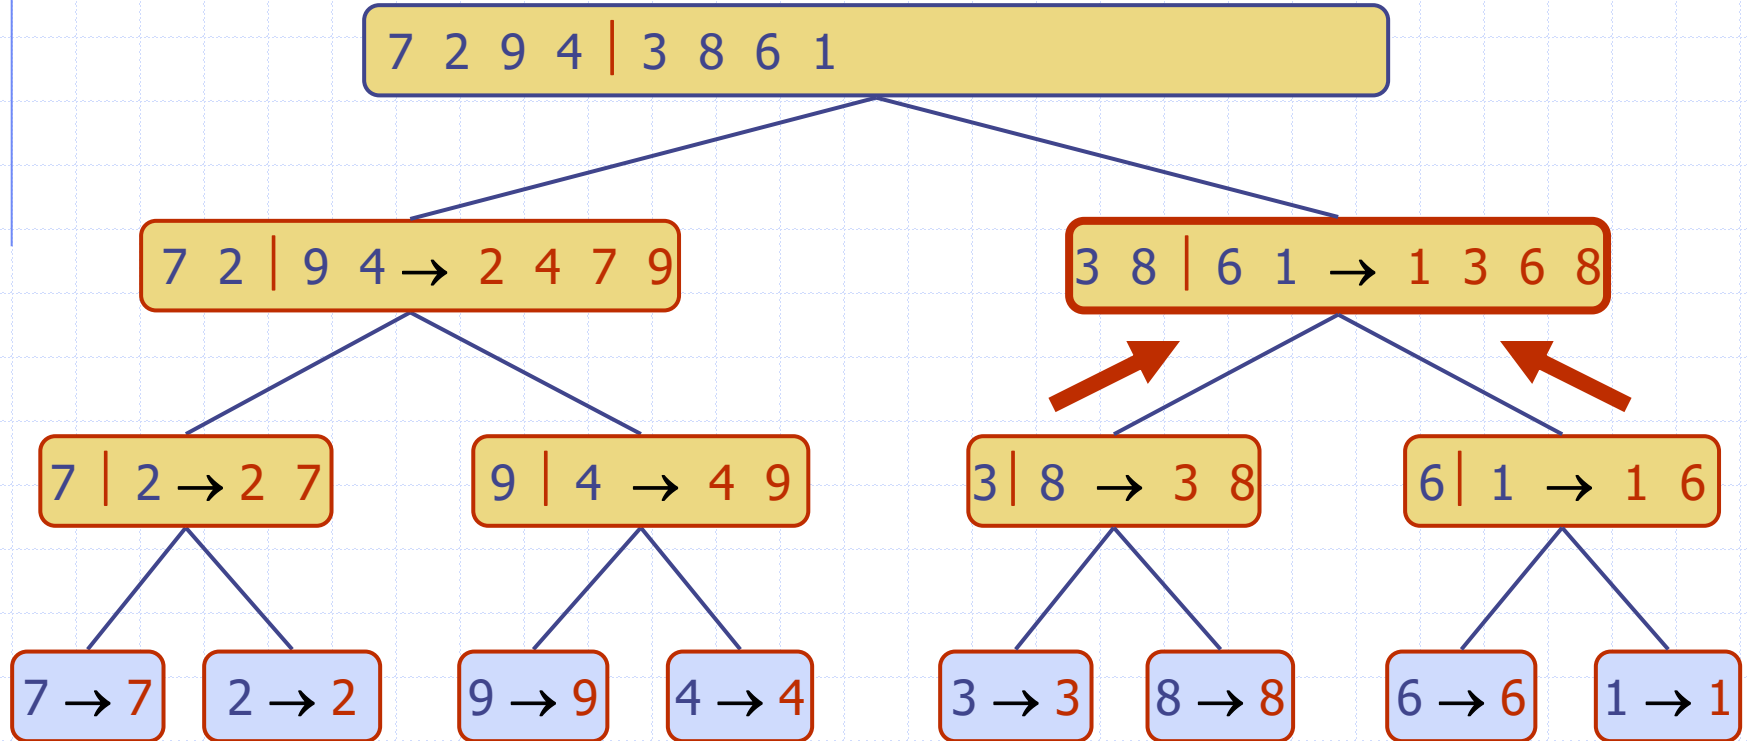

# Execution Example (cont.)

## ◆ Merge

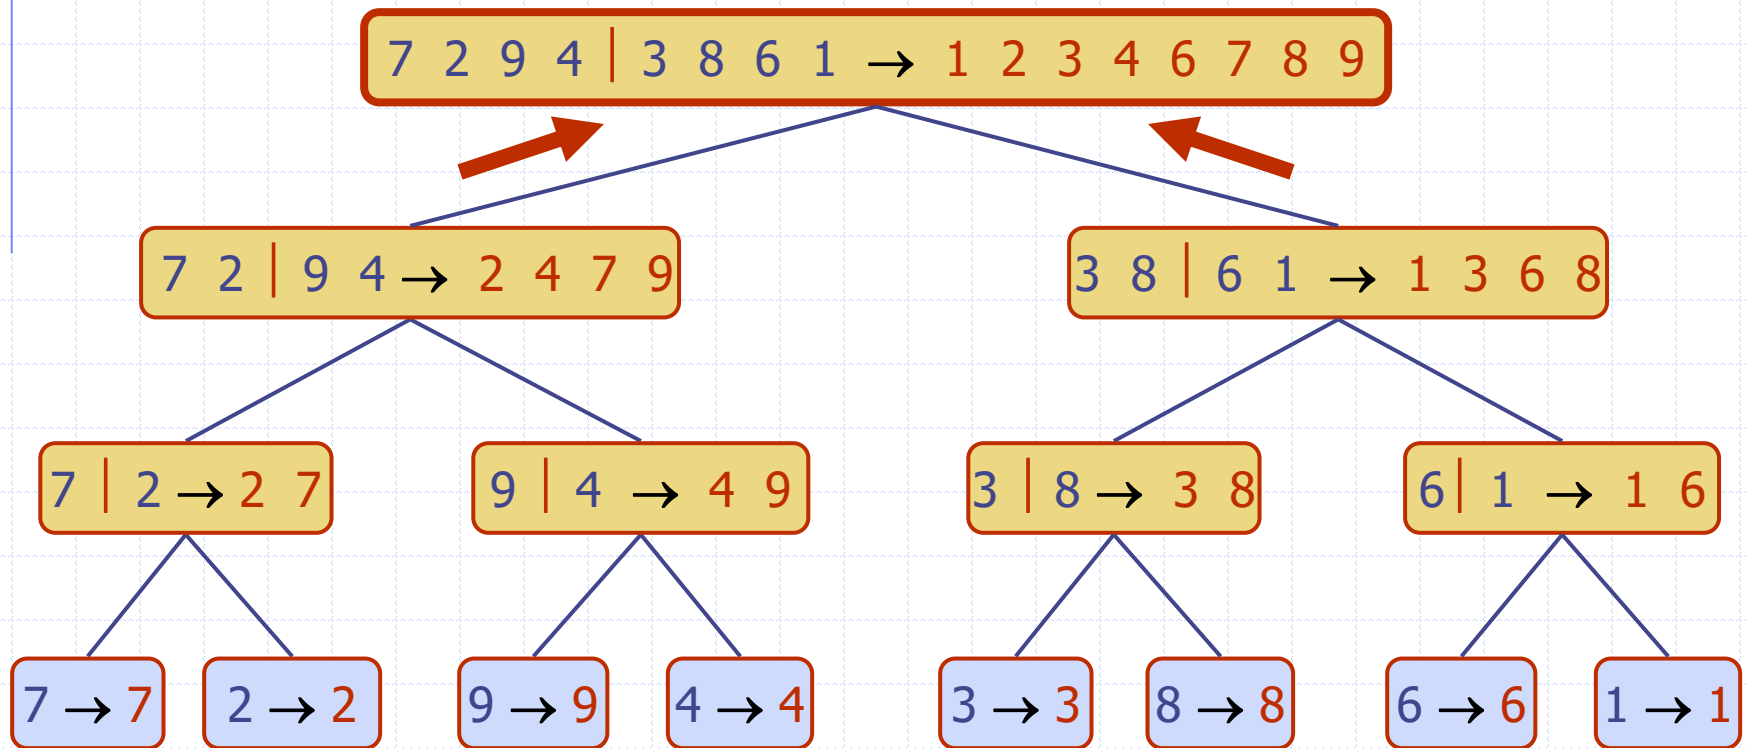

# Merge-Sort

- ◆ Merge-sort is a sorting algorithm based on the divide-and-conquer paradigm
- ◆ Merge-sort on an input sequence  $S$  with  $n$  integers consists of three steps:
  - **Divide**: partition  $S$  into two lists  $S_1$  and  $S_2$  of about  $n/2$  elements each
  - **Conquer**: recursively sort  $S_1$  and  $S_2$
  - **Combine**: merge  $S_1$  and  $S_2$  into a single sorted list  $S$

```
Algorithm mergeSort( $S$ )  
  Input List  $S$  with  $n$  integers  
  Output List  $S$  sorted  
  if  $S.size() > 1$  then  
     $(S_1, S_2) \leftarrow partition(S)$   
    mergeSort( $S_1$ )  
    mergeSort( $S_2$ )  
     $S \leftarrow merge(S_1, S_2, S)$   
  return  $S$ 
```

# Merging Two Sorted Sequences

- ◆ The conquer step of merge-sort consists of merging two sorted lists  $A$  and  $B$  into a sorted list  $S$  containing the union of the elements of  $A$  and  $B$
- ◆ Merging two sorted lists, each with  $n/2$  elements and implemented by means of a doubly linked list, takes  $O(n)$  time

**Algorithm** *merge*( $A, B, S$ )

**Input** Sorted lists  $A$  and  $B$  with  $n/2$  elements each and empty list  $S$

**Output**  $S$  contains sorted sequence of  $A \cup B$

```
while  $A.size() > 0 \wedge B.size() > 0$  do
    if (  $B.first().element() < A.first().element()$  ) then
         $S.insertLast(B.remove(B.first()))$ 
    else // first of  $A \leq$  first of  $B$ 
         $S.insertLast(A.remove(A.first()))$ 

while  $A.size() > 0$  do
     $S.insertLast(A.remove(A.first()))$ 

while  $B.size() > 0$  do
     $S.insertLast(B.remove(B.first()))$ 

return  $S$ 
```

# Analysis of Merge-Sort

- ◆ The height  $h$  of the merge-sort tree is  $O(\log n)$ 
  - at each recursive call we divide the sequence in half (n a power of 2)
- ◆ The overall amount of work done at each level is  $O(n)$
- ◆ Thus, the total running time of merge-sort is  $O(n \log n)$


depth	#seqs	size
-------	-------	------

0	1	$n$
---	---	-----

1	2	$n/2$
---	---	-------

$i$	$2^i$	$n/2^i$
-----	-------	---------

...	...	...
-----	-----	-----

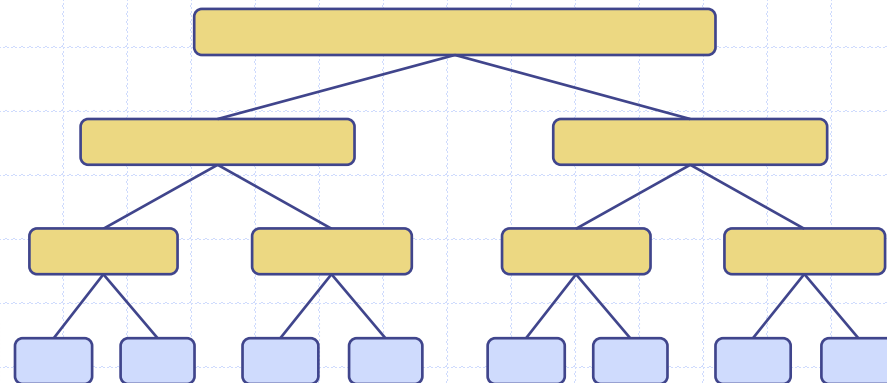



# Merge-Sort of an Array

- ◆ Merge-sort of an array by partitioning into segments of the input array
- ◆ Merge-sort on an input sequence  $S$  with  $n$  integers consists of three steps:
  - **Divide**: partition  $S$  into two segments of about  $n/2$  elements each ( $lo..mid$ ) and ( $mid+1..hi$ )
  - **Conquer**: recursively sort the two segments
  - **Combine**: merges the two segments back into  $S$  in the merge step

**Algorithm** *mergeSort(S)*

**Input** array  $S$

**Output** array  $S$  with elements sorted

$n \leftarrow S.length$

$Temp \leftarrow \text{new Array of size } n$

*mergeSortHelper(S, 0, n-1, Temp)*

**Algorithm** *mergeSortHelper(S, lo, hi, Temp)*

**Input** arrays  $S$  and  $Temp$  (work area), and *indices*  $lo$ ,  $hi$

**Output** array  $S$  with elements between  $lo$  and  $hi$  in sorted order

**if**  $hi - lo + 1 > 1$  **then**

$mid \leftarrow \text{floor}((lo + hi)/2)$

*mergeSortHelper(S, lo, mid, Temp)*

*mergeSortHelper(S, mid+1, hi, Temp)*

*merge(S, lo, mid, hi, Temp)*

**return**

# Merging Two Sorted Segments

- ◆ The conquer step of merge-sort consists of merging two sorted segments of  $A$  back into  $A$  in sorted order
- ◆ Merging two sorted array segments, each with  $n/2$  elements (where  $n=hi-lo+1$ ) takes  $O(n)$  time

**Algorithm** *merge*( $A, lo, mid, hi, Temp$ )

**Input** Sorted segments of array  $A$  between  $lo..mid$  and  $mid+1..hi$  and  $Temp$  array is working storage

**Output**  $A$  contains elements sorted between  $lo..hi$

$size \leftarrow hi - lo + 1$

$t \leftarrow 0$

$j \leftarrow lo$

$k \leftarrow mid + 1$

**while**  $j \leq mid \wedge k \leq hi$  **do**

**if**  $A[j] > A[k]$  **then**

$Temp[t] \leftarrow A[k]$

$k \leftarrow k + 1$

**else**

$Temp[t] \leftarrow A[j]$

$j \leftarrow j + 1$

$t \leftarrow t + 1$

**while**  $j \leq mid$  **do**

$Temp[t] \leftarrow A[j]; t \leftarrow t+1; k \leftarrow k+1;$

**while**  $k \leq hi$  **do**

$Temp[t] \leftarrow A[k]; t \leftarrow t+1; k \leftarrow k+1;$

**for**  $i \leftarrow 0$  **to**  $size - 1$  **do**

$A[lo+i] \leftarrow Temp[i]$

# Main Point

1. In merge-sort, the input is divided into two equal-sized subsequences, each of which is sorted separately. Then these sorted subsequences are merged together to form the sorted output.

*Science of Consciousness:* Creation arises from the collapse of the unbounded value of wholeness to a point; the re-emergence of wholeness results in the laws (algorithms of nature) that provide the balance, order, and efficiency in creation. Contact with this field improves the quality of life (order, balance, simplicity, efficiency) of the individual and society.

# Summary of Sorting Algorithms

Algorithm	Time	Notes
insertion-sort	$O(n^2)$ $O(n+k)$	<ul style="list-style-type: none"><li>◆ slow but fast for sorted input</li><li>◆ in-place</li><li>◆ for small data sets (&lt; 1K)</li></ul>
Shell-sort	$O(n^{3/2})$	<ul style="list-style-type: none"><li>◆ fast</li><li>◆ in-place</li><li>◆ for large data sets (&lt; 1M)</li></ul>
heap-sort	$O(n \log n)$	<ul style="list-style-type: none"><li>◆ fast</li><li>◆ in-place</li><li>◆ for large data sets (&lt; 1M)</li></ul>
merge-sort	$O(n \log n)$	<ul style="list-style-type: none"><li>◆ fast but NOT in-place</li><li>◆ sequential data access</li><li>◆ for huge data sets (&gt; 1M)</li></ul>

## Connecting the Parts of Knowledge With the Wholeness of Knowledge

### Merge Sort

1. Simple sorting algorithms examine each successive element in the input array, then perform a further step to place this element in an already sorted area. This style of sorting involves an *incremental unfolding*.
2. MergeSort proceeds by repeatedly collapsing (reducing) the wholeness of the current input into smaller parts, processing them separately, then synthesizing the parts into a sorted whole. This approach yields a much faster sorting algorithm.
3. *Transcendental Consciousness* is the silent field of *infinite correlation*, where “an impulse anywhere is an impulse everywhere,” a field of “frictionless flow”.
4. *Impulses within the Transcendental field*. Established in the transcendental field, action reaches fulfillment with minimum effort. Yoga is “skill in action” – efficiency in action, “doing less, accomplishing more”, whereby little needs to be done to accomplish great goals.
5. *Wholeness moving within itself*. In Unity Consciousness, the field of action effortlessly unfolds as the play of one’s own Self, one’s own pure consciousness.