JBoss BRMS

Customer Evaluation Demo

(Rules integration with BPM)

Eric D. Schabell

JBoss Technology Evangelist (Integration & BPM)

Table of Contents

2
. 2
2
.4
. 5
6
.6
.6
8.
8
8
8
.9

Introduction

This is a BRMS demo application setup guide for the Customer Evaluation Demo. The setup will create a fully installed and configured BRMS environment so that you can demo the project in all the available BPM components.

It will provide you with a JBoss Developer Studio project with unit tests to demo the project in the IDE. It will also provide a repository that you can import into BRMS BRM and demo the web tooling, web business central admin console and asset manager BRM tooling for business users.

Setup and Configuration

Installation

You first need to get the project by cloning it from the central location:

git clone -branch jdf-quickstart git://github.com/eschabell/brms-customer-evaluation-demo.git

Once downloaded, you will have the following folder structure:

- \brms-customer-evaluation-demo
 - \installs Initially empty, but will contain the BRMS platform downloads and the fully configured BRMS runtime server.
 - \projects The project that comprise the demo.
 - \support Additional supporting files used by the demo.
 - init.sh Script to install and configure the run time server environment.

Quick Start Guide.odt – This document

Next, download JBoss Enterprise BRMS Platform from the Red Hat Customer Portal (https://access.redhat.com/jbossnetwork).

Download BRMS Platform:

- 1. Under JBoss Enterprise Platforms, select the BRMS Platform product.
- 2. Select version 5.3.1 in the Version field.
- 3. Download *JBoss BRMS 5.3.1 Deployable for EAP 6* (Please note that this is the deployable distribution, not the standalone one.)

Now copy brms-p-5.3.1.GA-deployable-ee6.zip, to the brms-rewards-demo's *installs* folder.

Download EAP 6 Platform:

- 4. Under JBoss Enterprise Platforms, select the Application Platform product.
- 5. Select version 6.1.0.Beta in the Version field.
- 6. Download JBoss Aplication Platform 6.1.0.

Now copy jboss-eap-6.1.0.zip, to the brms-rewards-demo's *installs* folder. Lastly, from the brms-rewards-demo folder, run the *init.sh* script:

\$./init.sh

When the script completes you will have a new folder named *jboss-eap-6.1*, in the brms-rewards-demo's *installs* folder. The folder is a ready to run EAP 6 server with BRMS 5.3.1 with the following modifications made:

- The *admin, krisv, mary, john, erics* accounts enabled (passwords are same as users name) in the *brms-roles.properties* and *brms-users.properties* file in *brms-customer-evaluation-demo/installs/jboss-eap-6.1/jboss-as/standalone/configuration*
- The security settings modified by copying *components.xml* to *brms-customer-evaluation-demo/installs/jboss-eap-6.1/standalone/deployments*
- Adjusted server security domain to include *brms*, copied new *standalone.xml* to *brms-customer-evaluation-demo/installs/jboss-eap-6.1/jboss-as/standalone/configuration*
- The custom work items are activated by adding *CustomWorkItemHandlers.conf* and *drools.session.conf* to the *jbpm-gwt-console-server* at *brms-customer-evaluation-demo/installs/jboss-eap-6.1/standalone/deployments/business-central-server.war/WEB-INF/classes/META-INF*
- The domain model jar *customereval-model.jar* added to the console at *brms-customer-evaluation-demo/installs/jboss-eap-6.1/deployments/jbpm-gwt-console-server.war/WEB-INF/lib*
- Enable users in human task server by copying new *jbpm-human-task-war-web.xml* file to *brms-customer-evaluation-demo/installs/jboss-eap-6.1/jboss-as/standalone/deployments/jbpm-human-task.war/WEB-INF/web.xml*
- Both business-central-server and jbpm-human-task server needs a netty dependency, added a *MANIFEST.MF* to their repective *WEB-INF/classes/META-INF* directories

JBoss Developer Studio Configuration

In this section, you will configure JBoss Developer Studio. Specifically you will add the BRMS 5.3.1 platform server runtime environment and then import the project that makes up the BRMS

Customer Evaluation Demo.

Important: It is assumed that you already have JBoss Developer Studio installed. This demo has been tested with JBoss Developer Studio 7.0.0.Beta1

Launch JBoss Developer Studio

- 1. Either select or switch to a new workspace by pointing to the *brms-customer-evaluation-demo/projects* folder.
- 2. If the Welcome to JBoss Developer Studio screen appears, dismiss it by click the Workbench arrow in the upper right.

Install SOA tools for BRMS

- Select Help → Install New Software... and add SOA Tools update site: http://download.jboss.org/jbosstools/updates/integration/kepler/integration-stack/aggregate/4.1.0/
- 2. Select *Business Process and Rules Development & SOA Development (all sub-menu items will be selected)* and proceed thru installation and restart JBoss Developer Studio to complete the installation. You will be told to restart JBoss Developer Studio for the changes to take effect, do this now.



Detect and add a BRMS 5.3.1 runtime environment

- 1. Select *Preferences* from the *Window* menu.
- 2. In the left hand side, expand JBoss Tools and then select JBoss Tool Runtime Detection
- 3. Select the *Add* button and navigate to the *brms-customer-evaluation-demo/installs* folder, then select *OK*.
- 4. The *jboss-eap-6.1* runtime created earlier should have been found and selected. If so, select *OK*.
- 5. Select *OK* again to close the Preferences dialog window.

Import Projects

- 1. Select *Import*... from the *File* menu.
- 2. Expand the Maven folder, and then select Existing Maven Projects.
- 3. Select the *Browse* button to *Select root directory*, you should be in the *brms-customer-evaluation-demo* folder (if not, then navigate there) and then select *OK*.
- 4. Make sure the project (brms-customer-evaluation-demo) is selected and then select Finish.
- 5. The projects are now imported.

Start the JBoss Enterprise BRMS Platform

In this section, you will start the server from within JBoss Developer Studio.

- 1. Select the *Servers* view
 If it is currently not open, select *Show View --> Other*... from the *Window* menu and search for the *Servers* view.
- 2. You should see the *jboss-eap-6.1* server you created earlier.
- 3. Right click on *jboss-eap-6.1* and select Start from the pop-up menu. In a few moments your JBoss Enterprise BRMS Platform will be running.

Importing Project Repository into BRM

In this section, you will import all of the JBoss Enterprise BRMS artifacts into the Business Rules Manager.

- 1. Open up your Web browser of choice and navigate to http://localhost:8080/jboss-brms/
- 2. Use the default credentials of admin/admin
- 3. Upon logging in, you will see the following prompt:

This looks like a brand new repository. Would you like to install a sample repository?

Important: Please be sure to select *No thanks*.

- 4. Select the *Administration* section on the left hand side
- 5. From the *Administration* list select *Import Export*. This will open the *Import Export* window.
- 6. Now select *Browse...* and *navigate to brms-customer-evaluation-demo/support* folder and select the *repository_export.zip* file.
 - 1. Optional import of a declarative domain model (where your model is in the BRM package and not an uploaded jar of your Java objects) can be found by importing repository export declarative model.zip file.
- 7. Lastly, select the *Import* button. Select *OK* to confirm that you want to import the artifacts.

Running the Demo

JBDS IDE demo

You can demo the project in the JBoss Developer Studio by making use of the editors, running the provided unit tests and watching the console for logged (verbose) output. The following will run the demo process with four unit tests:

1. Select the file brms-customer-evaluation-demo/src/test/java/CustomerEvaluationTest.java, right click, Run As..., JUnit Test.

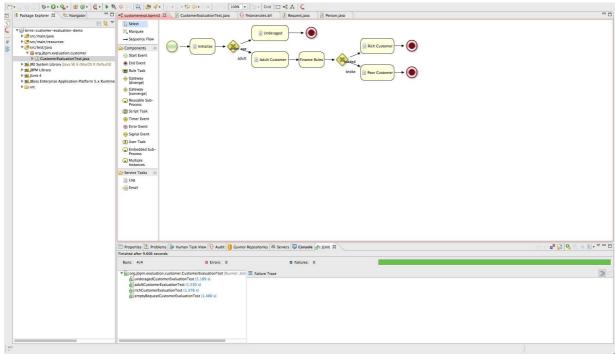


Illustration 1: Unit Tests in JBoss Dev Studio

Your output should look something like illustration 1 and example output of the console logging:

Test 1

= Starting Process Underaged Test Case. =

Entering Initialize Node Leaving Initialize Node Gateway: Qualify Age Gateway: Qualify Age Entering Underaged Node

Detected and reporting invalid request.

Set validRequest to: false Leaving Underaged Node

Process ended in End Minor Node.

Test 2

= Starting Process Poor Adult Test Case. =

Entering Initialize Node Leaving Initialize Node Gateway: Qualify Age Gateway: Qualify Age

Entering Adult Customer Node

Detected and reporting valid request

Set validRequest to: true Leaving Adult Customer Node Entering Finance Rules Node

Under funded customer

Set Request invalid comment to: Poor customer.

Customer request= org.jbpm.evaluation.customer.Request@31

Leaving Finance Rules Node. Gateway: Decide Financial Status Determined request is NOT valid, heading to Poor Customer Node

Request validity reason is: Poor customer

Leaving Finance Rules Node.

Gateway: Decide Financial Status

Detected request is invalid, heading to Poor Customer Node

Request not valid reason is: Poor customer

Entering Poor Customer Node

Customer has amount: 2 in the bank.

Leaving Poor Customer Node

Process ended in End Poor Customer Node.

Test 3

= Starting Process Rich Adult Test Case. =

Entering Initialize Node

Leaving Initialize Node Gateway: Qualify Age Gateway: Qualify Age

Entering Adult Customer Node

Detected and reporting valid request

Set validRequest to: true Leaving Adult Customer Node Entering Finance Rules Node Leaving Finance Rules Node.

Gateway: Decide Financial Status

Determined request is valid, heading to Rich Customer Node

Entering Rich Customer Node

Detected and reporting valid request Customer has amount: 2000 in the bank.

Leaving Rich Customer Node

Process ended in End Rich Customer Node.

Test 4

= Starting Process Empty Request Test Case. =

Enterina Initialize Node

There as no evaluation objects defined, adding default ones for demo purposes.

Leaving Initialize Node Gateway: Qualify Age Gateway: Qualify Age Entering Underaged Node

Detected and reporting invalid request.

Set validRequest to: false Leaving Underaged Node

Process ended in End Minor Node.

BRMS BRM demo

The package was already imported so now we can look closer at web designers viewing, rules asset viewing, package building and deploying, web business central admin console viewing.

Web Designer

The BRM is available on http://localhost:8080/jboss-brms once the BRMS server has been fully started.

- 1. Login with a user (admin, krisv, mary, john, erics available). To start fresh you can at any time import the original repository as follows: *Administration* → *Import Export* → *Choose File ->brms-customer-evaluation-demo/support/repository-export.zip* → *Import (Ok to popups)*
- 2. View process: $Knowledge\ Bases \rightarrow Packages \rightarrow org.jbpm.evaluation.customer \rightarrow Asset\ tab \rightarrow view\ Processes\ and\ Open\ customereval\ and\ wait\ for\ web\ designer\ to\ appear.$

Rule asset viewing

To view some of the assets in your project:

1. Knowledge Bases \rightarrow Packages \rightarrow org.jbpm.evaluation.customer \rightarrow Asset tab \rightarrow view Technical Rule Assets, Model, Processes, Other assets or WorkItemDefinition.

Build package for deployment

To build your package for deployment:

1. Build package: *Knowledge Bases* → *Packages* → *org.jbpm.evaluation.customer* → *Edit tab* → *Build Package button*. Now the process has been deployed in the Business Central administration component.

Business Central

The Business Central administration console is available on http://localhost:8080/business-central once the BRMS server has been fully started and after deploying your process by building the package in BRMS BRM.

- 1. Login as user (admin, erics, krisv have same rights).
- 2. On left open *Processes* tab → *Process Overview* and you should see *Customer Evaluation Demo* appear. If not, hit Refresh. If not, ensure the demo package has been built without errors in BRM as described previously.
- 3. Click on *Customer Evaluation Demo* to select this process, then *Start* button and *OK* for pop-up.
- 4. As this process has no pausing nodes, no human tasks for example, it will complete and show you nothing except the following in the Server log (note, this is one of the unit test outputs for an empty submission to the process):

```
12:53:26,937 INFO [STDOUT] Entering Initialize Node
12:53:26,937 INFO [STDOUT] There as no evaluation objects defined, adding default ones for demo purposes.
12:53:26,941 INFO [STDOUT] Leaving Initialize Node
12:53:26,944 INFO [STDOUT] Gateway: Qualify Age
12:53:26,944 INFO [STDOUT] Gateway: Qualify Age
12:53:26,947 INFO [STDOUT] Entering Underaged Node
12:53:26,947 INFO [STDOUT] Detected and reporting invalid request.
12:53:26,949 INFO [STDOUT] Set validRequest to: false
12:53:26,949 INFO [STDOUT] Leaving Underaged Node
12:53:26,949 INFO [STDOUT] Process ended in End Minor Node.
```