

A Governed QC-AI-HPC Architecture for Deciding When Quantum Computation Is Warranted in Non-Druggable Oncology

Doron Cohen

PhD/DTech Candidate, Center for Information Systems and Technology (CISAT)

Claremont Graduate University (CGU)

doron.cohen@cgu.edu

Supervisor: Prof. Itamar Shabtai

Working draft, September 2026 (revised from the May 2026 version)

Intended arXiv category: cs.ET | Not yet submitted

Author-selected arXiv license: CC BY-NC-ND 4.0

Abstract

Regulated quantum-oncology computation is an information-systems problem before it is a computational-chemistry problem. The first question is not how to run a quantum algorithm but whether a given target warrants one. This paper presents a governed QC-AI-HPC orchestration architecture that adjudicates, per mutation target, whether quantum computation is warranted, and that records every step of that decision in a nine-element P1-P9 provenance record aligned with the audit-trail logic of FDA 21 CFR Part 11.

The architecture has three layers. Layer 1 is the quantum-kernel layer, anchored by sample-based quantum diagonalization (SqDRIFT) on IBM Heron-class hardware. Layer 2 is the hybrid-substrate layer, covering classical preprocessing, GPU/HPC services, AI calibration, and emerging learned quantum-error-correction decoders. Layer 3 is the governed orchestration and provenance layer. Its central component is a two-method classifier: DMRG and SHCI, two classical methods with independent failure modes, run on the same active space, and the platform records the verdict of each method and any disagreement between them.

The classifier has now been exercised on real targets. Every real biological target measured to date, including TP53 C275F at active spaces of 36 and 48 electrons, is classically tractable (Class B). The same classifier returns the opposite verdict (Class A) for a declared model-compound proxy of a [2Fe-2S] redox center, so the Class B findings are measurements rather than a default. Small pipeline test jobs (4 to 8 qubits) also ran on three IBM Heron-class devices in July and August 2026; they validate the pipeline, not chemical accuracy. A design-science evaluation protocol is proposed. No energy result in this paper should be interpreted as a quantum-computed molecular binding energy.

Keywords: information systems; design science research; emerging computing; QC-AI-HPC orchestration; quantum computing; high-performance computing; artificial intelligence; precision oncology; classical-tractability adjudication; DMRG; SHCI; TP53; NSCLC; SqDRIFT; IBM Heron; NVIDIA NVQLink; FDA 21 CFR Part 11; provenance.

Status Update, September 2026

This version revises the May 2026 manuscript. Four developments since May change how the paper should be read.

Reframing. The contribution is now stated as adjudication: the platform decides, per target, whether quantum computation is warranted, instead of assuming that it is [1].

Two-method classification. The escalation rule of Section 5 now runs DMRG and SHCI in parallel on the same active space. The two methods fail in independent ways, so agreement between them is stronger evidence than either result alone, and a disagreement is flagged instead of hidden.

Measured classifications. Eight real targets have been classified by DMRG, and all are Class B: TP53 C275F, R175H, R282W, G245S, and R249S; SETD2 R1625C; KEAP1 G333C; and STK11 D194N. C275F was measured at 36 and 48 active electrons ($S_{\max} = 0.25$ and 0.35), and SHCI agrees on its class. The earlier figure of about 44 electrons and 88 qubits for C275F was an architectural estimate without a verifiable derivation and has been withdrawn. An early provisional Class A reading for R175H did not survive a warm-started re-run. The Class A designations of the May 2026 version are therefore superseded. Size figures for targets not yet measured remain pre-measurement estimates and are labeled as such.

Hardware and evidence discipline. Between July and August 2026, pipeline test jobs at CAS(2,2) to CAS(4,4), on 4 to 8 qubits, ran on three IBM Heron-class devices (Kingston, Marrakesh, and Fez). On September 23, 2026, a first wild-type-versus-mutant energy difference was retracted after a check showed that the mutation had not been applied to the input structure. The retraction is recorded in the provenance trail rather than silently corrected.

Sections 3, 5, 7, and 10 have been revised to match these findings.

1 Introduction

The central thesis of the dissertation proposal underlying this article is direct: the contribution is the **architecture**; simulation is the application; the patient case is the motivation [1]. This paper asks a systems question - what architecture is required so that a quantum-enabled oncology simulation workflow can be executed, reviewed, rerun, and governed without pretending that all computation occurs in a single deterministic environment? - and answers it with a governed orchestration layer implementing a real-time audit log for hybrid quantum-classical-AI pipelines.

Scope of this paper. The architecture specifically addresses the information-systems challenge of regulated computational escalation: deciding when, why, and under what recorded conditions work moves from classical and AI services to a quantum kernel. The motivating domain is non-druggable NSCLC tumor-suppressor mutation simulation; the stress-test case is TP53 p.Cys275Phe (C275F). NSCLC accounts for approximately 2.1 million new diagnoses and 1.53 million deaths annually (GLOBOCAN 2022), and approximately 60% of patients carry mutations for which no approved targeted therapy exists. Clinical validation, novel binding-energy estimates, and therapeutic recommendations are outside the scope of this architecture paper; these boundaries are design choices, not deficits. Readers seeking the chemistry or clinical evidence base should consult the literature

cited in the Limitations section.

Three architectural challenges motivate the design. First, a regulated oncology simulation workflow must *govern escalation*: the decision rule routing work from classical and AI methods to quantum kernels must be explicit, revisable, and recorded in a compliance-grade audit trail. Second, the workflow must manage a bifurcating hardware landscape in which IBM Heron/Qiskit and NVIDIA CUDA-Q/NVQLink paths expose different calibration records, compiler behaviours, and audit surfaces. Third, quantum simulation outputs are probabilistic distributions, not deterministic values, so the compliance record must operationalise reproducibility as statistical equivalence under recorded conditions rather than bitwise replay.

This paper therefore presents a bifurcation-aware QC-AI-HPC orchestration architecture. It treats IBM Heron r3 and SqDRIFT as the dissertation’s quantum-kernel anchor; treats NVIDIA CUDA-Q, NVQLink, and Ising-class decoders as an emerging hybrid-substrate pattern where applicable; and locates the information-systems contribution in the orchestration layer that makes those choices explicit, auditable, and revisable [4, 5, 6].

2 Design-Science Framing and Contributions

The paper follows design science research (DSR): the research contribution is an artifact designed and evaluated for utility, rigor, and novelty [7, 8]. The artifact is a workflow architecture and provenance schema for a class of regulated QC-AI-HPC simulation workflows, not a molecule, a clinical endpoint, or a standalone quantum circuit.

Three dissertation-derived contributions are translated into arXiv form:

1. **BQP-relevant classification as routing policy.** A tumor-suppressor mutation target becomes operationally BQP-relevant when the active-space boundary exceeds tractable classical accuracy under available resources and the corresponding fermionic-Hamiltonian problem admits a known quantum algorithmic formulation. This is a decision rule for computational escalation, not a formal hardness proof.
2. **Part-11-governed QC-AI-HPC orchestration.** The architecture is designed for oncology mutation simulation workflows in which regulated inputs, backend execution, AI/HPC services, and stakeholder outputs are coordinated by a governable information system rather than by ad hoc scripts.
3. **Provenance for probabilistic quantum outputs and learned decoders.** A nine-element P1-P9 record operationalises auditability for quantum simulation outputs. P9 is included because emerging learned quantum-error-correction (QEC) decoders make model lineage part of the computational record.

The evaluation plan follows FEDS, which treats DSR evaluation as a deliberate strategy rather than a single end-stage test [9]. The proposed evaluation therefore combines technical record-completeness tests, comparative workflow benchmarks, expert review, and case-based walkthroughs.

Table 1 maps the three contributions against Hevner et al.’s seven DSR guidelines [7] to make the design-science structure explicit for IS reviewers.

Table 1: Three contributions mapped to Hevner’s seven DSR guidelines [7].

DSR Guideline	How this paper addresses it
Design as artifact	The three-layer architecture, P1-P9 provenance schema, RBAC/JWT access layer, and working prototype (Phase 3A live; Phase 3B planned) collectively constitute the artifact, publicly accessible at https://nsclc-quantum-viewer.netlify.app .
Problem relevance	Section 3 establishes three domain gaps: clinical (no approved therapy for ~60% of NSCLC patients), computational (classical FCI ceiling at ~18 active electrons), and systems (no governed orchestration connecting these layers exists).
Design evaluation	Section 8 specifies a four-layer evaluation protocol: technical harnesses ($\geq 95\%$ completion, 100% P1-P9 emission), comparative benchmarks against four alternatives, expert-panel scoring ($n = 4-6$, Hevner criteria, 1-5 scale), and case-based walkthrough of two mutation scenarios.
Research contributions	Sections 2 and 6: BQP classification rule (novel operational escalation criterion), P1-P9 schema (first provenance framework for probabilistic quantum simulation outputs), RBAC/JWT access layer (Part-11 access control and user attribution). None are present in existing orchestration alternatives.
Research rigor	DSR methodology follows Hevner et al. (2004) [7] and Peffers et al. (2007) [8]. Evaluation strategy follows FEDS (Venable et al., 2016) [9], combining ex ante artificial evaluation with ex post naturalistic evaluation.
Design as search process	The three-layer architecture emerged from iterative response to three domain constraints (Section 1): the escalation-governance requirement, the bifurcating hardware landscape, and the probabilistic-output compliance problem.
Communication of research	arXiv submission targets cs.ET for emerging-computing and IS audiences. The companion prototype makes the artifact simultaneously inspectable by QC specialists, IS scholars, regulatory readers, and clinical informatics reviewers.

3 Motivating Use Case and Active-Space Requirements

The motivating case is TP53 p.Cys275Phe (C275F) in NSCLC. In the dissertation proposal, C275F functions as a requirements-driving case: it creates a need for mutation-aware ingestion, active-space definition, selective escalation, and stakeholder-facing explanation [1].

TP53 is selected because its mutation landscape is architecturally heterogeneous. Different mutations produce different active-space sizes, placing distinct demands on qubit count, circuit depth, telemetry volume, and backend routing. C275F is used because its active-space boundary - approximately 24 active electrons at the local binding site - sits at the classical-quantum frontier where escalation decisions are genuinely contested and the governance architecture is most severely stressed.

Table 2 expresses the requirements as systems-design tiers. The active-space estimates determine qubit demand, circuit depth, telemetry volume, backend routing, and provenance granularity.

Table 2: Workload tiers used by the orchestration architecture. Rows marked “measured” reflect September 2026 DMRG classifications; rows marked “estimate” are pre-measurement size estimates.

Tier	Active e ⁻	Approx. qubits	Architectural role
Reference molecular benchmark	32	100	External SqDRIFT/Heron precedent (IBM Research 2026; arXiv:2603.08696)
C275F active site (measured)	18-48	24-56	AVAS-tested range. DMRG Class B at 36e and 48e ($S_{\max} = 0.25, 0.35$); SHCI agrees. Within Heron r3 capacity (156 qubits)
KEAP1 G333C site (measured)	30-72	32-74	AVAS-tested range. DMRG Class B ($S_{\max} = 0.22$ at 72e). Within Heron r3 capacity
KEAP1 full Nrf2 interface (estimate)	~155	~310	Pre-measurement size estimate; PDB: 2FLU (19 interface residues)
STK11/LKB1 full ATP pocket (estimate)	~152	~304	Pre-measurement size estimate; PDB: 2WTK (8 Å shell). STK11 D194N measured Class B at its own site

The local tier tests end-to-end execution: de-identified input handling, active-space construction, fermion-to-qubit mapping, backend routing, error-mitigation metadata, AI/HPC support, stakeholder visualisation, and P1-P9 provenance emission. The full tier tests whether the same architecture scales without changing its governance contract.

The platform was designed around NSCLC mutation targets selected on three criteria: (1) clinical significance in NSCLC specifically, (2) absence of an approved targeted therapy, and (3) an active space large enough that classical tractability cannot be assumed in advance. Hardware feasibility on current quantum computers was deliberately *not* a selection criterion, because the architecture must be mutation-agnostic. STK11 and KEAP1 targets were selected for their clinical urgency in NSCLC: STK11/LKB1 loss-of-function occurs in ~20% of NSCLC adenocarcinomas and is a driver of immunotherapy (PD-1/PD-L1) resistance, and KEAP1 mutations co-occur in ~10-15% of NSCLC cases.

The May 2026 version of this paper designated TP53 C275F and three STK11 targets as Class A (quantum-necessary). Measurement has replaced that designation: every real target classified so far, including C275F at 36 and 48 active electrons, is Class B. C275F remains the primary stress-test case for two reasons. It anchors the work in a real patient report, and its measured active space (18 to 48 electrons, 24 to 56 qubits across tested criteria) sits within IBM Heron r3 capacity, so Phase 3B can demonstrate the governed pipeline at hardware scale. On current evidence, that demonstration tests the architecture; it does not answer a question that classical computation cannot already answer.

Translational chain and governance claim. The architecture produces quantum-accurate ground-state energy differentials (ΔE) between wild-type and mutant active sites. ΔE is not the terminal output; it is the necessary input to downstream binding free energy estimation via QM/MM frameworks, where $\Delta G_{\text{binding}} = \Delta E_{\text{total}} + \Delta G_{\text{solvation}} - T\Delta S$. Classical density-functional methods introduce systematic errors of 2-4 kcal/mol in correlated active sites; at this error level, predicted binding affinities shift by a factor of five to six, sufficient to misclassify a viable drug

candidate as inactive. Quantum-accurate ΔE reduces this error to approximately 0.5 kcal/mol, within the threshold of chemical accuracy. For the IS architecture, this chain establishes the scope of the governance claim: the output the system audits and cryptographically seals is the minimum computational signal required to justify downstream drug-design investment - making the provenance record a prerequisite for translational use, not a compliance formality.

4 Bifurcation-Aware Three-Layer Architecture

4.1 Architectural principle

The dissertation’s architectural rule is: hardware-agnostic at the workflow level; vendor-specific at the compilation and error-mitigation layer [1]. A regulated workflow cannot pretend that superconducting, trapped-ion, neutral-atom, photonic, simulator, GPU, and HPC backends expose the same latency, calibration records, compiler behaviour, error channels, or audit data. The system hides unnecessary complexity from users but must not hide substrate-specific lineage from the compliance record.

The post-2026 hybrid-computing landscape strengthens this rule. IBM Heron r3 is a 156-qubit Heron-family revision whose documented r3 improvements target coherence, gate fidelity, and read-out performance [4]. NVIDIA’s Ising and CUDA-Q QEC materials position GPUs, NVQLink, CUDA-Q, and learned decoders as real-time hybrid-substrate components for quantum calibration and QEC [5, 6]. The architecture therefore spans a vendor bifurcation: Qiskit Runtime and IBM Heron where the IBM path is selected; CUDA-Q, NVQLink, and Ising-class services where a non-IBM or GPU-coupled substrate is appropriate.

Figure 1 summarises the three-layer architecture.

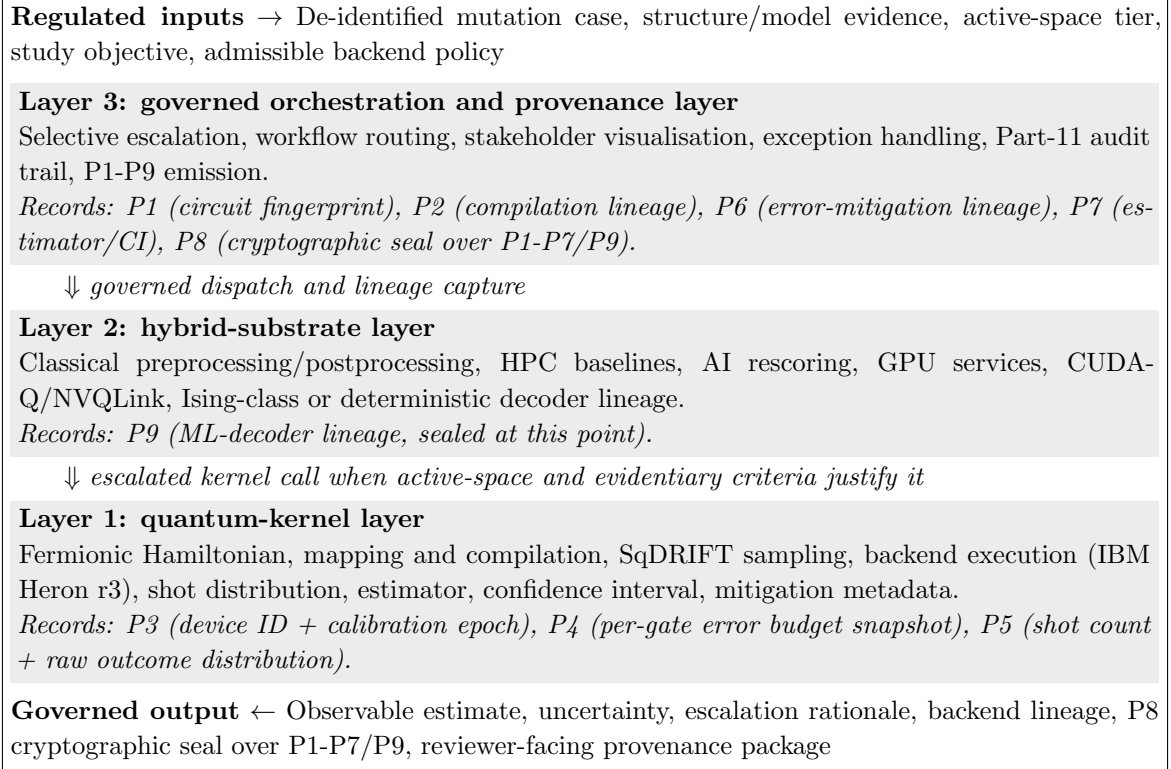


Figure 1: Three-layer QC-AI-HPC orchestration architecture. Each layer is annotated with the P-records emitted at that execution stage. The quantum kernel is invoked selectively; the hybrid substrate supplies surrounding AI/HPC services; the orchestration layer preserves provenance and auditability across backend-specific execution paths.

4.2 Layer 1: quantum-kernel layer

Layer 1 houses the quantum kernel: QPU plus quantum algorithm. In the dissertation proposal, this layer is anchored by SqDRIFT on IBM Heron r3. SqDRIFT is a sample-based quantum diagonalization method: the quantum processor samples the dominant electronic configurations, and a classical solver diagonalizes the Hamiltonian projected onto that sampled subspace. It matters because the target problem class is fermionic-Hamiltonian ground-state estimation at active-space sizes beyond the classical exact ceiling. IBM’s public materials (IBM Research; arXiv:2603.08696, and the SqDRIFT method paper arXiv:2508.02578) describe a 2026 quantum-computing contribution to the discovery of the half-Möbius molecule $C_{13}Cl_2$, in which SqDRIFT on 100 qubits explores a 32-electron active space beyond an approximately 18-electron exact-classical ceiling [10, 11].

At the moment of backend dispatch, Layer 1 stamps three provenance records. The system emits **P3** - device identifier and calibration epoch timestamp - to satisfy the FDA Part 11 requirement that the specific computing resource and its current characterisation be traceable in the audit log; without P3, a regulator cannot verify that the hardware was within a valid calibration window when the run was authorised. Simultaneously, the system captures **P4** - the per-gate error budget snapshot (one- and two-qubit fidelities, readout-error matrices, T1/T2 values) - to provide the quantitative hardware state against which the output’s uncertainty bound can later be re-derived. After shot

execution, the system stores **P5** - the full bitstring-level shot histogram - enabling independent re-derivation of any aggregated estimator from the raw data, which is the probabilistic analogue of raw-data preservation required under 21 CFR Part 11 §11.10(e).

The kernel layer is deliberately narrow. It executes the escalated electronic-structure subproblem under a recorded circuit, backend, calibration epoch, shot count, mitigation policy, estimator, and decoder lineage. That narrowness protects the paper from overstating quantum results and clarifies the systems contribution.

4.3 Layer 2: hybrid-substrate layer

Layer 2 contains the classical and AI substrate around the kernel. It includes HPC preprocessing, DFT/DMRG-style baselines where appropriate, conformational filtering, GPU acceleration, AI-assisted rescoring, calibration support, and QEC decoding. NVIDIA’s April 2026 Ising announcement describes open quantum AI models for calibration and QEC with claimed decoding speed and accuracy improvements over traditional approaches, and states that Ising complements CUDA-Q and integrates with NVQLink for real-time control and QEC [5]. NVIDIA’s CUDA-Q QEC 0.6 documentation further describes *cudaq-realtime*, NVQLink-connected callbacks between GPUs and quantum controllers, and real-time decoder pipelines including Ising CNN pre-decoders paired with PyMatching [6].

When an AI-based QEC decoder is active in Layer 2, the system emits **P9** - ML-decoder lineage: decoder identifier and version, weights checksum, training-corpus manifest hash, inference-time configuration, and execution environment. This record exists to satisfy the FDA Good Machine Learning Practice principle of model lifecycle control and transparency [18]: if a learned decoder shapes the inferred correction path, its identity and configuration become part of the regulated computational record, not a hidden implementation detail. The cryptographic seal in P8 anchors P9 together with P1-P7, making any post-hoc modification of decoder lineage detectable. For deterministic decoders, P9 records the algorithm name and software version, preserving the same auditability at lower lineage complexity.

4.4 Layer 3: governed orchestration and provenance layer

Layer 3 is the information-systems contribution. It coordinates the first two layers and emits the governance artifacts. It implements selective escalation, records backend and compilation choices, manages exceptions, presents stakeholder views, and produces the P1-P9 provenance record.

Specifically, Layer 3 stamps the following records in sequence. At circuit compilation, **P1** - the cryptographic hash of the post-transpilation compiled circuit - is recorded; this is the regulatory anchor that makes the executed computation uniquely identifiable and tamper-evident, fulfilling the audit-trail integrity requirement of 21 CFR Part 11 §11.10(a). At fermion-to-qubit mapping, **P2** - compilation lineage including source Hamiltonian, mapping choice, Trotter order/step, and SqDRIFT sampling parameters - is populated; this record satisfies the traceability requirement that every data transformation be documented so the output can be reconstructed from inputs [16, 17]. After quantum execution and mitigation, **P6** - the complete error-mitigation lineage, logging every transformation applied to raw outcomes, method versions, and parameters - is stored. Layer 3

then computes **P7** - the final statistical estimator and 95% confidence interval bounded by shot count and noise-model variance - and finally applies **P8**, the time-stamped cryptographic seal over P1-P7 and P9, anchoring the entire record against subsequent modification in compliance with the electronic-signature and record-locking provisions of 21 CFR Part 11.

Layer 3 also makes the vendor split manageable. If the workflow runs on IBM Heron through Qiskit Runtime, compiler and calibration fields are populated for that path. If a later workflow uses a CUDA-Q/NVQLink-enabled QPU with an Ising-class decoder, the substrate and P9 fields change while the workflow contract remains intact. The architecture is therefore portable without pretending that all backend behaviour is interchangeable.

5 Selective Computational Escalation

The system does not “use quantum computing everywhere.” AI handles pattern detection, rescoring, and interpretive support where such models are appropriate. HPC handles broad preprocessing, classical simulation, and postprocessing where classical methods remain tractable and reproducible. Quantum simulation is invoked only where active-space size, correlation structure, and accuracy requirements justify an escalated kernel.

The BQP-relevant classification is therefore operational, not absolutist. It relies on the established quantum-computing framing that selected local-Hamiltonian and molecular-energy estimation problems admit quantum formulations [2, 3, 15]. No formal classical-quantum separation is claimed: ground-state finding is QMA-hard in the general case, and containment in BQP is conditional on preparing an initial state with sufficient overlap on the true ground state. Lee et al. [12] argue that these caveats erode the case for exponential quantum advantage across chemical space; that critique is accepted here in the general case and delimits the present claim to a *practical* quantum algorithm in the selected operational regime, not a proof of exponential advantage. If a classical method later demonstrates chemical accuracy for the specified active-space boundary within tractable resources, the orchestration layer routes the workload to that classical backend. This revisability is a feature: the architecture governs escalation rather than advocating one substrate regardless of evidence.

The BQP-relevant classification operationalises as a three-condition escalation rule. A workload escalates to Layer 1 if and only if all three conditions in Table 3 are satisfied simultaneously; otherwise it routes to Layer 2 or remains classical, with the routing rationale recorded in the P2 provenance field.

Table 3: Three-condition escalation decision rule with C275F local-site instantiation.

Condition	Criterion	C275F local-site value	Met?
C1: Active-space size	Active electrons exceed classical FCI ceiling ($\sim 18e^-$ under tractable resources)	~ 24 active electrons at local binding site	✓
C2: Algorithmic formulation	Fermionic Hamiltonian admits a known quantum algorithmic formulation	Jordan-Wigner mapping available; SqDRIFT applicable	✓
C3: Hardware readiness	Calibration epoch meets P3 times-tamp policy for target backend	IBM Heron r3 calibration epoch current at dispatch	✓
Decision: All three conditions satisfied $\Rightarrow$ Route to Layer 1 (quantum kernel). Any condition fails $\Rightarrow$ Route to Layer 2 (hybrid substrate); record routing rationale in P2.			

Distinction from quantum-enhanced classical workflows. The BQP-relevant classification operationalises a boundary that existing quantum drug-discovery literature does not always make explicit. Vakili et al. applied a hybrid quantum-classical generative model - a quantum circuit Born machine (QCBM) on a 16-qubit IBM processor paired with an LSTM network - to KRAS inhibitor design, yielding experimentally validated hits and a 21.5% improvement in candidate quality over the classical baseline [20]. This is quantum-*enhanced* drug discovery: KRAS has resolved crystal structures, a substantial library of known inhibitors, and classical algorithms already generate viable candidates. Quantum computing refines the search; it does not replace the only available computational path.

The mutations targeted by this dissertation differ from KRAS in one respect: most have no resolved drug-binding pocket and no prior computational characterisation at chemical accuracy. The escalation rule in Table 3 therefore does not assume that quantum simulation is required for them; it tests that assumption per target, with two independent classical methods. To date the test has returned Class B for every real target measured, which means classical tensor-network methods still converge at those sizes. The Vakili et al. KRAS workflow would also fail condition C1 and would route to Layer 2 rather than to the quantum kernel.

6 Part-11-Governed Provenance for Probabilistic Quantum Simulation

FDA 21 CFR Part 11 governs electronic records and electronic signatures in FDA-regulated settings [16, 17]. Quantum simulation complicates record governance because a valid output is normally a distribution of measurement outcomes, not a single deterministic value. A rerun may be statistically equivalent without being bitwise identical. The architecture therefore operationalises reproducibility as statistical equivalence under recorded circuit, backend, calibration, error-mitigation, estimator, and decoder conditions.

Table 4 defines the nine-element provenance record. The wording follows the dissertation proposal because this schema is the paper’s core governance contribution.

Table 4: P1-P9 provenance schema for governed probabilistic quantum simulation.

Field	Record content
P1	Circuit fingerprint: cryptographic hash of the post-transpilation compiled circuit.
P2	Compilation lineage: source Hamiltonian, fermion-to-qubit mapping, Trotter order/step, SqDRIFT sampling parameters.
P3	Device identifier and calibration epoch: backend, processor revision, calibration timestamp.
P4	Per-gate error budget snapshot: one- and two-qubit fidelities, readout-error matrices, T1/T2 at the calibration epoch.
P5	Shot count and raw outcome distribution: full bitstring-level histogram permitting independent re-derivation of any aggregated estimator.
P6	Error-mitigation lineage: every transformation applied to raw outcomes, including zero-noise extrapolation, probabilistic error cancellation, twirling, parameters, and method versions.
P7	Statistical estimator and confidence interval: final reported observable, estimator function, 95% CI bounded by shot-count and noise-model variance.
P8	Cryptographic seal: time-stamped digital signature over P1-P7 and P9, anchoring the record against subsequent modification.
P9	ML-decoder lineage: when QEC inference uses a learned model - decoder identifier and version, weights checksum, training-corpus manifest hash, inference-time configuration (precision, batch size, decoder threshold), and execution environment (GPU class, CUDA/runtime version). For deterministic decoders: algorithm name and software version.

P9 is not an optional flourish. It is what makes the architecture forward-compatible with learned QEC and error-mitigation workflows. FDA’s good machine learning practice principles emphasise model lifecycle control and transparency for learned systems [18]. NVIDIA’s Ising/CUDA-Q materials show why the same logic becomes relevant inside a quantum pipeline when learned decoders become part of execution [5, 6].

Provenance in motion: P1-P9 lifecycle for a C275F local-site run

The following walk-through traces a C275F local binding-site run through the nine-step provenance lifecycle. Each step is annotated with the P-record emitted and the Part-11/GMLP regulatory need it satisfies.

1. **Circuit compilation (Layer 3).** After the Jordan-Wigner-mapped fermionic Hamiltonian is transpiled to a Heron-native gate set, Layer 3 computes a SHA-256 hash of the compiled circuit and writes it as **P1**. *Regulatory purpose:* satisfies 21 CFR Part 11 §11.10(a) audit-trail integrity - any subsequent modification of the compiled circuit would invalidate P1 and be detected on audit.
2. **Compilation lineage capture (Layer 3).** The system writes **P2**: source Hamiltonian identity, choice of Jordan-Wigner mapping, Trotter order and step size, and SqDRIFT sampling configuration. *Regulatory purpose:* satisfies the traceability requirement that every data-transformation parameter be documented so that the output can be reconstructed from inputs, as required under 21 CFR Part 11 §11.10(b).
3. **Backend dispatch (Layer 1).** At the moment of IBM Heron r3 job submission, Layer 1

stamps **P3**: device identifier, processor revision, and calibration epoch timestamp. *Regulatory purpose*: provides the regulatory anchor that the specific computing resource was characterised and within a valid calibration window when the run was authorised; essential for audit reconstruction.

4. **Hardware state snapshot (Layer 1).** Concurrently with dispatch, Layer 1 stores **P4**: per-gate one- and two-qubit fidelities, readout-error matrices, and T1/T2 decoherence times at the calibration epoch. *Regulatory purpose*: the quantitative hardware state against which the output uncertainty bound can be independently re-derived; supports the reproducibility standard for probabilistic outputs.
5. **Shot execution and histogram storage (Layer 1).** After quantum execution, Layer 1 stores **P5**: the full bitstring-level shot histogram. *Regulatory purpose*: equivalent to raw-data preservation under 21 CFR Part 11 §11.10(e); enables independent re-derivation of any aggregated estimator from raw data.
6. **Decoder lineage (Layer 2 - conditional).** If an Ising-class or other learned QEC decoder is active, Layer 2 emits **P9**: decoder identifier, weights checksum, training-corpus manifest hash, inference-time configuration, and execution environment. For deterministic decoders, P9 records algorithm name and software version. *Regulatory purpose*: satisfies FDA GMLP model lifecycle control requirements; makes decoder identity part of the regulated computation record, not a hidden dependency.
7. **Error-mitigation lineage (Layer 3).** Layer 3 writes **P6**: a complete ordered log of every mitigation transformation applied to raw outcomes - zero-noise extrapolation factors, probabilistic error-cancellation quasi-probabilities, twirling parameters - along with method identifiers and software versions. *Regulatory purpose*: enables independent auditors to reproduce the post-processed estimate from the raw P5 histogram.
8. **Statistical estimator and confidence interval (Layer 3).** Layer 3 computes and stores **P7**: the final reported observable, the estimator function applied, and the 95% confidence interval bounded by shot count and noise-model variance derived from P4. *Regulatory purpose*: provides the primary reported result in a form that quantifies and bounds uncertainty, replacing the naïve point-value convention inappropriate for probabilistic quantum outputs.
9. **Cryptographic seal (Layer 3).** Layer 3 applies **P8**: a time-stamped digital signature over the concatenated P1-P7 and P9 record. *Regulatory purpose*: satisfies 21 CFR Part 11 electronic-signature and record-locking provisions; any post-hoc modification of any P-field is detectable by re-verifying P8.

The result is a self-contained, tamper-evident provenance package that travels with the output and can be presented to a regulatory reviewer, an independent replicator, or a stakeholder audit committee without requiring reconstruction from logs.

6.1 Access Control and User Attribution as Part-11 Infrastructure

FDA 21 CFR Part 11 §11.10(d) requires that system access be limited to authorised individuals. §11.10(i) requires that audit trails capture the identity of the person performing each recorded action. The current implementation satisfies both requirements through two IS-level mechanisms that operate within the governed orchestration layer (Layer 3) rather than the quantum or hybrid substrate layers.

Role-based access control (RBAC). On authentication, the platform queries a persistent user-profile store for the authenticated user’s assigned role. Administrative functions - including access to all simulation runs across users, the provenance audit log, and user management - are gated behind a role check and invisible to non-administrative users. The access boundary is enforced by a database-resident role assignment, not by convention or self-restraint, mapping directly to the §11.10(d) requirement that the system boundary be actively enforced.

JWT-based user attribution. Every simulation run carries a JSON Web Token (JWT) credential. The platform fetches the authenticated session JWT and transmits it as a Bearer credential with each simulation request. The backend decodes the JWT to extract the user identifier and records it against the provenance row in the database, creating an unbroken chain from authenticated login to sealed P1-P9 record. This satisfies §11.10(i) without requiring the backend to maintain independent credential state - the identity provider handles verification separately.

Together, RBAC and JWT attribution are IS design decisions with direct regulatory consequences. A quantum simulation pipeline that emits complete, SHA-256-sealed P1-P9 records but cannot identify which authorised user initiated each run is not Part-11-compatible. These mechanisms extend the governance contract of Layer 3 into the access and identity layer and are accordingly treated as part of the IS contribution of this paper.

7 Research Artifact and Prototype

The research artifact is a QC-AI-HPC orchestration platform and associated governance schema. The public prototype associated with the dissertation proposal demonstrates the intended stakeholder workflow, including a multi-screen platform, architecture visualisation, and molecular-viewer interface [19]. In this article, the prototype is treated as an executable design specification rather than as evidence of quantum-computed binding energies.

Phase 3A of the prototype executes live 4-qubit VQE circuits on a PennyLane `default.qubit` noiseless simulator. Jordan-Wigner Hamiltonians are derived from real PySCF CASSCF(2,2)/STO-3G quantum chemistry calculations on mutation-specific sidechain model compounds (toluene for Phe275, methanethiol for Cys, acetic acid for Asp194, etc.), producing 27 Pauli terms per target stored in a pre-computed Hamiltonian library. At runtime, an AllSinglesDoubles UCCSD ansatz with Hartree-Fock initial state $|1100\rangle$ is optimised over 80 Adam steps, converging to within 10^{-5} H_a of the CASSCF-exact ground state by proof for the CAS(2e,2o) active space. Every simulation run exercises the complete pipeline - NGS ingestion, Hamiltonian construction, live circuit execution, provenance assembly, cryptographic sealing, and database storage - and produces a P1-P9 provenance record with a unique P8 SHA-256 seal, demonstrating that the governance schema correctly

distinguishes between mutation-specific ground-state energies. Phase 3B scales this minimal active space toward the measured C275F range (up to 48 active electrons) on IBM Heron r3 via SqDRIFT, contingent on IBM Quantum Network access. Between July and August 2026, small test jobs (CAS(2,2) to CAS(4,4), 4 to 8 qubits) already ran through the same pipeline on three IBM Heron-class devices. They validate the pipeline, not chemical accuracy.

The Transitional Window: Situating SqDRIFT and Heron r3 Within IBM’s Fault-Tolerant Roadmap

The selection of IBM Heron r3 as the quantum hardware substrate and SqDRIFT as the molecular simulation algorithm reflects a deliberate positioning within a well-defined and time-bounded technological window. IBM’s publicly disclosed roadmap - supported by a \$10+ billion capital commitment and a \$1 billion CHIPS Act award - establishes a clear architectural trajectory away from noisy intermediate-scale quantum (NISQ) devices toward fault-tolerant systems based on quantum low-density parity check (qLDPC) error correction. The milestones on this trajectory are specific: the Kookaburra processor (2026) introduces modular quantum memory, Cockatoo (2027) entangles multi-chip configurations, and Starling (2029) delivers the first large-scale fault-tolerant system at 200 logical qubits executing 100 million quantum gates.

This roadmap does not diminish the contribution of the present work - it contextualizes and justifies it. Heron r3, as the current-generation superconducting processor, and SqDRIFT, as a leading NISQ-era sample-based quantum diagonalization protocol whose stochastic state sampling inherits qDRIFT’s formally bounded error scaling, represent the state of the art during precisely the window in which clinically relevant quantum molecular simulation first becomes computationally tractable. IBM’s own March 2026 demonstration applied SqDRIFT on 100 qubits to a 32-electron active space of C₁₃Cl₂ - a benchmark that for the first time brings the active-space requirements of NSCLC tumor-suppressor mutations within reach of available hardware.

The significance of this window extends beyond the chemistry. The transition to fault-tolerant quantum computing will not resolve - and in fact will intensify - the information systems challenges that constitute the primary contribution of this dissertation. As IBM scales toward Starling (2029) and the Blue Jay quantum-centric supercomputer (2,000 logical qubits, 2033), targeting drug discovery as an explicit commercial vertical, the regulatory reconstruction problem becomes more acute, not less. Probabilistic, learned quantum outputs will be generated at greater scale and complexity, yet no established framework exists for governing their audit trails, ensuring reproducibility, or satisfying FDA 21 CFR Part 11 requirements in a clinical submission context. The pipeline architecture, P1-P9 provenance schema, and bifurcation-aware orchestration developed in this dissertation are designed precisely for this trajectory: they establish the IS governance substrate that fault-tolerant quantum drug discovery workflows will require, built and validated during the window in which the underlying quantum computation first becomes feasible.

The present work therefore occupies a strategically necessary position: it is neither premature nor transitional. It is foundational.

This distinction is necessary for a defensible arXiv submission. The article makes workflow, record, and evaluation criteria inspectable before full physical-hardware execution exists. The architecture

can therefore be reviewed by information-systems scholars for artifact design, by quantum specialists for backend and provenance assumptions, by biomedical readers for translational boundaries, and by regulatory readers for record-governance logic.

8 Evaluation Protocol

The evaluation is triangulated rather than single-metric. The dissertation proposal specifies four layers, which are adapted here into an arXiv-ready validation plan following the FEDS framework [9].

8.1 Layer 1: technical evaluation

Layer 1 measures the artifact itself through automated harnesses. Each acceptance criterion below is derived from a hardware, workflow, or regulatory constraint; the failure mode if the threshold is not met is stated explicitly.

- **End-to-end completion $\geq 95\%$ over simulated runs.** The 95% threshold is set at the point where the remaining 5% failure rate matches the expected noise floor of simulator-level qubit drop-out and decoherence under current IBM Heron r3 error rates; requiring 100% would be unrealistic for stochastic quantum workflows, while tolerating more than 5% failures would indicate a systematic fault in orchestration logic rather than hardware noise. *Failure mode:* completion below 95% signals a broken escalation rule or an unhandled exception path, rendering the architecture non-deployable in a regulated oncology pipeline.
- **100% P1-P9 provenance emission for all recorded outputs.** Derived from 21 CFR Part 11's requirement that every regulated computational output carry a complete, unambiguous audit record; partial records cannot satisfy regulatory review. *Failure mode:* any missing P-field in a regulated run constitutes an audit gap that would disqualify the output from a submission package under Part 11 conditions.
- **Cryptographic-seal (P8) verification latency $\leq 5\%$ of total workflow wall-clock time.** This threshold is grounded in the real-time feedback loop between GPU (Layer 2) and QPU (Layer 1): NVIDIA's NVQLink QEC pipeline operates within qubit coherence windows on the order of microseconds to milliseconds [6]. If cryptographic overhead exceeds 5% of wall-clock time, the seal operation competes with the real-time error-correction callback window, breaking the in-loop correction guarantee before qubits decohere. *Failure mode:* P8 latency above 5% causes the architecture to lose regulatory viability in time-sensitive oncology pipelines where real-time QEC is required.
- **100% audit-trail completeness across the local-to-full active-space boundary.** Derived from the regulatory requirement that the same record structure applies regardless of circuit depth or qubit count; an architecture that loses provenance at scale is not production-ready. *Failure mode:* provenance gaps at the full (~ 88 -qubit) tier reveal a scaling fault in the orchestration layer that would prevent frontier-scale regulatory use.
- **$\geq 90\%$ detection of injected fault scenarios.** The 90% threshold reflects the realistic

bound on automated fault detection given the stochastic nature of quantum outputs; 100% is unachievable without access to a ground truth that does not exist for probabilistic hardware. Fault injection follows the taxonomy used in the case-based walkthrough (Section 8.4). *Failure mode:* detection below 90% implies systematic blind spots in the exception-handling layer, undermining the governance contract.

8.2 Layer 2: comparative evaluation

Layer 2 compares the architecture against four narrower alternatives: direct Qiskit Runtime execution, Orquestra-style orchestration, CUDA-Q/NVQLink substrate pathways, and a manual notebook workflow. The comparison is not meant to prove that the proposed system is faster at every computational step. It tests whether the alternatives provide the same combined capabilities: oncology-mutation-specific construction, selective escalation, AI/HPC integration, stakeholder visualisation, statistical-equivalence validation, and Part-11-grade provenance.

The proposed architecture passes the comparative evaluation if and only if: (a) 0% of simulated runs produce incomplete P1-P9 records, where all four alternatives are expected to produce partial or absent audit trails - *failure mode: any incomplete record disqualifies the architecture for FDA-regulated submissions*; (b) Part-11-grade cryptographic seal (P8) verification succeeds with latency overhead $\leq 5\%$ of total workflow wall-clock time, justified by the NVQLink real-time coherence constraint described above - *failure mode: P8 latency above 5% breaks the real-time QEC callback loop*; and (c) stakeholder visualisation is available across all three active-space tiers defined in Table 2, a capability absent from all four alternatives - *failure mode: missing tier coverage implies the governance contract does not extend to frontier-scale runs, limiting translational utility*.

8.3 Layer 3: expert-panel evaluation

Layer 3 uses expert review to test cross-disciplinary validity. The dissertation proposal specifies a panel of four to six reviewers spanning quantum chemistry/quantum computing, oncology/molecular pathology, pharma R&D/computational drug discovery, information-systems/DSR methodology, and regulatory/clinical-informatics expertise. Review criteria map to the Hevner DSR guidelines: artifact existence, problem relevance, design evaluation, contribution, rigor, design-search process, and communication [7].

Reviewers score the artifact against each of Hevner’s seven DSR criteria on a 1-5 integer scale. The expert-panel evaluation passes if the mean score across all reviewers reaches at least **3.5** on every dimension and no criterion receives a majority of scores of 2 or below. The 3.5 threshold is meaningfully demanding in this setting because it represents cross-domain agreement among oncologists, quantum chemists, information-systems scholars, and regulatory specialists who operate under fundamentally different evidentiary standards and whose consensus is difficult to achieve by coincidence; a mean below 3.5 would indicate that the artifact fails to bridge at least one disciplinary boundary, reducing its translational utility. Where scores diverge by more than 2 points on any criterion, the panel convenes a structured reconciliation discussion before a final score is recorded. *Failure mode:* a mean below 3.5 on any criterion signals that the artifact is insufficiently legible or credible to one expert community, which would undermine adoption in the multi-stakeholder oncology pathway.

8.4 Layer 4: case-based walkthrough

Layer 4 traces a de-identified C275F scenario and a second mutation scenario through the workflow. The purpose is to show how the system works in context: where data enter, where routing decisions occur, where the audit layer records or rejects events, which stakeholder view is produced, and how anomalies are handled. Fault scenarios injected include: calibration-epoch staleness triggering a P3 policy violation; active-space boundary re-evaluation demoting a run from Layer 1 to Layer 2; and a learned-decoder weight mismatch producing a P9 integrity failure. This layer complements the technical benchmarks by testing whether the artifact is understandable and reviewable by its intended users.

9 Discussion

9.1 Information-systems contribution

The primary contribution is an architecture for governed computational escalation that turns a collection of specialised tools into a reviewable information system. Quantum simulation, AI rescoring, GPU-accelerated decoding, and HPC preprocessing each produce partial evidence under different assumptions; the orchestration layer makes those assumptions explicit enough for audit, comparison, and stakeholder review.

The architecture’s governance contract is defined by three domain-independent parameters: active-space size relative to the classical tractability ceiling, availability of a known quantum algorithmic formulation, and the compliance tier of the regulated workflow. None of these parameters are specific to TP53 or NSCLC. Any fermionic simulation workload whose active-space boundary falls at the classical-quantum frontier and whose regulatory context requires an auditable escalation record is a candidate for the same three-layer orchestration pattern. Extension to other mutation classes, cancer types, or non-oncology molecular simulation domains requires only reconfiguration of the active-space routing policy and the stakeholder-facing visualisation layer.

9.2 Emerging-computing contribution

The emerging-computing contribution is bifurcation awareness. The architecture recognises that the field is splitting between quantum-kernel platforms and hybrid AI/HPC substrates. IBM’s Heron/Qiskit path and NVIDIA’s CUDA-Q/NVQLink/Ising path are not forced into one universal abstraction. Instead, the workflow contract records which path is used and keeps substrate-specific evidence available for review.

9.3 Regulatory contribution

The regulatory contribution is the reinterpretation of Part-11-style records for probabilistic quantum outputs. Bitwise replay is not the right standard for a shot-based quantum simulation whose legitimate result is a distribution. The proposed record preserves the conditions under which statistical equivalence can be assessed. P9 extends this logic to learned decoders, where model lineage becomes part of the evidence chain.

10 Limitations and Future Work

This paper does not report a completed full active-site C275F quantum simulation on physical IBM Heron r3 hardware and does not present binding-energy values as executed quantum results. It does not claim an FDA submission, a clinical-trial result, or a therapeutic recommendation, and does not claim a formal classical-versus-quantum separation for C275F. It does not empirically validate NVIDIA Ising-class decoder provenance in a live regulated workflow; that is a future phase.

A May 2026 milestone by Merz et al. demonstrates that the hardware scale required for Phase 3B is no longer speculative: 94 qubits were used on IBM Heron r2 processors to compute the electronic structure of a 12,635-atom trypsin-benzamidine complex via EWF-TrimSQD at chemical accuracy [21]. C275F’s measured active space (up to 48 electrons) falls within this demonstrated range. The architectural contribution of this dissertation is therefore validated against hardware that can execute Phase 3B; the remaining step is institutional IBM Quantum Network access, not algorithmic or hardware feasibility. Because every real target measured so far is Class B, Phase 3B would demonstrate the governed pipeline at hardware scale; on current evidence it would not demonstrate quantum necessity.

The architecture is evaluated initially on one mutation instance and one quantum-modality anchor. Generalisation is therefore analytical rather than statistical. Multi-patient analysis, multi-modality empirical validation across trapped-ion or neutral-atom systems, and live cross-stack validation across IBM-native and NVIDIA-substrate pathways remain future work. These boundaries define the difference between a publishable architecture paper and an overextended chemistry or clinical paper; they do not undermine the information-systems claim.

11 Conclusion

This work is strongest when read as an information-systems contribution: the problem is not merely to compute a molecular number, but to design the system that makes such computation governable. The proposed QC-AI-HPC architecture organises the work into a quantum-kernel layer, a hybrid-substrate layer, and a governed orchestration/provenance layer. The P1-P9 provenance schema animates that architecture, stamping records at each execution stage with a clear regulatory purpose: P3, P4, and P5 anchor hardware-state traceability at Layer 1; P9 captures decoder lineage at Layer 2; and P1, P2, P6, P7, and P8 seal the complete computational chain at Layer 3. Together, these records turn a probabilistic quantum pipeline into a governable, auditable information system fit for regulated oncology settings.

License and arXiv Submission Note

This manuscript is prepared for arXiv submission under the author-selected CC BY-NC-ND 4.0 license. arXiv lists CC BY-NC-ND 4.0 as allowing copying and distribution of the material in unadapted form for noncommercial purposes with attribution, and notes that the license chosen for each version is irrevocable [22]. The submitter should verify compatibility with university, funder, and later journal policies before upload.

Acknowledgments

This manuscript was prepared from the author’s dissertation proposal and associated prototype materials under the supervision of Prof. Itamar Shabtai. The author remains responsible for verifying final authorship metadata, institutional approvals, patient-data handling, and arXiv submission settings before upload.

References

- [1] Doron Cohen. A Translational QC-AI-HPC Orchestration Platform for Non-druggable NSCLC Tumor-Suppressor Mutations. Dissertation proposal website, 2026. https://nscclq-quantum-viewer.netlify.app/dissertation_revised. Accessed May 11, 2026.
- [2] Daniel S. Abrams and Seth Lloyd. Quantum algorithm providing exponential speed increase for finding eigenvalues and eigenvectors. *Physical Review Letters*, 83(24):5162-5165, 1999. [doi:10.1103/PhysRevLett.83.5162](https://doi.org/10.1103/PhysRevLett.83.5162).
- [3] Alán Aspuru-Guzik, Anthony D. Dutoi, Peter J. Love, and Martin Head-Gordon. Simulated quantum computation of molecular energies. *Science*, 309(5741):1704-1707, 2005. [doi:10.1126/science.1113479](https://doi.org/10.1126/science.1113479).
- [4] IBM Quantum. Processor Types. IBM Quantum documentation, 2026. <https://quantum.cloud.ibm.com/docs/en/guides/processor-types>. Accessed May 11, 2026.
- [5] NVIDIA. NVIDIA Launches Ising, the World’s First Open AI Models to Accelerate the Path to Useful Quantum Computers. NVIDIA investor press release, 2026.
- [6] NVIDIA CUDA-Q. CUDA-Q QEC 0.6 Enables Real-Time QEC with NVQLink. NVIDIA CUDA-Q blog, 2026. <https://nvidia.github.io/cuda-quantum/blogs/blog/2026/04/14/cudaq-qec-0.6/>. Accessed May 11, 2026.
- [7] Alan R. Hevner, Salvatore T. March, Jinsoo Park, and Sudha Ram. Design science in information systems research. *MIS Quarterly*, 28(1):75-105, 2004.
- [8] Ken Peffers, Tuure Tuunanen, Marcus A. Rothenberger, and Samir Chatterjee. A design science research methodology for information systems research. *Journal of Management Information Systems*, 24(3):45-77, 2007. [doi:10.2753/MIS0742-1222240302](https://doi.org/10.2753/MIS0742-1222240302).
- [9] John Venable, Jan Pries-Heje, and Richard Baskerville. FEDS: A Framework for Evaluation in Design Science Research. *European Journal of Information Systems*, 25(1):77-89, 2016. [doi:10.1057/ejis.2014.36](https://doi.org/10.1057/ejis.2014.36).
- [10] IBM. IBM and University Researchers Create a Never-Before-Seen Molecule and Prove its Exotic Nature with Quantum Computing. IBM Newsroom, 2026.
- [11] Quantum Computing Report. IBM and Researchers Synthesize First Half-Möbius Molecule Validated by Quantum Computing. Quantum Computing Report, 2026.
- [12] S. Lee, J. Lee, H. Zhai, Y. Tong, A. M. Dalzell, A. Kumar, P. Helms, J. Gray, Z.-H. Cui, W. Liu, M. Kastoryano, R. Babbush, J. Preskill, D. R. Reichman, E. T. Campbell,

- E. F. Valeev, L. Lin, and G. K.-L. Chan. Evaluating the evidence for exponential quantum advantage in ground-state quantum chemistry. *Nature Communications*, 14(1):1952, 2023. doi:[10.1038/s41467-023-37587-6](https://doi.org/10.1038/s41467-023-37587-6).
- [13] IBM Research and collaborators. Exploring pathways towards quantum advantage in quantum chemistry: the case of a molecule with half-Möbius topology. arXiv:2603.08696, 2026.
 - [14] IBM Research and collaborators. Quantum chemistry with provable convergence via randomized sample-based Krylov quantum diagonalization. arXiv:2508.02578, 2026.
 - [15] Charles H. Bennett, Ethan Bernstein, Gilles Brassard, and Umesh Vazirani. Strengths and weaknesses of quantum computing. *SIAM Journal on Computing*, 26(5):1510-1523, 1997. doi:[10.1137/S0097539796300933](https://doi.org/10.1137/S0097539796300933).
 - [16] U.S. Food and Drug Administration. 21 CFR Part 11: Electronic Records; Electronic Signatures. Electronic Code of Federal Regulations, 2026.
 - [17] U.S. Food and Drug Administration. Guidance for industry: Part 11, electronic records; electronic signatures - scope and application. FDA guidance document, 2003.
 - [18] U.S. Food and Drug Administration. Good Machine Learning Practice for Medical Device Development: Guiding Principles. FDA web resource, 2021.
 - [19] Doron Cohen. NSCLC Quantum Viewer and QC-AI-HPC Prototype. Prototype website, 2026. <https://nsclc-quantum-viewer.netlify.app/>. Accessed May 11, 2026.
 - [20] Mohammad Ghazi Vakili, Christoph Gorgulla, Jamie Snider, et al. Quantum-computing-enhanced algorithm unveils potential KRAS inhibitors. *Nature Biotechnology*, 43:1954-1959, 2025. doi:[10.1038/s41587-024-02526-3](https://doi.org/10.1038/s41587-024-02526-3).
 - [21] Kenneth M. Merz et al. Crossing the 12,000-atom barrier with heterogeneous quantum-classical supercomputing: quantum chemistry of protein-ligand complexes. arXiv preprint arXiv:2605.01138, 2026. Cleveland Clinic Foundation, RIKEN, and IBM Quantum. <https://arxiv.org/abs/2605.01138>.
 - [22] Licenses. arXiv help page, 2026. <https://info.arxiv.org/help/license/index.html>. Accessed May 11, 2026.