How a Young AI-Protocol Ecosystem Absorbs a Breaking Change: An Empirical Study of the MCP Statelessness Migration

PRELIMINARY PREPRINT – every number regenerates at the 2026-10-10 freeze via reproduce.sh - [PF]=pending freeze, [PW]=pending probe waves - [FIG-n]=figure; rendered figures appear at the end of this document, [PF]-marked ones land at the freeze

Abstract

When a protocol ecosystem ships a breaking change, two migrations happen; only one is visible in repositories. We name their difference the **deployment gap**: the share of systems *capable* of a new revision minus the share observed *negotiating* it live. We measure it for the Model Context Protocol's first breaking revision — the dominant LLM-agent tool interface — pairing artifact mining (a nine-SDK census; 23,931 registry servers; an 84,972-repository frame) with a longitudinal live-probe panel — porting the capability-vs-use tradition (TLS negotiated use; DNSSEC validation) to an ecosystem breaking change — including a 1,232-server panel measuring both quantities per server, per wave. Capability ran ahead of the release: six of nine official SDKs shipped support during the release-candidate window, three still lack it, and version names mislead (one ships "2.0.0" releases without the protocol). Among observable servers, verified live behavior runs an order of magnitude below capability — though missingness bounds leave the gap's sign unidentified so far. A first probe on the legacy `initialize` handshake — which the revision deletes — measured dual-stack prevalence, not adoption; we rebuilt the instrument on the mandatory `server/discover` RPC with a verification control. At four weeks post-release, 10.8% of capability-resolved, behavior-observed joint-panel publishers publish capable artifacts and 1.7% verifiably negotiate it live (Δ_pub = +0.092, discordance 36:3) [PW]. Adoption tracks migration mechanics: sixty-day repository adoption is ~15-17% for a version bump, 0.3% for a package-family switch, zero with no supporting SDK. [PF]/[PW] numbers finalize at the data freeze. Pre-registered, public amendment log; instruments, data, code released.

1. Introduction

Every maturing protocol eventually breaks something. When it does, the ecosystem's response is usually narrated with repository data: releases shipped, dependencies bumped, milestones closed. This paper argues that such accounts measure *capability* — what deployed code could do — and systematically miss *behavior* — what running systems actually do. The distinction is not pedantic. A server whose repository gained new-protocol support but whose deployment still negotiates the old revision has not migrated in any sense that matters to a client; an ecosystem can look migrated on GitHub and remain unmigrated in production indefinitely.

We formalize this distinction as the **deployment gap**: the difference, over the same population at the same time, between the share of systems capable of the new protocol and the share observed negotiating it live (Section 3.4). We measure it for the Model Context Protocol (MCP) statelessness migration of 2026-07-28 — the first breaking revision of the dominant AI-agent protocol — using paired instruments: repository/artifact mining for the capability side, and a longitudinal live-probe panel on the revision's mandatory `server/discover` RPC (paired with the legacy `initialize` handshake) for the behavioral side.

Three research questions organize the study. **RQ1 (adoption):** how quickly do the ecosystem's layers — official SDKs, registry servers, dependent repositories, and live deployments — adopt the new revision, and how large is the deployment gap over time? **RQ2 (strategies):** which migration strategies do maintainers adopt, measured as artifact signatures rather than survey answers? **RQ3 (friction):** what breaks, per maintainers' own public reports, and what do stated rationales reveal about why migration happens or stalls? An explanatory layer models who adopts early, with publisher-level clustering throughout, because adoption concentrates heavily in platform publishers.

Contributions: (1) the FIRST joint per-unit pairing of capability and live behavior for an AI-agent protocol — the deployment-gap framing adapts the security literature's available-vs-deployed patch-gap and longitudinal live-protocol scanning (e.g. TLS-version measurement) to protocol *revision* adoption, measured per server rather than at population level; (2) a breaking-change adoption study of an AI-agent protocol ecosystem — to our knowledge the first to pair per-server capability with live negotiation for such an event; (3) an artifact-verified SDK census showing version names cannot be trusted for adoption dating; (4) evidence that

packaging strategy dominates migration speed; (5) released instruments, data, and a fully pre-registered analysis with a public deviation log. Two audiences are served: protocol stewards deciding how to ship the next breaking change (§7 is addressed to them), and empirical-SE researchers who need deployment-side constructs that repository mining cannot see.

2. The migration, briefly

MCP's statelessness revision was released 2026-07-28 after a two-month release-candidate window (RC 2026-05-29 → sixty days). It changes session semantics — and it changes what is observable. On the OLD revision, behavior surfaces through the `initialize` handshake: a client opens with `{"method":"initialize", "params":{"protocolVersion":...}}` and the server answers with the revision it will actually speak. On the NEW revision that handshake is REMOVED (SEP-2575) and replaced by a mandatory `server/discover` RPC with a per-request protocol version in `_meta` — so a fully migrated deployment is invisible to an initialize probe, and answering `server/discover` is the positive signal of the running deployment. Neither response is taken on faith: our wave-1 data shows servers advertising a revision on `initialize` that they do not fully implement (41 of 43 old-instrument "new-revision negotiators" turned out legacy-only under the corrected probe), and permissive gateways answering any method at all — which is why the instrument pairs both RPCs and verifies every positive with a same-session negative control (Section 3.5). The ecosystem at study: nine official SDKs, an official registry (23,931 distinct servers at baseline), and the dependent open-source population (84,972 repositories across four package ecosystems). Primary sources (all Wayback-archived 2026-08-21): the official 2026-07-28 changelog (modelcontextprotocol.io/specification/2026-07-28/changelog), the community migration guide (mcpjam.com/blog/mcp-v2-2026-07-28-migration-guide), and an infrastructure operator's migration account (blog.cloudflare.com/mcp-v2).

3. Instruments and estimands

3.1 SDK census (capability, artifact-verified). For each official SDK we date support by downloading candidate *published artifacts* (npm tarballs, PyPI sdists, crates, module zips, jars, gems, nupkgs) and searching for the protocol identifier. Tags and version names are not trusted; the census shows why (§4.1). **3.2 Registry reconstruction and cohorts.** Daily snapshots (deletion-aware from 2026-08-21) plus per-version publish timestamps reconstruct the registry's history; servers partition into pre-RC incumbents (10,040), RC-era joiners (8,704), and post-release entrants (5,187). Capability for a registry server = its package resolves to a manifest requiring a stateless-supporting SDK release (deviation DEV-1, logged). **3.3 Dependent-repository frame and adoption events.** An adaptive size-sliced code-search pipeline enumerates 84,972 repositories (fork-free by construction); all are hydrated with covariate metadata. A stratified sample (n=4,266; census of the smallest ecosystem) receives manifest-history extraction; adoption events are dated by the first default-branch manifest commit requiring a supporting release, with active (commit) vs passive (range-admitted) adoption separated. Time origins are per-ecosystem: the date adoption first became possible. **3.4 The deployment gap (frozen as Amendment A7).** $\Delta(t)$ = P[capable] − P[negotiating] on the joint panel: the 1,232-server census of registry entries with both packages and https remotes, where both quantities are measured per server per wave. Paired counts, discordance, and MNAR bounds (auth-walled servers bounded both ways) are reported; the publisher-level twin Δ_pub is primary. The estimand's target population is stated precisely: the publicly probeable, package-resolvable registry population — not the ecosystem at large; a covariate-balance table (joint panel vs full registry: publisher size, cohort, ecosystem, auth-wall rate) quantifies the difference [PF]; per-wave paired counts land with each wave [PW]. Capability(s,t) is resolved version-aware with `not-capable` expressible, in three mechanical tiers: (T1) the registry-linked package's manifest names a known SDK line, whose requirement is evaluated against the artifact-verified supporting-version table; (T2) mcp-named framework dependencies are resolved one hop, at the version the requirement admits, and classified by the same rule; (T3) packages with no resolvable dependency chain (bundlers) have their published artifact scanned for the protocol-revision constants themselves. Servers resolving at no tier are `unresolved` — first-class missingness that enters the MNAR bounds beside the auth-walled stratum and never the point estimate. **3.5 Probe panel (behavior).** A server is **probeable** in a wave iff its registry- advertised https remote resolves, connects, and returns a protocol-conformant JSON-RPC response (a result, a negotiation, or a structured error — `UnsupportedProtocolVersionError` is an informative response, not a failure); DNS/connect failures and non-conformant responses are non-probeable that wave, and auth-walled servers form their own bounded stratum (§3.4). This is the denominator of every behavioral share. Per server per biweekly wave, at most three requests: one `server/discover` (MUST-

implement on the new revision — the positive discriminator an initialize-based probe lacks, §4) carrying the per-request `_meta` protocol version; one same-session NEGATIVE CONTROL (a nonsense method) sent only when `server/discover` returns a result — a genuine implementation must reject it, so permissive echo endpoints cannot count as positives (this control retired 4 of the 21 uncontrolled wave-1 positives, including an entire three-server "fleet"); and one legacy `initialize` handshake. The pair of verified outcomes yields the mutually exclusive states new-only / dual-stack / legacy-only / unreachable / auth-walled (Amendment A8; general panel n=400 seeded from the full registry, joint panel per §3.4). Ethics: registry-advertised public endpoints, at most three well-formed requests, identifying User-Agent, no tool access, auth walls never retried; the design follows the Menlo Report's beneficence and respect-for-persons principles for active measurement, and the study uses only public interfaces advertised for exactly these requests, and the design falls outside human-subjects review under the applicable policies — stated explicitly rather than left to inference. From wave 3, the odd half of each frame is offered the prior protocol revision, turning the panel into a negotiation experiment while the even half remains a comparable longitudinal series (Amendment A5.2). Estimation consequences, stated up front: $\Delta(t)$ and all trajectory claims are estimated on the EVEN half only (joint panel ≈616 servers, general panel 200; at 40% response — the worst case observed so far, actual response has run 40-52% — a wave-level share carries a ±6pp 95% CI on the joint even arm, adequate for the pre-registered sign-consistency rule and reported with every estimate; if any joint even-arm wave falls below 40% response, the pre-specified fallback is pooling with the adjacent wave, disclosed wherever used). The joint frame is name-sorted, so parity-alternation interleaves same-publisher servers across arms (verified: the largest fleet splits 40/40); the general frame is in frozen random order, so its arm balance is empirical and reported per wave. In waves 1-2 (pre-experiment) both arms are offered the new revision, and wave-level estimates use the full frame; the even-half-only rule binds from wave 3, when the odd arm's offers diverge. A reactivity risk — old-revision offers prompting operator changes that spill into the even arm via shared publisher infrastructure — is acknowledged in Section 8 and bounded by comparing even-arm waves 1-2 (pre-experiment) with waves 3+. **3.6 Strategy signatures and failure corpus.** RQ2 strategies are frozen artifact detectors (parallel package lines, runtime negotiation triangulated against the probe, version gates, vendoring, cut signatures, and a characterized no-signature residual), validated for precision AND recall with Wilson intervals on author-labeled samples under a pre-registered reliability protocol: 50 hits per detector plus a 200-item negative audit; every label carries a verbatim evidence quote and URL; we relabel a blind 20% subsample after a two-week interval (intra-rater agreement reported, Cohen's kappa, threshold 0.8); all labels and evidence are released for public re-audit. Detectors freeze in a dated commit before the production run. RQ3 draws on 2,992 migration-linked issues/PRs under a frozen attribution rule, characterized descriptively with quote-anchored exemplars; rationale codes are qualitative only.

4. RQ1 — Adoption across the ecosystem's layers

4.1 SDKs adopted before the release; version names mislead. Six of nine official SDKs shipped stateless support during the RC window — python first (2026-06-11), then rust, go, csharp, typescript, ruby (2026-07-07); release day itself shipped no new SDK capability. Three SDKs (java, kotlin, php) had shipped none as of [PF], verified negative at submodule-artifact level. The census also shows why artifact verification is mandatory: one official SDK publishes releases named "2.0.0" that contain no new-protocol support, and another published a release on the migration's release day without it. [FIG-1] **4.2 Dependent repositories: packaging strategy dominates.** Sixty days after adoption became possible: rust 17.4% of sampled repositories adopted (134 events; the median adopter committed before release day), go 15.4% (116), npm 0.3% (6), maven structurally zero — no supporting JVM SDK exists. The npm collapse has a mechanism: stateless support moved off the main `sdk` package line into a new package family, so migration there is a package switch, not a version bump. The npm–go contrast is large and robust nonparametrically (log-rank, with a publisher-block permutation variant pre-committed as the cluster-aware robustness check [PF]); the sparse npm stratum is modeled with Firth-penalized Cox and profile-likelihood intervals (implemented; preliminary HR 0.021, 95% profile-likelihood CI [0.009,0.043], no Wald p-value), with the nonparametric log-rank primary (preliminary publisher-block permutation $p \leq 0.0005$, the floor of 2,000 permutations, cluster-aware) [PF]; a light-ridge sensitivity fit puts the same hazard ratio at 0.16, outside the Firth profile CI — the two shrinkage estimators agree only on direction, which is all we claim; owner type, stars, and repository age are so far not significant — where a repository lives outweighs who owns it. [FIG-2, FIG-3] **4.3 Registry and behavioral layers.** Registry cohort curves [PF]. Behaviorally, the 2026-07-28 revision REMOVES the `initialize` handshake (SEP-2575), so a first-generation initialize-probe measures DUAL-STACK prevalence (servers still answering the removed handshake), not full adoption; we rebuilt the probe on the mandatory `server/discover` RPC (Amendment A8; states new-only / dual-stack / legacy-only /

unreachable / auth-walled). First corrected wave (2026-08-25), all positives verified: of 400 general-panel servers, 3 verifiably speak the new revision (all dual-stack), from 2 of 119 probeable-server publishers (1.7% publisher-level; probeable is the denominator of every behavioral share, §3.5) — legacy-only dominates at 185. Of the 21 uncontrolled wave-1 positives across both panels, 14 verified; the negative control retired 4 as permissive echo endpoints (including one publisher's entire three-server general- panel "fleet") and 3 more failed re-verification for other reasons (2 answered only the legacy handshake on recontact, 1 unreachable). The joint census (n=1,232) shows 11 verified new-speakers (10 dual-stack + 1 new-only) from 10 of 446 probeable-server publishers (2.2%). The earlier initialize-only "22%" was almost entirely legacy-only servers answering the removed handshake — the instrument artifact this rebuild corrects; verified new-revision behavior at ~4 weeks is 1.6% of probeable general-panel servers (3/188) and 2.2% of probeable joint-panel servers (11/492), an order of magnitude below the artifact. The deployment gap $\Delta(t)$ and its publisher-level twin are reported across waves on the corrected instrument [PW]. Wave 1 (2026-08-25): on capability-resolved, behavior-observed units, $\Delta_pub = +0.092$ — P[capable] 10.8% vs P[verified-negotiating-new] 1.7% (n=360 publishers; server-level twin +0.087, n=390). Discordance is one-sided: 36 capable-but-legacy publishers against 3 in the opposite cell (McNemar exact $p \approx 4\times10^{-8}$). MNAR bounds [−0.34, +0.28] brace the point estimate; a stricter full-panel sensitivity that also treats the 362 unreachable servers as unknown-both-ways gives [−0.44, +0.33] — wide because missingness dominates this panel: capability is unresolved for 272/1,232 servers (22%: 209 bundled artifacts carrying no protocol constant, 52 opaque mcpb/oci artifacts, 11 dead package links), 378 servers sit auth-walled, and capability is ~5.5× ENRICHED among unreachable servers (56.3% of the resolved unreachable are capable vs 10.3% of resolved responders) — so the unreachable stratum cannot be ignored and the trajectory claim rule (§3.4) is what carries inferential weight, not any single wave. Capability concentrates like behavior does: 230/1,232 servers (18.7%) collapse to 108/966 publishers (11.2%), one framework publisher owning 77 capable servers; and 129 of 136 directly-resolved capable packages admit a supporting SDK version through an open range rather than pinning one — capability here is overwhelmingly PASSIVE (range-admitted), the joint-panel twin of §3.3's active/passive split. The three opposite-discordant servers publish a legacy-SDK package while their live remote verifiably speaks the new revision — published artifact and deployed endpoint can diverge, which is precisely why the design measures both. [FIG-4]

5. RQ2+RQ3 — Strategies as artifact signatures; friction as maintainers reported it

Strategy signatures (RQ2). The strategy space itself is ecosystem-shaped: parallel-line dual-stacking is expressible in npm (five wild repositories hold both lines simultaneously; the SDK institutionalized the strategy as a published `server-legacy` package) and structurally impossible at manifest level in single-crate ecosystems. Cut signatures — one commit moving a manifest from not-capable to capable with no dual state — number 66 across go/rust/npm in the sample, with the ambiguous first-observed-capable stratum reported separately. Vendoring exists (7/200 in the dev audit). Detectors certify presence only; every prevalence is a lower bound; full production, precision/recall tables, and the characterized no-signature residual land with the frozen detector commit [PF] [FIG-5]. Runtime-negotiation detection is triangulated against the probe experiment (§3.5) [PW]. **Reported friction (RQ3, descriptive).** 2,992 candidate issues/PRs under the frozen attribution rule: volumes over time, strata, resolution-time distributions, and quote-anchored exemplars [PF]. Maintainer rationale statements are presented qualitatively with verbatim quotes and links — no prevalence claims; member-checking via public maintainer statements only.

6. Who adopts early (explanatory layer)

THE UNIT OF ADOPTION IS THE PUBLISHER — server-level rates are pseudo-replicated by publisher fleets and are reported only as twins. Concentration is real but panel-specific — and instrument-dependent: under the corrected instrument the general panel's three verified new-revision servers belong to two publishers (an uncontrolled count of six spanned three — the retired third being one publisher's echo fleet, concentration even in the artifacts) and the joint panel's eleven to ten (top 2 of 11) [PW]; a publisher counts as capable or negotiating if ANY panel server is, an aggregation that mechanically favors multi-server publishers (their wave-1 Δ runs +0.15 vs +0.08 for singletons) — disclosed here because the twin is the paper's primary unit; on the capability side one framework publisher owns 77 of the joint panel's 230 capable servers. What generalizes is the mechanism, not any one share: the top five publishers own 3,253 of 23,931 registry servers, so any server-level rate can be manufactured by a single fleet. All adoption estimates are therefore reported at server AND publisher level, with publisher- level primary; hazards are publisher-clustered, sparse strata Firth-

penalized [PF]. The preliminary pattern — ecosystem/packaging effects dwarfing repository characteristics — is tested against the frozen covariate set at freeze [PF].

6b. Results-blind conclusions (pre-committed before freeze)

The pre-registration protects the method, not the direction. We pre-commit the interpretation for the two outcomes that can actually falsify the paper's thesis; we deliberately do NOT enumerate outcomes that cannot fail:

Falsifiable outcome	**Pre-committed conclusion**
Deployment gap $\Delta<0$ (behavior leads capability)	Operators run new-revision deployments ahead of published artifacts; repository mining UNDERstates migration — the paper's directional claim is wrong and is reported as refuted
npm/go packaging contrast reverses or vanishes at freeze	Packaging mechanics is not the operative axis; the association was confounded (note: packaging is collinear with ecosystem — see §8, this is at most an association, never causal)

No other row is claimed as a pre-committed "finding"; every reported number carries its interval and its [PF]/[PW] provenance. One outcome has already part-realized and is treated under the rule rather than the table: wave-1 Δ is positive but its missingness bounds straddle zero — by the §3.4 trajectory rule this licenses NO directional claim until $\geq$3 waves agree in sign at both units of analysis, and the paper will say "undetermined" if they do not.

7. Discussion — what a protocol steward can use

Three lessons fall out of the preliminary data and sharpen at freeze. **(1) The RC window is the migration; the release is a formality.** Every SDK that supports the revision shipped during the RC period, and rust's median adopting repository moved before the spec was final. Stewards who treat the RC as a comment period rather than a migration runway measure the wrong interval and under-invest in it. **(2) Packaging is policy — in this event.** The same revision, announced the same day, produced ~15-17% sixty-day repository adoption where migrating meant a version bump versus 0.3% where it meant switching package families (a contrast whose npm side rests on six events so far [PF]); the JVM zero tests SDK availability rather than packaging shape. Read together, the pattern suggests the largest lever a steward controls is not communication but the migration's mechanical shape — a hypothesis this event supports and future breaks should test. **(3) Deployed behavior needs its own telemetry.** Artifact dashboards and live reality can diverge: at wave 1, published capability ran 10.8% against 1.7% verifiably live among capability-resolved joint-panel publishers (Δ_pub = +0.092) — a gap whose SIGN the missingness bounds do not yet identify, and which only the §3.4 trajectory rule can settle [PW]. Protocols with version negotiation get this telemetry almost for free — a single well-formed handshake — and stewards could publish behavioral adoption alongside download counts. Each lesson is bounded by the scope in Section 8.

8. Threats to validity

Capability≠use is the paper's subject, not a threat — both are measured, on shared units. Remaining threats: GitHub-visible ecosystem only; all behavioral measurement is conducted over the remote HTTP transport, so servers launched locally over stdio are unobservable by construction and are excluded from every behavioral denominator — the probeable population is remote-deployed servers, not all deployments; probe non-response (48–60% across panels) with auth-walled strata handled by pre-committed worst-case bounds and observable-covariate comparison; registry deletions unobservable before 2026-08-21; no pre-release behavioral baseline can exist (the probe postdates the release by construction); per-ecosystem time origins make cross-ecosystem contrasts descriptive, not causal; capability is overwhelmingly range-admitted rather than pinned (129 of 136 directly-resolved capable packages, §4.3), so Δ contrasts a permissive artifact-side predicate against a strict verified-negotiation one and its magnitude should be read accordingly; detector constructs are presence-only lower bounds with precision/recall reported; probe reactivity — the wave-3+ old-revision offers to the odd arm could prompt operator changes that spill into the even arm via shared publisher infrastructure — is bounded by comparing pre-experiment even-arm waves 1-2 against waves 3+ (§3.5); single ecosystem, single event — scope limited to young, centrally-specified, multi-SDK protocol ecosystems.

9. Related work

Prior MCP measurement audits the ecosystem at a point in time — servers, applications, registry text, runtime security (2509.25292; 2506.13538; 2607.25635; 2607.10123; 2608.00997; 2607.11086); none studies adoption of a specification REVISION in this ecosystem (scope-locked claim). The API-evolution literature's core findings, against ours:

Prior finding	**This study's counterpart**
Deprecation reactions are slow and partial (Smalltalk/Pharo; Java)	SDK capability adoption was fast and PRE-EMPTIVE (RC window) — central spec + coordinated SDK teams differ from diffuse deprecation
App populations lag platform API evolution by months	Behavioral lag measured at the server level within weeks via live probes (extending the TLS/DNSSEC live-scanning tradition to a spec revision)
Technical lag grows with dependency depth (npm)	Dependency-depth covariate tested directly in the hazard model [PF]
Ecosystems differ in breaking-change practices (Eclipse/R/npm)	One protocol, one break, four ecosystems: strategy signatures as artifacts (incl. a PUBLISHED legacy package line), not survey responses
Most systems stay outdated despite awareness	Registry cohorts + born-capable split quantify the same inertia for an AI protocol

Capability-vs-use measurement (the tradition we extend, cited explicitly): pairing what software *can* do with what it *does* is established — Chung et al. (USENIX Sec. 2017) pair DNSSEC signing with validation; Kotzias et al. (IMC 2018) and Holz et al. (CCR 2020) pair TLS version/cipher support with negotiated use; patch-gap studies distinguish available from deployed fixes. We claim none of these ideas as novel. Our contribution is to port this design to a software-ecosystem BREAKING REVISION, measuring the capability side by artifact mining (not just live scanning) and pairing it on the SAME server over time; the DNSSEC study pairs across different populations and the TLS-scanning work measures behavior alone. Scope-locked novelty: no prior study measures adoption of a specification revision in the MCP / AI-agent ecosystem, and none rebuilds the behavioral probe around a revision that deletes its own handshake.

10. Availability

Daily registry snapshots, frames, hydration, manifest histories, probe waves, detectors, analysis code, the pre-registration and its complete amendment/deviation log — anonymized artifact [PF].

Appendix A — Registry publication-rate check (demoted from RQ4)

A growth-respecting count model (Negative-Binomial segmented regression; null = exponential growth) with two pre-registered placebo dates detects no publication-rate shock at release [PF confirms]; the earlier linear specification produced spurious placebo effects and was replaced before analysis, per the logged Amendment A3 — itself a cautionary methods note for fast-growing ecosystems.

10. Data and code availability

All instruments, inputs, intermediate state and analysis code are released at `https://github.com/dosvk/mcp-deployment-gap`. The repository contains: the live-probe instrument (`instruments/probe_v2.py`, v0.3, including the per-request `_meta` protocol version and the same-session negative control); the capability resolver and its version-aware mapping table (`instruments/resolve_joint_capability.py`, `data/mapping_table.json`); the frozen capability detectors with their known-answer suite (`instruments/detectors/`, 16 golden cases, self-contained and runnable without network); the banked manifests, dependency frames, hydrated repository metadata and adoption events for every ecosystem (`data/`); the probe waves and the wave-1 revalidation record (`data/probe_v2_wave_2026-08-25.json`, `data/probe_v2_validation_2026-08-25.json`); the survival, Firth-penalised Cox, log-rank and negative-binomial ITS analyses with their emitted results (`analysis/`); and `reproduce.sh`, which regenerates every reported number and prints PASS, SKIP or FAIL per step.

Numbers marked [PF] or [PW] regenerate at the 2026-10-10 data freeze; the repository records which are frozen and which are pending. The pre-registration and the full amendment log are included so that every deviation from the registered plan is auditable against the reported analysis.

References

1. Decan, Alexandre, Mens, Tom, Constantinou, Eleni. *On the Evolution of Technical Lag in the npm Package Dependency Network*. Proc. IEEE ICSME. pp. 404–414. 2018.
2. Sawant, Anand Ashok, Robbes, Romain, Bacchelli, Alberto. *On the Reaction to Deprecation of Clients of 4+1 Popular Java APIs and the JDK*. Empirical Software Engineering. vol. 23. pp. 2158–2197. 2018.
3. Gautam Bharti. *Registry Descriptions Go Stale Unevenly: An 89-Day Measurement of Model Context Protocol Drift, and Why Drift-Ranked Re-Auditing Under-Covers It*. arXiv:2608.00997. 2026.
4. Pei Chen, Baichao An, Mengying Wu, et al.. *Rethinking MCP Security: A Large-Scale Study of Runtime MCP Servers and Security Scanner Reliability*. arXiv:2607.11086. 2026.
5. Bogart, Christopher, K\{}"astner, Christian, Herbsleb, James, et al.. *How to Break an API: Cost Negotiation and Community Values in Three Software Ecosystems*. Proc. ACM SIGSOFT FSE. pp. 109–120. 2016.
6. Firth, David. *Bias Reduction of Maximum Likelihood Estimates*. Biometrika. vol. 80. pp. 27–38. 1993.
7. Dittrich, David, Kenneally, Erin. *The Menlo Report: Ethical Principles Guiding Information and Communication Technology Research*. U.S. Department of Homeland Security. 2012.
8. Li, Frank, Paxson, Vern. *A Large-Scale Empirical Study of Security Patches*. Proc. ACM CCS. pp. 2201–2215. 2017.
9. Kula, Raula Gaikovina, German, Daniel M., Ouni, Ali, et al.. *Do Developers Update Their Library Dependencies?*. Empirical Software Engineering. vol. 23. pp. 384–417. 2018.
10. Heinze, Georg, Schemper, Michael. *A Solution to the Problem of Monotone Likelihood in Cox Regression*. Biometrics. vol. 57. pp. 114–119. 2001.
11. Hechuan Guo, Yongle Hao, Yue Zhang, et al.. *A Measurement Study of Model Context Protocol Ecosystem*. arXiv:2509.25292. 2025.
12. Mohammed Mehedi Hasan, Hao Li, Emad Fallahzadeh, et al.. *Model Context Protocol (MCP) at First Glance: Studying the Security and Maintainability of MCP Servers*. arXiv:2506.13538. 2025.
13. Czyz, Jakub, Allman, Mark, Zhang, Jing, et al.. *Measuring IPv6 Adoption*. Proc. ACM SIGCOMM. pp. 87–98. 2014.
14. Lopez Bernal, James, Cummins, Steven, Gasparrini, Antonio. *Interrupted Time Series Regression for the Evaluation of Public Health Interventions*. International Journal of Epidemiology. vol. 46. pp. 348–355. 2017.
15. Muhammad Hamza Arshad Majeed, May Mahmoud, Sarah Nadi. *An Empirical Study of Model Context Protocol Applications*. arXiv:2607.25635. 2026.
16. *MCP v2 (2026-07-28) Migration Guide*. `https://mcpjam.com/blog/mcp-v2-2026-07-28-migration-guide`. Wayback-archived 2026-08-21. 2026.
17. *Migrating to MCP v2: An Infrastructure Operator's Account*. `https://blog.cloudflare.com/mcp-v2`. Wayback-archived 2026-08-21. 2026.
18. *Model Context Protocol Specification Changelog, revision 2026-07-28*. `https://modelcontextprotocol.io/specification/2026-07-28/changelog`. Wayback-archived 2026-08-21. 2026.
19. Kotzias, Platon, Razaghpanah, Abbas, Amann, Johanna, et al.. *Coming of Age: A Longitudinal Study of TLS Deployment*. Proc. ACM IMC. pp. 415–428. 2018.
20. Holz, Ralph, Hiller, Jens, Amann, Johanna, et al.. *Tracking the Deployment of TLS 1.3 on the Web*. ACM SIGCOMM CCR. vol. 50. pp. 3–15. 2020.
21. Robbes, Romain, Lungu, Mircea, R\{}"othlisberger, David. *How Do Developers React to API Deprecation? The Case of a Smalltalk Ecosystem*. Proc. ACM SIGSOFT FSE. pp. 56:1–56:11. 2012.
22. Chung, Taejoong, van Rijswijk-Deij, Roland, Chandrasekaran, Balakrishnan, et al.. *A Longitudinal, End-to-End View of the DNSSEC Ecosystem*. Proc. USENIX Security. pp. 1307–1322. 2017.
23. Benny Toeppe, Amine Barrak, Emna Ksontini. *A Large-Scale Dataset of MCP Implementations on GitHub*. arXiv:2607.10123. 2026.
24. McDonnell, Tyler, Ray, Baishakhi, Kim, Miryung. *An Empirical Study of API Stability and Adoption in the Android Ecosystem*. Proc. IEEE ICSM. pp. 70–79. 2013.
25. Durumeric, Zakir, Wustrow, Eric, Halderman, J. Alex. *ZMap: Fast Internet-wide Scanning and Its Security Applications*. Proc. USENIX Security. pp. 605–620. 2013.

Figures

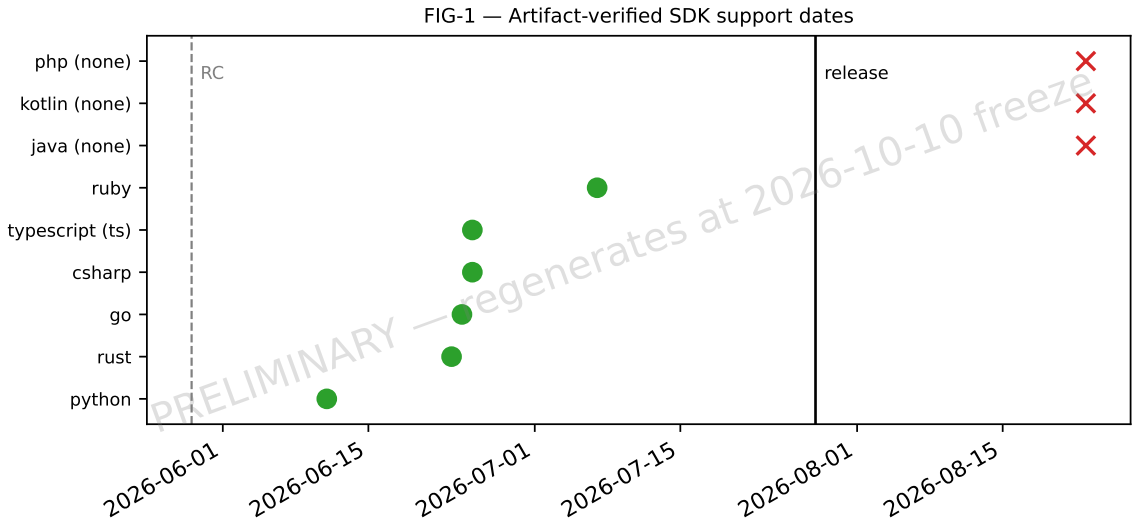


Figure 1: FIG-1. Artifact-verified first-supporting-release date per official SDK, against the release-candidate window and the 2026-07-28 release. Crosses mark SDKs with no supporting artifact as of observation.

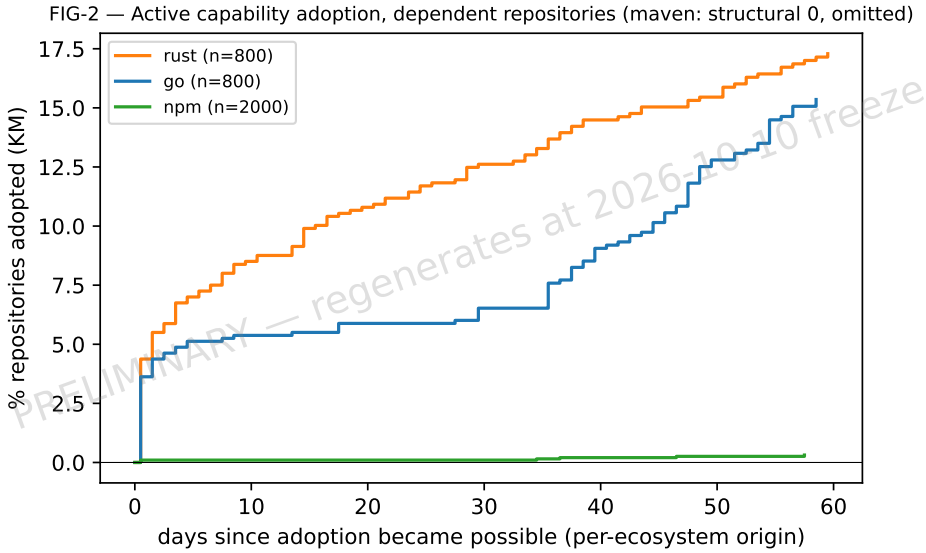


Figure 2: FIG-2. Kaplan–Meier active-capability adoption among dependent repositories, per ecosystem, with per-ecosystem time origins. Maven is a structural zero and is omitted.

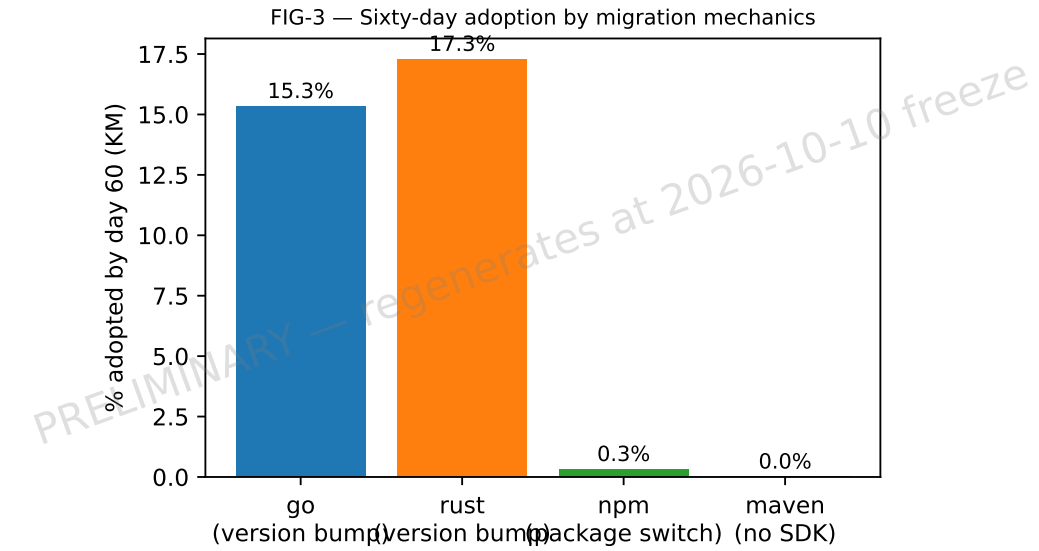


Figure 3: FIG-3. Sixty-day adoption share by migration mechanics, contrasting a version bump against a package-family switch.

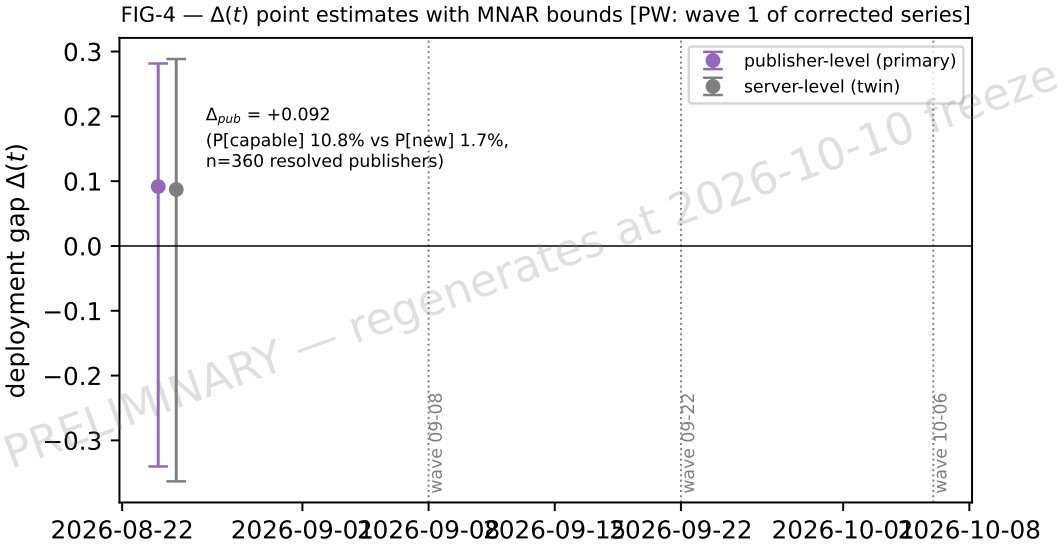


Figure 4: FIG-4. Deployment gap $\Delta(t)$, publisher-level primary with the server-level twin, shown with MNAR worst-case bounds. Wave 1 of the corrected-instrument series.