

， ，
， UI gent
Agent

	API	
Agent		
RAG		Agent

“ 50 + 50” Agent ， Agent
.[1]
Tauri macOS Windows ， SQLite
RAG . [2]

，

•

•

UI

，

HTML , Tailwind TSX , UI

UI , API . [2]

API , , , . Mermaid ,

“ ” “ ”

，

，

，

MES LOT

	， ， ，
API	， ， ，
Front	UI, URL , ,
	API , ,

TODO , API Front . UI .

LOT , , , . [1, 7]

• , ,
 , •

UI , . [2]

React UI	
Tailwind CSS	,
TanStack Query	, ,
Lexical	
Mermaid	

import , Tailwind TSX . [2]

“ → → → → ” ,
 , .
“ ”
“ ” , , , . [1, 8]

UI , , , ,

Agent

PI for LLM

gent

.

,

.

,

. Agent

API

API

.

. [2]

Agent

1

API

. Agent tree topic

.

2

,

,

.

3

,

,

.

Lexical

.

4

expectedVersion

,

.

.

5

,

.

Agent

“ LOT

.

API

,

,

.

,

”

.

,

,

. Agent

.

.

Agent

,

,

,

.

Agent

.


“

,

”

. [1, 8~9]

RAG

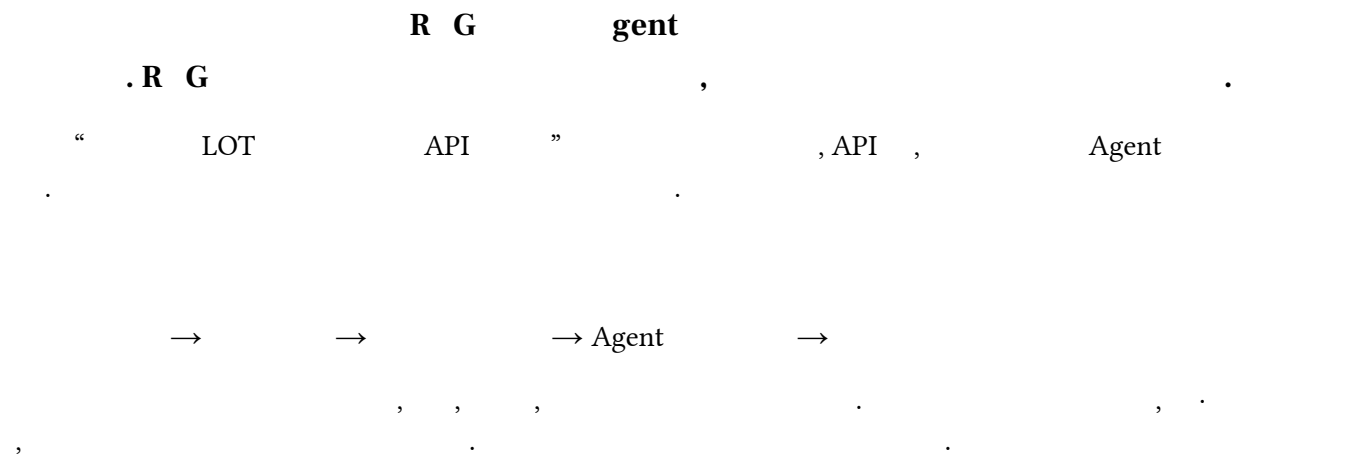

	API	
Agent		

The **Agent** interacts with the **API** to retrieve information from the **Vector Store**. The **Agent** also interacts with the **UI** to provide a response to the user. The **Agent** is responsible for managing the **API** and the **Vector Store**.

[1, 11]

[1] Agent Engineering Guide, 12 . , LOT , : tikitaka-agent-engineering-guide.pdf.

[2] pkt-study-fullstack 0.1.80 API .UI , , . 0.1.58 .