Your Name: Amvith Reddy. K
Table mates: Jasmitha, Sara, Kassy

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

zip-code
Age Nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

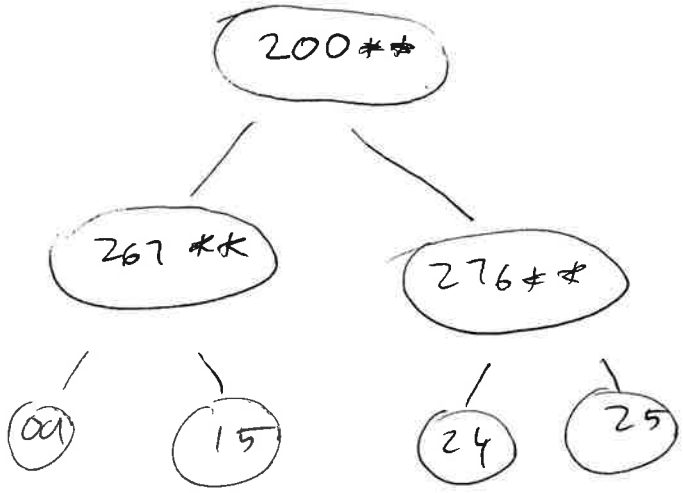

Put your final data table here:

Zipcode	Age	Nationality	condition
27609	18-23	*	Heart disease
27615	18-23	*	Heart disease
27615	18-23	*	viral infection
27609	18-23	*	viral infection
276**	31-35	American	cancer
276**	31-35	American	cancer
2672*	47-49	American	viral infection
2672*	50-55	*	cancer
2672*	50-55	*	Heart disease

Your Name: Jasmitha Alle
Table mates: Kassy, Sara, Anvith

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

zipcode

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Age, nationality
Age, condition

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition,
zipcode (kind of)

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

→ Name, Nationality or → generalize nationality,
Name, age.
→ Name, general zipcode. → 27...

It may help to draw some quasi-identifier hierarchies here:

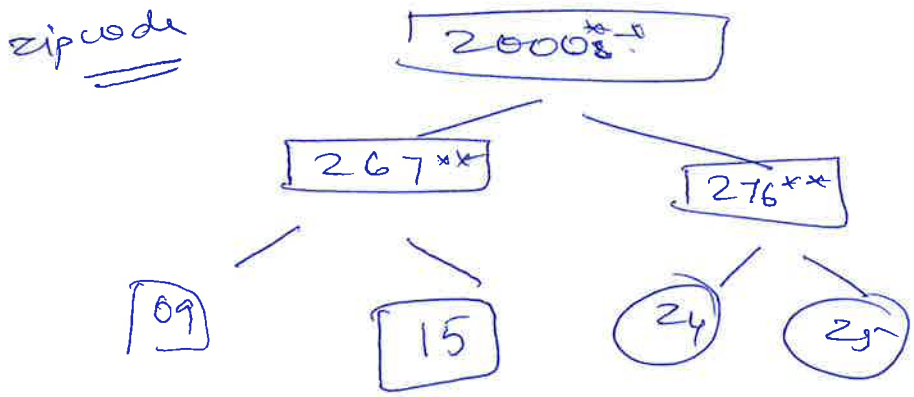

Put your final data table here:

Name	zip	Age	Nationality	Condition
Alice	276**	18	Asian	Heart
Bob	276**	19	American	Heart
Emma	276**	21	Asian	Viral
grace	276**	23	Am..	Viral
Helen	276**	31	Am..	Cancer
Luke	276**	35	Am..	Cancer
Frank	267**	47	Am..	Viral
John	267**	49	Ame..	Viral
Carol	267**	50	Asian	Cancer
David	267**	55	Asian	heart

Your Name: Kassy Paulemon
Table mates: Sara, Anuth, Jasmitha

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

zip code, age, nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

~~name~~	~~zip code~~	~~age~~	~~nationality~~	~~condition~~
276**		10-20	continent	
276**		20-30	Asia	
276**		30-40	North America	
276**		40-50		
276**		50+		
276**				
267**				
267**				
267**				
267**				

Put your final data table here:

(Continent) nationality	zip code	age	condition
Asia	276**	10-20	heart disease
North America	276**	10-20	heart disease
Asia	276**	20-30	viral infection
North America	276**	20-30	viral infection
North America	276**	30-40	cancer
North America	276**	30-40	cancer
North America	267**	40-50	viral infection
North America	267**	40-50	viral infection
Asia	267**	50+	cancer
Asia	267**	50+	heart disease

Your Name: Jordan Sadler
Table mates: Matthew, Michael

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

name
age

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

zip code
nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

1 - indian → singled out
→ (Asian vs American)

name → remove column

zip code → remove last 2 digits

Put your final data table here:

Zip code	Age	Nationality	Condition
276 ✗ ✗	18 - 29	Asian	Heart disease
271 ✗ ✗	18 - 29	American	Heart disease
276 ✗ ✗	18 - 29	Asian	viral infection
276 ✗ ✗	18 - 29	American	viral infection
276 ✗ ✗	30 - 39	American	cancer
276 ✗ ✗	30 - 39	American	cancer
267 ✗ ✗	40 +	American	viral infection
267 ✗ ✗	40+	American	viral infection
267 ✗ ✗	40+	Asian	cancer
267 ✗ ✗	40+	Asian	Heart disease

Your Name: Mathew Winske
Table mates: Jordan, Michael

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

- name - zip
- age

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

- zip code
- condition
- age

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

- condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

Put your final data table here:

name	zip	age	nationality	condition
**** none visible	visible	-- visible	asian/american	visible

Your Name: Michael Pelgrino
Table mates: Matt, Jordan

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Names.
Nationality

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip code.
Age.

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition.

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

Name	Zip code	Age	Nationality	Condition
***		11 11	Asian	
***		6 9	American	
		6 1	Asian	
		6 7	American	
		6 7	American	
		6 1	American	
		6 4	Asian American	
		6 4	Asian	
		6 4	Asian	

Put your final data table here:

Name	Zip Code	Age	Nationality	Condition
***	----	----	Asian/American	----

Your Name: Sara Abba
Table mates: Kaysy, Jasmine, Avineath.

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
~~Alice~~	~~27609~~ (1)	~~18~~	~~Chinese~~	~~Heart Disease~~
~~Bob~~	~~27615~~ (2)	~~19~~	~~American~~	~~Heart Disease~~
~~Emma~~	~~27615~~ (2)	~~21~~	~~Japanese~~	~~Viral Infection~~
~~Grace~~	~~27609~~ (1)	~~23~~	~~American~~	~~Viral Infection~~
~~Helen~~	~~27609~~ (1)	~~31~~	~~American~~	~~Cancer~~
~~Luke~~	~~27615~~ (2)	~~35~~	~~American~~	~~Cancer~~
~~Frank~~	~~26725~~ (4)	~~47~~	~~American~~	~~Viral Infection~~
~~John~~	~~26725~~ (4)	~~49~~	~~American~~	~~Viral Infection~~
Carol	26724 (3)	50	Indian	Cancer
David	26724 (3)	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name,

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

zip code, age, Nationality)

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

condition.

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

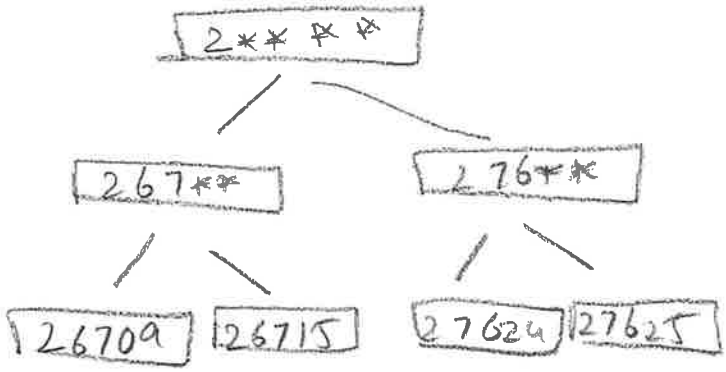

Put your final data table here:

Alice	276**	18	Asian	Heart disease
Grace	276**	23	American	Viral infection
Helen	276**	31	American	Cancer
Bob	276**	19	American	Heart disease
Emma	276**	21	Asian	Viral infectio
Luke	276**	35	American	Cancer
Frank	267**	47	American	Viral infectio
John	267**	49	American	Viral infection
Carol	267**	50	Asian	Cancer
David	267**	55	Asian	Heart disease

Your Name: Prince
Table mates: Alice

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

zip-code, ethnicity age

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

age

18

⋮ } 18 - 25

25

31

} 26 47

⋮

47

48 } 40 - 55

⋮

55

Put your final data table here:

ZIP	age	nationality	condition
276 xx	18-25	Asian	
	18-25		
	18-25		
267 xx	25-46		
	40 -55		
	40-51		

It may help to draw some quasi-identifier hierarchies here:

age:

18
19
21
23
31
35
47
49
50
55

18-25

25-46

40-55

Put your final data table here:

Zip code	age	Nationality	condition
276**	18-25	Asian	
	18-25		
	18-25		
	18-25		
	25-46		
	25-46		
267**	40-55		
	40-55		
	40-55		
	40-55		

Your Name: Alice Yacubovich
Table mates: Prince

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip code, nationality, age

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

Your Name: Askari Mohammad
Table mates: Milan, Mariamne, Annamaria, Kevin

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name,

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip-code, age, nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers. nationality, name

It may help to draw some quasi-identifier hierarchies here:

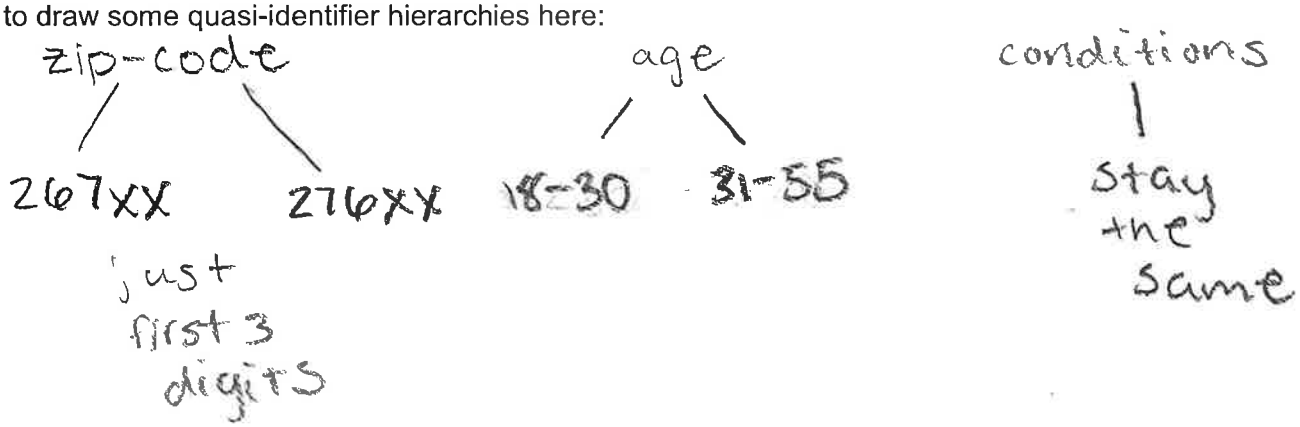

Put your final data table here:

zip-code	age	condition	nationality
276	18-30	Heart Disease	chinese
276	18-30	Heart Disease	American
276	18-30	viral Infection	Japanese
276	18-30	viral Infection	American
276	31-55	cancer	American
276	31-55	cancer	American
267	31-55	viral Infection	American
267	31-55	viral Infection	American
267	31-55	cancer	Indian
267	31-55	Heart Disease	chinese

It may help to draw some quasi-identifier hierarchies here:

Zip Code	Remove	Age
3 - digits	Nationality	<30, >30

Put your final data table here:

Name	Zip Code	Age	Condition
—	276 x x	<30	Heart Disease
—	276 x x	< 30	Heart Disease
—	276 x x	< 30	Viral Infection
—	276 x x	< 30	Viral Infection
—	276 x x	> 30	Cancer
—	276 x x	> 30	Cancer
—			
—			
—			

Your Name: Marianne Nguyen
Table mates: Milan, Askari, Kevin, Annamaria

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Nationality, Age, Zip Code

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

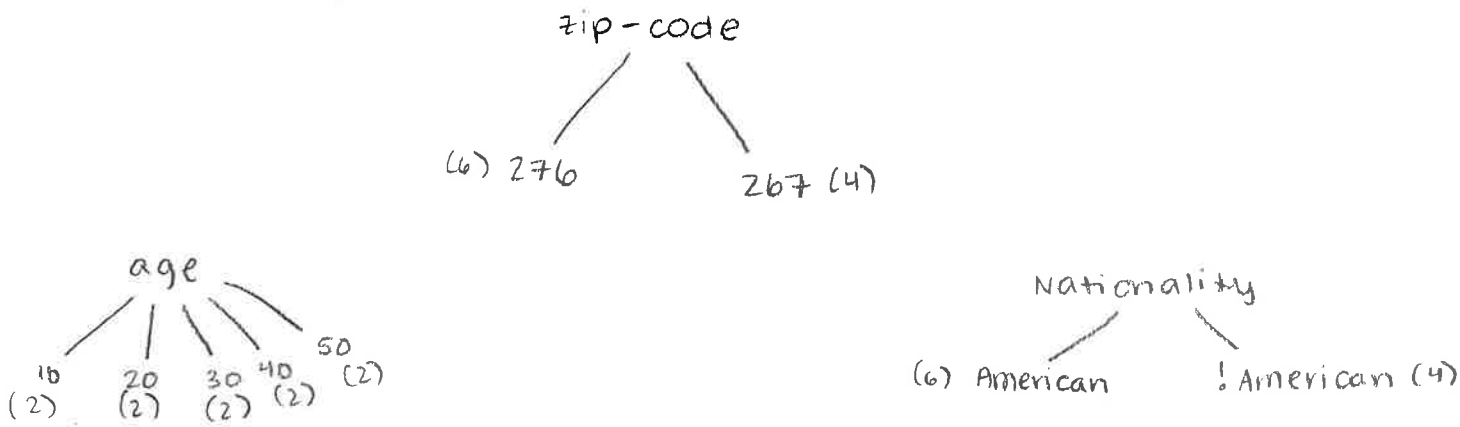

Put your final data table here:

Zip-code	Age	Condition	Nationality
276 **	< 30	heart disease	Asian
276 **	< 30	heart disease	Am.
276 **	< 30	viral infection	Asian
276 **	< 30	viral infection	Am.
276 **	> 30	cancer	Am.
276 **	> 30	cancer	Am.
267 **	> 30	viral infection	Am
267 **	> 30	viral infection	Am.
267 **	> 30	cancer	Asian
267 **	> 30	heart disease	Asian

Your Name: Annamaria
Table mates: Kevin, Askari, Milan, Marianne

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Nationality, Age, zip-code

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

Put your final data table here:

Zip Code	Age	Condition	Nationality
276**	18-30	heart disease	Asian
276**	18-30	heart disease	American
276**	18-30	viral infection	Asian
276**	18-30	viral infection	American
276**	30-40	cancer	American
276**	30-40	cancer	American
267**	40-50	viral infection	American
267**	40-50	viral infection	American
267**	>50	cancer	Asian
267**	>50	heart disease	Asian
267**			

Your Name: Kevin Chau
Table mates: Annamaria, Marianne, Milan, Aslan

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip code, age, nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

Your Name: Milan Valdemeuer
Table mates: Marianne, Annamaria, Kevin, Aikersi

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zipcode, AGE, Nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

Zipcode	AGE	condition
3dig	$x \leq 30$, $x > 30$	stays same

Put your final data table here:

Zipcode	AGE	condition
276	~~18~~ >30	HD
276	~~19~~ >30	HD
276	~~21~~ >30	VI
276	~~23~~ >30	VI
276	~~31~~ <30	C
276	~~35~~ <30	C
276	~~47~~ <30	VI
276	~~49~~ <30	VI
276	~~50~~ <30	C
276	~~54~~ <30	HD

Your Name: Cristian Guevara
Table mates: Matteo

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27607	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Age, zipcode, Nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

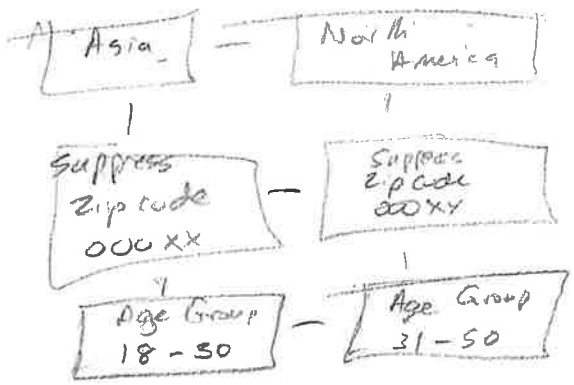

Put your final data table here:

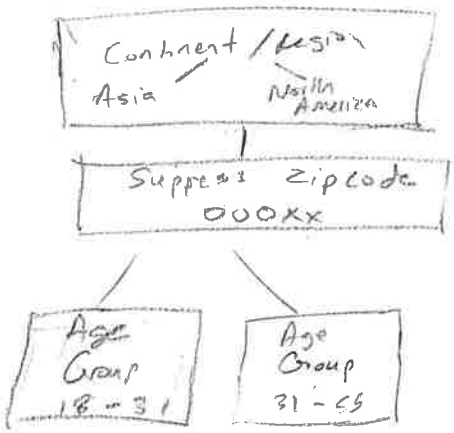

Your Name: Krish Kapoor
Table mates: Mang

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Nationality, Age, Zip Code

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

Put your final data table here:

Nationality	Age	Zip	Condition
Chinese	18	2760*	Heart Disease
American	23	2760*	Viral Infection
American	31	2760*	Cancer
Japanese	21	2761*	Viral Infection
American	19	2761*	Heart Disease
American	35	2761*	Cancer
American	47	2672*	Viral Infection
American	49	2672*	Viral Infection
American	50	2672*	Cancer
Indian	55	2672*	Heart Disease
Chinese			

Your Name: Isa Farid
Table mates: Luke

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip code, Age, Nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

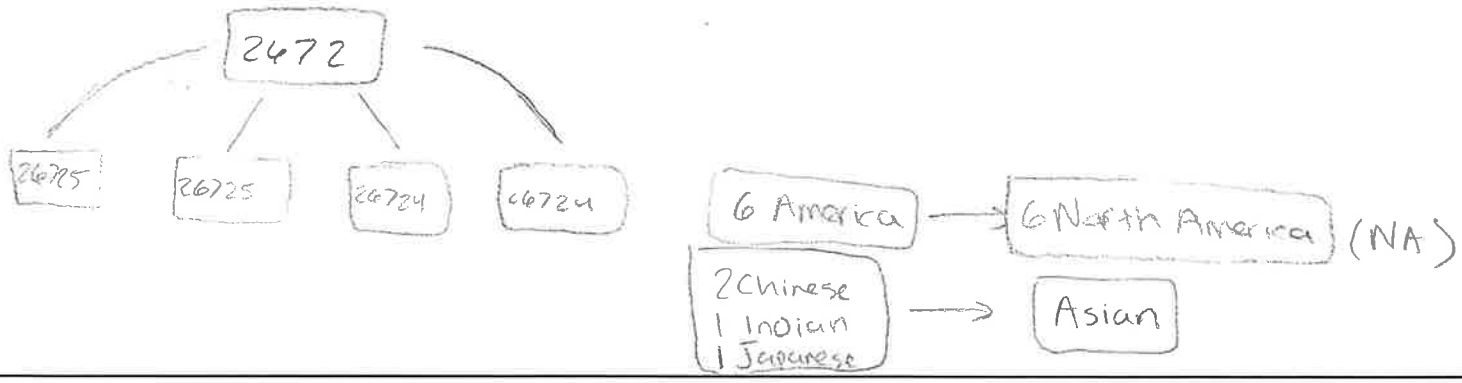

Put your final data table here:

Zip Code	Age-Group	Nationality	Condition
276--	18-19	Asian	As listed in table
276--	18-19	North American	
276--	20-25	Asian	
276--	20-25	North American	
276--	30-35	North American	
276--	30-35	North American	
267--	46-49	North American	
267--	46-49	North American	
267--	50-55	Asian	
267--	50-55	Asian	

Your Name: Luke Parrish
Table mates: Isa

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

	Name	Zip code	Age	Nationality	Condition
*	Alice	27600	18	Chinese	Heart Disease
□	Bob	27615	19	American	Heart Disease
*	Emma	27608	21	Japanese	Viral Infection
△	Grace	27609	23	American	Viral Infection
△	Helen	27609	31	American	Cancer
□	Luke	27615	35	American	Cancer
○	Frank	26725	40-49 ~~47~~	American	Viral Infection
○	John	26725	~~49~~	American	Viral Infection
	Carol	26724	50	Indian	Cancer
	David	26724	55	Chinese	Heart Disease

Asia/NA

Direct Identifiers: Attributes that directly reveal an individual's identity.

None

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip, age, nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

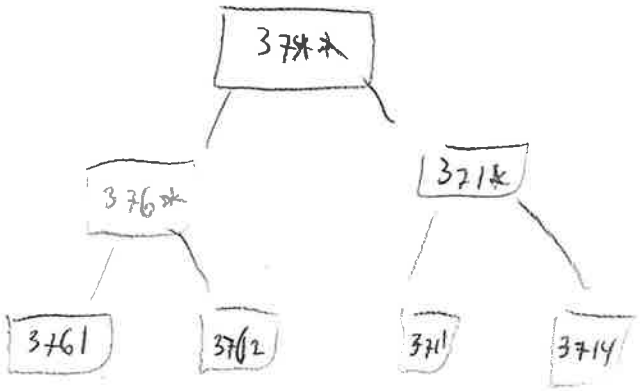

American → NA

Indian, Japanese, Chinese → ASIA

Put your final data table here:

Nationality	Age	ZIP	Condition
American	45-49	26725	viral
American	45-49	26725	viral

Your Name: Sogtbechmmy Max Unegzai
Table mates: Devon, Ian.

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip Code,
Age, Nationality.

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition.

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

Put your final data table here:

~~Name~~	Zip Code	Age range	Nationality continent ~~Nationality~~	Condition.
	276 * *	<20	~~Asia~~ Asia	Heart disease
	276 * *	<20	N America	heart disease.
	276 * *	>20 <30	Asia	Viral infection
	276 * *	>20 <30	N America	Viral infection.
	276 * *	>30 <40	N America	Cancer
	276 * *	>30 <40	N America	Cancer
	267 * *	>40 <50	N America	Viral infection
	267 * *	>40 <50	N America.	Viral infection
	267 * *	>50	Asia	Cancer.
	267 * *	>50	Asia.	Heart disease.

Your Name: Mary Vu
Table mates: Krish

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Nationality, Age, zip code

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

Put your final data table here:

Nationality	Age	ZIP	Condition
American	19	2761	Heart Disease
American	35	2761	Cancer
American	23	2760	Viral Infection
American	31	2760	Cancer
American	47	2672	Viral Infection
American	49	2672	Viral Infection
Japanese	21	2761	Viral Infection
Indian	50	2672	Cancer
Chinese	18	2760	Heart Disease
Chinese	55	2672	Heart Disease

Your Name: Julian Leal
Table mates: Eric Lowera, Nathan Lee

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip code, Age, Nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

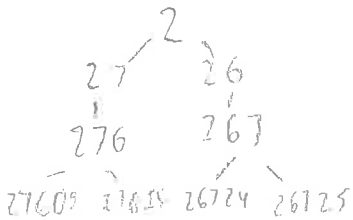

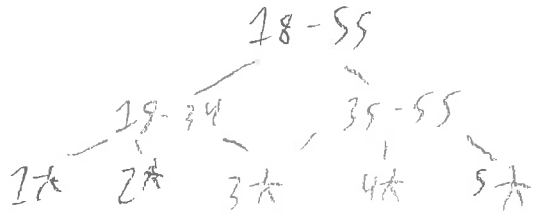

Put your final data table here:

Zip code	Age	Nationality	Condition
276**	18-34	Asian	Heart Disease
276**	18-34	American	Heart Disease
276**	18-34	Asian	Viral Infection
276**	18-34	American	Viral Infection
276**	18-34	American	Cancer
276**	35-55	American	Cancer
2672*	35-55	American	Viral Infection
2672*	35-55	American	Viral Infection
2672*	35-55	Asian	Cancer
2672*	35-55	Asian	Heart Disease

Your Name: Gio Anthony Legaspi
Table mates: Nathan Lee, Julian Leon

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name, Age

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip Code, Nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

Age

10-19

20-29

30-39

40-49

50-59

Put your final data table here:

Zip code	Age	Condition
276**	1*	Heart Disease
276**	1*	Heart Disease
276**	2*	Viral Infection
276**	2*	Viral Infection
276**	3*	Cancer
276**	3*	Cancer
267**	4*	Viral Infection
267**	4*	Viral Infection
267**	5*	Cancer
267**	5*	Heart Disease

Your Name: Nathan Lee
Table mates: Julian & Gio

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip code, age, nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

Age

1*
2*
3*
4*
5*

2****

27*** 26***
276** 267**

Put your final data table here:

Zip Code	Age	Nationality	Condition
276**	18-35	Asian	Heart disease
276**	18-35		Heart disease
276**	18-35	Asian	Viral infection
276**	18-35		Viral infection
276**	18-35		Cancer
276**	18-35		Cancer
267**	36-66		Viral infection
267**	36-66		Viral infection
267**	36-66	Asian	Cancer
267**	36-66	Asian	Heart disease

Your Name: Ian McWright
Table mates: Mary Jeren

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

<25
<40

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip code
age
nationality condition

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

Put your final data table here:

zip	nationality	Age	condition
276 * *	~~Chinese~~ asia	Teens	HD
276 * *	American	Teens	HD
276 * *	~~Chinese~~ asia	20's	VI
276 * *	American	20's	VI
276 * *	American	30's	Ca
276 * *	American	30's	Ca
276 * *	American	40's	VI
267 * *	American	40's	VI
267 * *	asian	50's	Ca
267 * *	asian	50's	HD
267 * *			

Your Name: Mateo
Table mates:

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zipcode + Age + Nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

~~Nationality~~, Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

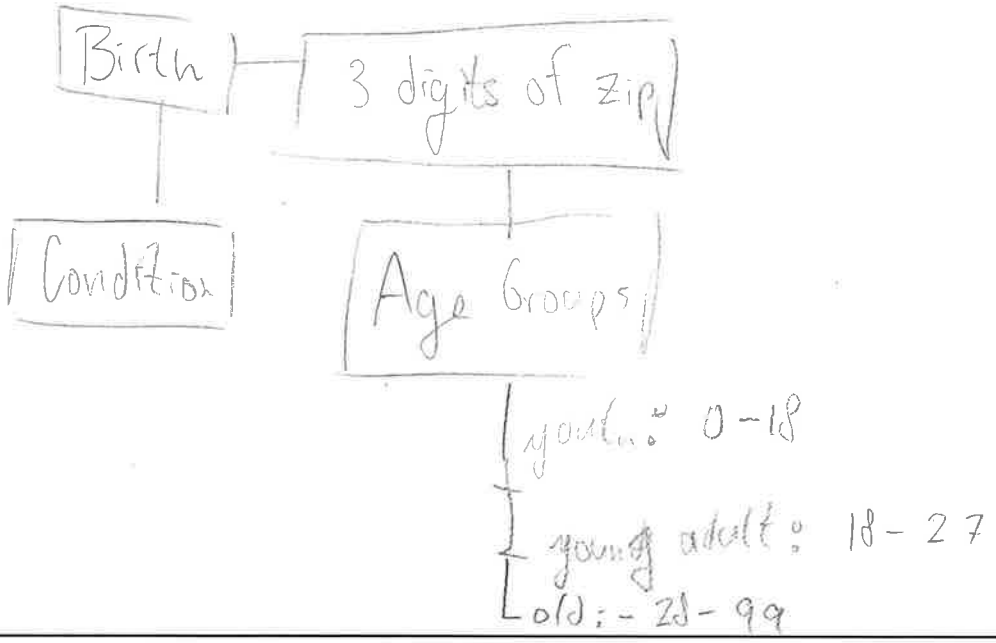

Put your final data table here:

Continent

Zip Code	Age	Nationality	Condition	Groups
276	<30	*	Heart Disease	Group 1

Your Name: Kamar Purnell
Table mates: _____

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

Zip code, Age, and Nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:

Zipcode

Age

Nationality

Put your final data table here:

Name	Zipcode	Age Group	Nationality	condition
Alice	27***	≤ 20	chinese	Heart Disease
Bob	27***	≤ 20	American	Heart Disease
Emma	27***	20 < } ≤ 30	Japanese	Viral Infection
Grace	27***	20 < } ≤ 30	American	Viral Infection
Helen	27***	30 < } ≤ 40	American	cancer
Luke	27***	30 < } ≤ 40	American	cancer
Frank	26***	40 < } ≤ 50	American	Viral Infection
John	26***	40 < } ≤ 50	American	Viral Infection
carol	26***	40 < } ≤ 50	Indian	cancer
David	26***	≥ 50	chinese	Heart Disease

Your Name: Deven Parmar
Table mates: Max, Ian

K-anonymity for Data Privacy and Protection

You're a software engineer working on a secure application for health records. You're given this dataset and told by your boss to "make it have like, privacy or whatever."

Step 1: Review the dataset and identify the relevant attributes and identifiers

Name	Zip code	Age	Nationality	Condition
Alice	27609	18	Chinese	Heart Disease
Bob	27615	19	American	Heart Disease
Emma	27615	21	Japanese	Viral Infection
Grace	27609	23	American	Viral Infection
Helen	27609	31	American	Cancer
Luke	27615	35	American	Cancer
Frank	26725	47	American	Viral Infection
John	26725	49	American	Viral Infection
Carol	26724	50	Indian	Cancer
David	26724	55	Chinese	Heart Disease
	First 3	Decade	Continent	

Direct Identifiers: Attributes that directly reveal an individual's identity.

Name, ZI

Quasi-Identifiers: Attributes that, in combination, could reveal someone's identity.

- ZIP
- Age
- Race/Nationality

Sensitive Attributes: Attributes containing information that individuals may want to keep private, that are not uniquely identifying but might be used to predict or group individuals

Condition

Step 2: Anonymize the dataset to achieve **2-anonymity** by generalizing or suppressing quasi-identifiers.

- Remember, for k-anonymity, your information contained in the released dataset cannot be distinguished from at least k-1 other individuals whose information also appear in the dataset.
- You'll also want to remove any direct identifiers.

It may help to draw some quasi-identifier hierarchies here:



Put your final data table here:

ZIP	Age	Continent of Nationality	Condition
276--	18-29	Asia	Heart Disease
276--	18-29	NA	Heart Disease
276--	18-29	Asia	Viral Infection
276--	18-29	NA	Viral Infection
276--	30-39	NA	Cancer
276--	30-39	NA	Cancer
267--	40+	NA	Viral Infection
267--	40+	NA	Viral Infection
267--	40+	Asia	Cancer
267--	40+	Asia	Heart Disease