(a) Message

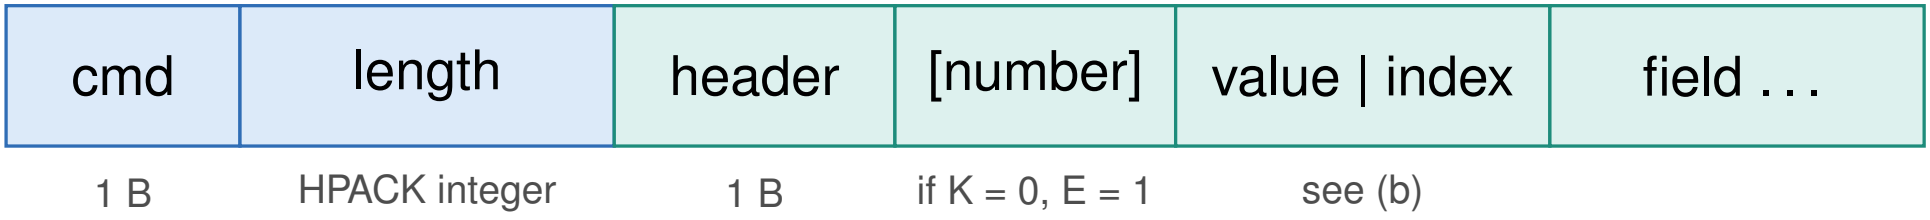

(b) Field header byte

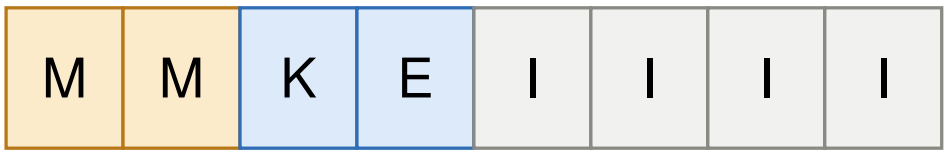

`MM` = 00: literal value
`MM` = 01: literal, add to value table
`MM` = 10: index into value table

`K` = 1: field number from key table, index in low 5 bits
`K` = 0, `E` = 1: field number in the following bytes, added to key table
`K` = 0, `E` = 0: field number `IIII`
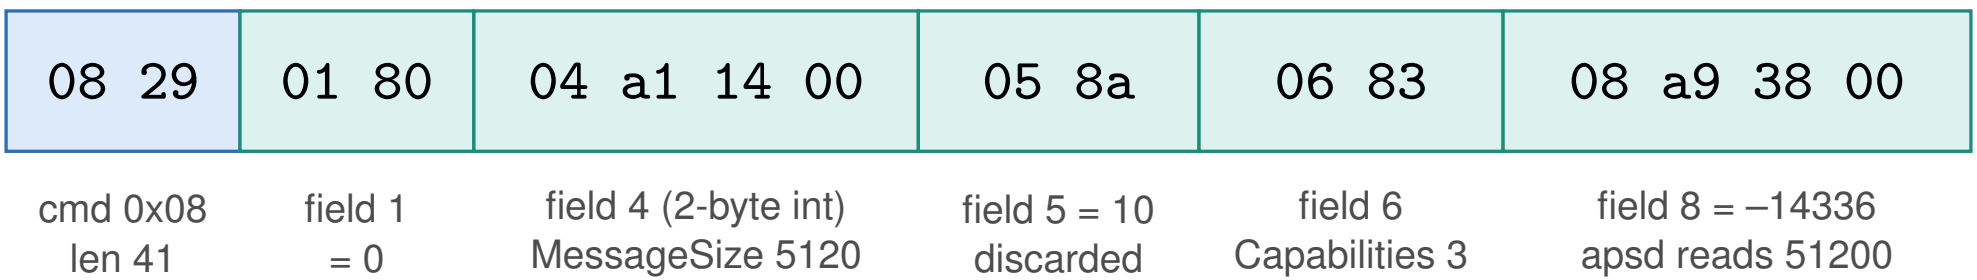
(c) Start of a ConnectResponse