

Project Management and Reproducibility in RStudio: Part 2

Doug Joubert

2022-10-06

Table of contents

Configuration	3
Introduction.....	3
Assumptions for This Class	4
Markdown and Literate Programming	4
A History of Markdown.....	5
Quarto.....	6
How Quarto is Different From R Markdown	6
R Markdown Only Options	6
Quarto Only Options.....	7
Quarto Interfaces.....	7
Creating Quarto Documents	9
Quarto Content Structure	10
Layout Elements	11
Block Element	12
Inline Element.....	12
Metadata Element	12
Editor Options.....	13
Visual Editor	13
Source Editor.....	14
Basic Markdown	14
Metadata: YAML.....	14
Headers	15
Unnumbered Lists.....	15
Numbered Lists	16
Math (Block Element).....	16
Math: (Inline)	16
Links.....	17

Images	17
Text Formatting	18
References and further reading	18
Adding Code Blocks Using R	18
Inserting Code Chunks	19
Basic Anatomy of the Code Chunk	20
Running Code Chunks.....	23
Labeling Code Chunk	24
Execution Options	26
Code Chunk Options	27
Code Evaluation Option	27
Text Output Options	27
Figure Options	28
Caption and Alt Text.....	28
Rendering	29
Rendering in RStudio Using Knitr	29
System shell via quarto render	30
Navigating in the terminal	30
R console via quarto R package.....	31
Citations & Bibliographies.....	31
Bibliography Files	31
Supported Citation Sources	32
Linking to Citation Manager	32
Citation Syntax.....	32
Citation Style	33
Creating Your Reference List.....	33
Exporting Your Reference List from Endnote.....	36
Inserting Citations.....	38
Changing Citation Styles.....	40
Bibliography Generation	41
Resources.....	42
R Project Management	42
Quarto.....	42
Official Documentation & Quickstarts	42

Tutorials and Workshops.....	43
Licenses	43
References	43

Configuration

This class features exercises that will help you learn by doing. To prepare, please install the following on your machine:

- Install latest version of [RStudio](#), v2022.07.0-548 or later
- Install latest version of [Quarto](#) (v1.0.36 or greater)

Quarto is also available as a package. The **quarto** package provides an R interface to frequently used operations in the Quarto Command Line Interface (CLI). The package is not a requirement for using Quarto with R. Rather, it provides an R interface to common Quarto operations for users who prefer to work in the R console rather than a terminal, and for package authors that want to programmatically interface with Quarto.

```
# install.packages("quarto")
```

You will also need to install the [knitr](#) package. Knitr is a general-purpose tool for dynamic report generation in R using Literate Programming techniques.

```
# install.packages("knitr")
```

Other useful packages to install include the tidyverse and rmarkdown packages.

[rmarkdown](#), The rmarkdown package helps you create dynamic analysis documents that combine code, rendered output (such as figures).

[tidyverse](#), includes the packages that you're likely to use in everyday data analyses.

Introduction

This 75 minute class focuses on data and project management using R and RStudio. RStudio makes it possible to work on a complete research project in a more efficient, integrated, and organized manner. Participants will learn how to create reproducible documents that combine code, analysis, and narrative. This intermediate-level course is designed to be relevant to students from different disciplines. Some familiarity or experience in R and RStudio is recommended but not required. Students are encouraged to install [R](#) and [RStudio](#) before the webinar so that they can follow along with the instructor.

Upon completion of this class students should be able to:

- Create a markdown document using Quarto

- Distinguish between source and visual editors
- Add code chunks to markdown documents
- Create a bibliography and link it to a markdown document

Assumptions for This Class



You know R



You know a little bit of markdown



You want to learn about Quarto, the next-generation of markdown

Markdown and Literate Programming

Researchers and analysts tend to write a lot of reports, describing their analyses and results, for their collaborators or to document their work for future reference.

Ideally, you want your reports to be reproducible documents. For example, if an error is discovered, or if some additional subjects are added to the data, you can just re-compile the report and get the new or corrected results rather than having to reconstruct figures, paste them into a Word document, and hand-edit various detailed results.

Many new users begin by first writing a single R script containing all of their work, and then share the analysis by emailing the script and various graphs as attachments. But this can be cumbersome, requiring a lengthy discussion to explain which attachment was which result.

One option is using [R Markdown](#), a light-weight markup language for creating documents in multiple formats. When the document is processed by `knitr`, chunks of code will be executed, and graphs or other results will be inserted into the final document. This sort of idea has been called “literate programming”.

Additionally, the formatting of a markdown document is simple and easy to modify, allowing you to spend more time on your analyses instead of writing reports. You can use a single markdown file to both

- Save and execute code
- Generate high quality reports that can be shared with an audience

This [page](#) provides a nice overview of R markdown the top provide examples of R Markdown documents, as well as an in depth discussion of various R Markdown topics.

You may also find the following resources helpful:

- [The R Markdown Cheat sheet](#)
- [The R Markdown Reference Guide](#)
- [R Markdown Cookbook](#)

A History of Markdown

History adapted from (Bray et al., n.d.)

- 1984 **Literate Programming** proposed to combine text with code
- 2002 Sweave weaves together S/R and TEXTEX
- 2006 pandoc converts between different document formats
- 2012 knitr a next gen Sweave for R and Markdown
- 2014 knitr::pandoc added to leverage pandoc flexible outputs
- 2015 pandoc functionality moved into new rmarkdown
- 2018 R Markdown: A definite guide
- 2020 R Markdown Cookbook
- 2022 Quarto

Figure 1 is displaying the workflow for RMD.

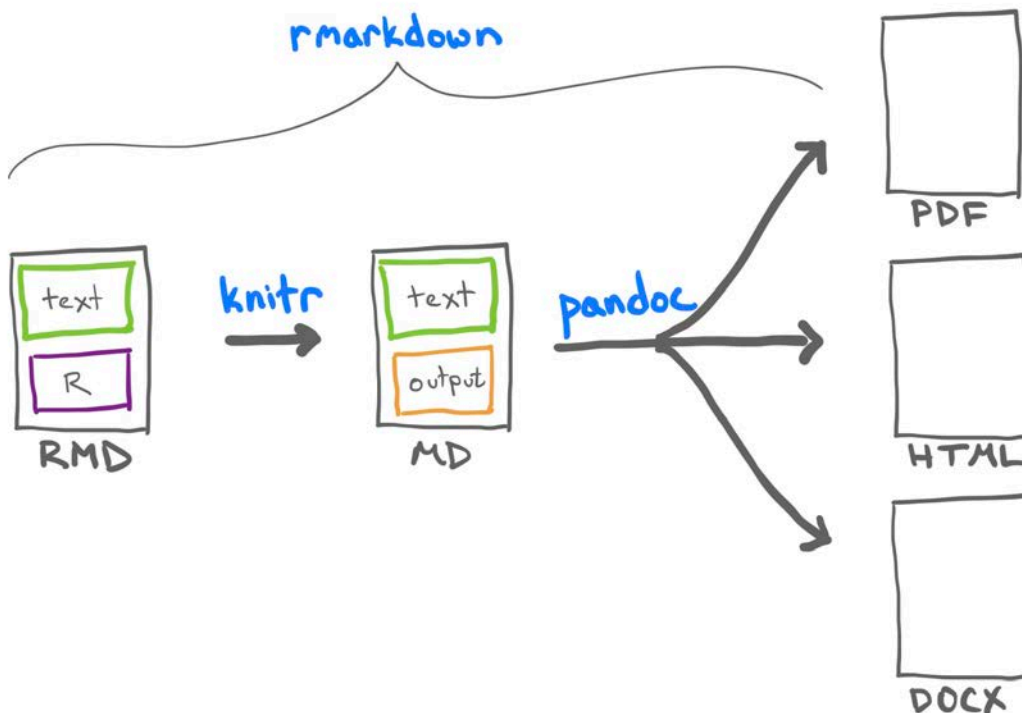


Figure 1: RMD transformation workflow.

Quarto

In August 2022, RStudio adopted [Quarto](#) as its supporting publishing platform. Quarto is an open-source scientific and technical publishing system built on [Pandoc](#). Quarto allows you to create dynamic content with [Python](#), [R](#), [Julia](#), and [Observable](#).

- Author documents as plain text markdown or [Jupyter](#) notebooks.
- Publish high-quality articles, reports, presentations, websites, blogs, and books in multiple formats.
- Author with scientific markdown, including equations, citations, crossrefs, and figure panels.

Figure 2 is displaying the workflow for Quarto.

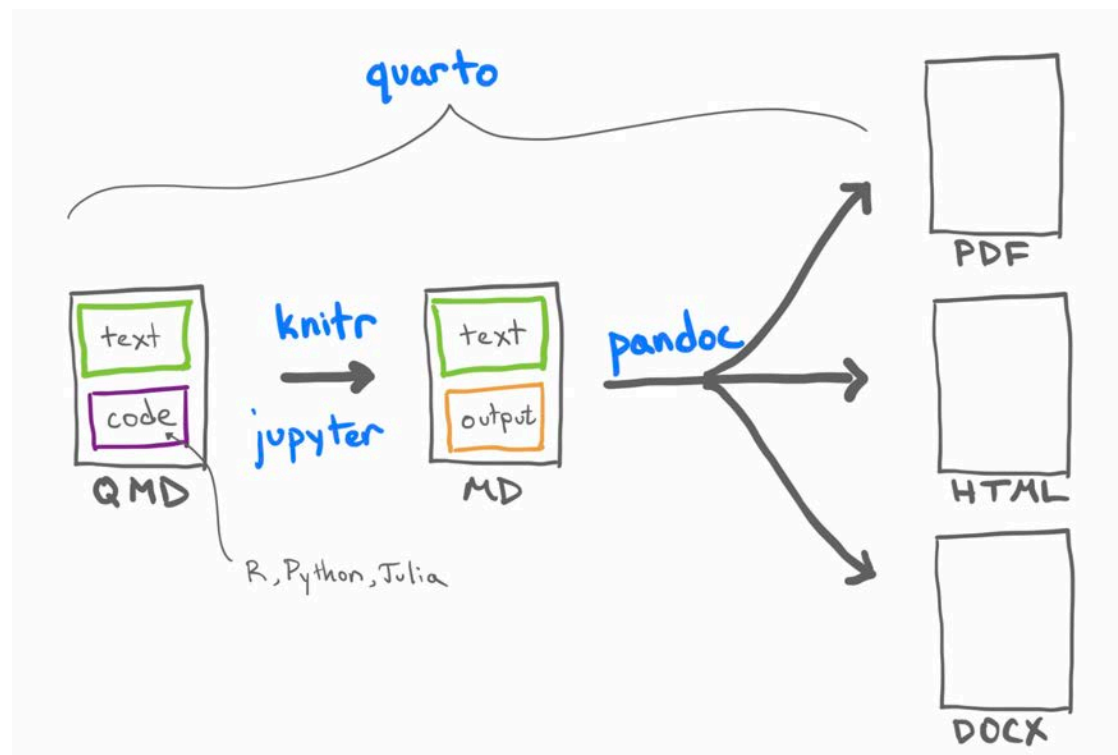


Figure 2: Quarto transformation workflow.

How Quarto is Different From R Markdown

- Quarto is compute-agnostic. R Markdown requires R.
- The ecosystem of R packages is replaced by a single framework.

R Markdown Only Options

- Access tools built around R Markdown (e.g. [blogdown](#)) that haven't yet been implemented in Quarto

- Heavy users of such tools may want to stick with R Markdown

Quarto Only Options

- Easier to organize appearance across documents
- Features (e.g. figures, tables) have better cross-format support
- Better cross referencing
- Up-to-date revealjs slides. reveal.js is an open source HTML presentation framework. It's a tool that enables anyone with a web browser to create fully-featured and beautiful presentations for free.
- Easier to customize websites and books with projects

Quarto Interfaces

In this class we will be creating and interacting with Quarto docs using RStudio [Figure 3].

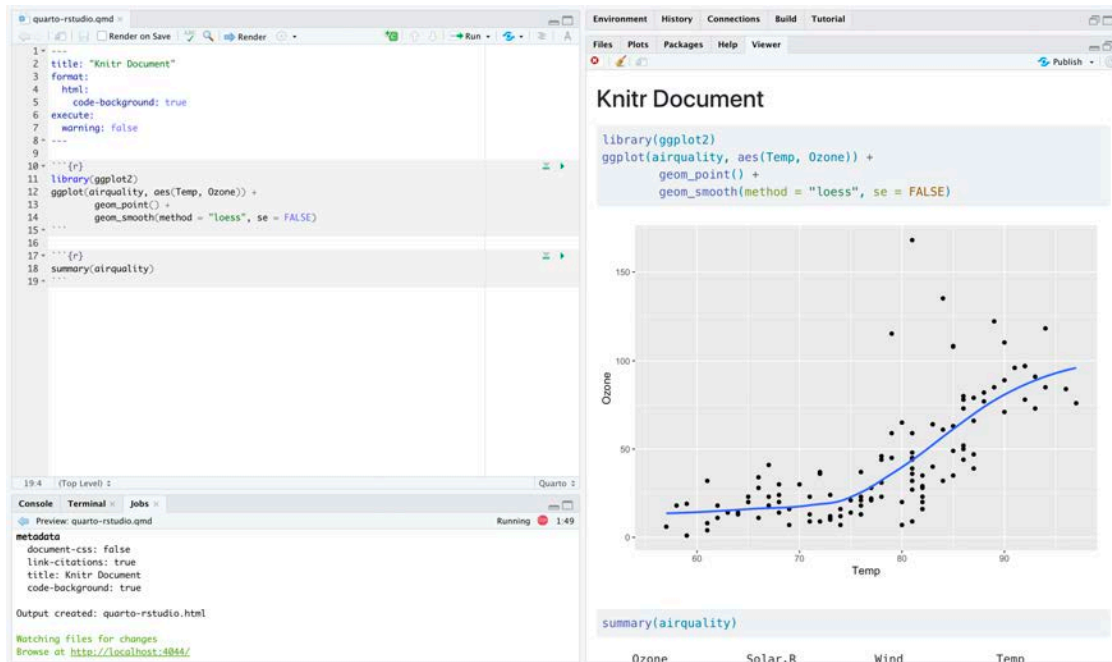


Figure 3: Quarto doc opened in RStudio.

However, you can create Quarto docs using Jupyter notebooks [Figure 4].

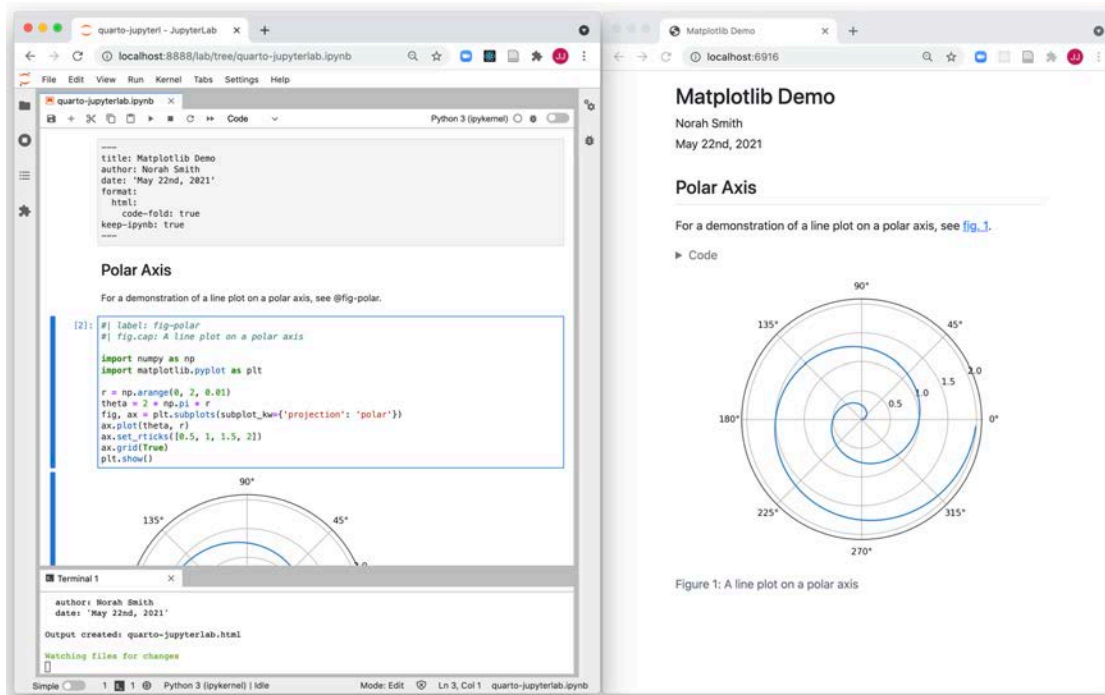


Figure 4: Quarto doc opened in a Jupyter notebook.

You can also create Quarto docs using a text editor. Figure 5 is a Quarto doc opened in Visual Studio Code editor. You might have also noticed that the code in Figure 5 is Python.

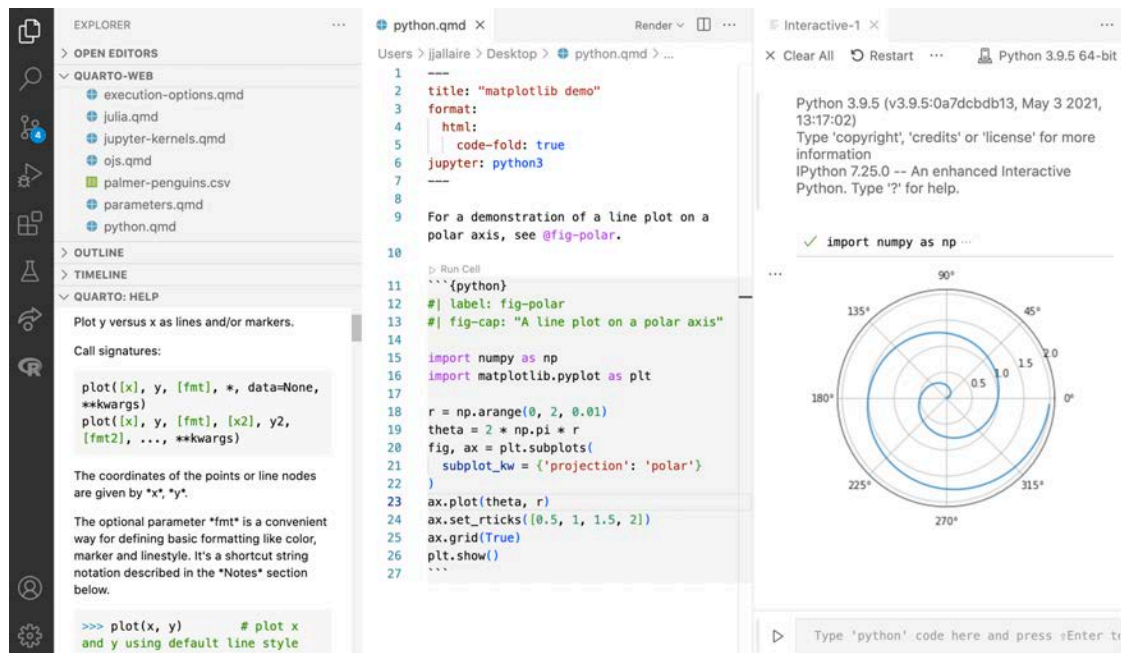


Figure 5: Quarto doc opened in Visual Studio Code editor.

Creating Quarto Documents

<https://rstudio-conf-2022.github.io/rmd-to-quarto/materials/2-polishing-documents/>

Quarto is a multi-language, next generation version of R Markdown from RStudio, with many new new features and capabilities. A Quarto document (.qmd) is a plain text file, that can be rendered to many different formats. Like R Markdown, Quarto uses [Knitr](#) to execute R code, and is therefore able to render most existing Rmd files without modification. Also, most .ipynb can be rendered as-is via Quarto.

In this section we are going to learn how to create generic block and inline elements, set classes and attributes, and practice using Quarto-specific elements in RStudio's visual editor. Although we do not cover this topic in this class, I have included some resources on how to customize the appearance of your documents with elementary CSS.

<https://quarto.org/docs/computations/r.html>

Let us create a new document by navigating to File > New File > Quarto Document [Figure 6].

- Add the title Proj-Mgmt-02.
- Add your name as author
- Leave Knitr as the render engine
- Enable the Visual Markdown Editor (more about this feature below)

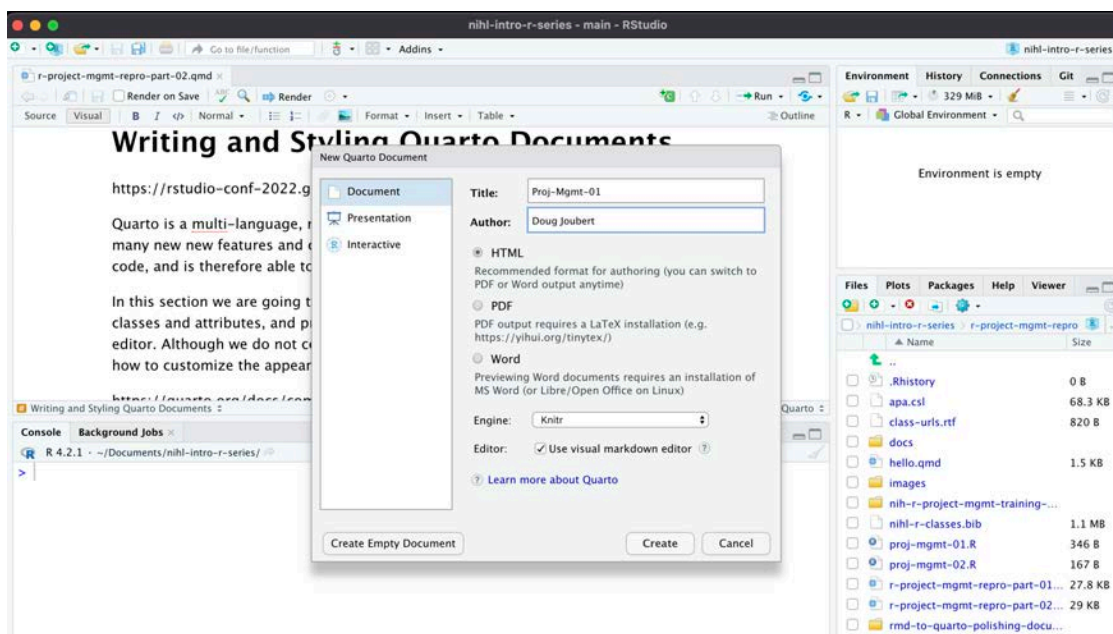


Figure 6: Creating a new Quarto document.

If you scroll down the doc that you just created you can see that the Quarto file is already populated with text and code [Figure 7].

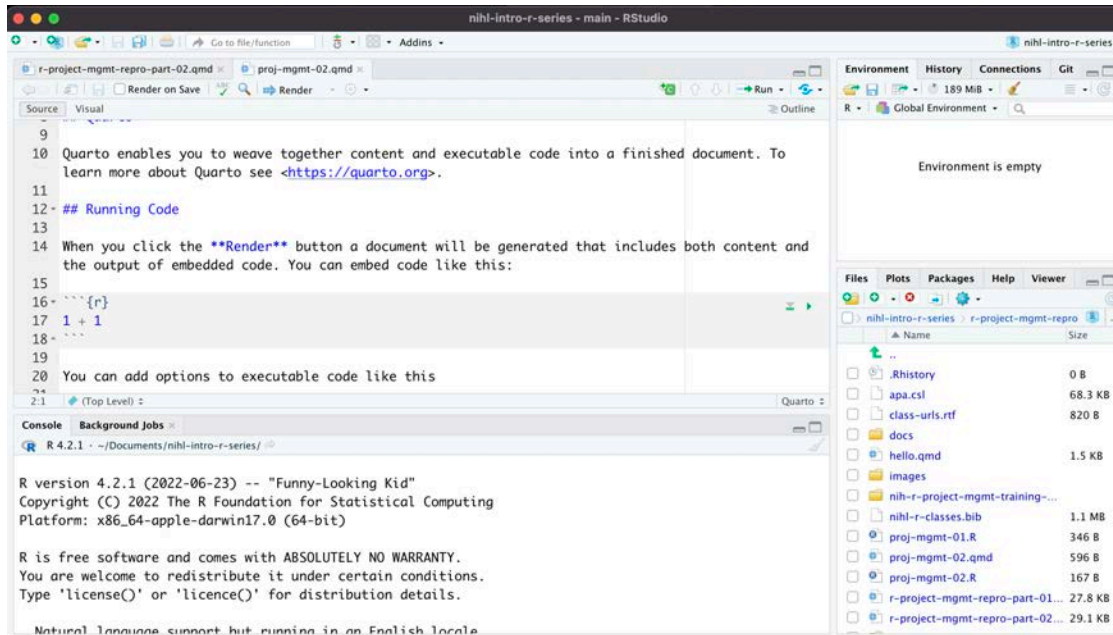


Figure 7: Default RMD document.

Let's first delete the generic text because we don't need it at this point. The only thing we need to keep is the Header:

```
---  
title: "Proj-Mgmt-01"  
author: "Doug Joubert"  
format: html  
editor: visual  
---
```

Quarto Content Structure

A Quarto document consists of content, structure, appearance, format [Figure 8].

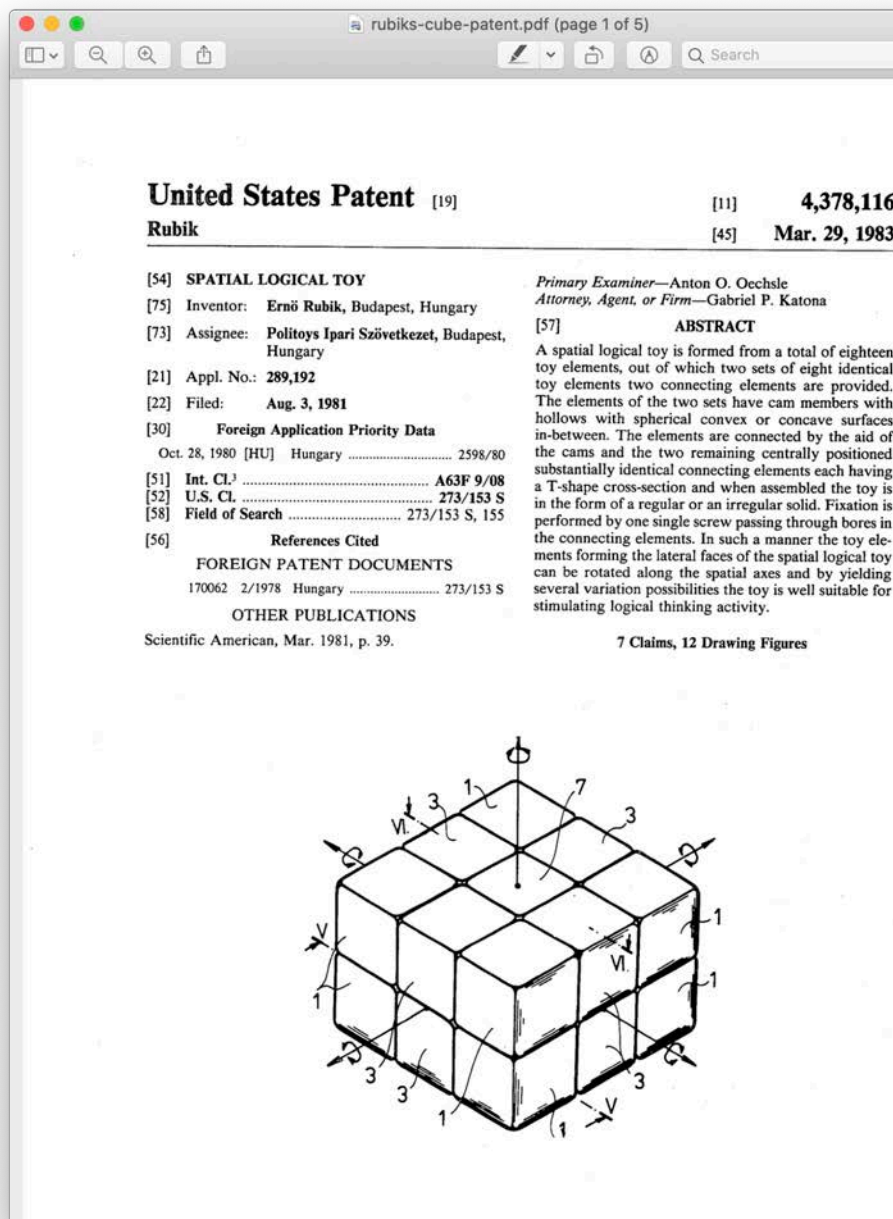


Figure 8: Sample quarto document.


Layout Elements

For **technical writing** or for authoring more **complex documents**, you have the ability to control the layout of documents. is a list of **block elements** that contain **inline elements** or other blocks, along with associated **metadata**.

- **Content:** text, code, graphics
- **Structure :** paragraphs, lists, emphasis, etc.
- **Appearance:** fonts, colors, layout
- **Format:** based on function
- **Layout (Advanced)**
 - Block
 - Inline

Block Element

A Block Element starts on a new line and followed by an empty line. An example of block elements is included in Figure 9.

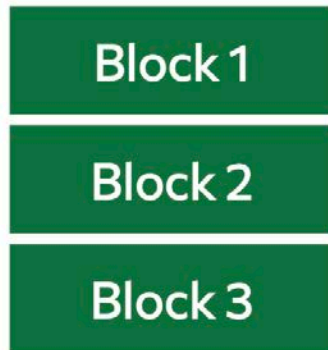


Examples:

- Paragraph
- Heading
- Image
- List

Figure 9: Example of Quarto block elements.

Inline Element

Inline elements modify content inline and are not followed by a new line. An example of inline elements are included in Figure 10.




Examples:

- Emphasis
- Link
- Footnote
- Citation

Figure 10: Inline element in a Quarto doc.

Metadata Element

Metadata elements contain ancillary info about the document's origin, format, look, etc. An example of a metadata elements are included in Figure 11.

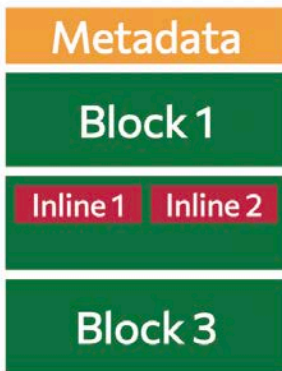

Examples:

- Author
- Keywords
- Character set
- Appearance/style

Figure 11: Example of Quarto metadata elements.

Editor Options

Visual Editor

The Quarto visual editor provides a [WYSIWYM](#) editing interface for all of Pandoc markdown, including tables, citations, cross-references, footnotes, divs/spans, definition lists, attributes, raw HTML/TeX, and more. The visual editor also includes support for executing code cells and viewing their output inline.

Current version of RStudio has the Source/Visual tabs on the Menu panel. If you are using an older version of RStudio, the visual editor is accessible through a small button on the far right side of the script/document pane in RStudio. The icon is a protractor, but from further away it just looks like a squiggly “A”. Figure 13 is displaying the Quarto document for this class, in visual mode.

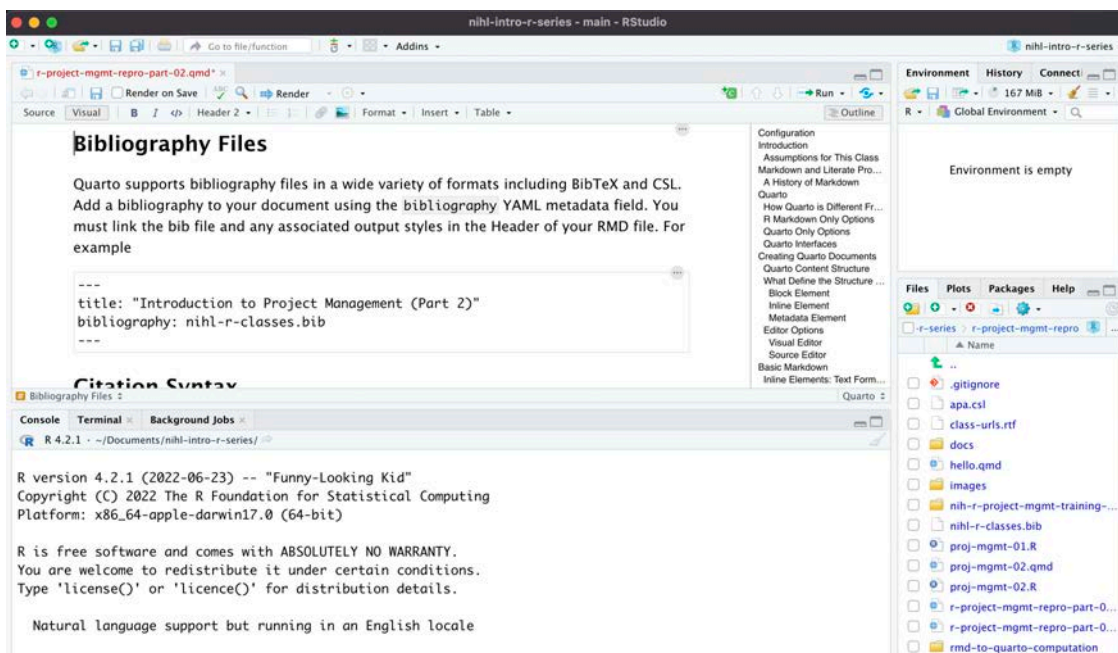


Figure 13: Markdown using the visual editor.

Source Editor

Figure 14 is showing the same document using the “source editor” mode. Notice the symbols scattered throughout the text are examples of R Markdown syntax.

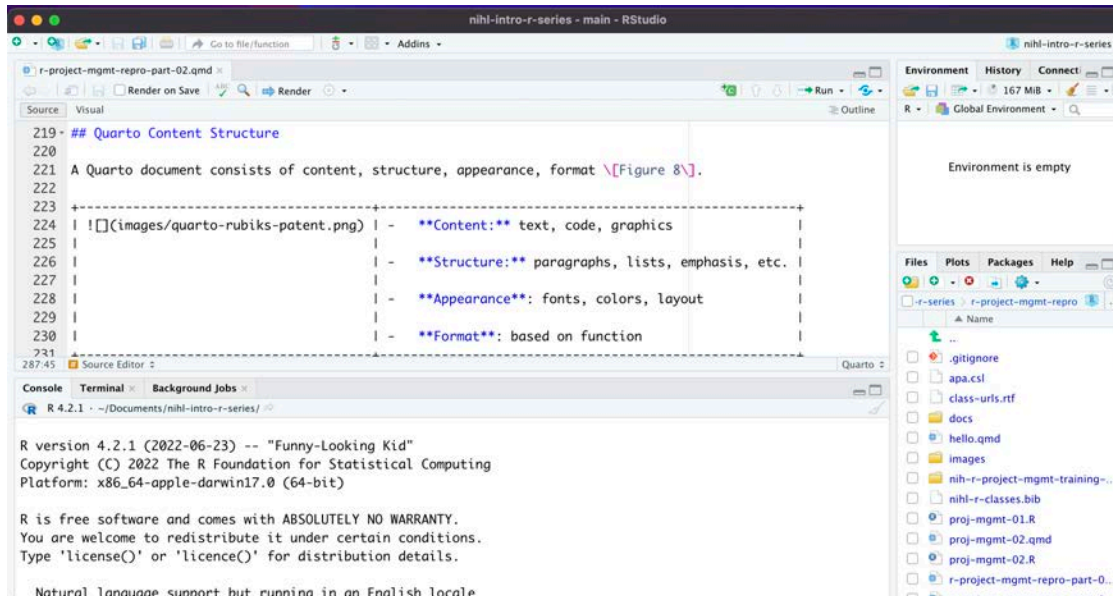


Figure 14: RMD file using Source Editor.

It is good to be aware of how to use the source editor, since you might have to fix a piece of broken markdown created using the Visual Editor.

Basic Markdown

Markdown is designed to be easy to write, and, even more importantly, easy to read. As previously mentioned, Quarto uses extended version of **Pandoc markdown** designed with multiple output formats in mind.

Metadata: YAML

Metadata can be included via YAML, which is human-readable data-serialization language. It is commonly used for configuration files and in applications where data is being stored or transmitted. For example the Header of a Quarto document:

```
---
title: "US Patent: A Spatial Toy"
author:
  - Erno Rubrik
  - Albert Einstein
format:
  html:
```



```
toc: true
abstract: |
  This is the abstract.

  It has two paragraphs.
---
```

There are some syntax rules:

- Set a single option key: value
- Strings with : must be quoted
- Include multiple values in a list with -
- Nest key-value pairs using indentation
- Multi-line strings follow |
- Multiple YAML blocks in a document will be merged

These two resources have more information about YAML

1. Pandoc's interpretation of [YAML metadata](#):
2. An overview of [YAML syntax](#):

Headers

You can make section headers of different sizes by initiating a line with some number of # symbols:

```
# Title
## Main section
### Sub-section
#### Sub-sub section
```

Unnumbered Lists

You can make a bullet list by writing a list with hyphens or asterisks, like this:

```
* bold with double-asterisks
* italics with underscores
* code-type font with backticks
```

or like this:

```
- bold with double-asterisks
- italics with underscores
- code-type font with backticks
```

Each will appear as:

- bold with double-asterisks
- italics with underscores
- code-type font with backticks

You can use whatever method you prefer, but *be consistent*. This maintains the readability of your code.

Numbered Lists

You can make a numbered list by just using numbers.

1. bold with double-asterisks
2. italics with underscores
3. code-type font with backticks

This will appear as:

1. bold with double-asterisks
2. italics with underscores
3. code-type font with back ticks

Pandoc gives you a lot of control over lists, including *nesting*, *definition lists*, *blocks in lists*, and *example lists*. The Pandoc [manual](#) has detailed information about lists.

Math (Block Element)

When using math as Block Elements, math use \$\$ delimiters. The delimiters may be separated from the formula by white space. No blank lines between the opening and closing \$\$ delimiters. For example:

A larger equation:

$$f(x) = \sqrt{\frac{\tau}{2\pi}} e^{-\tau(x-\mu)^2/2}$$

Math: (Inline)

Figure 15 is displaying the markdown that generates the math displayed below.

```
## Inline Elements: Math
```

```
The area of a circle is $A = pi r^2$, where $r$ is the radius and $pi$ is the constant
$3.141592\ldots$.
```

Figure 15: Inline element: math markdown.

The area of a circle is $A = \pi r^2$, where r is the radius and π is the constant 3.141592

TeX math occurs between two \$. Opening \$ must have a non-space character immediately to its right, while the closing \$ must have a non-space character immediately to its left, and must not be followed immediately by a digit.


Links

You can embed links with names [Links in Quarto](#)


You can also use direct links <https://quarto.org/docs/reference/formats/html.html#links>

Images

Linking to images is very similar, except that you start with a bang ! This is an example of an inline link to an image of an Elephant

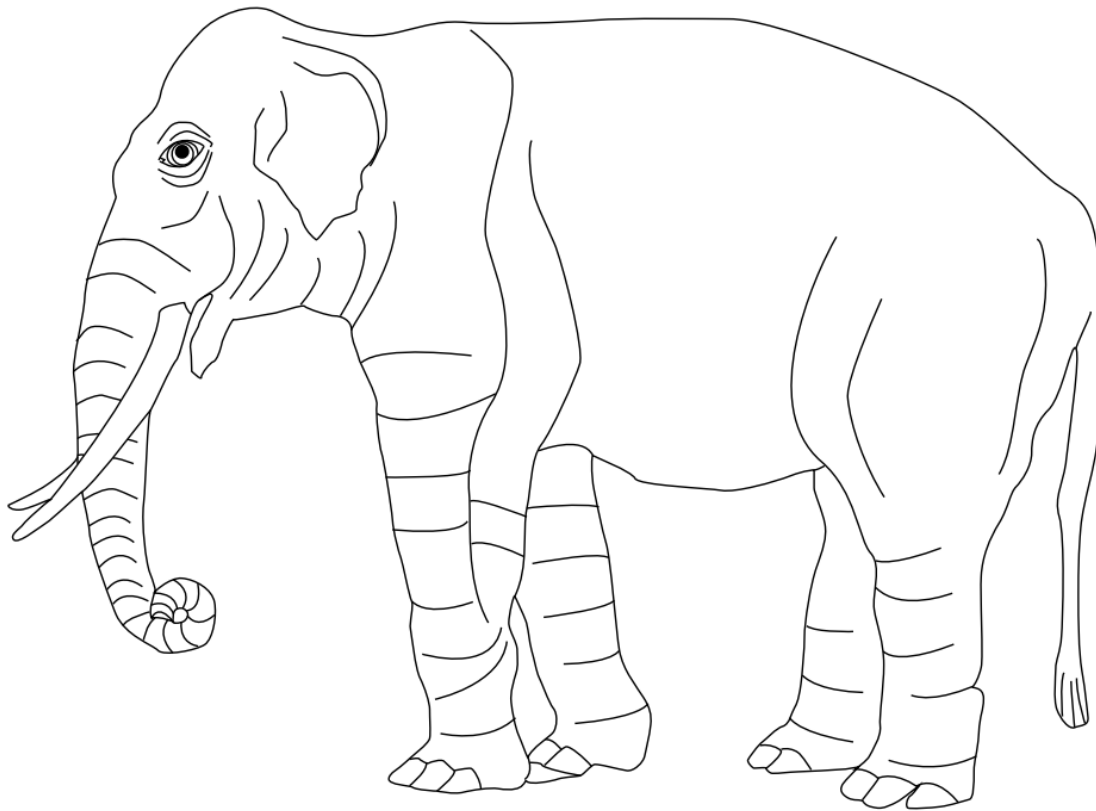

Images on their own line become a block:

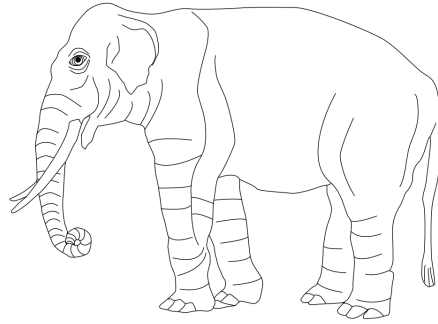

Elephant

Text Formatting

Markdown Syntax	Output
<code>*italics*</code> and <code>**bold**</code>	<i>italics</i> and bold
<code>superscript^2^</code> / <code>subscript~2~</code>	superscript ² / subscript ₂
<code>~~strikethrough~~</code>	strike through
<code>`verbatim code`</code>	verbatim code

References and further reading

- [A Brief History of R Markdown](#): a presentation by Yihui Xie in 2021.
- [Pandoc documentation on type references](#): this section documents the tools needed to write Lua filters but included in this is a compendium of the different block and inline elements recognized by pandoc.
- [Block and Inline Elements](#): from Client-side Web Development by Ross and Freeman. Provides clear description of elements in the setting of HTML.
- [Command Line Essentials](#): a short primer on how to navigate through a file structure at the command line.sla

The [Polishing Documents](#) section of the RMD to Quarto workshop has some great information. However, I think it would work best as an advanced class.

Adding Code Blocks Using R

Quarto is a multi-language, next generation version of R Markdown from RStudio, with many new new features and capabilities. Like R Markdown, Quarto uses [Knitr](#) to execute R code, and is therefore able to render most existing Rmd files without modification.

This section will only focus on code blocks [using R](#). Quarto [documentation](#) includes options for other languages. We'll start by covering the basics of Quarto, then delve into the differences between Quarto and R Markdown in the sections on [Chunk Options](#) and [Output](#)

Formats below. Let us revisit the Quarto workflow that we saw in Figure 2, focusing on the code block [Figure 17].

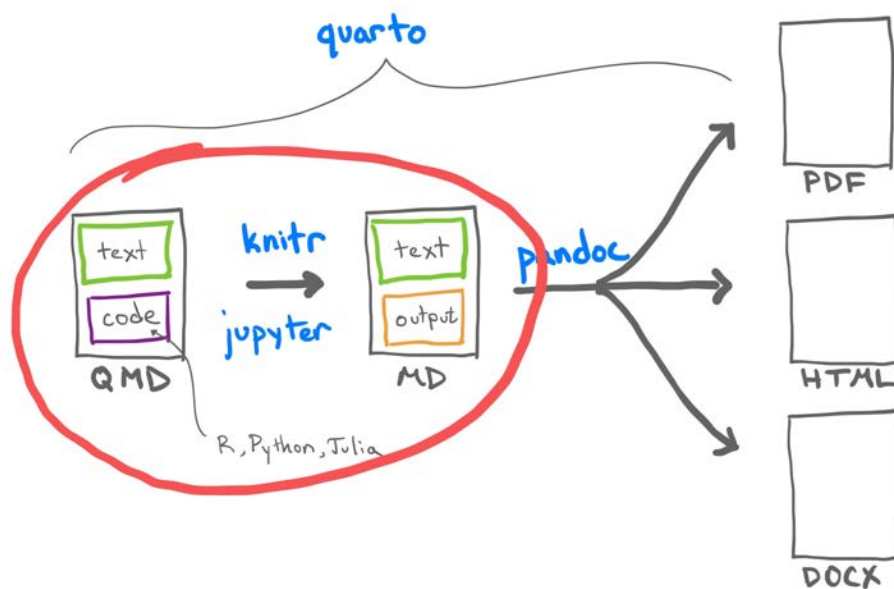


Figure 17: Quarto workflow, with focus on code blocks and conversion of code.

Inserting Code Chunks

You can quickly insert chunks like these into your file with:

- the keyboard shortcut Ctrl + Alt + I (OS X: Cmd + Option + I)
- the Add Chunk command in the editor toolbar
- or by typing the chunk delimiters `{r}` and ````.`

The most basic (and empty) code chunk looks like this [Figure 18]



Figure 18: Code chunk in Source-mode and in Visual-mode.

Although I am demonstrating using R, it's possible to use other programming or markup languages. For example, we have seen that we can use LaTeX code for equations. You can also use python and a handful of other languages [Figure 19].

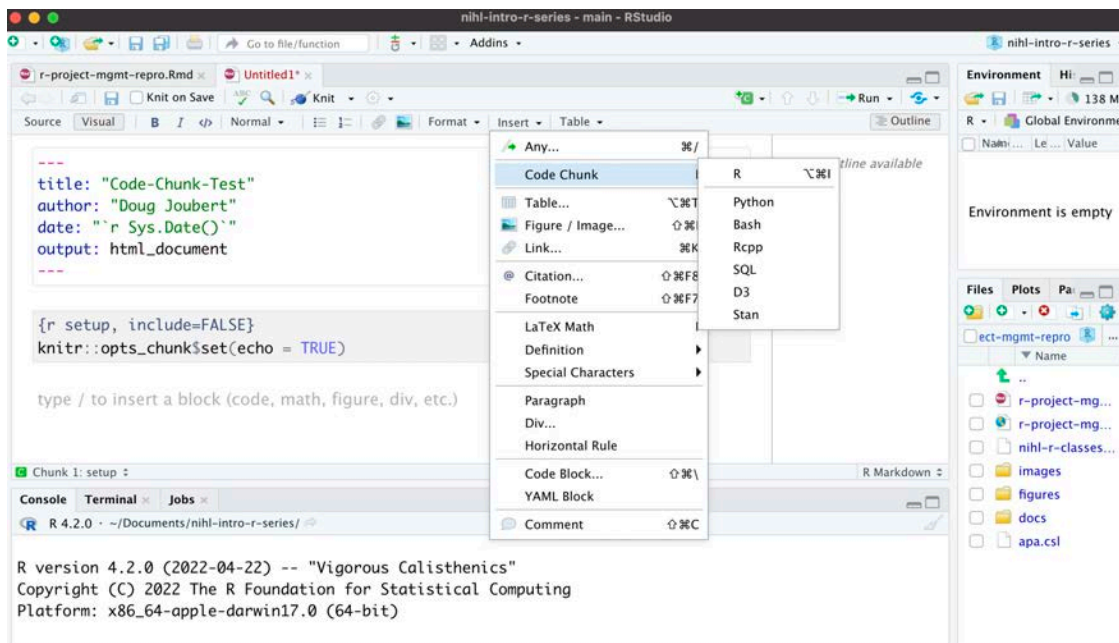


Figure 19: Code options available in markdown.

Basic Anatomy of the Code Chunk


Code blocks that use braces around the language name (e.g. {r}) are executable, and will be run by Quarto during render. Here is a simple example:

```
library(ggplot2)
ggplot(airquality, aes(Temp, Ozone)) +
  geom_point() +
  geom_smooth(method = "loess"
)
```

`geom_smooth()` using formula 'y ~ x'

Warning: Removed 37 rows containing non-finite values (stat_smooth).

Warning: Removed 37 rows containing missing values (geom_point).

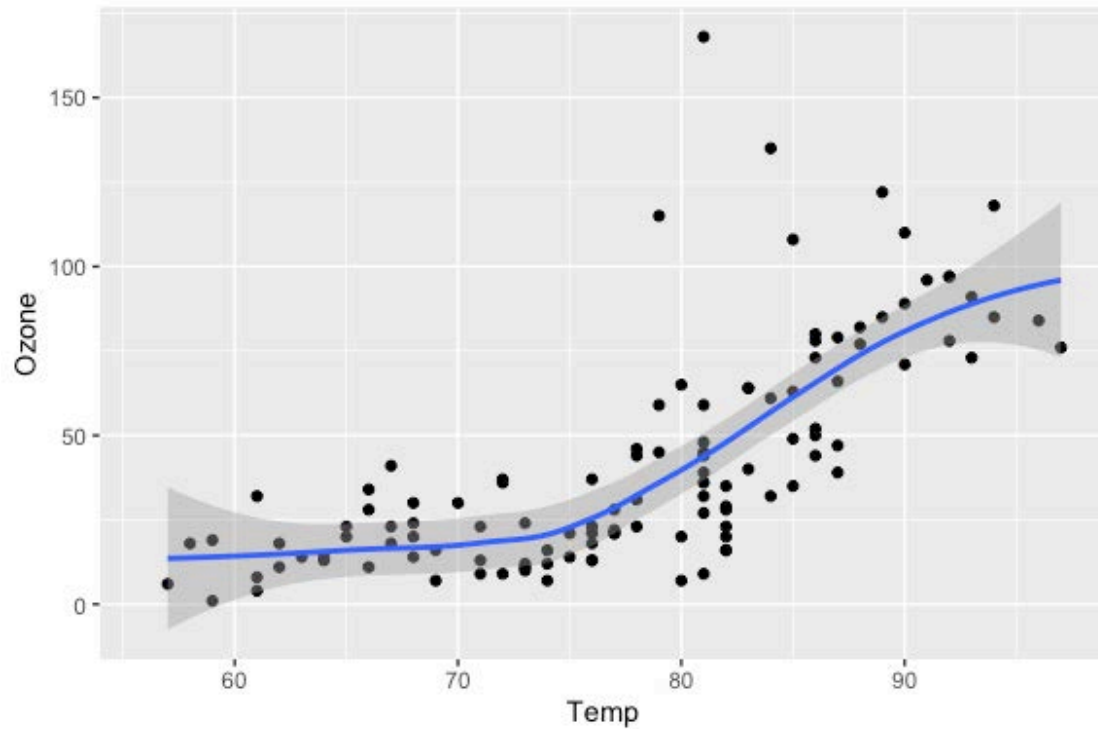

{#fig-

airquality 01}

You might have noticed that there are some special comments at the top of the code block. These comments use `#|` (the hash pipe!). `#|` provides the cell options. When the document is rendered, this code chunk will look like this [Figure 20]:

```
library(ggplot2)
ggplot(airquality, aes(Temp, Ozone)) +
  geom_point() +
  geom_smooth(method = "loess"
  )
```

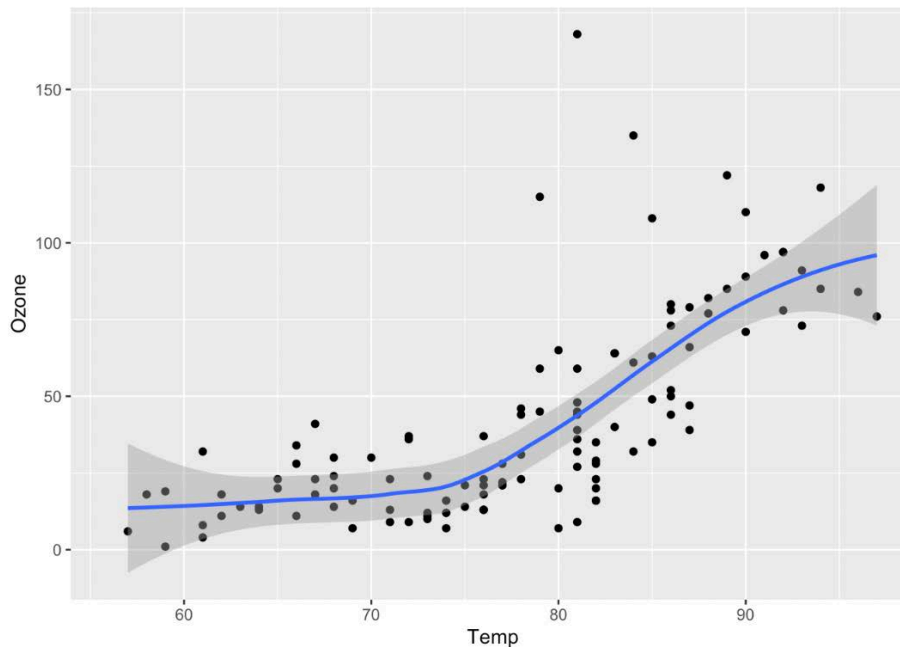


Figure 1: Temperature and ozone level.

Figure 20: Rendered version of a code-chunk.

While it is possible to use R chunks options, hash pipe options are more portable across computational engines. Also, don't forget the "tab-complete" option that is built into RStudio [Figure 21].

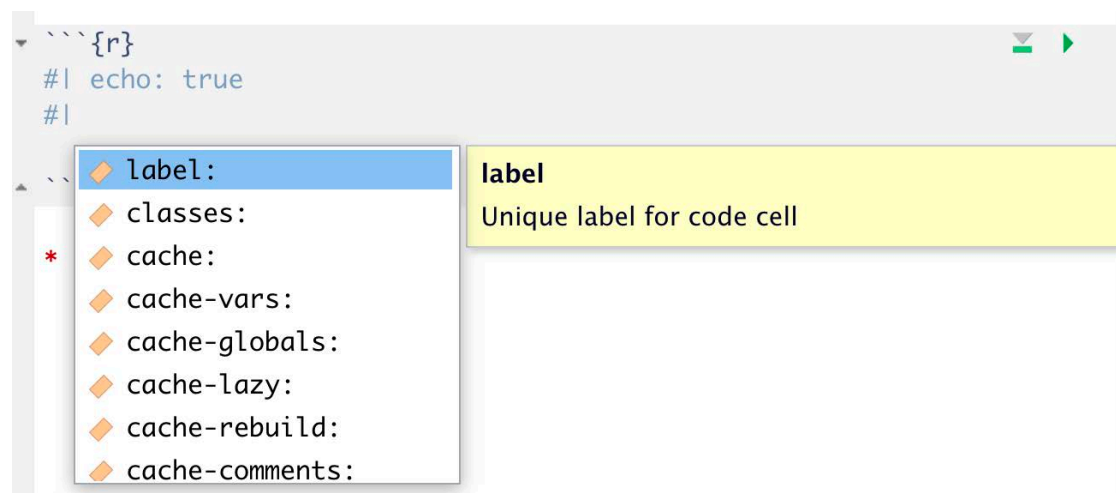


Figure 21: Example of tab-complete feature in RStudio.

Running Code Chunks

There are 3 main options for running and debugging code that don't require us to wait for the file to render.

- 1) Run from code chunk (green play button on the right top corner). This allows us to run one specific code chunk [Figure 22].



```

```{r}
This is a example of a code chunk to read in some data
library(tidyverse)
read_data <- "../raw-data/combined.csv"
```

```

Figure 22: Running a code chunk from the code-box.

2. Run menu, which gives more options for running code chunks including the current one, the next one, all chunks, etc [Figure 23].

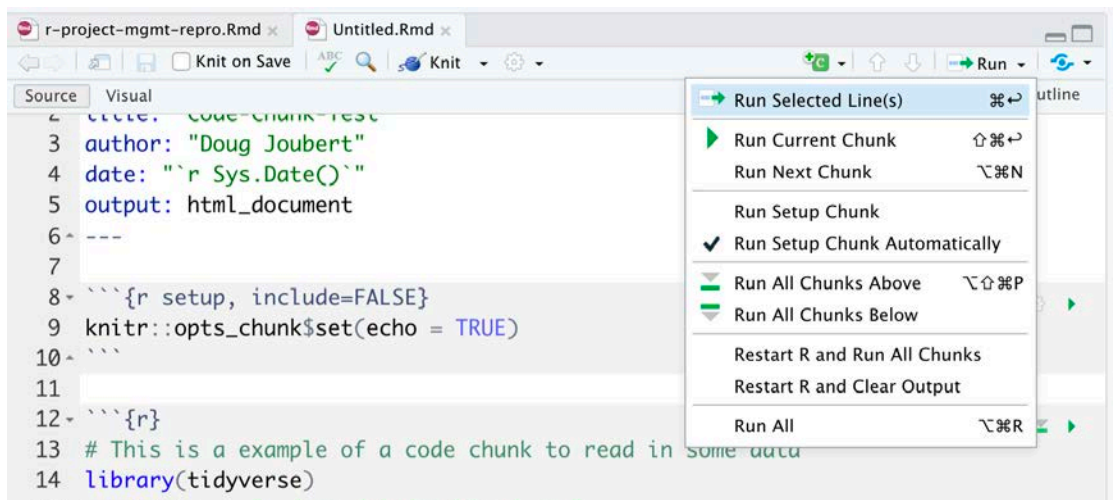


Figure 23: Running a code chunk from the Code-Chunk menu.

3. Using keyboard shortcuts

| Task | Windows & Linux | macOS |
|----------------------|------------------|---------------------|
| Create a code chunk | Ctrl + Alt + I | Cmd + Option + I |
| Run all chunks above | Ctrl+Alt+P | Command+Option+P |
| Run current chunk | Ctrl+Alt+C | Command+Option+C |
| Run current chunk | Ctrl+Shift+Enter | Command+Shift+Enter |
| Run next chunk | Ctrl+Alt+N | Command+Option+N |
| Run all chunks | Ctrl+Alt+R | Command+Option+R |

| Task | Windows & Linux | macOS |
|----------------------------|-----------------|----------------|
| Go to next chunk/title | Ctrl+PgDown | Command+PgDown |
| Go to previous chunk/title | Ctrl+PgUp | Command+PgUp |

Labeling Code Chunk

While not necessary for running your code, it is good practice to give a name to each code chunk because it gives the chunk a unique identifier which allows for more advanced options (such as cross-referencing) to work with your rmd files later on:

```
{r chunk-name}
```

Some things to keep in mind

- The chunk name is the only value other than r in the code chunk options that doesn't require a tag (i.e. echo =)
- The chunk label has to be unique (i.e. you can't use the the same name for multiple chunks)

We'll see in a bit where this code chunk label comes in handy. But, for now let's go back and give our first code chunk a name:


1. Creating Air Quality Figure
2. Then, run the code-chunk

```
library(ggplot2)
ggplot(airquality, aes(Temp, Ozone)) +
  geom_point() +
  geom_smooth(method = "loess")
```

```
`geom_smooth()` using formula 'y ~ x'
```

```
Warning: Removed 37 rows containing non-finite values (stat_smooth).
```

```
Warning: Removed 37 rows containing missing values (geom_point).
```

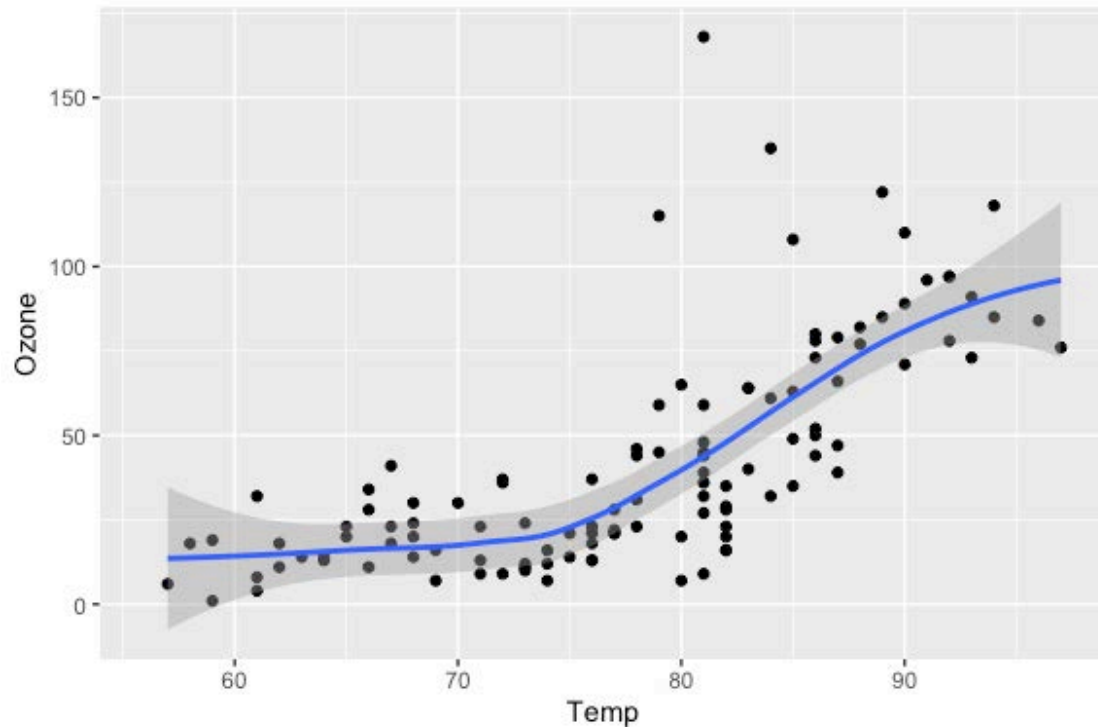{#fig-

airquality 02}

Figure 24 is displaying the output of the code-chunk. Can you explain what is happening in the console?

```

14
15- {r Importing our Data}
16 # This is an example of a code chunk to read in some data
17 library(tidyverse)
18 read_data <- "../raw-data/combined.csv"
19-

Registered S3 methods overwritten by 'dplyr':
  method      from
print.tbl_lazy print.tbl_sql

Attaching packages: tidyverse 1.3.1
✔ ggplot2 3.3.6   ✔ purrr  0.3.4
✔ tibble  3.1.7   ✔ dplyr  1.0.9
✔ tidyr   1.2.0   ✔ stringr 1.4.0
✔ readr   2.1.2   ✔ forcats 0.5.1

Conflicts:
✔ dplyr::filter() masks stats::filter()

15:25  Chunk 2: Importing our Data 2
R Markdown

```

Figure 24: Output from our first code chunk.

Execution Options

There are a wide variety of options available for customizing output from executed code. All of these options can be specified globally. We have already seen an example of this in the YAML header:


```
---  
title: "Project Management and Reproducibility in RStudio: Part 2"  
author: "Doug Joubert"  
date: "2022-10-06"  
format: docx  
toc: true  
toc-location: body  
fig-width: 6  
fig-height: 4  
bibliography: nihl-r-classes.bib  
csl: apa.csl  
---
```

Options can also be specified in specific code-blocks.

```
`geom_smooth()` using formula 'y ~ x'
```

Warning: Removed 37 rows containing non-finite values (stat_smooth).

Warning: Removed 37 rows containing missing values (geom_point).

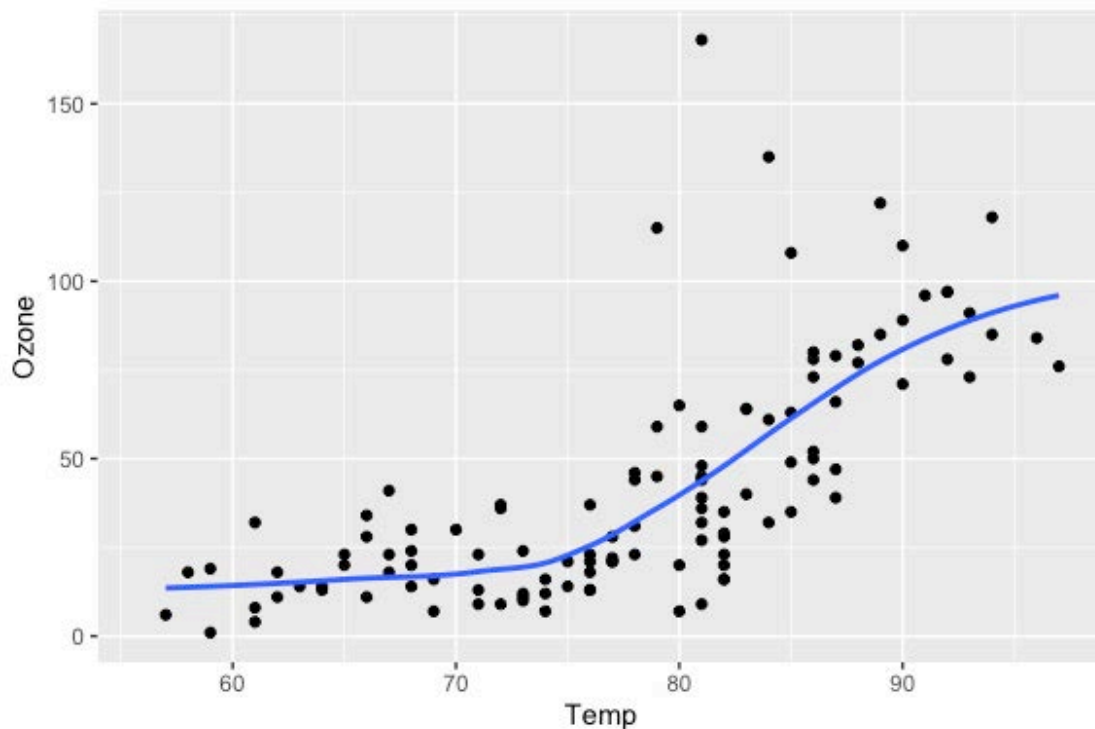

| Ozone | Solar.R | Wind | Temp |
|----------------|---------------|----------------|---------------|
| Min. : 1.00 | Min. : 7.0 | Min. : 1.700 | Min. :56.00 |
| 1st Qu.: 18.00 | 1st Qu.:115.8 | 1st Qu.: 7.400 | 1st Qu.:72.00 |
| Median : 31.50 | Median :205.0 | Median : 9.700 | Median :79.00 |
| Mean : 42.13 | Mean :185.9 | Mean : 9.958 | Mean :77.88 |
| 3rd Qu.: 63.25 | 3rd Qu.:258.8 | 3rd Qu.:11.500 | 3rd Qu.:85.00 |
| Max. :168.00 | Max. :334.0 | Max. :20.700 | Max. :97.00 |
| NA's :37 | NA's :7 | | |
| Month | Day | | |
| Min. :5.000 | Min. : 1.0 | | |
| 1st Qu.:6.000 | 1st Qu.: 8.0 | | |
| Median :7.000 | Median :16.0 | | |
| Mean :6.993 | Mean :15.8 | | |
| 3rd Qu.:8.000 | 3rd Qu.:23.0 | | |
| Max. :9.000 | Max. :31.0 | | |

Code Chunk Options

There are over 50 different code chunk options. Wow, that is a lot. Obviously we will not go over all of them, but they fall into several larger categories including: code evaluation, text output, code style, cache options, plot output and animation.

You can find a complete list of code chunk options on Knitr developer, Yihui Xie's, [online guide to knitr](#). Or, you can find a brief list of all options on the R Markdown Reference guide on page 3 accessible through the RStudio Interface by navigating to the main menu bar Help > Cheat Sheets > R Markdown Reference Guide.

The chunk name is the only value other than `r` in the code chunk options that doesn't require a tag (i.e. the "`= VALUE`" part of option `= VALUE`). So chunk options will always require a tag, and the syntax will be in the form:

```
{r chunk-label, option = VALUE}
```

The option always follows the code chunk label (don't forget to add a `,` after the label either).

Code Evaluation Option

| Option | Description |
|----------------------|---|
| <code>include</code> | Catch all for preventing any output (code or results) from being included (e.g. <code>include: false</code> suppresses all output from the code block). |

Text Output Options

| Option | Description |
|-------------------|--|
| <code>eval</code> | Evaluate the code chunk (if <code>false</code> , just echos the code into the output). |
| <code>echo</code> | Include the source code in output |

| Option | Description |
|---------|---|
| output | Include the results of executing the code in the output (true, false, or asis to indicate that the output is raw markdown and should not have any of Quarto's standard enclosing markdown). |
| warning | Include warnings in the output. |
| error | Include errors in the output. |

Figure Options

There are a number of ways to control the default width and height of figures generated from code. Quarto sets a default width and height for figures appropriate to the target output format. Here are the defaults (expressed in inches):

| Format | Default |
|-------------------------|-----------|
| Default | 7 x 5 |
| HTML Slides | 9.5 x 6.5 |
| HTML Slides (reveal.js) | 9 x 5 |
| PDF | 5.5 x 3.5 |
| PDF Slides (Beamer) | 10 x 7 |
| PowerPoint | 7.5 x 5.5 |
| MS Word, ODT, RTF | 5 x 4 |
| EPUB | 5 x 4 |
| Hugo | 8 x 5 |

Defaults were chosen to provide well proportioned figures

You can change the default sizes using the `fig-width` and `fig-height` options. For example:

```
---
title: "My Document"
format:
  html:
    fig-width: 8
    fig-height: 6
  pdf:
    fig-width: 7
    fig-height: 5
---
```


Caption and Alt Text

You can specify the caption and alt text for figures generated from code using the `fig-cap` and `fig-alt` options. For example, I added these options to a ggplot code cell that creates a plot:

```
library(palmerpenguins)
library(ggplot2)

ggplot(penguins, aes(x = bill_length_mm,
                     y = bill_depth_mm,
                     col = island)) +
  geom_point() +
  labs(x = "Bill Length",
       y = "Bill Depth")
```

Warning: Removed 2 rows containing missing values (geom_point).

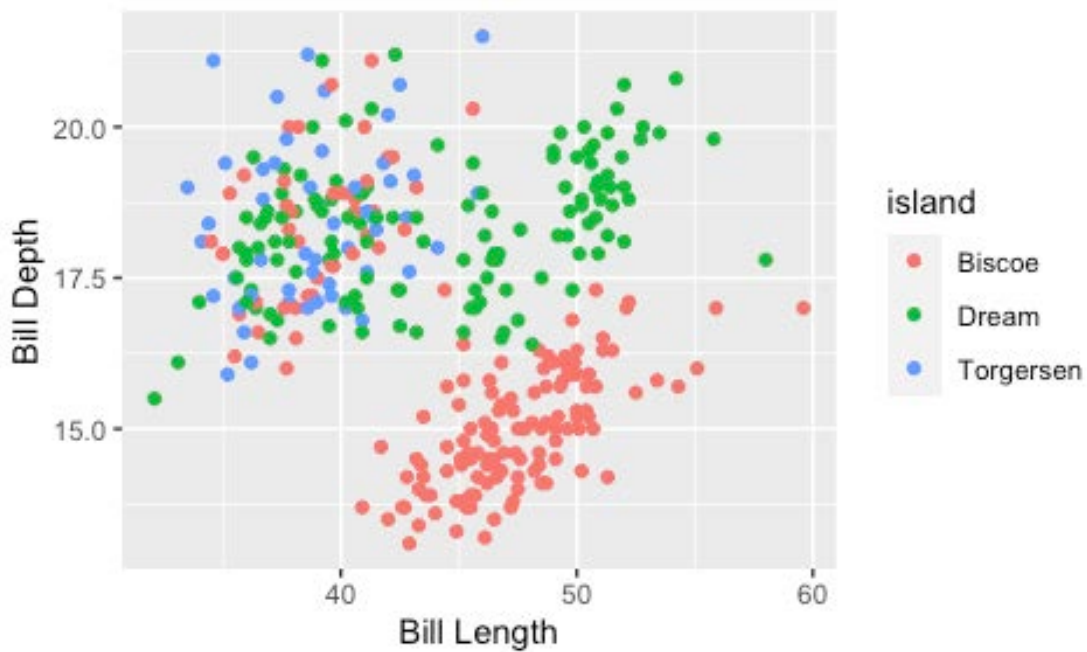

Penguin length and depth

Rendering

There are three methods for rendering a Quarto document.

1. Render in RStudio
2. System shell via quarto render
3. R console via quarto R package

Rendering in RStudio Using Knitr

RStudio is integrated with R, knitr and Quarto

- Render button

- Visual Editor
- Preview of output

You should always use RStudio 2022.07 and beyond which comes bundled with a production-stable release of Quarto. Quarto uses the [Knitr](#) engine just like RMarkdown to execute R code natively. Quarto can also use the Jupyter engine to natively execute Julia, Python, or other languages that Jupyter supports.

Figure 25 is highlighting the **Render** button to preview documents as you edit them.

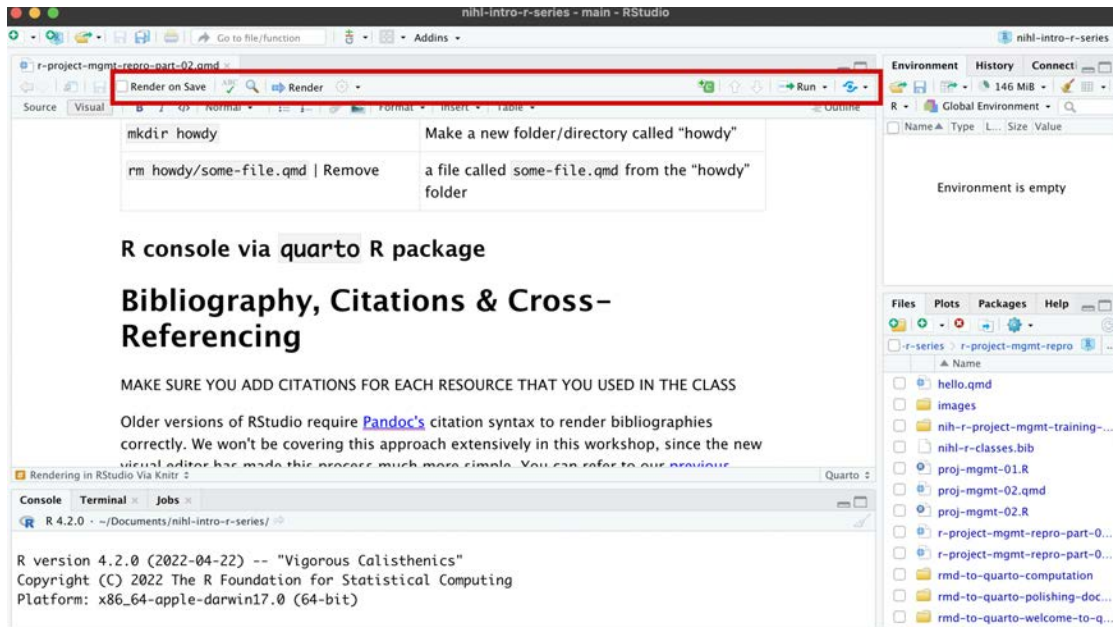


Figure 25: Rendering Quarto documents in RStudio.


System shell via quarto render

Navigating in the terminal

Because Quarto is also a command line interface (CLI), you can also render via the terminal. The table below provides some common commands.

| Command | Action |
|--|---|
| <code>pwd</code> | Print name of current working directory |
| <code>cd</code> | Change current working directory |
| <code>ls</code> | List directory contents |
| <code>quarto --help</code> | Return quarto help docs |
| <code>mkdir howdy</code> | Make a new folder/directory called "howdy" |
| <code>rm howdy/some-file.qmd Remove</code> | a file called some-file.qmd from the "howdy" folder |

A great overview of using the command line and navigating files/directories is available via the [Data Carpentries](https://tldr.oostera.io) or a great interactive tool for understanding commands: <https://tldr.oostera.io>.

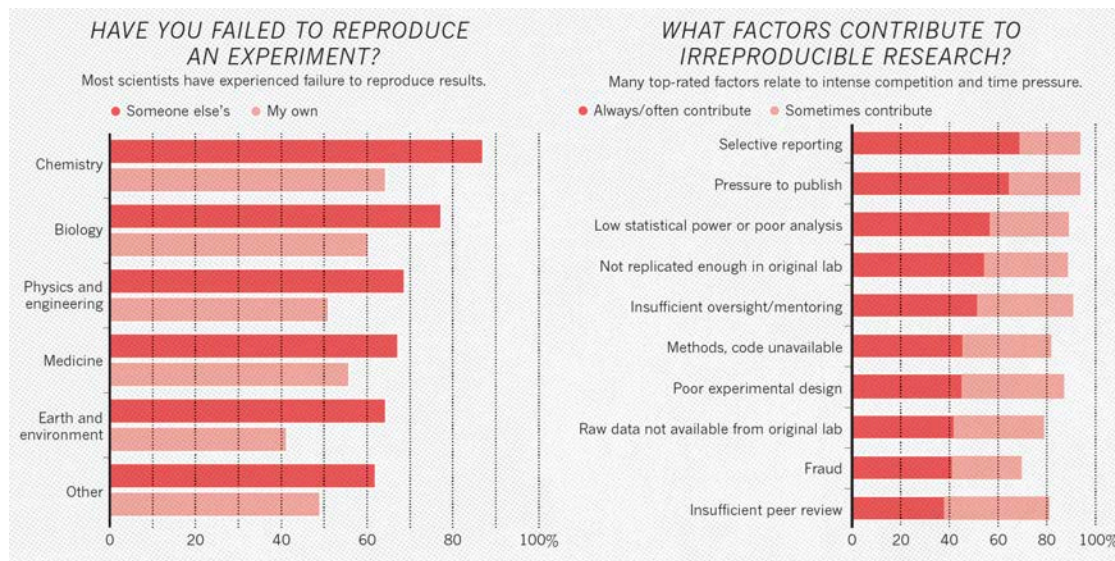

R console via quarto R package

You can render from the R Console by installing the [Quarto R package](#). To install the R package:

```
# install.packages("quarto")
```

I have commented out the code since I already have the package installed. You can learn more about the package from the Quarto resources [page](#), or from the GitHub page.

Citations & Bibliographies

Quarto uses Pandoc to automatically generate citations and a bibliography. To use this capability, you will need:

- A quarto document formatted with citations (see [Citation Markdown](#)).
- A bibliographic data source, for example a BibTeX (.bib) file.
- Optionally, a CSL file which specifies the formatting to use when generating the citations and bibliography.

Bibliography Files

Quarto supports multiple bibliography formats including BibTeX and CSL. Bibliographies are linked from the Header YAML metadata field. You must also link any associated output styles. For example

```

---
title: "Introduction to Project Management: Part 2"
bibliography: nihl-r-classes.bib
---

```

Supported Citation Sources


Citations can be inserted from a variety of sources:

- Bibliography DOI (Document Object Identifier) references
- Searches of [Crossref](#), [DataCite](#), or [PubMed](#), or [Zotero](#)

Linking to Citation Manager

[Zotero](#) is a free and open-source reference manager. Zotero must be installed locally to use it. RStudio will automatically link to Zotero.

Zotero settings are accessed from **Options>R Markdown>Citations**

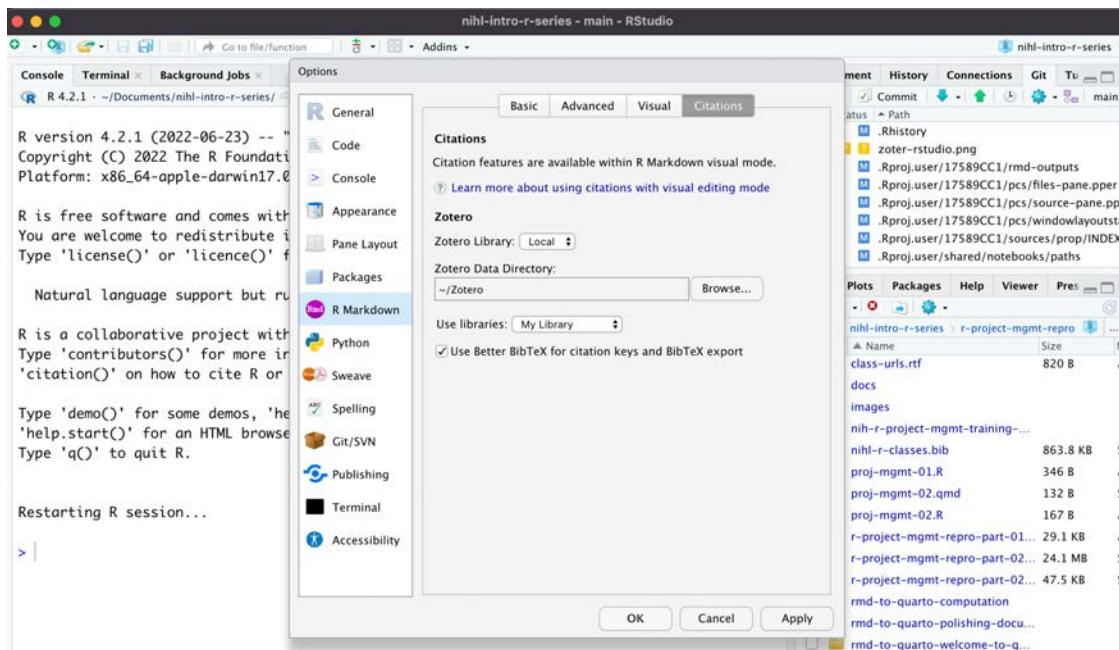

Figure

XX: Accessing citation options in RStudio.

Citation Syntax

Quarto uses the standard Pandoc for citations. Citations go inside square brackets and are separated by semicolons. For example:

[@citation]

Since I will be exporting my references from Endnote, I will not go over the citation metadata. You can provide citation data for Quarto documents in the document front

matter. The citation options are based upon the [Citation Style Language \(CSL\) specification for items](#), but as YAML (rather than XML). Consult this [page](#) for more information.

Citation Style

By default, Pandoc will use the [Chicago Manual of Style](#) author-date format. However, you can specify a custom formatting using CSL [Citation Style Language](#). You must provide a path to a CSL file using the csl metadata field in your document, for example:

```
---  
title: "My Document"  
bibliography: references.bib  
csl: nature.csl  
---
```

You can find CSL files at the [CSL Project](#). You can browse the list of more than 8,500 Creative Commons CSL definitions in the CSL Project's [central repository](#) or Zotero's [style repository](#).

Creating Your Reference List

You need to have a list of references saved to a [.bib file](#) before you can insert citations into your markdown document. A file with the .bib extension is a BibTeX Bibliographical Database file. It's a specially formatted text file that lists references pertaining to a particular source of information. Each item can be edited, in case there is any metadata incorrect or missing.

There are a number of ways to create your bib file.

1. Manually
2. Export citations using Endnote or Zotero
3. Use the lookup feature to search for publications by DOI (Digital Object Identifier), Crossref, DataCite, or PubMed ID

Most citation and reference management tools such as Refworks, Endnote, Mendeley and Zotero, as well as some most scientific databases allow you to export citations as .bib files.



Figure xx: Exporting a citation in .bib format.

I am going to show you how to export references from Endnote to your bib file. Figure 26 is displaying all of the references in my Endnote Library. I have highlighted the DataServices folder since I only want to explore these 742 records.

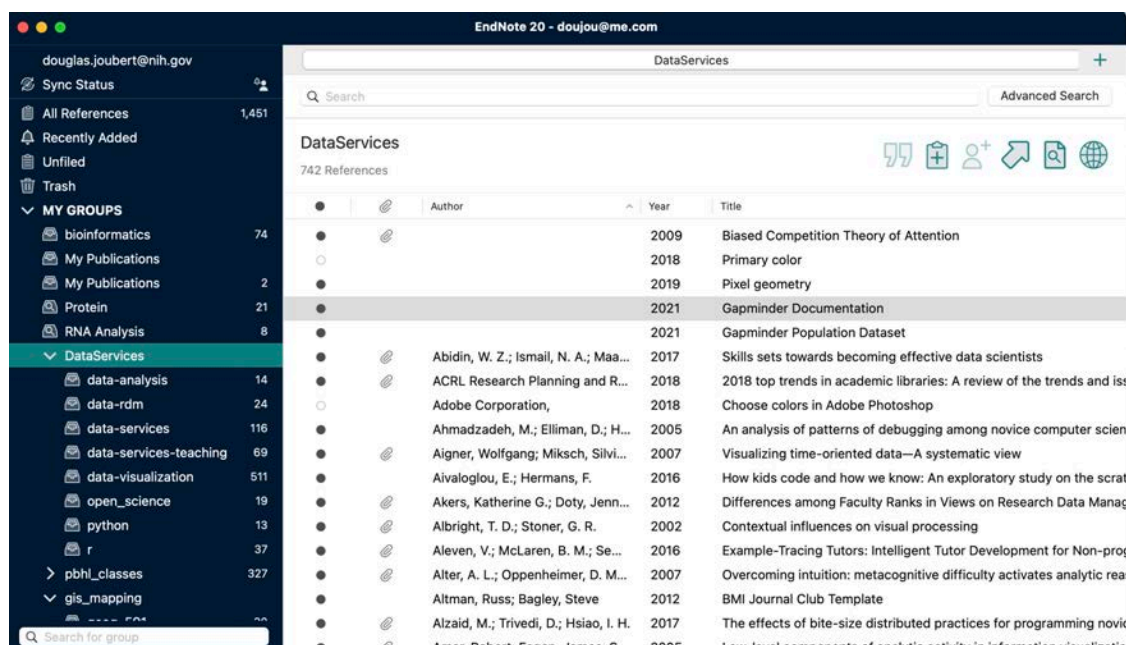


Figure 26: Example of an Endnote Library.

The first thing I need to do is to get the records in the correct format (bibtex). The Output Style Manager is locating under the Tools Menu (I am on Mac OS) [Figure 27].

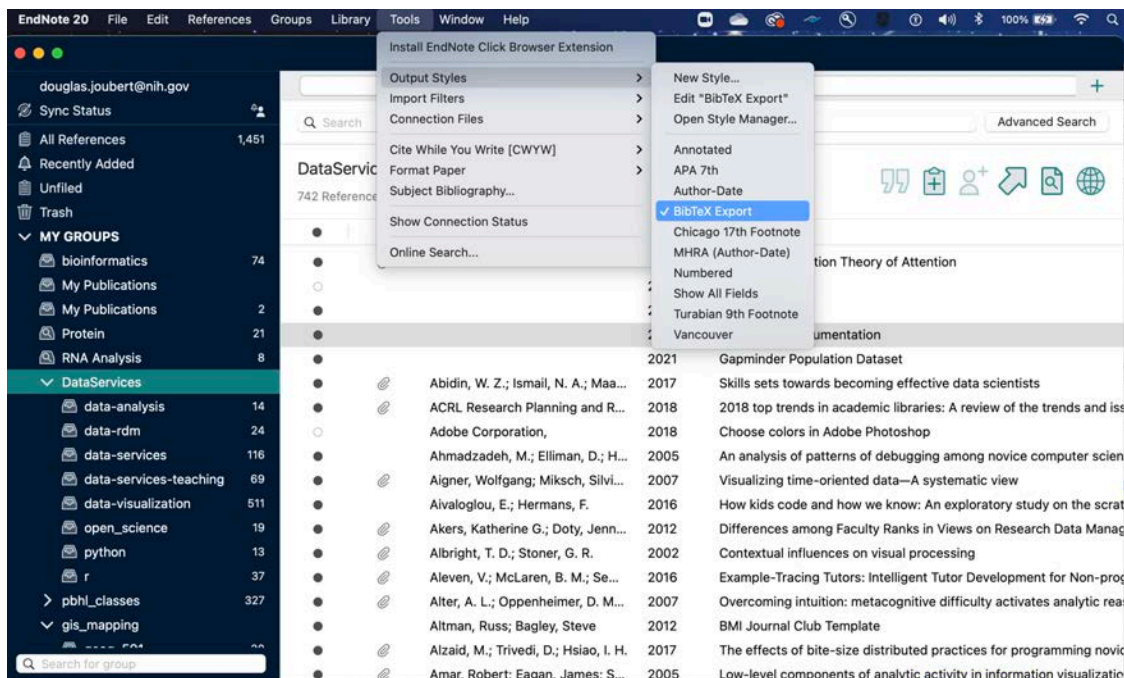


Figure 27: Selecting the bibtext output format in Endnote.

If *bibtex* format is not in the list of styles, you can use **Open Style Manager** to search for the *bibtex* format.

The next step is to select all of the references that you want in your bib file and choose the **Copy Formatted Reference** option [Figure 28]. Please note that using **Copy** will not work.

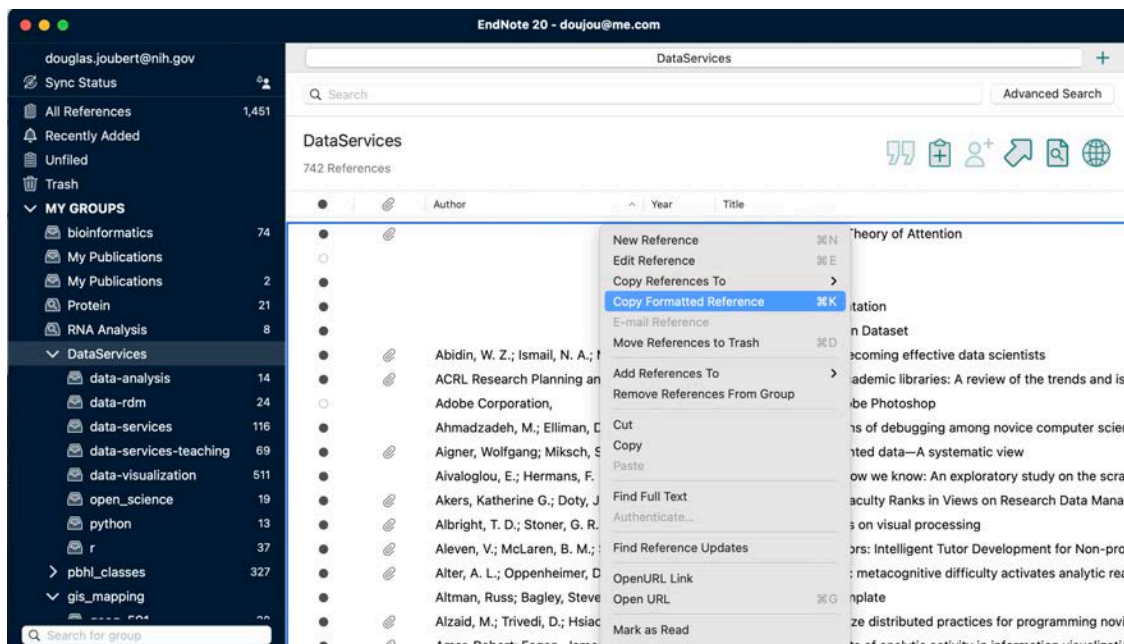


Figure 28: Copying references from an Endnote Library in *bibtex* format.

Figure 29 is showing single reference in *bibtex* format. As you can see in Figure 29, the *bibtex* format is a tagged format that starts with the reference type, preceded by the @ symbol. In this particular example, the reference type is *inbook*.

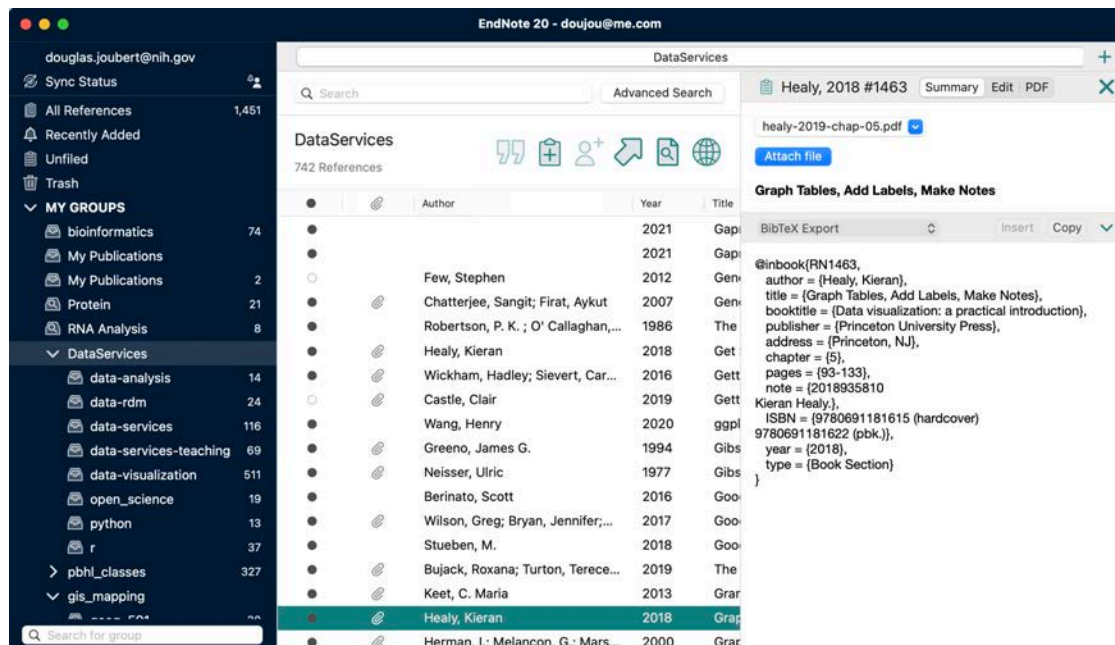


Figure 29: Example of a record in bibtex format.

The minimal template for a chapter or section in a book with authors is included below.

```
@inbook{citekey,
  author   = "",
  title    = "",
  chapter  = "",
  publisher = "",
  year     = ""
}
```

The BibTeX [website](#) is a great resources for learning more about formatting options. Overleaf is another great [resource](#) with a focus on bibliographic management.

Exporting Your Reference List from Endnote

There are two ways to export the selected references from Endnote:

1. Copy and past into a text document
2. Using the Export feature in Endnote

I will cover using the Export feature from Endnote. These steps are very similar in Zotero, Refworks or Mendeley [Figure 30]:

1. Make sure you have selected your records
2. Choose File->Export in Endnote

3. Make sure the Output Style says BibTeX
4. Make sure the file extension is bib
5. Make sure you are saving the file in the same folder as your RMD file.
6. Click Save
7. Make sure the file was saved to the correct directory. Note, that you might have to manually check the file extensions after you export it.

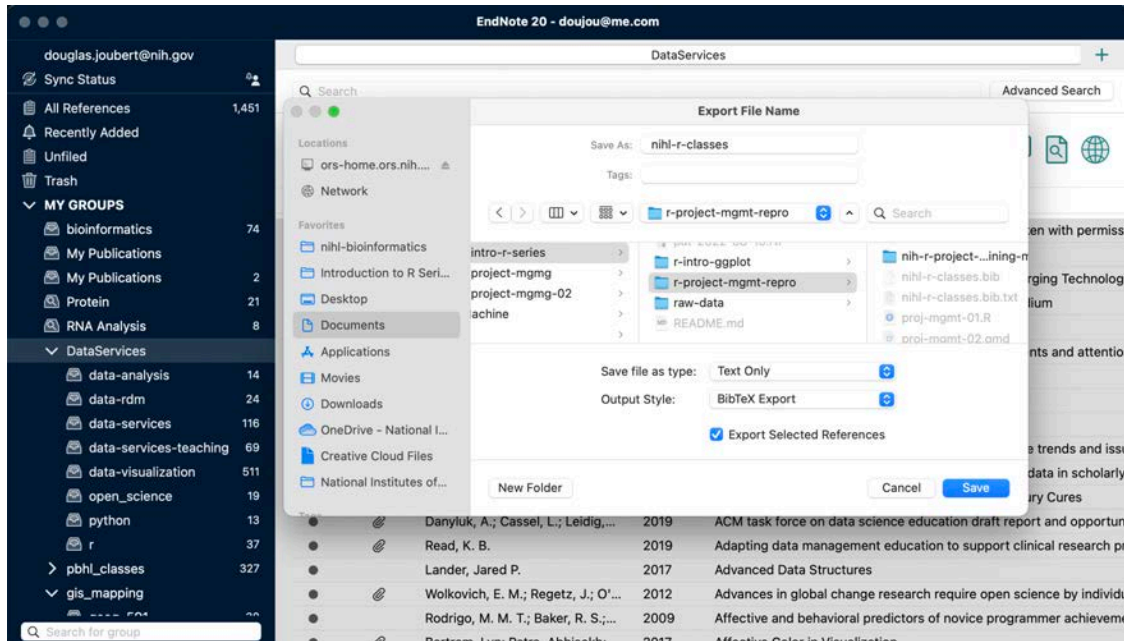


Figure 30: Using the Export feature in Endnote.

In some cases you might need to manually change the file extension from .txt to .bib [Figure 31].

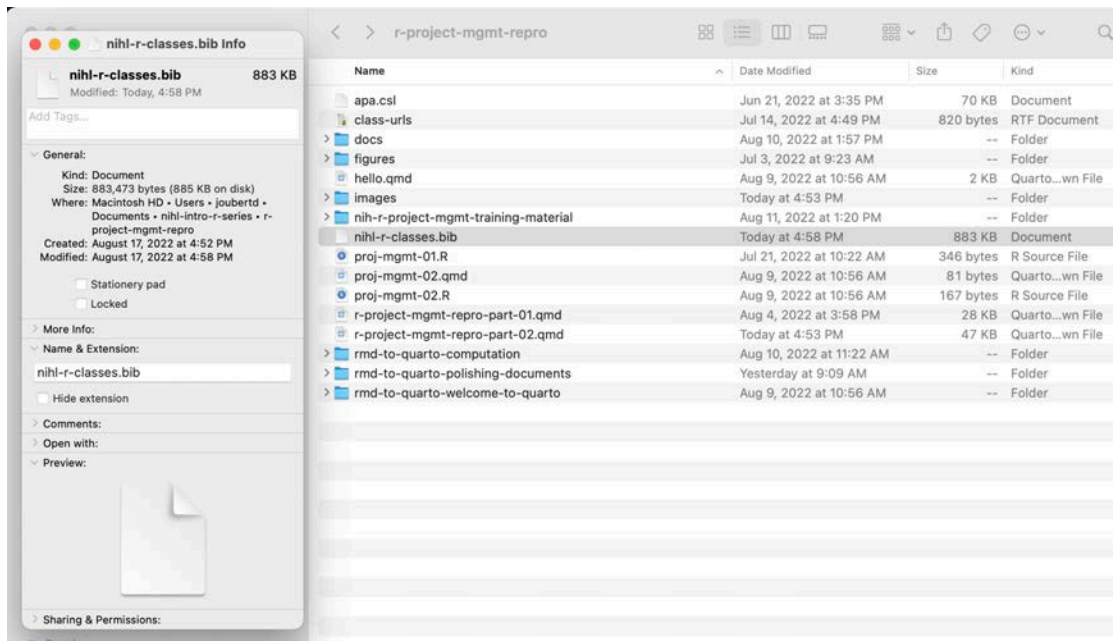


Figure 31: Manually changing the file extension for a .bib file.

Inserting Citations

Choose Insert>Citation within RStudio [Figure23].

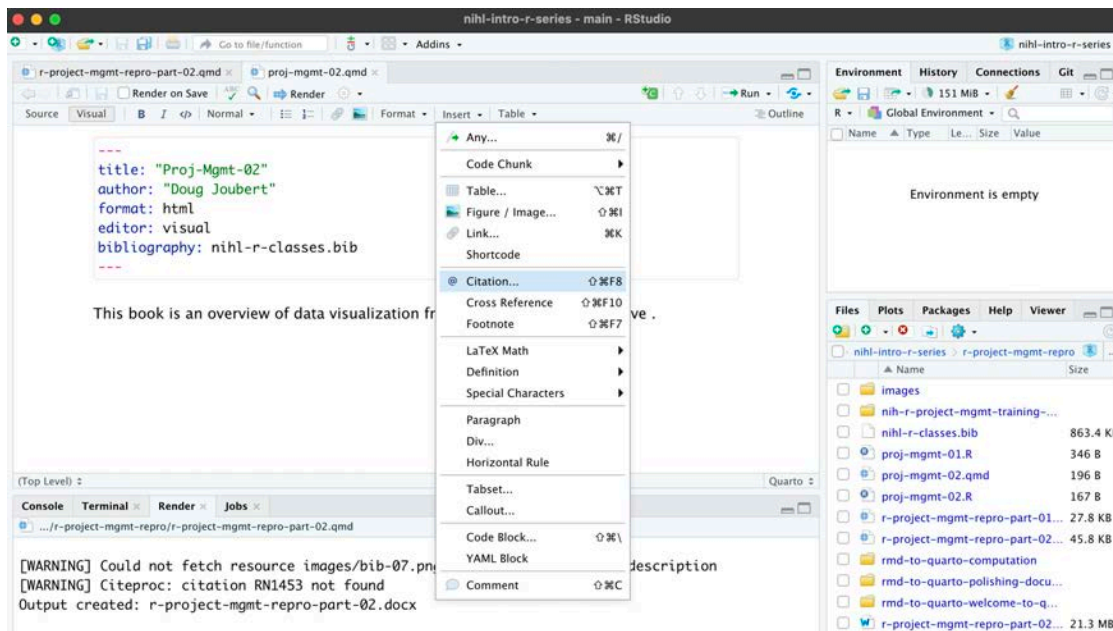


Figure 23: Inserting a citation in RStudio in Visual Mode.

When you do this, you should see the records in the linked bib file. The search box in Figure 23 is a free text search. This means that it will search on the Author names and the title. Thus, if I search for the name **Healy**, the reference list will filter to contain records that match my search string [Figure 24] .

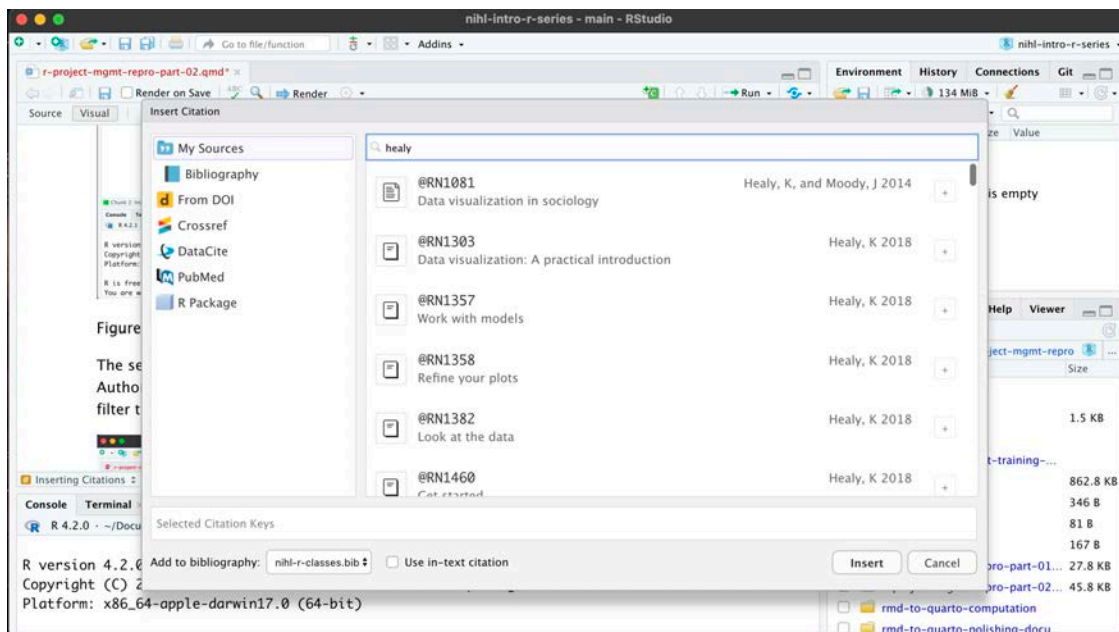


Figure 24: Searching for a record in your bib file.

The record number should appear at the insertion point in your RMD file [Figure 25].

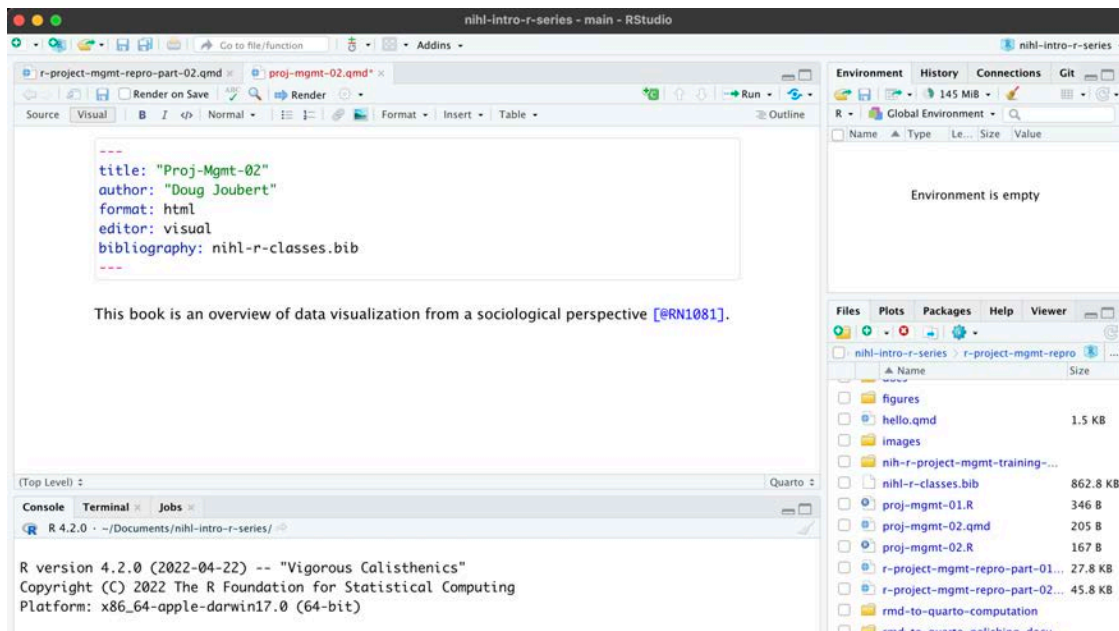


Figure 25: Reference inserted into a RMD document.

Figure 26 is displaying all the citation options that are currently supported by RStudio.

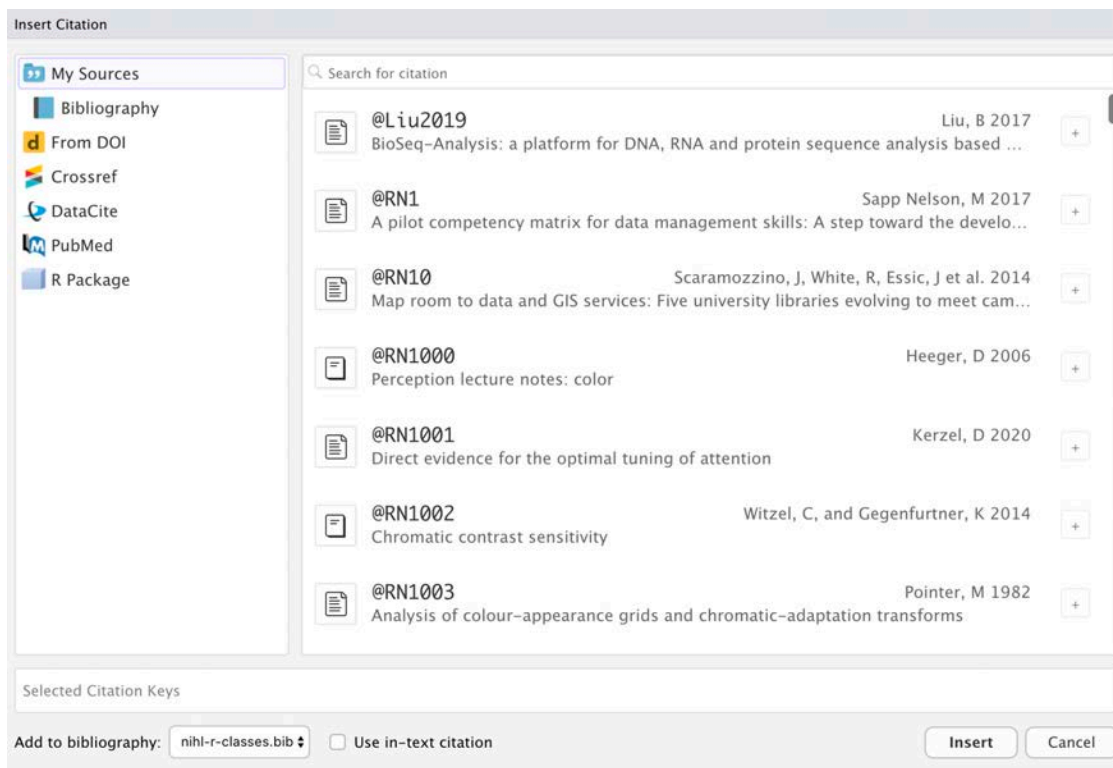


Figure 26: Citation options in RStudio.

[Zotero](#) is a popular free and open source reference manager. If you use Zotero, you can also insert citations directly from your Zotero libraries. If you have Zotero installed locally it's location will be detected automatically and citations from your main library (**My Library**) will be available.

Changing Citation Styles

By default, RStudio via Pandoc will use a Chicago author-date format for citations and references. To use another style, you will need to specify a CSL (Citation Style Language) file in the csl metadata field in the YAML.

You can find CSL formats on the [Zotero Style Repository](#), which makes it easy to search for and download your desired style.

Download the format you wish to use and call it out in the YAML. I have already saved the APA CSL file in the project folder. But if you would like to follow the process or try another style, go to the Zotero Style repo and select [American Psychological Association 7th edition](#) or any other style of your choice. You will notice that it will automatically download the file (e.g. apa.csl).

Make sure to save it to your project directory in report/source folder. In the YAML we have to call the exact name of the file preceded by "csl:" The Header of your RMD file should now look like this [Figure 26]:

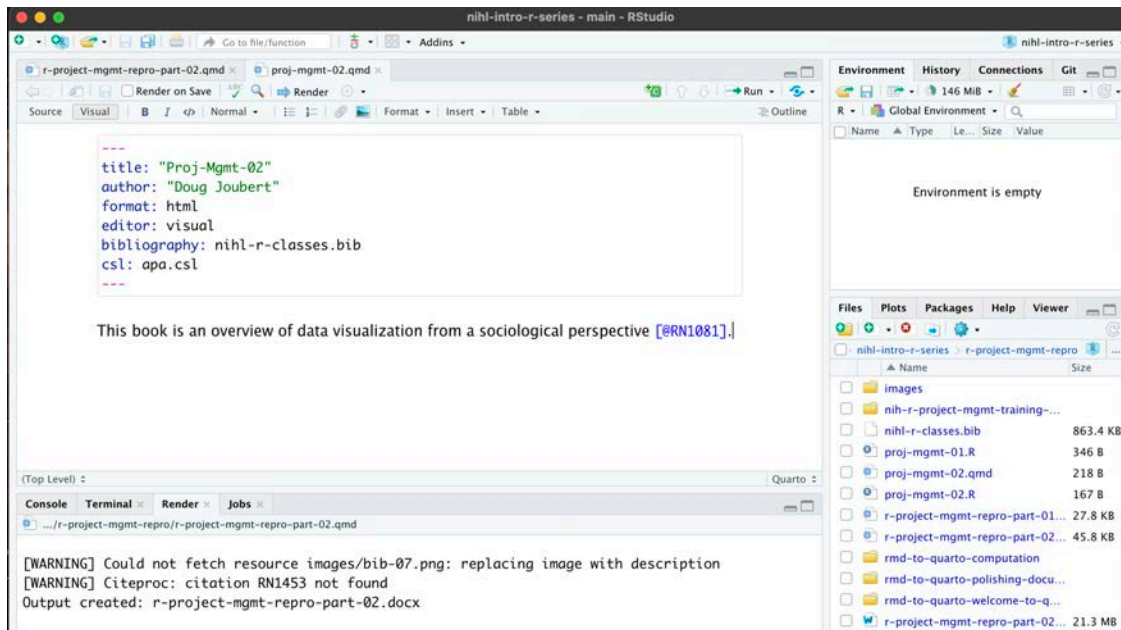


Figure 26: RMD Header with a linked bib file and output style.

Bibliography Generation

Pandoc will automatically generate a list of works cited and place it in the document if the style calls for it. It will be placed in a div with the id refs if one exists:

```
### References
```

```
::: {#refs}
:::
```

If no such div is found, the works cited list will be placed at the end of the document.

The bibliography will be formatted when you Render your file [Figure 27]. In Figure 27. I have knitted the RMD document in html format.

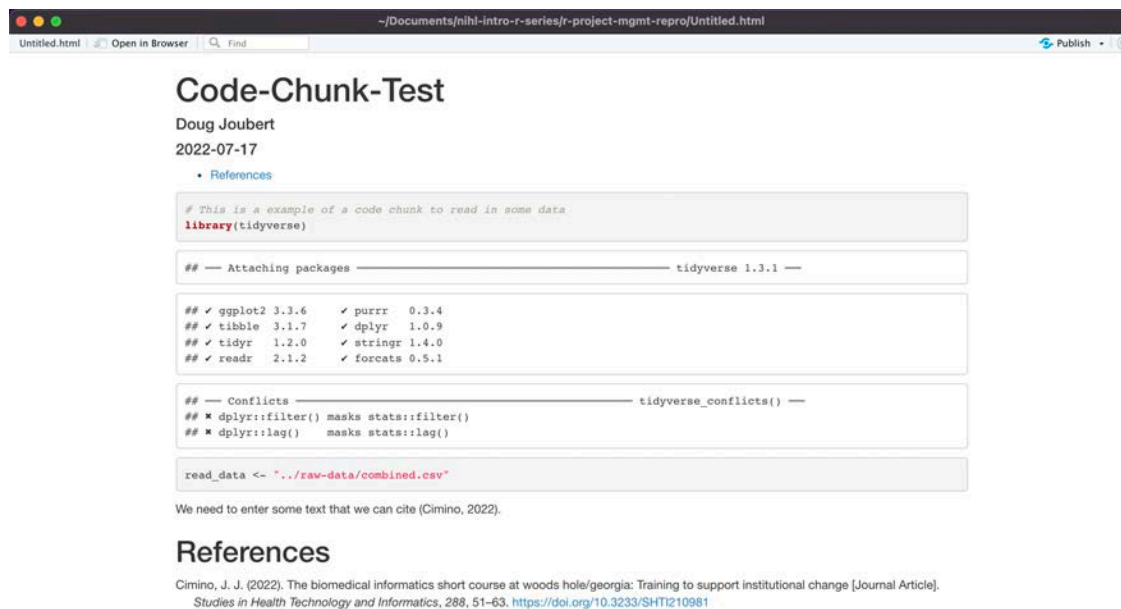


Figure 27: Knitted document with formatted bibliography.

Tip

You can suppress generation of a bibliography by including `suppress-bibliography: true` option in your document metadata.

Resources

R Project Management

- Introduction to Reproducible Publications with RStudio: <https://carpentries-incubator.github.io/Reproducible-Publications-with-RStudio/>
- R for Reproducible Scientific Analysis: <https://swcarpentry.github.io/r-novice-gapminder/>
- Reproducible Research Data and Project Management in R: <https://annakrystalli.me/rrresearchACCE20/>
- Using Projects: <https://support.rstudio.com/hc/en-us/articles/200526207-Using-RStudio-Projects>
- Using the RStudio Terminal in the RStudio IDE

Quarto

Official Documentation & Quickstarts

- Documentation: [Quarto documentation](#) - Official Quarto Documentation.
- GitHub: [Quarto GitHub repository](#) - Official Quarto GitHub repository.

- [Tutorial: Hello, Quarto](#) - Official “Hello, Quarto” tutorial.
- [Tutorial: Computations](#) - Official “Computations” tutorial.
- [Tutorial: Authoring](#) - Official “Authoring” tutorial.

Tutorials and Workshops

- [Quarto for Scientists](#) - This is a book on rmarkdown, aimed for scientists. It was initially developed as a 3 hour workshop, but is now developed into a resource that will grow and change over time.
- [Reproducible authoring with Quarto](#) - 2022 Toronto Workshop on Reproducibility with Mine Çetinkaya-Rundel (slides: <https://mine-cetinkaya-rundel.github.io/2022-repro-toronto/>).
- [Tutorial: Making shareable docs with Quarto](#) - A tutorial to make a website with Quarto.
- [Workshop: From R Markdown to Quarto](#) - A workshop for those who want to take their R Markdown skills and expertise and apply them in Quarto, the next generation of R Markdown.
- [Workshop: Getting started with Quarto](#) - “Get started with Quarto” workshop materials for rstudio::conf(2022).

Note: [Mickaël Canouil](#) maintains a [page](#) of Quarto resources

Licenses

Licensed under [CC-BY 4.0](#) 2022 by [the authors](#).

References

Bray, A., Barter, R., Canelón, S., Dervieux, C., & Shigeta, T. (n.d.). From r markdown to quarto. *Rstudio::conf 2022*. <https://rstudio-conf-2022.github.io/rmd-to-quarto/>