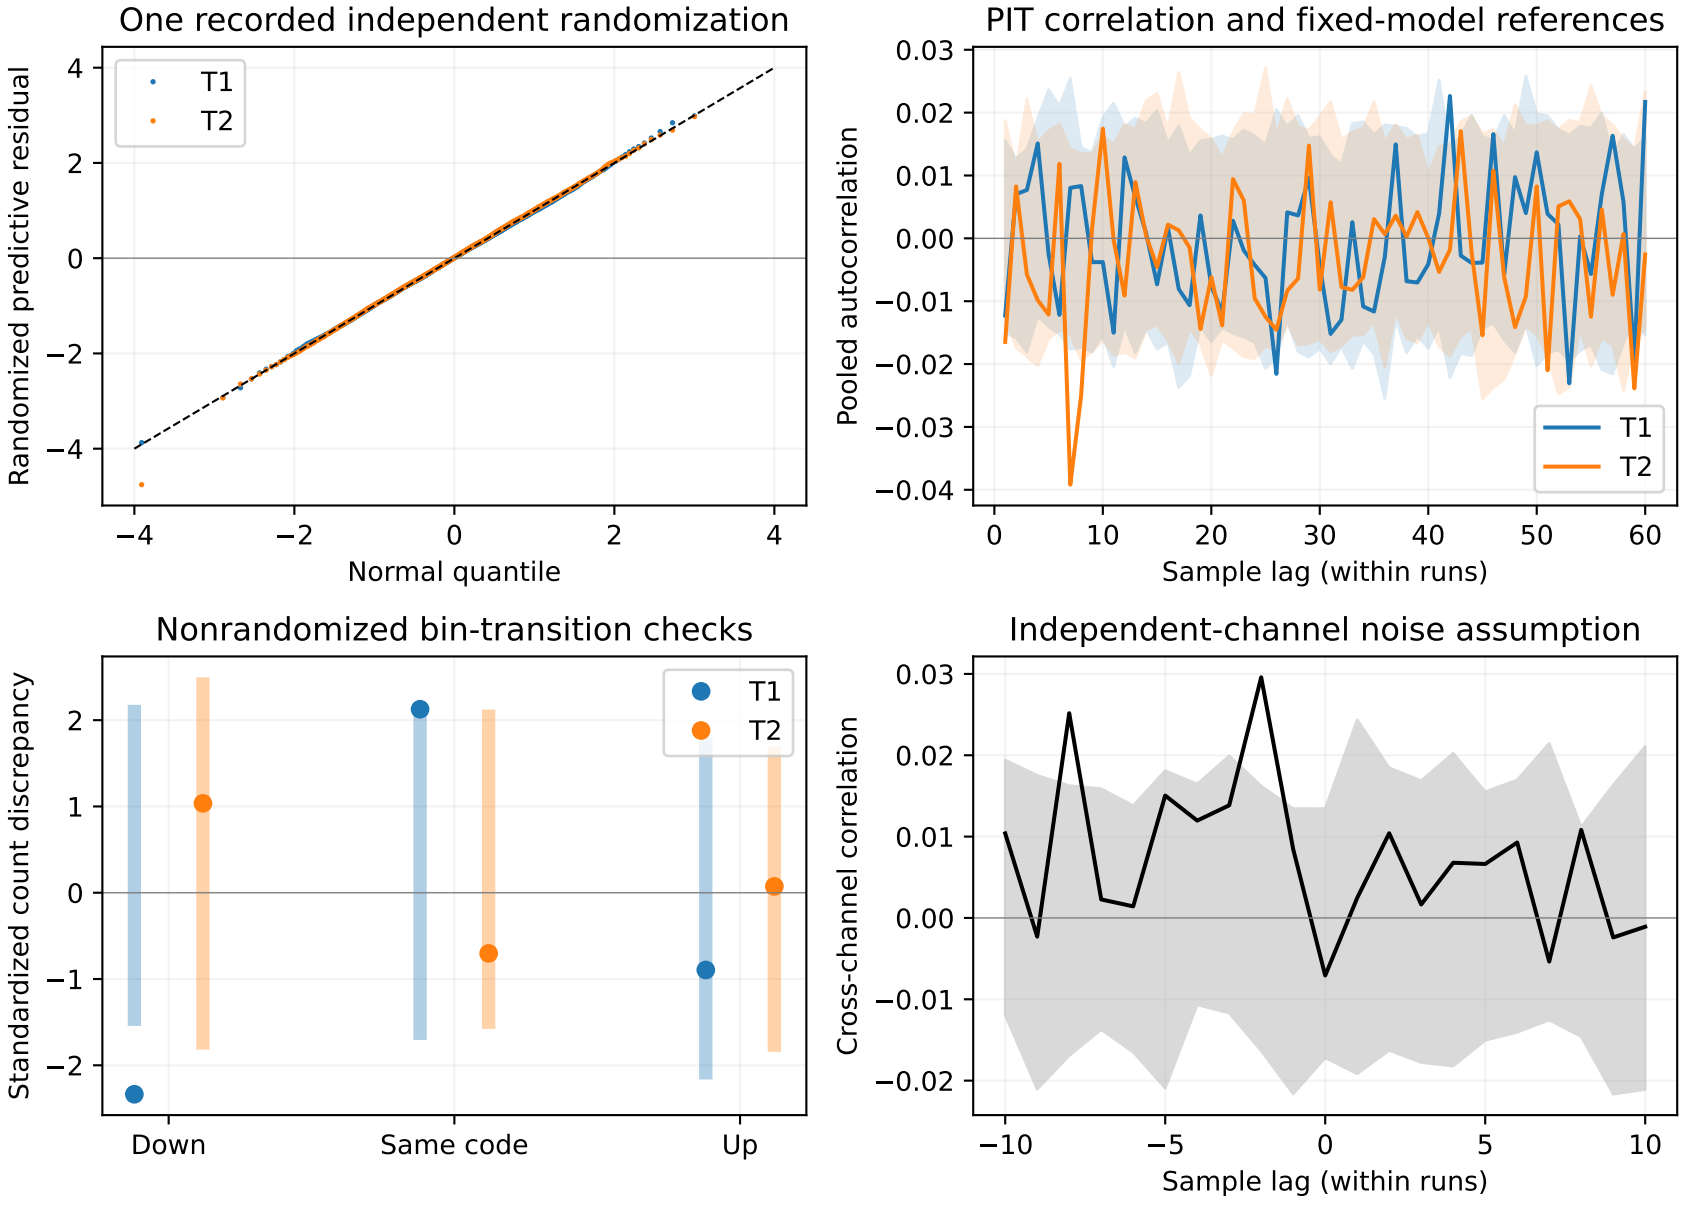
One recorded independent randomization
Randomized predictive residual
Normal quantile
T1
T2
PIT correlation and fixed-model references
Pooled autocorrelation
Sample lag (within runs)
T1
T2
Nonrandomized bin-transition checks
Standardized count discrepancy
Down
Same code
Up
T1
T2
Independent-channel noise assumption
Cross-channel correlation
Sample lag (within runs)