INTRO TO DATA SCIENCE LECTURE 8: DATABASES, STRUCTURED DATA, & INTRO TO SQL

Rob Hall DAT5 SF // April 2, 2014

LAST TIME:

- LOGISTIC REGRESSION
- IMPLEMENTING LOGISTIC REGRESSION IN PYTHON
- FINAL PROJECT KICKOFF

QUESTIONS?

LECTURE:

- I. DATABASE EVOLUTION
- II. THE NOSQL MOVEMENT
- III. WORKING WITH STRUCTURED DATA (MYSQL, SQLITE)


LAB: SQL

FINAL PROJECT ELEVATOR PITCHES


HW2 SOLUTION REVIEW

I. THE EVOLUTION OF DATABASE TECHNOLOGY


What is transactional integrity? A motivating example:

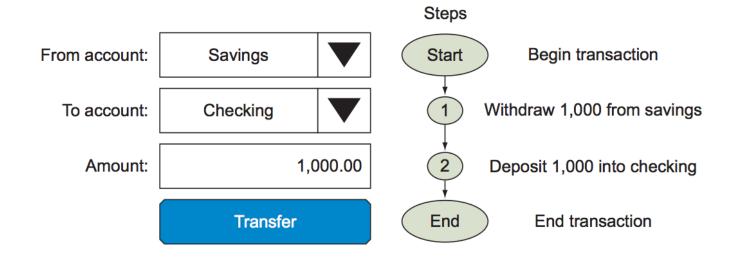

What happens if step 1 succeeds and step 2 fails?

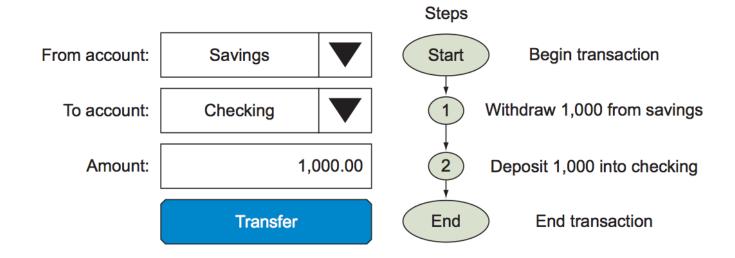

What if you request your balance between step 1 and step 2?

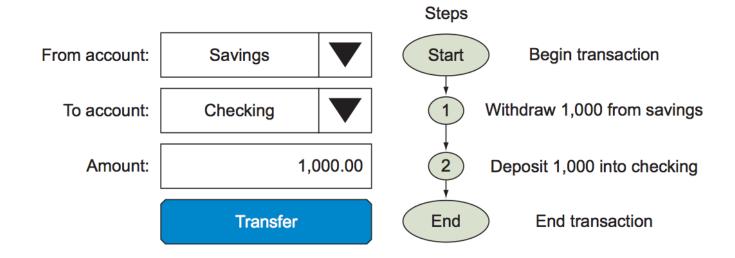

Transaction concepts:

- Transaction
- Begin / end transaction
- Rollback


What other types of business activities can you think of that would be "transactions" as defined here...?

What other types of business activities can you think of that would be "transactions" as defined here...?

	Debit	Credit
Asset	Increase	Decrease
Liability	Decrease	Increase
Income/Revenue	Decrease	Increase
Expense	Increase	Decrease
Equity/Capital	Decrease	Increase

	Account	Debit (Dr)	Credit (Cr)
1.	Rent	100	
	Bank		100
2.	Bank	50	
	Sales		50
3.	Equipment	5200	
	Bank		5200
4.	Bank	11000	
	Loan		11000
5.	Salary	5000	
	Bank		5000
6.	Total (Dr)	21350	
	Total (Cr)		21350

That's why enterprise resource planning (ERP) systems and relational database management systems (RDBMS) grew up together.

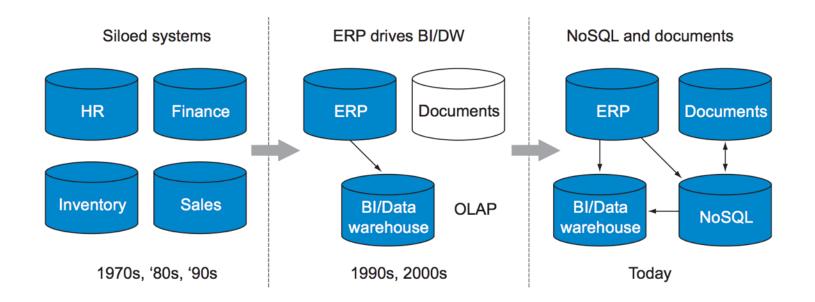


- 1960s
 - Hierarchical data structure (IBM IMS)
 - Network data structure (CODASYL)
- 1970s
 - Relational data model
 - A Relational Model of Data for Large Shared Data Banks – E. F. Codd [1970]
 - System R (IBM), Ingres (Berkeley)

- 1980s
 - Commercialization of RDBMS
 - Oracle, Sybase, IBM DB2, Informix
 - SQL
 - ACID (<u>A</u>tomic, <u>C</u>onsistent, <u>I</u>solated, <u>D</u>urable)
- 1990s
 - PC RDBMS
 - Paradox, Microsoft SQL Server & Access
 - Larger DBs, driven by internet
 - Consolidation among commercial DB vendors

- 2000s
 - Commercialization of Open Source RDBMS
 - MySQL, Postgres
 - Evolving requirements expose RDBMS limitations
 - Storing complex and dynamic objects
 - Processing increasing data volumes
 - Analyzing massive amounts of data

Business drivers for NoSQL include

- Volume
- Velocity
- Variability
- Agility

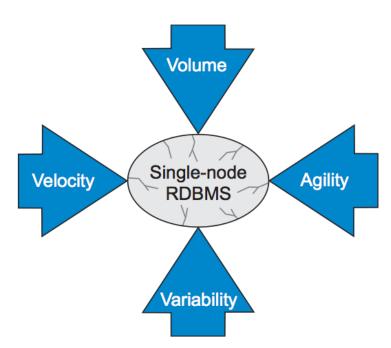

Business drivers for NoSQL include:

- Volume the ability to query big data using clusters of commodity processors (horizontal scaling, parallel processing)
- Velocity the ability to maintain performance in the face of traffic bursts from public-facing websites
- Variability the ease of capturing & reporting on exception data
- Agility object-relational mapping is complicated; even small changes can substantially slow development projects

II. THE NOSQL MOVEMENT

Eric Brewer's CAP (**C**onsistency, **A**vailability, **P**artition Tolerance) Theorem [2000] Pick 2!

Research

MapReduce: Simplified Data Processing on Large Clusters — Google [2004] Bigtable: A Distributed Storage System for Structured Data — Google [2006]

Dynamo: Amazon's Highly Available Key-value Store — Werner Vogels, et. al. [2007]

Pregel: A System for Large-Scale Graph Processing — Google [2010]

BASE (**B**asic **A**vailability, **S**oft-state, **E**ventually Consistent)

Vs.

Acid

- Get transaction details right
- Block any reports while you are working
- Be pessimistic: anything might go wrong!
- Detailed testing and failure mode analysis
- · Lots of locks and unlocks



Base

- Never block a write
 Focus on throughput, not consistency
 - Be optimistic: if one service fails it will eventually get caught up
 - Some reports may be inconsistent for a while, but don't worry
 - · Keep things simple and avoid locks




THE NOSQL MOVEMENT


Туре	Typical usage	Examples
Key-value store—A simple data storage system that uses a key to access a value	Image storesKey-based filesystemsObject cacheSystems designed to scale	Berkeley DBMemcacheRedisRiakDynamoDB
Column family store—A sparse matrix system that uses a row and a column as keys	 Web crawler results Big data problems that can relax consistency rules 	Apache HBaseApache CassandraHypertableApache Accumulo
Graph store—For relationship- intensive problems	Social networksFraud detectionRelationship-heavy data	Neo4jAllegroGraphBigdata (RDF data store)InfiniteGraph (Objectivity)
Document store—Storing hierarchical data structures directly in the data-base	High-variability dataDocument searchIntegration hubsWeb content managementPublishing	 MongoDB (10Gen) CouchDB Couchbase MarkLogic eXist-db Berkeley DB XML

```
Key-value
   memcached, Redis, Riak, Tokyo Cabinet, Voldemort, Amazon SimpleDB
Column-oriented (Bigtable clones)
   Cassandra, HBase
Document-oriented
   MongoDB, CouchDB
Graph
   Neo4J, FlockDB, OrientDB, Pregel (Google)
```


THE NOSQL MOVEMENT

Case study/standard	Driver	Finding
LiveJournal's Memcache	Need to increase performance of database queries.	By using hashing and caching, data in RAM can be shared. This cuts down the number of read requests sent to the database, increasing performance.
Google's MapReduce	Need to index billions of web pages for search using low-cost hardware.	By using parallel processing, indexing billions of web pages can be done quickly with a large number of commodity processors.
Google's Bigtable	Need to flexibly store tabular data in a distributed system.	By using a sparse matrix approach, users can think of all data as being stored in a single table with billions of rows and millions of columns without the need for up-front data modeling.
Amazon's Dynamo	Need to accept a web order 24 hours a day, 7 days a week.	A key-value store with a simple interface can be replicated even when there are large volumes of data to be processed.
MarkLogic	Need to query large collections of XML documents stored on commodity hardware using stan- dard query languages.	By distributing queries to commodity servers that contain indexes of XML documents, each server can be responsible for processing data in its own local disk and returning the results to a query server.

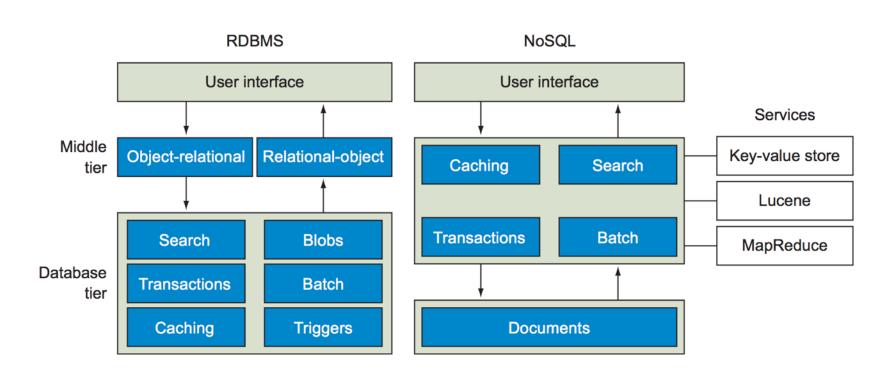




let \$hash := hash(\$invoice, 'md5')

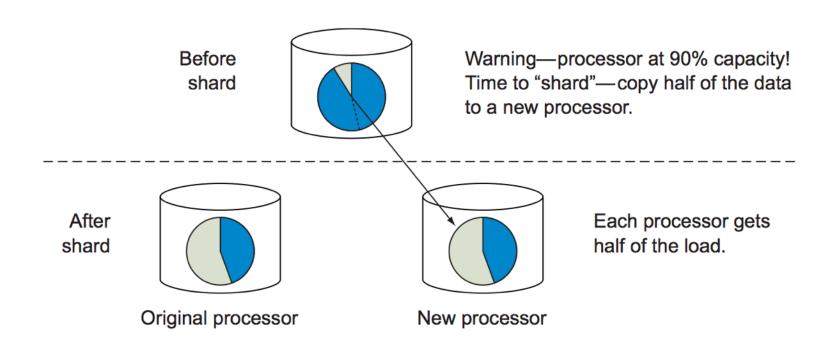

III. WORKING WITH STRUCTURED DATA (MYSQL, SQLITE)

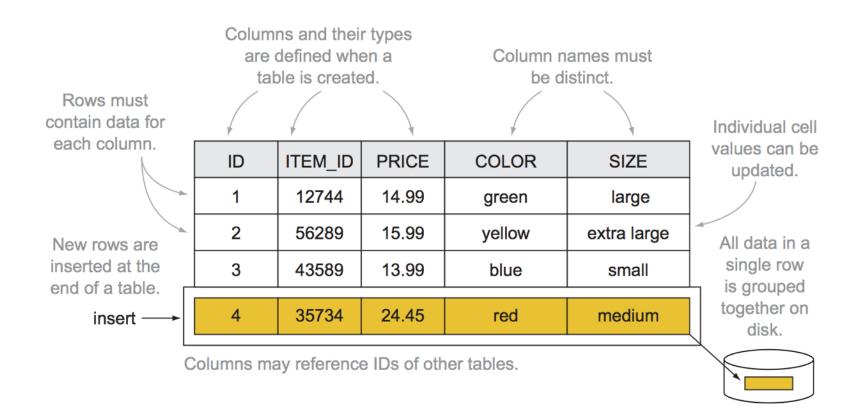

JOINS - EXAMPLE OF SALES ORDER

Primary key

Table: SALES_ORDER


ORDER_ID	ORDER_DATE	SHIP_STATUS	TOTAL
123	2012-07-11	SHIPPED	39.45
124	2012-07-12	BACKORDER	29.37
125	2012-07-13	SHIPPED	42.47

Foreign key

Table: ORDER_ITEMS

	ORDER_ID	ITEM_ID	PRICE
	123	83924893	10.00
_	123	563344893	20.00
/	123	343978893	9.45
/	124	83924893	29.37
/	125	563344893	20.00
\	125	343978893	22.47

SELECT * FROM SALES_ORDER, ORDER_ITEMS
WHERE SALES_ORDER.ORDER_ID = ORDER_ITEMS.ORDER_ID



Physical table

ORDER_ID	ORDER_DATE	SHIP_STATUS	CARD_INFO	TOTAL
123	2012-07-11	SHIPPED	VISA-1234	39.45
124	2012-07-12	BACKORDER	MC-5678	29.37
125	2012-07-13	SHIPPED	AMEX-9012	42.47

The physical table includes all the column, including credit card info.
Only select users ever see the physical table.

View of table

ORDER_ID	ORDER_DATE	SHIP_STATUS	TOTAL
123	2012-07-11	SHIPPED	39.45
124	2012-07-12	BACKORDER	29.37
125	2012-07-13	SHIPPED	42.47

The view excludes some fields like credit card information. All sales analysts have access to the views.

RDBMS STRENGTHS & WEAKNESSES

Feature	Strength	Weakness
Joins between tables	New views of data from different tables can easily be created.	All tables must be on the same server to make joins run efficiently. This makes it difficult to scale to more than one processor.
Transactions	Defining begin point, end point, and completion of critical transactions in an application is simple.	Read and write transactions may be slowed during critical times in a transaction unless the transaction isolation level is changed.
Fixed data definitions and typed columns	Easy way to define structure and enforce business rules when tables are created. You can verify on insert that all data conforms to specific rules. Allows range indexes over columns.	Difficult to work with highly variable and exception data when adding to a column.
Fine-grained security	Data access control by row and column can be done with a series of view and grant statements.	Setup and testing security access for many roles can be a complex process.
Document integration	None. Few RDBMSs are designed to easily query document structures.	Difficult to create reports using both structured and unstructured data.

INTRO TO DATA SCIENCE

LAB: SQL