
Health AI Sales Agent

User Guide

macOS / Mac mini Local Deployment

Audience: Mac mini end users, owners, sales managers, and support leads

Covers: Telegram Bot setup, installation, operator binding, go-live testing, dashboard usage, operations, and security rules.

Core flow Create Bot → Install service → Bind operator → Test before launch
→ Serve customers

Version date: May 15, 2026

File: USER_GUIDE_EN.pdf

Table of Contents

1. What this system does	2
Basic flow	2
2. What you need before installation	2
3. Create your own Telegram Bot	3
3.1 Open BotFather	3
3.2 Create the bot	3
3.3 Disable privacy mode	4
3.4 Recommended optional settings	4
4. Install on a Mac mini	4
4.1 Unpack the archive	5
4.2 Run the installer	5
5. Bind the operator Telegram account	6
5.1 Get your Chat ID	6
5.2 Save the Chat ID	6
5.3 Verify	6
6. Put real customers on the bot without “seen but no reply” issues	6
6.1 Customer link	7
6.2 Expected customer experience	7
6.3 Mandatory go-live test	7
6.4 If the customer does not receive the approved reply	8
7. Web dashboard	8
8. Telegram operator commands	8
9. Troubleshooting	9
Q1: Customer messages are seen but not answered	9
Q2: Approval cards do not arrive in the operator Telegram	9
Q3: How do I switch to a new bot?	9
Q4: How do I stop or restart the service?	9
Q5: Can customers chat on my website instead of Telegram?	10
Q6: Can multiple operators work together?	10
10. Security rules	10
The three files operators need to know	10

Audience: end users who operate the Mac mini deployment, such as the owner, sales manager, or customer support lead. You do not need command-line experience. Technical installers should also read MAC_MINI_INSTALL.md.

1. What this system does


This is a local AI sales support gateway running on your own Mac mini. Customers can message your Telegram Bot or your website chat integration. The AI replies to normal sales inquiries automatically and routes sensitive topics to a human operator.

Sensitive topics include:

- Price, discount, payment terms, refund, compensation, or contract wording.
- Medical claims, disease treatment, cure claims, side effects, or complaints.
- OEM, custom formulas, certificates, exclusive agency, or unusual commercial terms.

For these cases, the AI does not make final decisions. It sends a proposed reply to the operator account in Telegram. The operator can approve, reject, take over, or send a custom human reply.

Basic flow

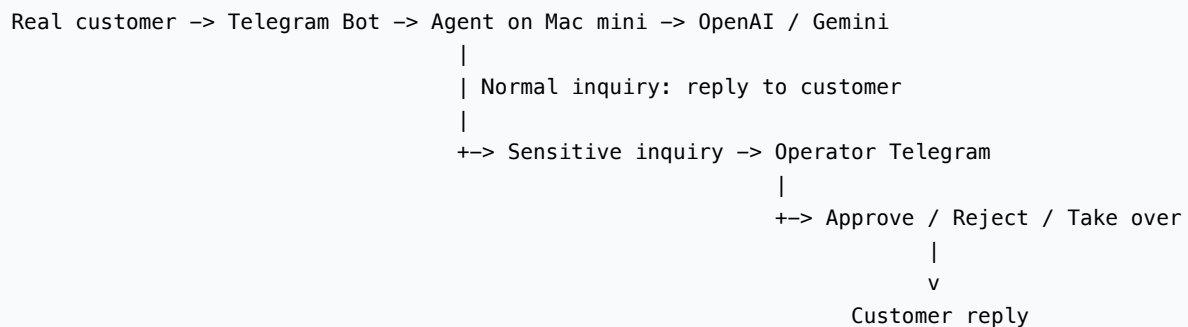

All sessions, messages, and approval records are stored locally on the Mac mini in data/*.jsonl.

2. What you need before installation

Prepare these items first:

Item	Description	Where to get it
Mac mini	Online and logged into the user account that will run the service	–
Mac login password	Required when macOS installs developer tools or Homebrew	–
OpenAI API Key	Recommended model provider	https://platform.openai.com/api-keys
Or Gemini API Key	Alternative model provider	https://aistudio.google.com/app/apikey
Telegram account	Used to create and operate the bot	Telegram app
Telegram Bot Token	Created with BotFather	See section 3
Operator Telegram Chat ID	The account or group that receives approvals	See section 5

Item	Description	Where to get it
Installer archive	health-ai-sales-agent-*.tgz	Provided by your technical installer

Important: do not reuse keys that have appeared in chat messages, screenshots, emails, or shared documents. Use fresh keys for production and revoke leaked keys immediately.

3. Create your own Telegram Bot

This step is done once inside Telegram. The bot belongs to you, and the bot token must be kept private.

3.1 Open BotFather

1. Open Telegram.
2. Search for @BotFather.
3. Choose the official verified BotFather account.
4. Click **Start**.

3.2 Create the bot

1. Send this command to BotFather:

```
/newbot
```

2. BotFather asks: **“Alright, a new bot. How are we going to call it?”**

Reply with a display name, for example:

```
Herbaloem Sales Agent
```

Customers will see this display name.

3. BotFather asks: **“Good. Now let’s choose a username for your bot.”**

Reply with a globally unique username ending in bot, for example:

```
herbaloem_sales_bot
```

Rules:

- The username must be unique.
- It must end with bot or Bot.
- It must be at least 5 characters long.
- Customers will use a link like https://t.me/herbaloem_sales_bot.

4. BotFather returns a token like this:

```

Done! Congratulations on your new bot.
...
Use this token to access the HTTP API:
1234567890:ABCDEF_example_replace_with_your_token

Keep your token secure and store it safely, ...

```

The string after **Use this token** is your Telegram Bot Token. Paste your real token into the installer later.

Store it in a password manager. Anyone with this token can control your bot.

3.3 Disable privacy mode

Private 1-to-1 chats work without this step, but disabling privacy mode avoids missed messages if you later use the bot in a group.

1. Send this to BotFather:

```
/setprivacy
```

2. Select your new bot.
3. Choose **Disable**.

3.4 Recommended optional settings

You can also set these in BotFather:

Command	Purpose	Suggested value
/setdescription	Bot search description	24/7 AI sales inquiry assistant. Prices require human approval.
/setabouttext	Bot profile About text	Health product AI sales agent
/setuserpic	Bot avatar	Upload your company logo
/setcommands	Customer-facing slash command menu	See below

Recommended /setcommands value:

```

start – Start inquiry
help – Contact a human

```

Do not add operator commands such as /approve, /reply, or /sessions to the customer command menu. Those commands are protected internally and only work for the configured operator chat.

4. Install on a Mac mini

4.1 Unpack the archive

1. Put health-ai-sales-agent-xxxxxxxx-xxxxxx.tgz in the Downloads folder.
2. Double-click the archive. macOS will create a folder.
3. Rename the folder to health-ai-sales-agent.
4. Move it to ~/Apps/health-ai-sales-agent. If the Apps folder does not exist, create it.
5. Open the folder.

4.2 Run the installer

Double-click:

```
INSTALL.command
```

If macOS says the file cannot be opened because it is from an unidentified developer:

1. Hold the Control key.
2. Click `INSTALL.command`.
3. Choose **Open**.
4. Confirm **Open** again.

The installer asks for:

```
Model provider: 1 OpenAI / 2 Gemini / 3 stub test mode
OpenAI model [gpt-4.1-mini]
OpenAI API Key
Telegram Bot Token
Operator Telegram Chat ID
Local service port [8787]
```

Recommended first setup:

```
Model provider: 1
OpenAI model: press Enter to use gpt-4.1-mini
OpenAI API Key: paste your fresh OpenAI key
Telegram Bot Token: paste the BotFather token
Operator Telegram Chat ID: leave empty for now
Local service port: press Enter
```

When you paste API keys or tokens, the terminal may show nothing. This is normal for hidden password input. Paste, then press Enter.

When installation finishes, the browser opens the local dashboard:

```
http://localhost:8787/admin
```

If port 8787 is already used, the installer may choose another port such as 8790.

5. Bind the operator Telegram account

The operator is the Telegram account or group that receives approval cards and can approve, reject, take over, or send human replies.

5.1 Get your Chat ID

1. In Telegram, open your new bot.
2. Click **Start**.
3. Send:

```
/whoami
```

4. The bot replies:

```
chat_id: 6103474891
```

This number is your operator Chat ID.

5.2 Save the Chat ID

On the Mac mini, double-click:

```
CONTROL.command
```

Choose:

```
3) Set operator Telegram Chat ID
```

Paste the Chat ID and press Enter. The script saves it to `.env` and restarts the service.

5.3 Verify

Send this to the bot from the operator account:

```
/status
```

If it replies with `Agent status: running`, the operator account is correctly bound.

If it says `This command is only available to the operator chat`, the Chat ID is wrong or the service has not finished restarting. Wait a few seconds and try again.

6. Put real customers on the bot without “seen but no reply” issues

Before sending the bot link to real customers, run the full test below using a second Telegram account or a colleague’s account.

6.1 Customer link

Send customers this link:

```
https://t.me/<your-bot-username>
```

Example:

```
https://t.me/herbaloem_sales_bot
```

Customers click **Start** and begin chatting.

6.2 Expected customer experience

- Customer says: Hi, I want 500 units of turmeric powder to Germany.
 - AI replies and asks for specification, quantity, packaging, destination, delivery time, and contact details.
- Customer says: What is your best price?
 - AI does not quote a final price automatically.
 - Customer receives a holding message.
 - Operator receives an approval card in Telegram.
- Customer says: Can it cure diabetes?
 - AI does not make a medical claim.
 - The session is routed to human review.

6.3 Mandatory go-live test

Run this test before real traffic:

Step	Action	Expected result
1	Second account sends hello to the bot	Second account receives an AI reply within a few seconds
2	Second account sends what is your best price for 1000 units?	Second account receives a holding message; operator receives an approval card with Approve / Take over / Reject
3	Operator clicks Approve	Operator sees Delivery: sent to customer; second account receives the proposed AI reply
4	Second account sends thanks, can it cure cancer?	The case is routed to human review; operator gets a queue notification
5	Operator sends /reply <sessionId> Sorry, we cannot make medical claims.	Second account receives the human reply

If all five steps pass, the bot is ready for real customers.

6.4 If the customer does not receive the approved reply

Open `CONTROL.command`, choose **8) View live logs**, and check for:

- customer delivery skipped
 - The session is probably a website channel session, not a Telegram session. The operator will see a message such as `Delivery: skipped (channel site has no outbound delivery)`. This is expected for website integrations.
- telegram handler crashed
 - This should not happen in the current version. If it appears, send the log line to technical support.
- telegram delivery failed
 - The customer may have blocked the bot, the token may have been revoked, or Telegram rejected delivery.

The current version includes protection against the previous issue where approving a non-Telegram session could stop Telegram polling. The handler now catches errors globally and sends a safe fallback reply if customer processing fails.

7. Web dashboard

Open:

`http://localhost:<port>/admin`

Default port is 8787. You can also double-click `CONTROL.command` and choose option 7.

The dashboard supports Chinese and English. Use the language selector in the top-right corner.

Tabs:

Tab	Purpose
Overview	Status, uptime, active sessions, approvals, message counts, 24-hour trends, channel and risk distribution
Approvals	Review customer text and proposed replies; approve, reject, take over, or send a custom human reply
Sessions	View all sessions, open a session timeline, pause, resume, take over, or reply
Message Stream	Latest 100 cross-session messages
Workflow	End-to-end routing view and risk rules
System / Config	PID, port, model provider, key configuration status, approval settings, SLA

The page refreshes automatically every 5 seconds.

8. Telegram operator commands

Only the configured operator Chat ID can use these commands.

<code>/whoami</code>	Show current chat_id
<code>/status</code>	Show service status
<code>/sessions</code>	List active sessions
<code>/pause <sessionId> [reason]</code>	Pause AI for a session
<code>/resume <sessionId></code>	Resume AI for a session
<code>/takeover <sessionId></code>	Enable human takeover
<code>/approve <approvalId></code>	Approve the proposed AI reply
<code>/reject <approvalId> [reason]</code>	Reject the proposed AI reply
<code>/reply <sessionId> <message></code>	Send a human reply to the customer

Approval cards also include **Approve**, **Take over**, and **Reject** buttons.

9. Troubleshooting

Q1: Customer messages are seen but not answered

Check in this order:

1. Double-click `CONTROL.command` and choose **6) Status / process / logs**. The service must be running.
2. Open `http://localhost:<port>/health`. It must return `{"ok":true}`.
3. Choose **8) View live logs** and look for errors.
4. In BotFather, use `/mybots` and confirm the bot still exists.
5. Send `/whoami` to the bot. If even `/whoami` does not reply, the token is wrong or the service is not running.
6. Restart the service: `CONTROL.command` → option 5 Stop → option 4 Start.

Q2: Approval cards do not arrive in the operator Telegram

1. Send `/whoami` from the operator account to the bot.
2. Copy the returned chat_id.
3. Run `CONTROL.command` → option 3.
4. Paste the Chat ID and restart.

Q3: How do I switch to a new bot?

Run `CONTROL.command` → option 2, paste the new Telegram Bot Token, and keep other settings by pressing Enter. Revoke the old bot token in BotFather.

Q4: How do I stop or restart the service?

Use `CONTROL.command`:

```
4) Start service
5) Stop service
6) View status / process / logs
```

The service is registered with macOS LaunchAgent and starts automatically after login.

Q5: Can customers chat on my website instead of Telegram?

Yes. Your website can POST messages to:

```
http://<Mac-mini-LAN-IP>:<port>/webhooks/site/message
```

Example request body:

```
{"customerId":"web-user-001", "text":"Hello", "displayName":"Visitor", "locale":"en"}
```

The response field `customerReply` is the message to show to the website visitor. Do not expose this port directly to the public internet. Use Tailscale, Cloudflare Tunnel, VPN, or a controlled backend proxy.

Q6: Can multiple operators work together?

The current version supports one operator chat. To let multiple people operate together, create a Telegram group, add the bot and all operators to that group, send `/whoami` in the group, and set `TELEGRAM_OPERATOR_CHAT_ID` to the negative group chat ID returned by the bot.

10. Security rules

- Keep the Telegram Bot Token only in `.env`. Do not share it in chat or screenshots.
- Keep OpenAI and Gemini API keys private. Revoke and rotate any key that appears in chat, GitHub, email, or screenshots.
- Do not expose port 8787 or 8790 directly to the public internet.
- Use Tailscale, Cloudflare Tunnel, or VPN for remote access.
- Enable macOS FileVault full-disk encryption.
- Use a strong Mac login password.
- Back up the `data/` folder regularly. It contains all local session history.
- To uninstall, run `CONTROL.command` → option 9, then delete the `health-ai-sales-agent` folder.

The three files operators need to know

File	Purpose
<code>INSTALL.command</code>	First installation or full reinstall
<code>CONTROL.command</code>	Daily control menu: start, stop, logs, dashboard, configuration, key changes
<code>SET_OPERATOR.command</code>	Quick shortcut to update the operator Chat ID

If something is not covered here, open `CONTROL.command`, choose **8) View live logs**, and send the relevant error lines to technical support.