

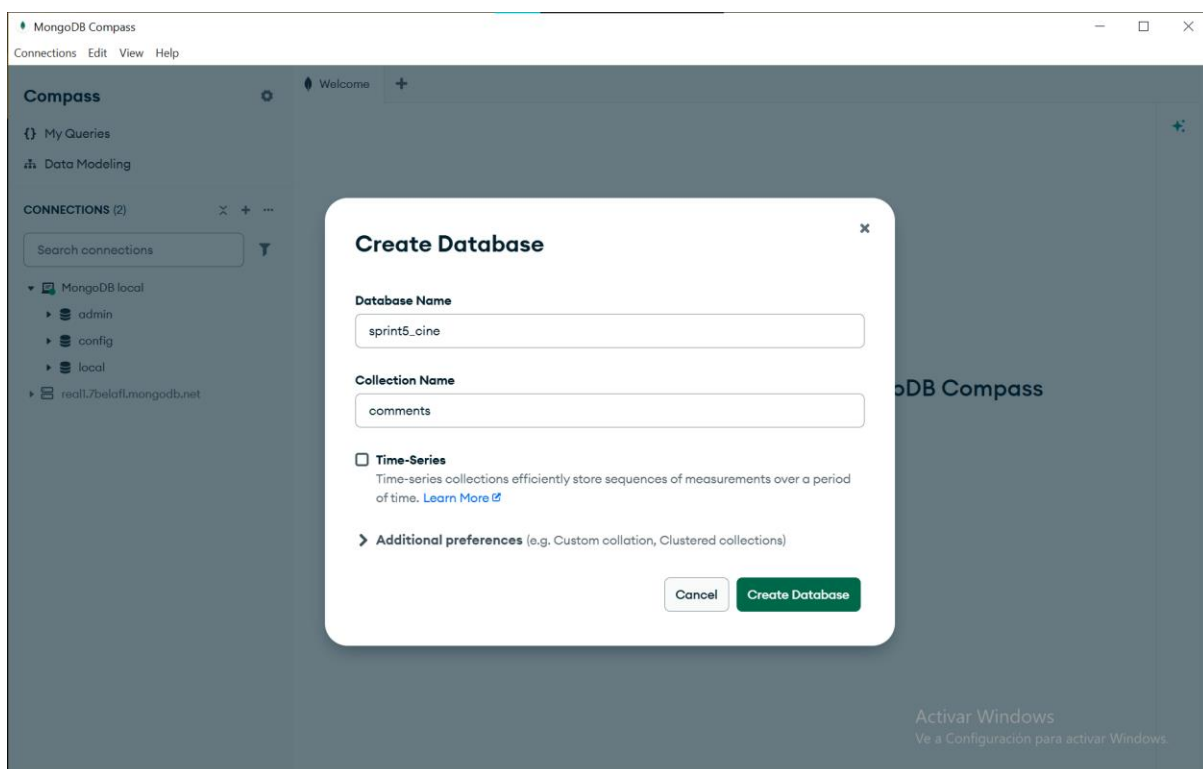
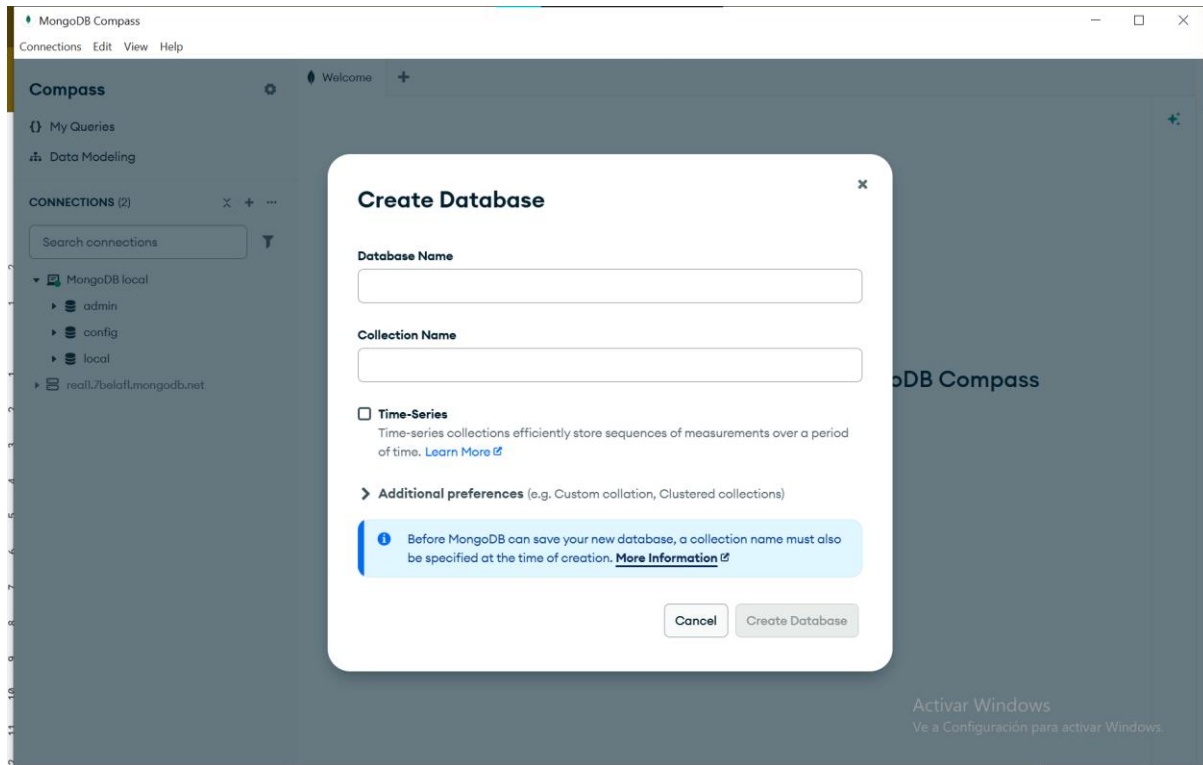


MongoDB Community Server 7.0.43 y MongoDB Compass 1.50 se instalaron en Windows 10. La conexión local se realizó mediante la URI `mongodb://127.0.0.1:27017/`. Posteriormente se creó la base de datos `sprint5_cine`, destinada a almacenar las colecciones proporcionadas para la práctica.

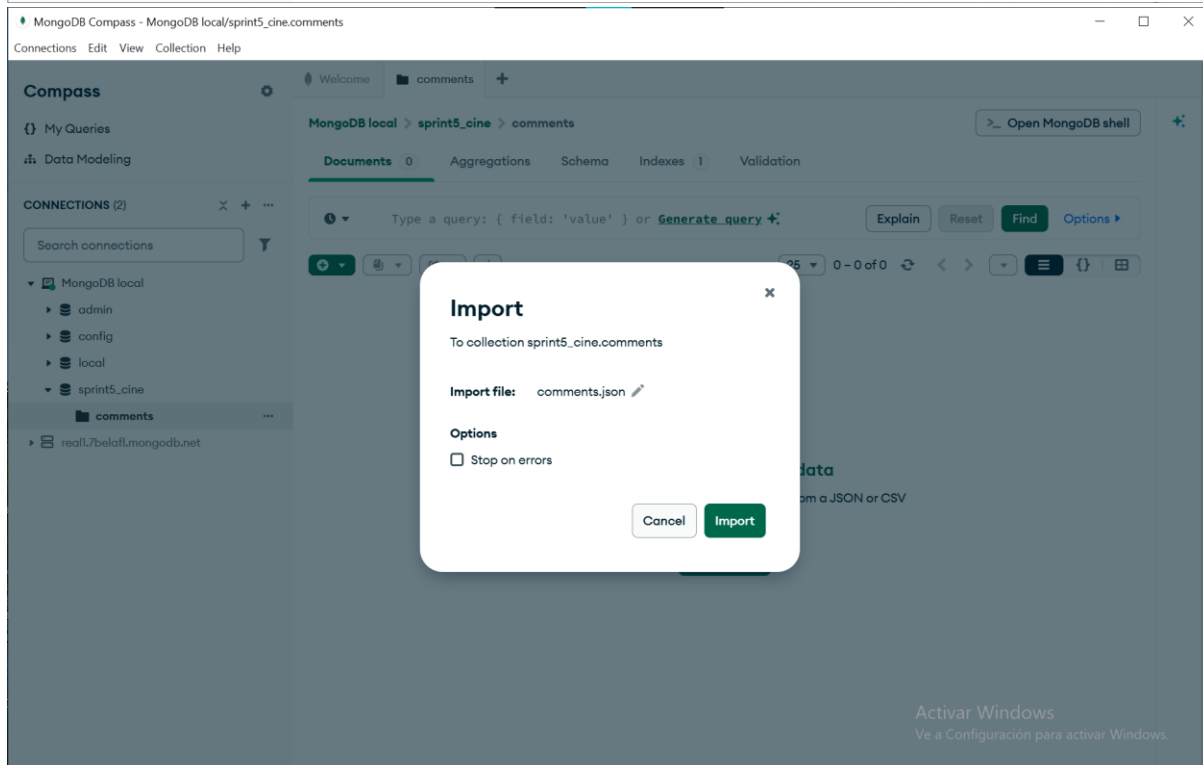

Se importaron correctamente las cinco colecciones JSON en la base de datos sprint5_cine: comments, movies, sessions, theaters y users. Compass muestra aproximadamente 50.304 comentarios, 24.000 películas, 1 sesión, 1.600 teatros y 185 usuarios.

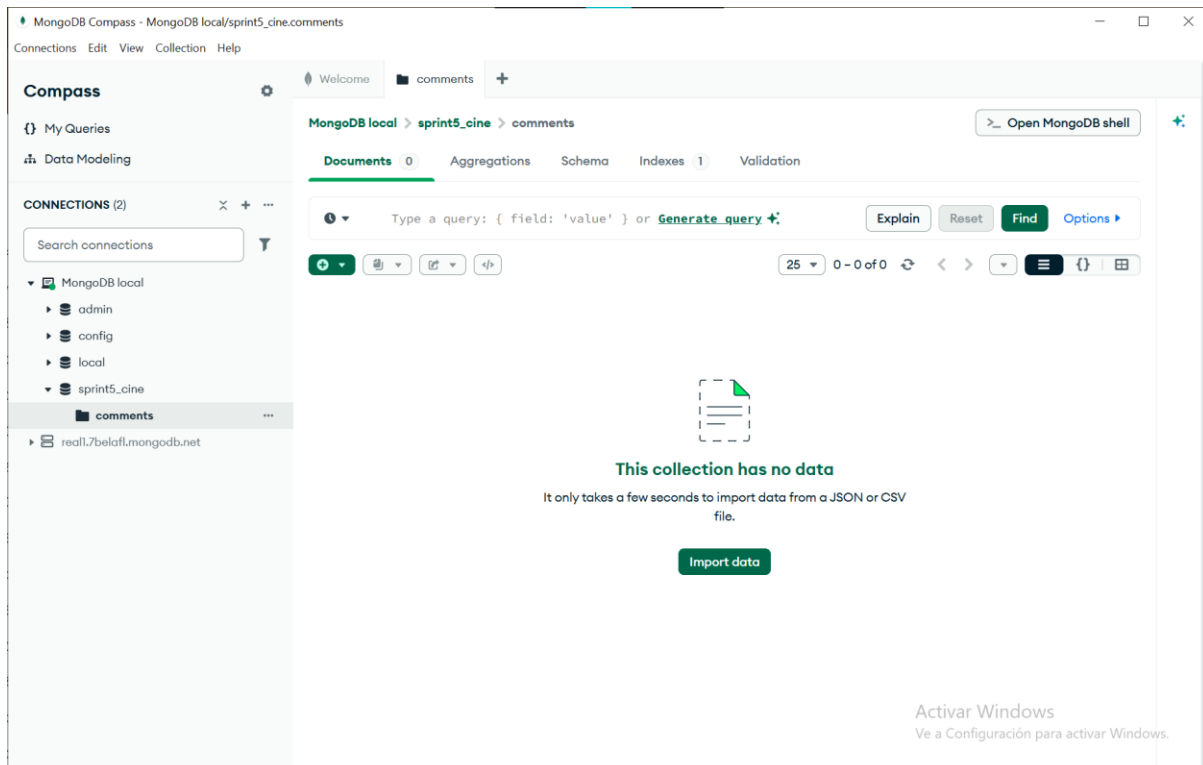

The image shows two screenshots of the MongoDB Compass interface. The top screenshot displays the 'comments' collection with 50K documents. A notification at the bottom left states 'Import completed. 50304 documents imported.' The bottom screenshot shows a 'Create Collection' dialog box with the 'Collection Name' field set to 'users'. The dialog also includes options for 'Time-Series' and 'Additional preferences'.

Top Screenshot: MongoDB Compass - MongoDB local/sprint5_cine.comments

Connections: Edit View Collection Help

Compass

My Queries

Data Modeling

CONNECTIONS (2)

Search connections

MongoDB local

- admin
- config
- local
- sprint5_cine
 - comments

real7beloff.mongodb.net

MongoDB local > sprint5_cine > comments

Documents 50K Aggregations Schema Indexes 1 Validation

Type a query: { field: 'value' } or [Generate query](#)

Explain Reset Find Options

25 1 - 25 of 50304

Document 1:

```
{
  "_id": ObjectId('5a9427648b0beebe69579cc'),
  "name": "Andrea Le",
  "email": "andrea_le@fakegmail.com",
  "movie_id": ObjectId('573a1390f29313caabdc418c'),
  "text": "Rem officiis eaque repellendus amet eos doloribus. Porro dolor volupta.",
  "date": ISODate('2012-03-26T23:20:16.000+00:00') 26 de marzo de 2012 a las 11:20:16 p. m. UTC
}
```

Document 2:

```
{
  "_id": ObjectId('5a9427648b0beebe69579cf'),
  "name": "Greg Powell",
  "email": "greg_powell@fakegmail.com",
  "movie_id": ObjectId('573a1390f29313caabdc41b1'),
  "text": "Tenetur dolorum molestiae ea. Eligendi praesentium unde quod porro. Co.",
  "date": ISODate('1987-02-10T00:29:36.000+00:00') 10 de febrero de 1987 a las 12:29:36 a. m. UTC
}
```

Document 3:

```
{
  "_id": ObjectId('5a9427648b0beebe69579d0'),
  "name": "Talisa Maegyr",
  "email": "oona_chaplin@gameofthron.es",
  "movie_id": ObjectId('573a1390f29313caabdc41b1'),
  "text": "Rem itaque ad sit rem voluptatibus. Ad fugiat maxime illum optio iure .",
  "date": ISODate('1998-08-22T11:45:03.000+00:00') 22 de agosto de 1998 a las 11:45:03 a. m. UTC
}
```

Document 4:

```
{
  "_id": ObjectId('5a9427648b0beebe69579d3'),
  "name": "Cameron Duran",
  "email": "cameron_duran@fakegmail.com",
  "movie_id": ObjectId('573a1390f29313caabdc4217'),
  "text": "Rem itaque ad sit rem voluptatibus. Ad fugiat maxime illum optio iure .",
  "date": ISODate('1998-08-22T11:45:03.000+00:00') 22 de agosto de 1998 a las 11:45:03 a. m. UTC
}
```

Import completed. 50304 documents imported.

Activar Windows
Ve a Configuración para activar Windows.

Bottom Screenshot: MongoDB Compass - MongoDB local/sprint5_cine.comments

Connections: Edit View Collection Help

Compass

My Queries

Data Modeling

CONNECTIONS (2)

Search connections

MongoDB local

- admin
- config
- local
- sprint5_cine
 - comments

real7beloff.mongodb.net

MongoDB local > sprint5_cine > comments

Documents 50K Aggregations Schema Indexes 1 Validation

Type a query: { field: 'value' } or [Generate query](#)

Explain Reset Find Options

25 1 - 25 of 50304

Document 1:

```
{
  "_id": ObjectId('5a9427648b0beebe69579cc'),
  "name": "Andrea Le",
  "email": "andrea_le@fakegmail.com",
  "movie_id": ObjectId('573a1390f29313caabdc418c'),
  "text": "Rem officiis eaque repellendus amet eos doloribus. Porro dolor volupta.",
  "date": ISODate('2012-03-26T23:20:16.000+00:00') 26 de marzo de 2012 a las 11:20:16 p. m. UTC
}
```

Document 2:

```
{
  "_id": ObjectId('5a9427648b0beebe69579cf'),
  "name": "Greg Powell",
  "email": "greg_powell@fakegmail.com",
  "movie_id": ObjectId('573a1390f29313caabdc41b1'),
  "text": "Tenetur dolorum molestiae ea. Eligendi praesentium unde quod porro. Co.",
  "date": ISODate('1987-02-10T00:29:36.000+00:00') 10 de febrero de 1987 a las 12:29:36 a. m. UTC
}
```

Document 3:

```
{
  "_id": ObjectId('5a9427648b0beebe69579d0'),
  "name": "Talisa Maegyr",
  "email": "oona_chaplin@gameofthron.es",
  "movie_id": ObjectId('573a1390f29313caabdc41b1'),
  "text": "Rem itaque ad sit rem voluptatibus. Ad fugiat maxime illum optio iure .",
  "date": ISODate('1998-08-22T11:45:03.000+00:00') 22 de agosto de 1998 a las 11:45:03 a. m. UTC
}
```

Document 4:

```
{
  "_id": ObjectId('5a9427648b0beebe69579d3'),
  "name": "Cameron Duran",
  "email": "cameron_duran@fakegmail.com",
  "movie_id": ObjectId('573a1390f29313caabdc4217'),
  "text": "Rem itaque ad sit rem voluptatibus. Ad fugiat maxime illum optio iure .",
  "date": ISODate('1998-08-22T11:45:03.000+00:00') 22 de agosto de 1998 a las 11:45:03 a. m. UTC
}
```

Import completed. 50304 documents imported.

Activar Windows
Ve a Configuración para activar Windows.

Create Collection Dialog

Collection Name

users

☐ Time-Series
Time-series collections efficiently store sequences of measurements over a period of time. [Learn More](#)

> Additional preferences (e.g. Custom collation, Clustered collections)

Cancel Create Collection

The image displays two screenshots of the MongoDB Compass interface, showing the process of importing data into a MongoDB database.

Top Screenshot: Importing users

- The interface shows the **users** collection in the **sprint5_cine** database.
- The **Documents** tab is selected, showing 185 documents.
- A query is entered: `{ field: 'value' }` or `Generate_query`.
- The **Find** button is clicked, displaying a list of documents. The first document is:

```
{ "_id": ObjectId("59b99db4cfa9a34dcd7885b6"), "name": "Ned Stark", "email": "sean_bean@gameofthron.es", "password": "$2b$12$UREFwsRuoyF0CRqGNk0Lz00HM/jLhgUCNNI39R3AqMUQ74crLj1Vu" }
```

Bottom Screenshot: Importing sessions

- The interface shows the **sessions** collection in the **sprint5_cine** database.
- The **Documents** tab is selected, showing 1 document.
- A query is entered: `{ field: 'value' }` or `Generate_query`.
- The **Find** button is clicked, displaying a list of documents. The first document is:

```
{ "_id": ObjectId("5a97f9c91c807bb9c6eb5fb4"), "user_id": "t3quLfeem@kwiv5.6ur", "jwt": "eyJ0eXA0IjK1Q1IjLCJhbGciOiJIUzI1NiJ9.eyJpYXQiOiJlMTk5MDkzMjEsIm51ZiI6Im" }
```

Both screenshots show a notification at the bottom: **Import completed.** 185 documents imported. (Top) and 1 document imported. (Bottom).


The image displays two screenshots of the MongoDB Compass interface, showing the process of importing data and querying collections.

Top Screenshot: MongoDB Compass - MongoDB local/sprint5_cine.movies

- Connections:** MongoDB local is selected. The 'movies' collection is highlighted under the 'sprint5_cine' database.
- Documents:** 24K documents are shown. A query is entered: `{ field: 'value' }`. The results show two document snippets:
 - Document 1: `{ _id: ObjectId('573a1390f29313caabcd4135'), plot: "Three men hammer on an anvil and pass a bottle of beer around.", genres: Array (1), runtime: 1, cast: Array (2), num_mflix_comments: 1, title: "Blacksmith Scene", fullplot: "A stationary camera looks at a large anvil with a blacksmith behind it...", countries: Array (1), released: ISODate('1893-05-09T00:00:00.000+00:00'), 9 de mayo de 1893 a las 12:00:00 a. m. UTC, directors: Array (1), rated: "UNRATED", awards: Object (3), lastupdated: "2015-08-26 00:03:50.133000000", year: 1893, imdb: Object (3), type: "movie", tomatoes: Object (2) }`
 - Document 2: `{ _id: ObjectId('573a1390f29313caabcd42e8'), plot: "A group of bandits stage a brazen train hold-up, only to find a determ...", genres: Array (2), runtime: 11, Array (4), "https://m.media-amazon.com/images/M/MV5BMTU3NjE5NzYtYTYyNS08MDVmLWIwYj...", "The Great Train Robbery", fullplot: "Among the earliest existing films in American cinema - notable as the ..." }`
- Import Status:** A notification at the bottom left states: "Import completed. 23539 documents imported."

Bottom Screenshot: MongoDB Compass - MongoDB local/sprint5_cine.theaters

- Connections:** MongoDB local is selected. The 'theaters' collection is highlighted under the 'sprint5_cine' database.
- Documents:** 1.6K documents are shown. A query is entered: `{ field: 'value' }`. The results show five document snippets:
 - Document 1: `{ _id: ObjectId('59a47286cfa9a3a73e51e72c'), theaterId: 1000, location: Object (2) }`
 - Document 2: `{ _id: ObjectId('59a47286cfa9a3a73e51e72d'), theaterId: 1003, location: Object (2) }`
 - Document 3: `{ _id: ObjectId('59a47286cfa9a3a73e51e72e'), theaterId: 1008, location: Object (2) }`
 - Document 4: `{ _id: ObjectId('59a47286cfa9a3a73e51e72f'), theaterId: 1004, location: Object (2) }`
 - Document 5: `{ _id: ObjectId('59a47286cfa9a3a73e51e730'), theaterId: 1002, location: Object (2) }`
- Import Status:** A notification at the bottom left states: "Import completed. 1564 documents imported."

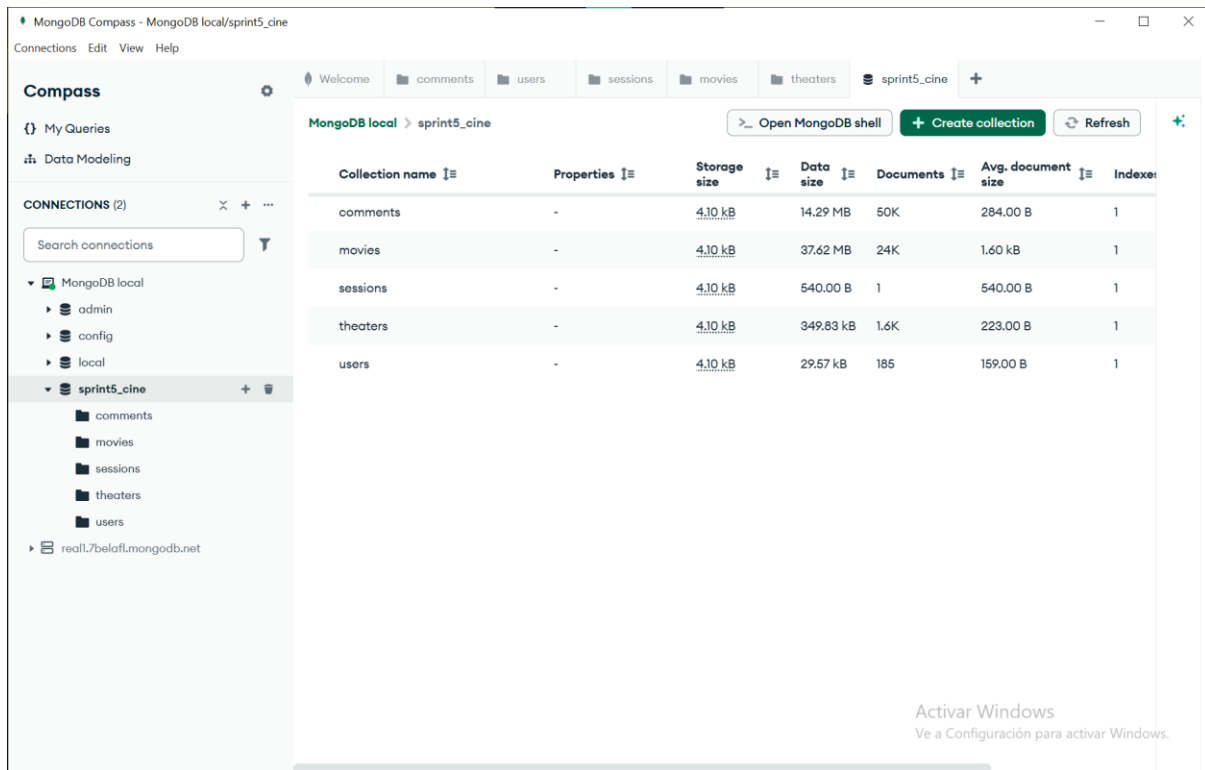

The screenshot shows the MongoDB Compass application window. The title bar reads "MongoDB Compass - MongoDB local/sprint5_cine". The interface includes a sidebar on the left with "My Queries" and "Data Modeling" sections. Below these is a "CONNECTIONS (2)" section with a search bar and a list of connections: "MongoDB local" (expanded) showing "admin", "config", "local", and "sprint5_cine" (selected), and "real1.7belaffl.mongodb.net". The main panel displays the "sprint5_cine" database with a table of collections. The table has columns: "Collection name", "Properties", "Storage size", "Data size", "Documents", "Avg. document size", and "Indexes". The collections listed are "comments", "movies", "sessions", "theaters", and "users".

Collection name	Properties	Storage size	Data size	Documents	Avg. document size	Indexes
comments	-	4.10 kB	14.29 MB	50K	284.00 B	1
movies	-	4.10 kB	37.62 MB	24K	1.60 kB	1
sessions	-	4.10 kB	540.00 B	1	540.00 B	1
theaters	-	4.10 kB	349.83 kB	1.6K	223.00 B	1
users	-	4.10 kB	29.57 kB	185	159.00 B	1

At the bottom right of the window, there is a message: "Activar Windows. Ve a Configuración para activar Windows."


Nivell 1

Crea una base de dades amb MongoDB utilitzant com a col·leccions els arxius adjunts.


Exercici 1

- Mostra els 2 primers comentaris que hi ha en la base de dades.
- Quants usuaris tenim registrats?
- Quants cinemes hi ha en l'estat de Califòrnia?
- Quin va ser el primer usuari/ària en registrar-se?
- Quantes pel·lícules de comèdia hi ha en la nostra base de dades?


La consulta inicial muestra los dos primeros documentos de la colección comments, incluyendo el nombre del usuario, su correo electrónico, la película comentada, el texto y la fecha.

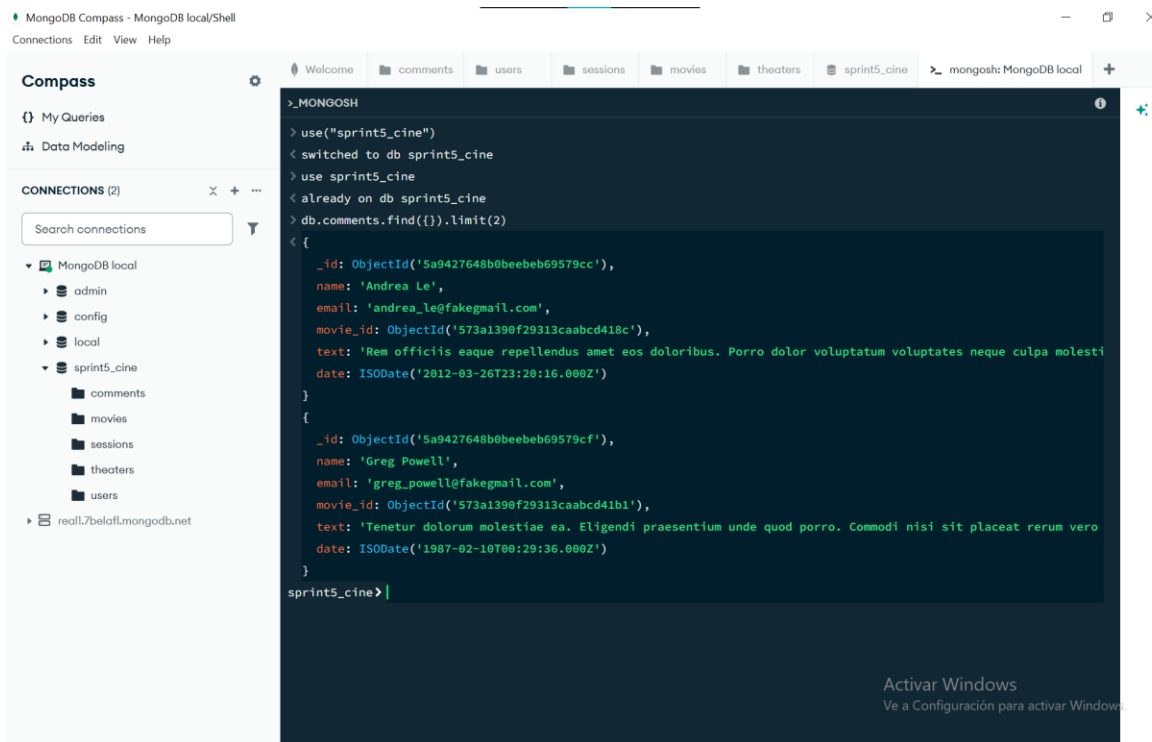


La consulta countDocuments() sobre la colección users contabiliza todos los documentos almacenados. El resultado indica que hay 185 usuarios registrados.

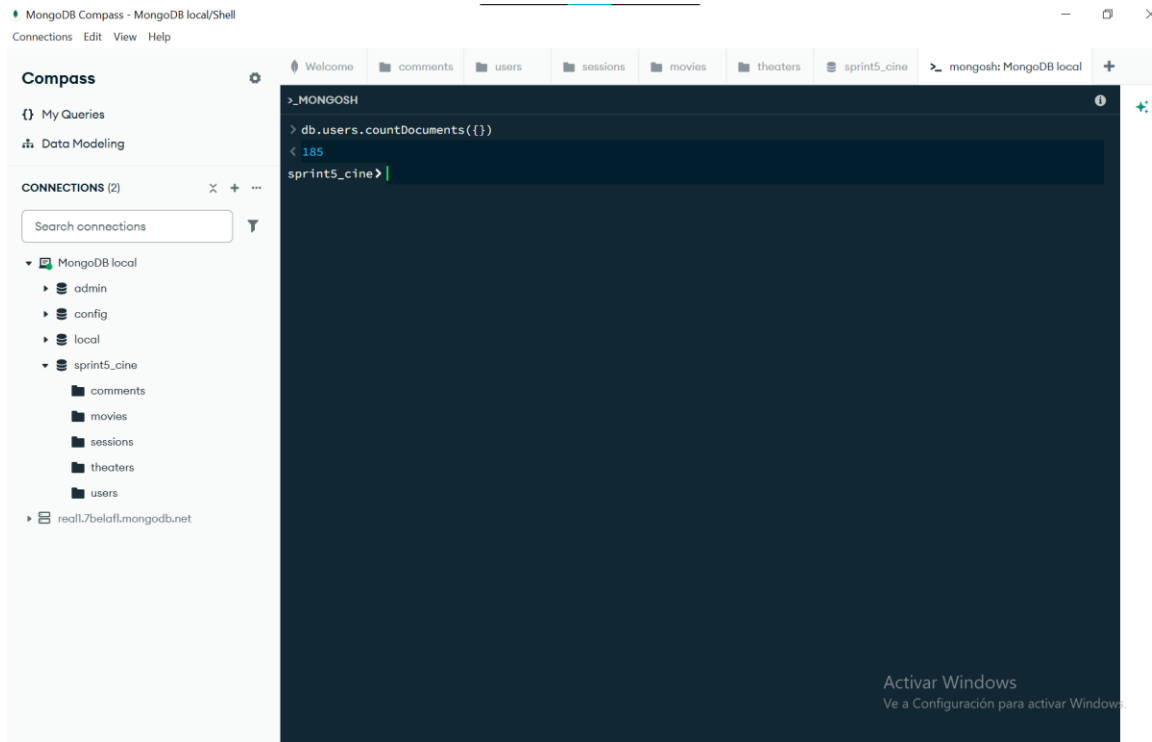


La consulta filtra la colección theaters mediante el campo location.address.state, seleccionando únicamente los documentos cuyo estado es CA. El resultado muestra que hay 169 cines en California.

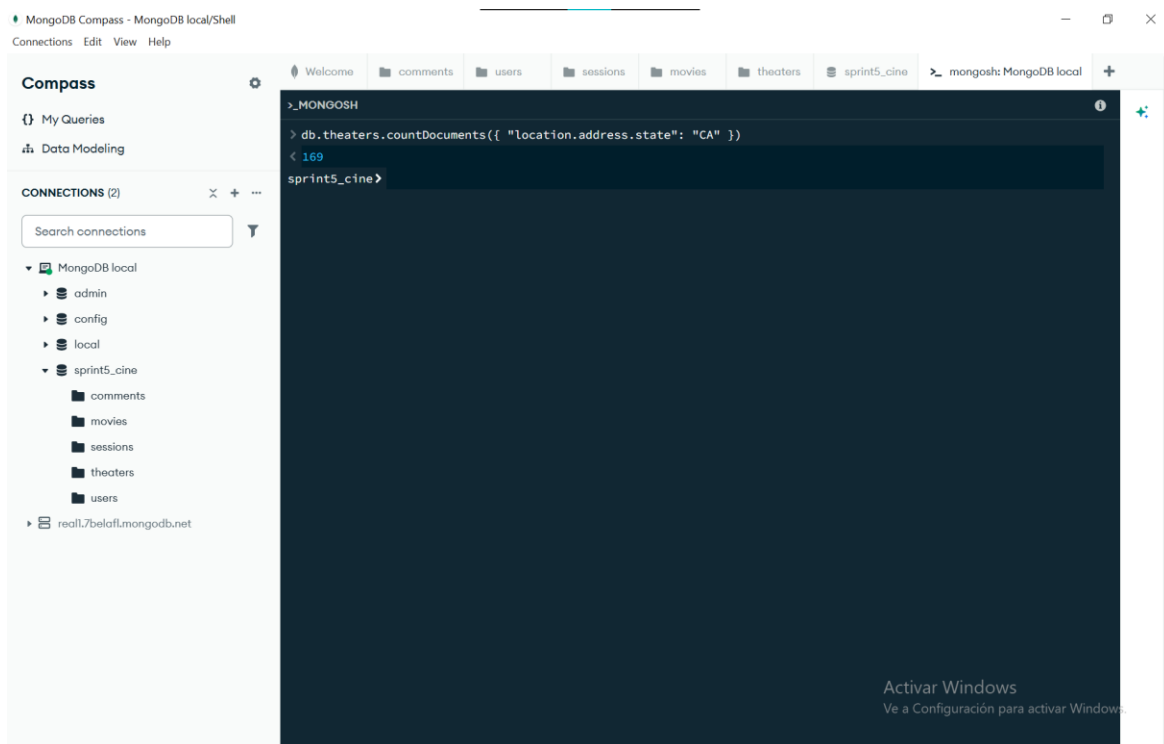

La consulta ordena los usuarios por su identificador `_id` en orden ascendente y devuelve el primer documento, correspondiente a Ned Stark. Al no disponer de un campo de fecha de registro, se utiliza este orden como aproximación a la antigüedad de los usuarios.

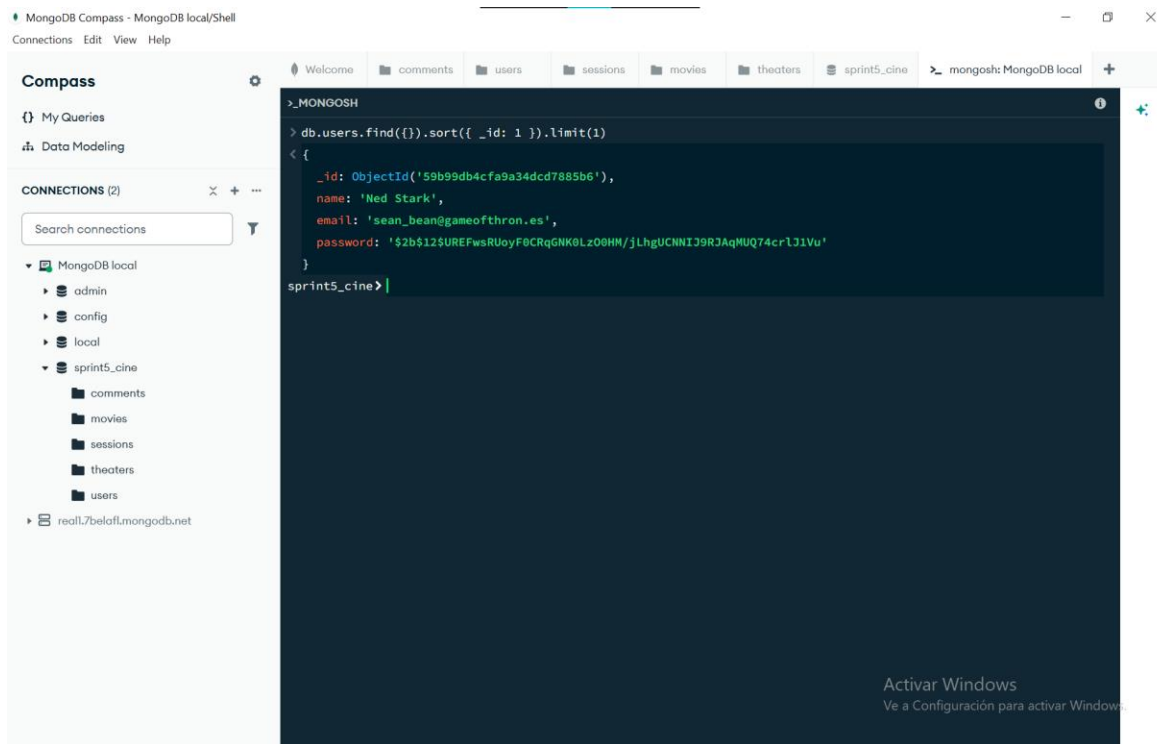



La consulta filtra la colección `movies` buscando el valor `Comedy` dentro del campo `genres`. El resultado indica que hay 7.024 películas de comedia en la base de datos.

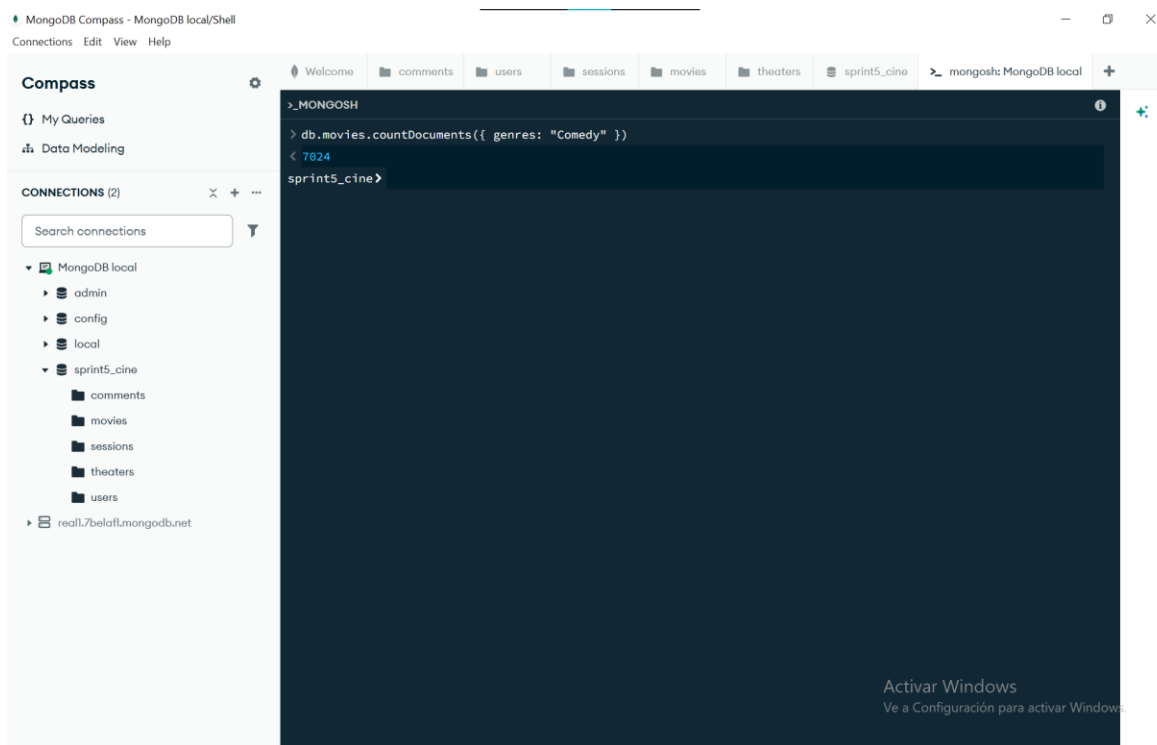

Exercici 2

Mostra'm tots els documents de les pel·lícules produïdes en 1932, però que el gènere sigui drama o estiguin en francès.



La consulta filtra las películas producidas en 1932 y aplica una condición lógica OR: el género debe ser drama o el idioma debe ser francés. De esta forma, se muestran todos los documentos que cumplen al menos una de las dos condiciones.

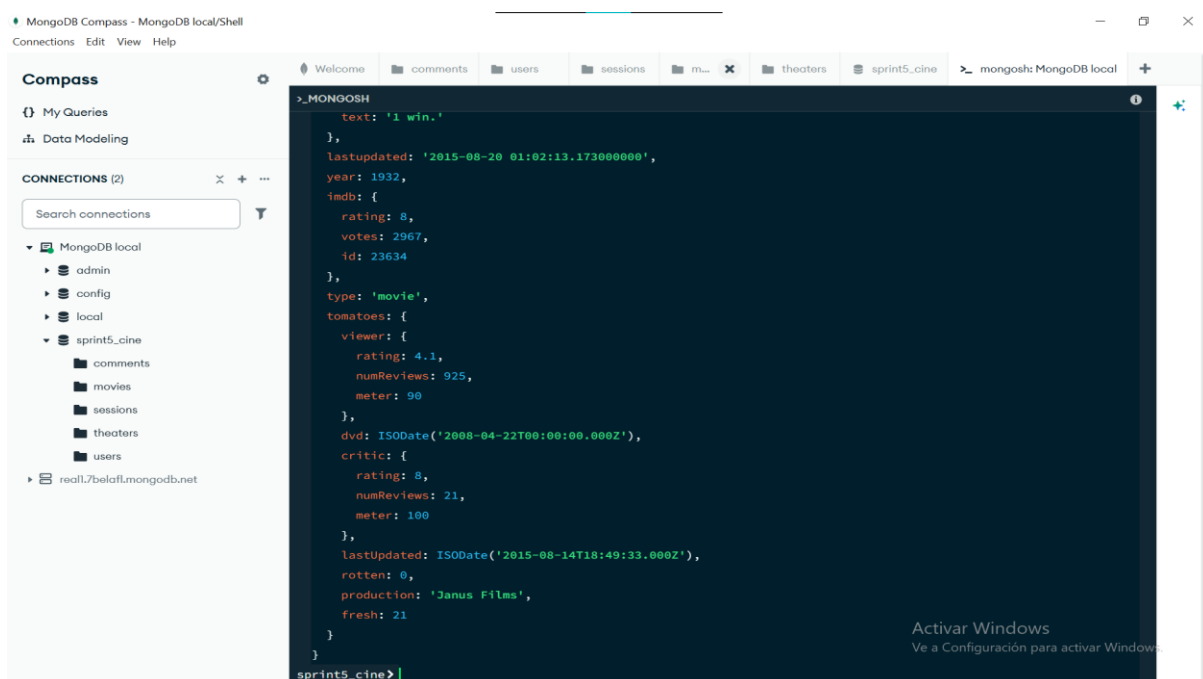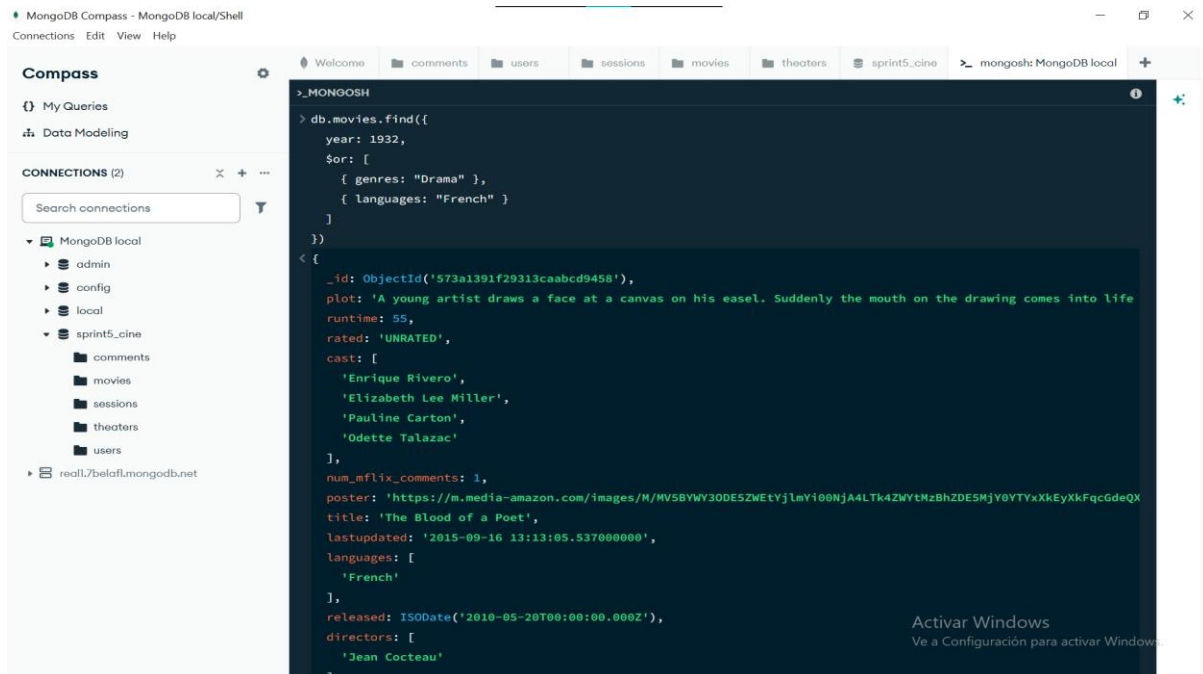

Exercici 3

Mostra'm tots els documents de pel·lícules estatunidenques que tinguin entre 5 i 9 premis que van ser produïdes entre 2012 i 2014.

La consulta selecciona pel·lícules estatunidenques produïdes entre 2012 y 2014, cuyos premios ganados están comprendidos entre 5 y 9, ambos incluidos. El resultado muestra los documentos que cumplen simultáneamente los tres criterios.

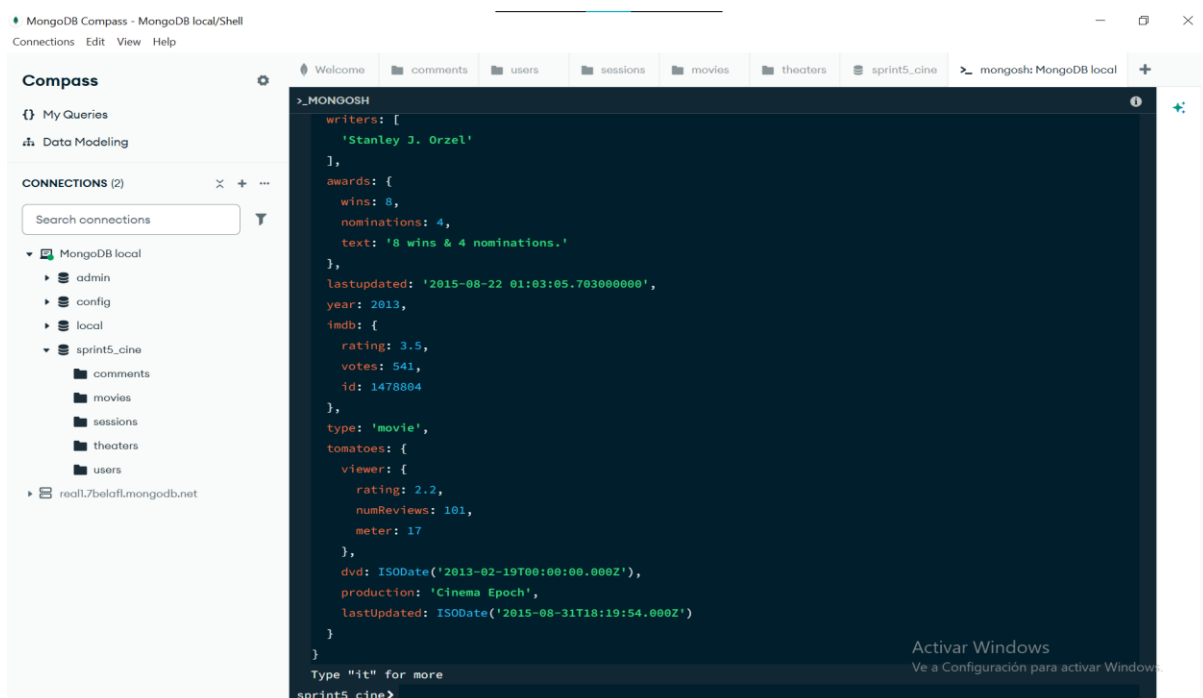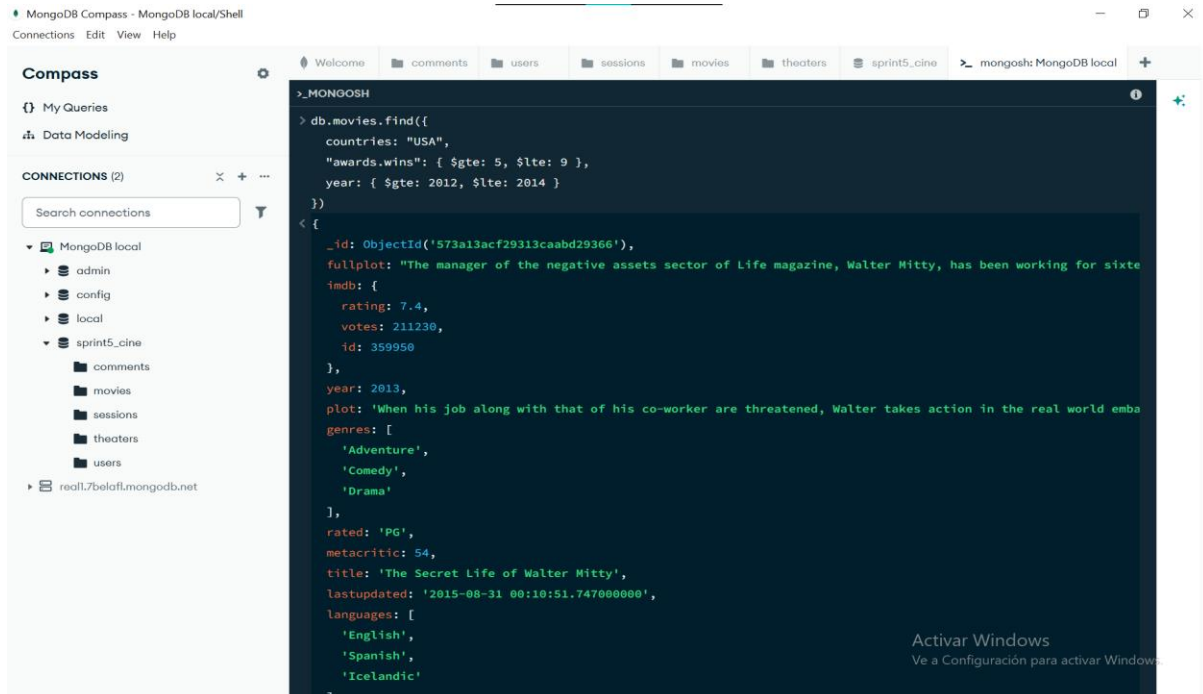


Nivell 2

Exercici 1

Compte quants comentaris escriu un usuari/ària que utilitza "GAMEOFTHRON.ES" com a domini de correu electrònic.

La consulta utilitza una expresi3n regular per localitzar los correos electr3nicos cuyo dominio termina en @gameofthron.es. El resultado indica que existen 22.841 comentarios escritos por usuarios con este dominio.

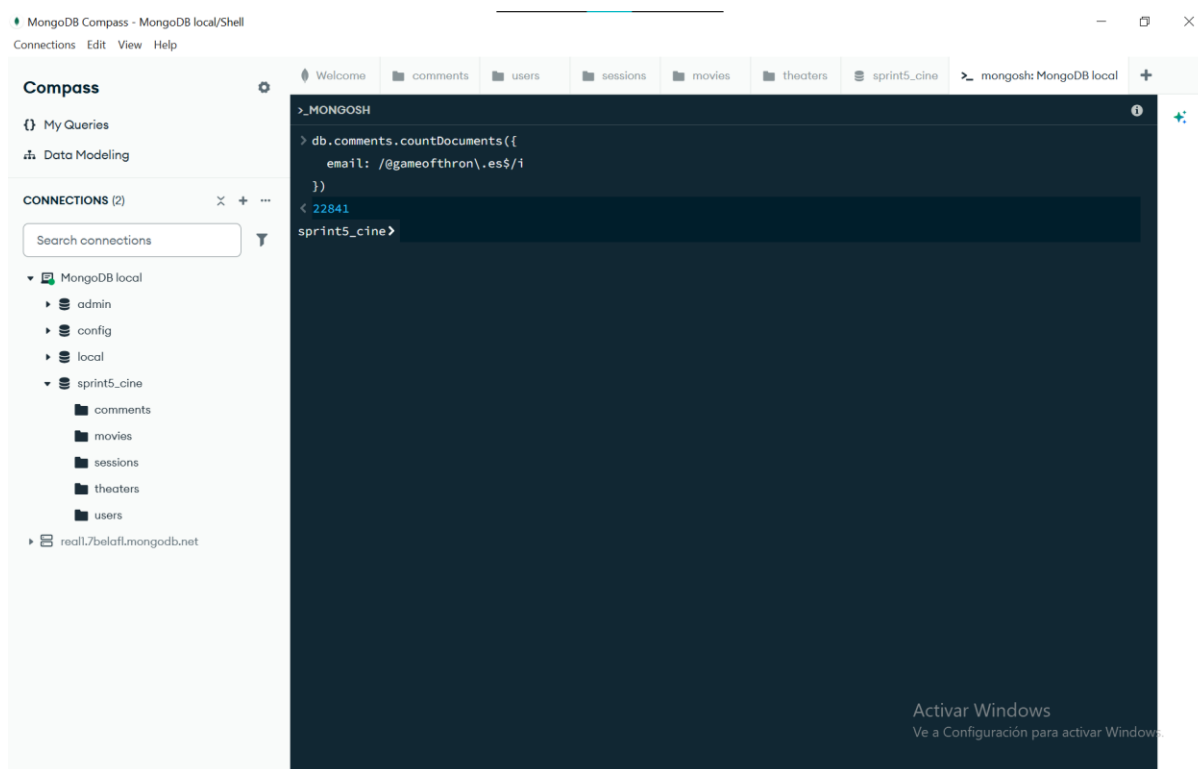

Exercici 2


Quants cinemes hi ha en cada codi postal situats dins de l'estat Washington D. C. (DC)?

Mediante una agregación se filtraron los teatros situados en el estado DC y se agruparon por código postal. Se obtuvieron tres códigos postales, cada uno con un cine:

20002: 1 cine.

20010: 1 cine.

20016: 1 cine.

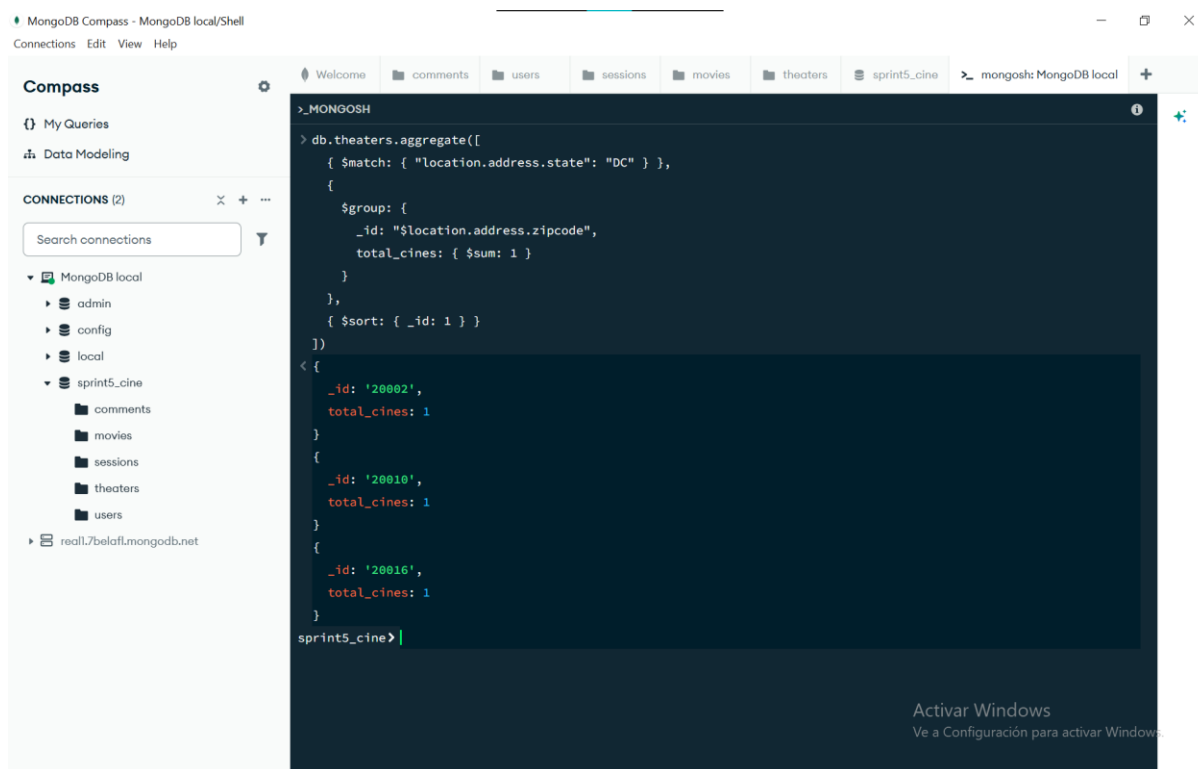


Nivell 3

Exercici 1


Troba totes les pel·lícules dirigides per John Landis amb una puntuació IMDb (Internet Movie Database) d'entre 7,5 i 8.

La consulta busca pel·lícules dirigides por John Landis cuya puntuación IMDb se encuentra entre 7,5 y 8, incluidos ambos límites. Los resultados muestran las películas coincidentes junto con sus datos de IMDb, año, título y director.

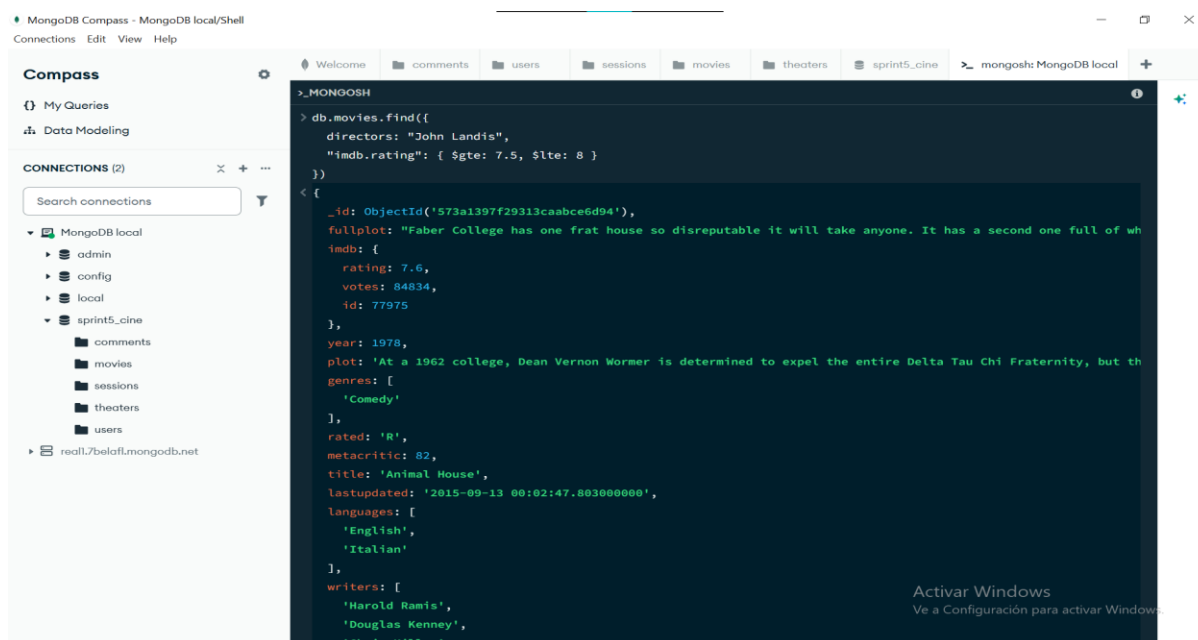

The screenshot shows the MongoDB Compass interface. On the left, the 'CONNECTIONS (2)' panel lists 'MongoDB local' and 'realL7belafLmongodb.net'. The 'My Queries' panel shows a query for the 'movies' collection. The main panel displays the following query and result:

```
>_MONGOSH
> db.movies.find({
  directors: "John Landis",
  "imdb.rating": { $gte: 7.5, $lte: 8 }
})
< [
  {
    _id: ObjectId('573a1397f29313caabce6d94'),
    fullplot: "Faber College has one frat house so disreputable it will take anyone. It has a second one full of wh
    imdb: {
      rating: 7.6,
      votes: 84834,
      id: 77975
    },
    year: 1978,
    plot: 'At a 1962 college, Dean Vernon Wormer is determined to expel the entire Delta Tau Chi Fraternity, but th
    genres: [
      'Comedy'
    ],
    rated: 'R',
    metacritic: 82,
    title: 'Animal House',
    lastupdated: '2015-09-13 00:02:47.803000000',
    languages: [
      'English',
      'Italian'
    ],
    writers: [
      'Harold Ramis',
      'Douglas Kenney',
      'Chris Miller'
    ]
  }
]
```

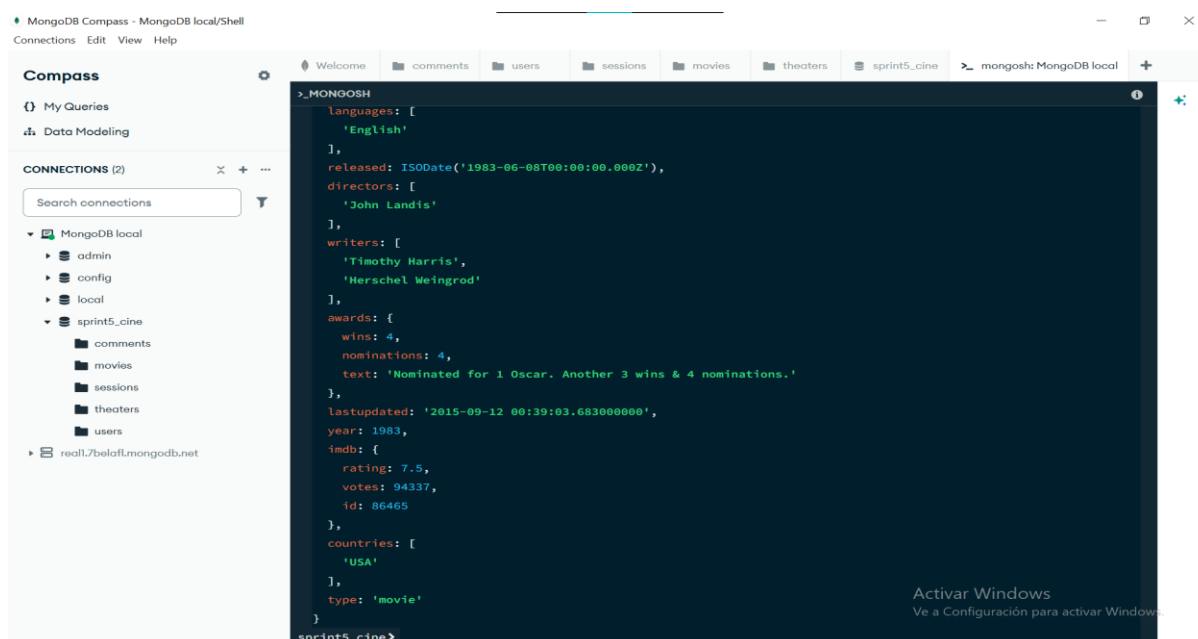


The screenshot shows the MongoDB Compass interface. On the left, the 'CONNECTIONS (2)' panel lists 'MongoDB local' and 'realL7belafLmongodb.net'. The 'My Queries' panel shows a query for the 'movies' collection. The main panel displays the following query and result:

```
>_MONGOSH
languages: [
  'English'
],
released: ISODate('1983-06-08T00:00:00.000Z'),
directors: [
  'John Landis'
],
writers: [
  'Timothy Harris',
  'Herschel Weingrod'
],
awards: {
  wins: 4,
  nominations: 4,
  text: 'Nominated for 1 Oscar. Another 3 wins & 4 nominations.'
},
lastupdated: '2015-09-12 00:39:03.683000000',
year: 1983,
imdb: {
  rating: 7.5,
  votes: 94337,
  id: 86465
},
countries: [
  'USA'
],
type: 'movie'
}
sprint5_cine>
```

Exercici 2

Mostra en un mapa la ubicació de tots els teatres de la base de dades.

La pestanya Schema de MongoDB Compass reconeix el camp geogràfic geo de la col·lecció theaters y representa sus coordenadas sobre un mapa. La visualització permet observar la distribució geogràfica de los teatros incluidos en la base de datos. La colección contiene aproximadamente 1.600 documentos y el informe geográfico mostrado por Compass se basa en una muestra de 1.000 documentos.

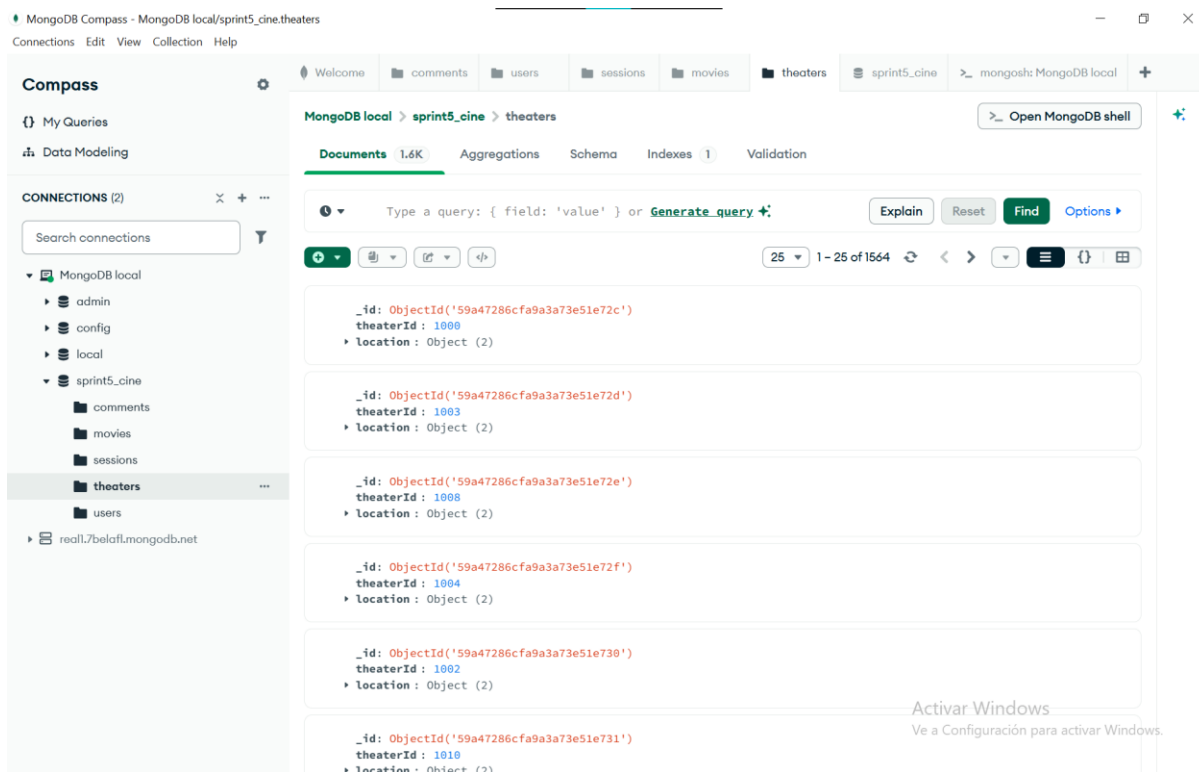

MongoDB Compass - MongoDB local/sprint5_cine.theaters

Connections Edit View Collection Help

Compass

My Queries

Data Modeling

CONNECTIONS (2)

Search connections

MongoDB local

- admin
- config
- local
- sprint5_cine
 - comments
 - movies
 - sessions
 - theaters**
 - users
- real17belaff.mongodb.net

MongoDB local > sprint5_cine > theaters

Documents 1.6K Aggregations Schema Indexes 1 Validation

Type a query: { field: 'value' } or [Generate query](#)

Reset Analyze Options

Explore your schema

Quickly visualize your schema to understand the frequency, types and ranges of fields in your data set.

Analyze schema

[Learn more about schema analysis](#)

Activar Windows
Ve a Configuración para activar Windows.

MongoDB Compass - MongoDB local/sprint5_cine.theaters

Connections Edit View Collection Help

Compass

My Queries

Data Modeling

CONNECTIONS (2)

Search connections

MongoDB local

- admin
- config
- local
- sprint5_cine
 - comments
 - movies
 - sessions
 - theaters**
 - users
- real17belaff.mongodb.net

MongoDB local > sprint5_cine > theaters

Documents 1.6K Aggregations Schema Indexes 1 Validation

Type a query: { field: 'value' } or [Generate query](#)

Reset Analyze Options

[EXPORT SCHEMA](#)

This report is based on a sample of 1000 documents. [Learn more](#)

_id
objectId

first: 2017-08-28 19:44:06 last: 2017-08-28 19:44:07

location
document

Document with 2 nested fields.

theaterid
int32

229	2870	8026	2802	294	2815	1536	1506	233	1021
2710	2753	881	430	2907	1455	8082	2700	8012	8108

Activar Windows
Ve a Configuración para activar Windows.

