

# Mise en place du serveur dns

1-On installe bind9:

```
root@debian:/home/etudiant# apt install bind9
```

2-On configure les fichiers de configuration qui vont permettre de déclarer les zones notamment:

```
GNU nano 7.2                                named.conf.local
//
// Do any local configuration here
//
// Consider adding the 1918 zones here, if they are not used in your
// organization
//include "/etc/bind/zones.rfc1918";

zone "gp7Sloom.local" {
    type master;
    file "/etc/bind/zones/gp7Sloom.local";
};

zone "0.27.172.in-addr.arpa" {
    type master;
    file "/etc/bind/zones/gp7Sloom.local.rev";
};
```

```
GNU nano 7.2                                named.conf.options
options {
    directory "/var/cache/bind";
    recursion yes;
    listen-on{any;};
    // If there is a firewall between you and nameservers you want
    // to talk to, you may need to fix the firewall to allow multiple
    // ports to talk.  See http://www.kb.cert.org/vuls/id/800113

    // If your ISP provided one or more IP addresses for stable
    // nameservers, you probably want to use them as forwarders.
    // Uncomment the following block, and insert the addresses replacing
    // the all-0's placeholder.
    allow-query{any;};
    forwarders {
        8.8.8.8;
        8.8.4.4;
    };

    //=====
    // If BIND logs error messages about the root key being expired,
    // you will need to update your keys.  See https://www.isc.org/bind-keys
    //=====
    dnssec-validation auto;


    listen-on-v6 { any; };
};
```

```
GNU nano 7.2                                named.conf
// This is the primary configuration file for the BIND DNS server named.
//
// Please read /usr/share/doc/bind9/README.Debian for information on the
// structure of BIND configuration files in Debian, *BEFORE* you customize
// this configuration file.
//
// If you are just adding zones, please do that in /etc/bind/named.conf.local

include "/etc/bind/named.conf.options";
include "/etc/bind/named.conf.local";
include "/etc/bind/named.conf.default-zones";
```

```
GNU nano 7.2                                db.local
;
; BIND data file for local loopback interface
;
$TTL      604800
@         IN      SOA      localhost. root.localhost. (
                        2      ; Serial
                        604800 ; Refresh
                        86400  ; Retry
                        2419200; Expire
                        604800 ) ; Negative Cache TTL
;
@         IN      NS       localhost.
@         IN      A        127.0.0.1
@         IN      AAAA     ::1
```

3-test pour voir si le dns est bien configuré:

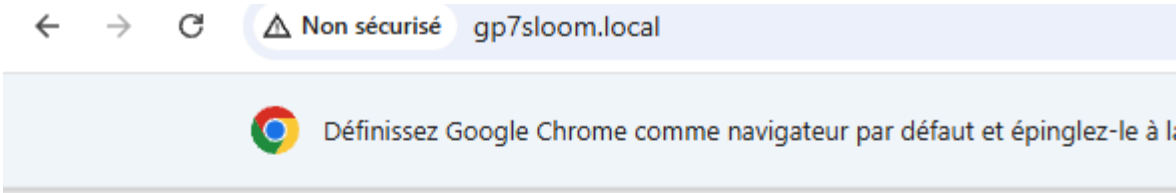

# Index of /

| <a href="#">Name</a>                                                                                                        | <a href="#">Last modified</a> | <a href="#">Size</a> | <a href="#">Description</a> |
|-----------------------------------------------------------------------------------------------------------------------------|-------------------------------|----------------------|-----------------------------|
|  <a href="#">code_source/</a>            | 2026-03-25 14:40              | -                    |                             |
|  <a href="#">index.nginx-debian.html</a> | 2026-04-08 15:20              | 615                  |                             |
|  <a href="#">mywiki/</a>                 | 2025-09-09 21:14              | -                    |                             |

Apache/2.4.66 (Debian) Server at gp7sloom.local Port 80

Ainsi au lieu de voir notre adresse ip, on voit bien le nom de domaine configuré précédemment c'est-à-dire "gp7Sloom.local".

4-Il faut mettre en place un certificat ssl pour pouvoir obtenir le protocole https:

4.1:Mettre en place la clé ainsi que les certificats nécessaire:

```
certdam.crt certdam.csr cledam.key
```

```
root@debian:/home/etudiant# openssl req -new -key cledam -out certdam.csr
```

```
root@debian:/home/etudiant# openssl genrsa -out cledam 20
```

```
root@debian:/home/etudiant# openssl x509 -req -days 300 -in certdam.csr -signkey cledam -out certdam.crt
```

4-2:avec le module ssl pour apache il faut décommenter la ligne dans le fichier **/etc/apache2/mods\_enabled/ssl.load:**

```
# Depends: setenvif mime socache_shmcb
LoadModule ssl_module /usr/lib/apache2/modules/mod_ssl.so
```

4-3: il faut configurer le fichier ports.conf pour que le serveur écoute sur le port 443

```
# If you just change the port or add more ports here, you will likely also
# have to change the VirtualHost statement in
# /etc/apache2/sites-enabled/000-default.conf

Listen 80

<IfModule ssl_module>
    Listen 443
</IfModule>

<IfModule mod_gnutls.c>
    Listen 443
</IfModule>
```

4-4:il faut configurer le fichier /etc/apache2/sites-enabled/default-ssl.conf pour mettre le chemin vers notre clé et notre certificat en .crt:

```
GNU nano 7.2                                default-ssl.conf
<VirtualHost *:443>
    ServerAdmin webmaster@localhost

    DocumentRoot /var/www/html

    # Available loglevels: trace8, ..., trace1, debug, info, notice, warn,
    # error, crit, alert, emerg.
    # It is also possible to configure the loglevel for particular
    # modules, e.g.
    #LogLevel info ssl:warn

    ErrorLog ${APACHE_LOG_DIR}/error.log
    CustomLog ${APACHE_LOG_DIR}/access.log combined

    # For most configuration files from conf-available/, which are
    # enabled or disabled at a global level, it is possible to
    # include a line for only one particular virtual host. For example the
    # following line enables the CGI configuration for this host only
    # after it has been globally disabled with "a2disconf".
    #Include conf-available/serve-cgi-bin.conf

    # SSL Engine Switch:
    # Enable/Disable SSL for this virtual host.
    SSLEngine on

    # A self-signed (snakeoil) certificate can be created by installing
    # the ssl-cert package. See
    # /usr/share/doc/apache2/README.Debian.gz for more info.
    # If both key and certificate are stored in the same file, only the
    # SSLCertificateFile directive is needed.
    SSLCertificateFile      /home/etudiant/certdam.crt
    SSLCertificateKeyFile    /home/etudiant/cledam.key
```

4.5: il ne reste plus qu'à relancer le service et de tester si celui ci fonctionne ou non:



Ainsi on observe bien que le protocole https est actif