

Columns:

1. №
2. Action
3. Expected result
4. Pass/Fail
5. Comment

№	Action	Expected result	Pass/Fail	Comment
1	Empty the database by running the script <i>emptyDb.sh</i> .			
2	Launch PCC by executing command <i>mvn jetty:run</i> .	There are no processes in the Processes tab of the PCC (see image № 1 below).		
3	Add a new resource DP with following data: <pre>resource R1210 "DP" { limits { <u>dailymax</u> 8.00h } }</pre>			
4	Add a new task with following data: <pre>task T2010 "Some interesting task" { start \${now} priority 200 allocate R1210 effort 2.50h }</pre>			
5	Schedule the processes by pressing the Schedule button in the <i>Scheduling</i> tab.	Tasks are scheduled without problems.		
6	Open <i>Daily plan</i> tab.			
7	Select <i>Estimated completion dates</i> tab.	Table contains one entry for the task from		

		step 4.		
8	Select the day, on which the entered task is assumed to be completed (see step 7).	Table <i>Daily goals</i> contains one entry for the task from step 4. Table <i>Schedule</i> contains one entry for task from step 4.		

Images

Image № 1

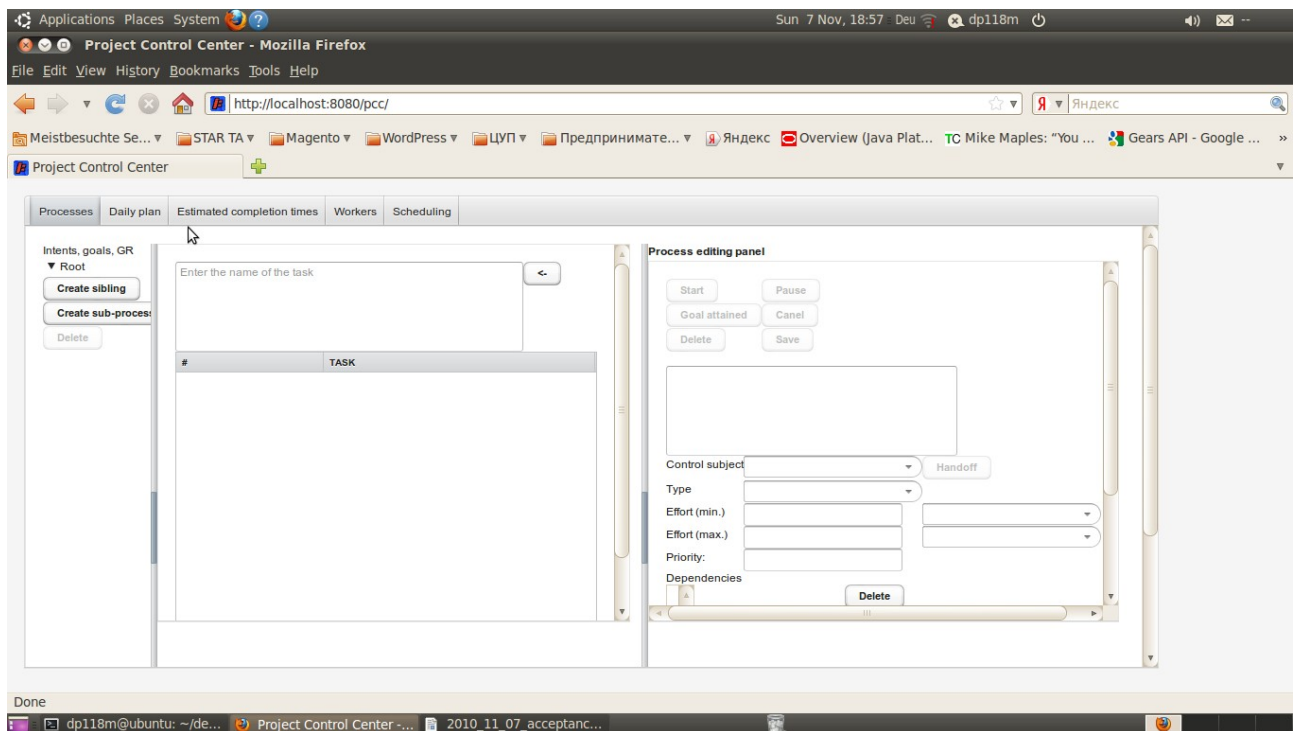


Image № 2

