


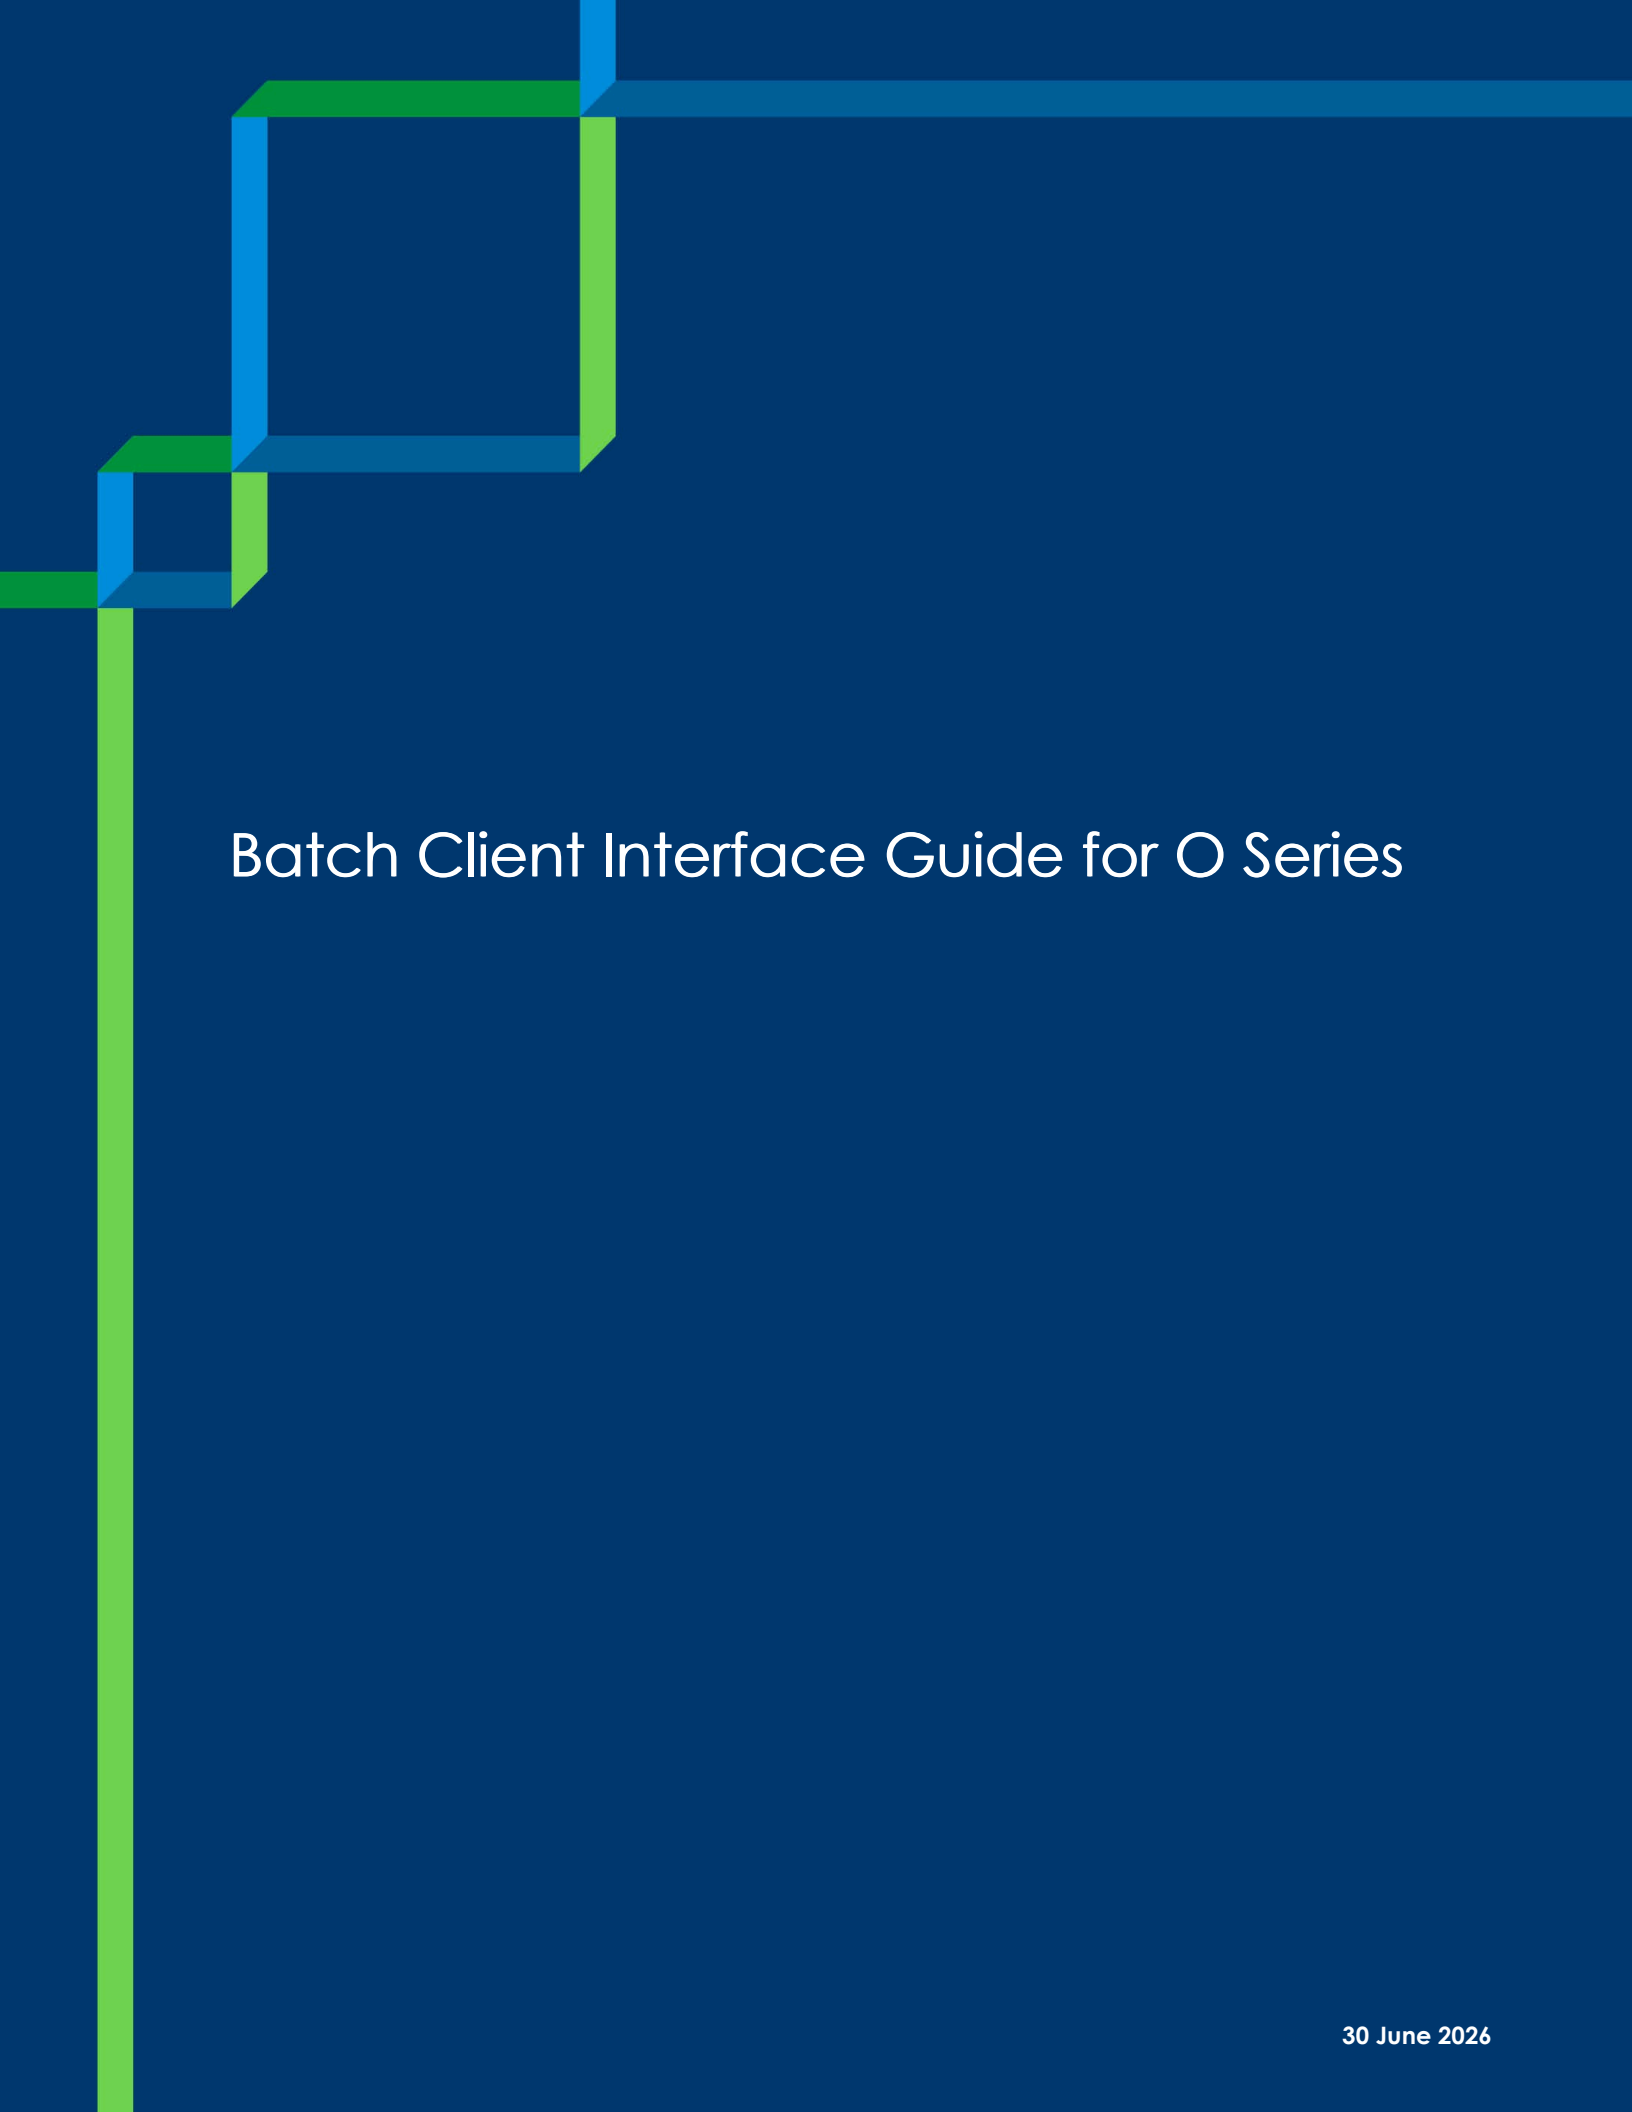

Batch Client Interface Guide for O Series

Contents

- BCI fields for Procurement events 3
 - BCI Accrual, Distribute Tax, and Purchase Order events: Required fields 3
 - BCI Accrual, Distribute Tax, PO, and ERS events: Optional transaction fields..... 6
 - BCI Accrual, Distribute Tax, PO, and ERS events: Optional line-item fields 14
 - BCI Accrual, Distribute Tax, PO, and ERS events: Location role fields 37
 - BCI Inventory Removal and Asset Movement events: Required fields 45
 - BCI Inventory Removal and Asset Movement events: Optional transaction fields 47
 - BCI Inventory Removal and Asset Movement events: Optional line-item fields 53
 - BCI Inventory Removal and Asset Movement events: Location role fields 68

BCI fields for Procurement events

A series of articles describe the fields for Procurement transactions that are processed for tax calculation via Batch Client Interface (BCI). The source of transactions can be either a CSV file or a database. The Procurement events are:

- Accrual, Distribute Tax, Purchase Order, and Evaluated Receipts Settlement events
- Inventory Removal and Asset Movement events

You can find the field descriptions for various types of fields in these articles:

- [BCI Accrual, Distribute Tax, PO, and ERS events: Required fields](#)
- [BCI Accrual, Distribute Tax, PO, and ERS events: Optional transaction fields](#)
- [BCI Accrual, Distribute Tax, PA, and ERS events: Optional line-item fields](#)
- [BCI Accrual, Distribute Tax, PA, and ERS events: Location role fields](#)
- [BCI Inventory Removal and Asset Movement events: Required fields](#)
- [BCI Inventory Removal and Asset Movement events: Optional transaction fields](#)
- [BCI Inventory Removal and Asset Movement events: Optional line-item fields](#)
- [BCI Inventory Removal and Asset Movement events: Location role fields](#)

Related articles

[Overview of BCI](#)

[BCI with CSV files](#)

[BCI with databases](#)

[BCI fields for Supplies events](#)

BCI Accrual, Distribute Tax, and Purchase Order events: Required fields

This article describes the required fields for certain types of Procurement transactions that are processed for tax calculation via Batch Client Interface (BCI). The source of transactions can

be either a CSV file or a database. The fields described in this article pertain to these transaction types:

- Accrual
- Distribute Tax
- Purchase Order (PO)
- Evaluated Receipts Settlement (ERS)

The table distinguishes transaction-level fields from line item-level fields. It also specifies when there is a difference in the field name for CSV files and databases.

Required fields

These fields are required for Accrual, Distribute Tax Procurement, Purchase Order, and Evaluated Receipts Settlement (ERS) events:

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
<i>Transaction-level fields</i>			
None/batchId	N/A	numeric(9)	Identifies a group of transaction records within your input database. If you use batch control, this field is required in every row of the input database. Also required is a transaction control database. This field is required for database input.
batchStatus	N/A	numeric(1)	Field for database use only. The status of the transactions that are associated with this batch: • 0 = New. Batch is not ready to be processed. Set batchStatus to 0 when you are building the batch. • 1 = Ready to be processed. Batch is ready to be processed. Set batchStatus to 1 when the batch is ready. • 2 = Processing. Batch for which processing is in progress. • 3 = Complete. Batch for which processing is completed. • 4 = Failed. Batch for which processing has failed.

Company Code/ companyCode	String (1-40)	varchar/ nvarchar (40)	The identifier for the taxpayer. In Procurement events, this field refers to the Buyer.
Destination Tax Area ID/ destinationTaxAreald	Integer (0 - 999999999)	numeric(9)	A Vertex-specific number that identifies a tax area. If the Tax Area ID exists in your host system, use that data to populate this data element in a request message.
Destination City/ destinationCity	String (1 - 60)	varchar/ nvarchar (60)	The proper name of the city that determines the Tax Area ID (if none is supplied). Optional but recommended for greatest precision if no Tax Area ID is supplied.
Document Number/ documentNumber	String (1-40)	varchar/ nvarchar (80)	The document number in the host application that references the event.
Document Date/ documentDate	Date	varchar/ nvarchar (10)	The actual date of the requested action. The Calculation Engine uses this date to determine the valid tax rates and rules. Valid formats are MM/DD/CCYY (for CSV) and CCYY-MM-DD (for database).
Message Type/ messageType	String (1-40)	varchar/ nvarchar (50)	Determines the type of financial event for each transaction in the BCI data input file. Valid values for Procurement are Accrual, Distribute Tax Procurement, Purchase Order, and Evaluated Receipts Settlement (ERS) events. Note: The message type delete can be used to back out transactions that were not meant to be processed, and to flag the transactions as deleted.
Line item-level fields			
None/batchid	N/A	numeric(9)	Identifies a group of transaction records within your input database. If you use batch control, this field is required in every row of the input database. Also required is a transaction control database. This field is required for database input.
Extended Price/ extendedPrice	Decimal	Numeric(18.3)	Specifies the actual price of the line item. However, if Quantity and Unit Price are supplied, this field is not required.
Line Item Number/ lineItemNumber	Integer	Numeric(18.0)	A line number for the line item. This number can be used as a reference in reports or in audits. If no line item number is supplied, a number is assigned. This field must be a unique value within a given transaction. The Document Number field groups line items into a transaction. Each Line Item Number must be unique within a Document Number.

Identify the destination location

For every transaction, BCI requires a field that identifies the destination location of the transaction. BCI can use one of four fields, which it searches for in this order:

1. Destination Tax Area ID (Destination TAID). If this field is null, BCI searches for:
2. Either Destination City (destinationCity) or Destination State (destinationMainDivision). If this field is null, BCI searches for:
3. Location Code (locationCode). If this field is null, BCI throws an error.

Related articles

[BCI Accrual, Distribute Tax, PO, and ERS events: Optional transaction fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Optional line-item fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Location role fields](#)

[BCI Inventory Removal and Asset Movement events: Required fields](#)

[BCI Inventory Removal and Asset Movement events: Optional transaction fields](#)

[BCI Inventory Removal and Asset Movement events: Optional line-item fields](#)

[BCI Inventory Removal and Asset Movement events: Location role fields](#)

[BCI fields for Supplies events](#)

[Overview of BCI](#)

BCI Accrual, Distribute Tax, PO, and ERS events: Optional transaction fields

This article describes the optional, transaction-level fields for certain types of Procurement transactions that are processed for tax calculation via Batch Client Interface (BCI). The source of transactions can be either a CSV file or a database. The fields described in this article pertain to these transaction types: Accrual, Distribute Tax, Purchase Order (PO), and Evaluated Receipts Settlement (ERS).

The fields are organized alphabetically by these types:

- Administrative Destination (refer to [Location role fields](#))

- Billing Type
- Brazil Drivers
- Buyer
- Calculate Both Perspectives
- Chain Transaction Phase
- Company
- Currency
- Destination (refer to [Location role fields](#))
- Document Type
- Exemption Certificate Number
- Exporter Of Record
- Importer Of Record
- Order Type
- Posting Date
- Transport Responsible Entity
- Vendor

Billing Type field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Billing Type	String (1-20)	varchar/ nvarchar (20)	Identifies billing documents that specify business transactions that are involved in billing activities. Examples of these documents include invoices, credit memos, and debit memos.

Brazil Driver fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
buyerCondition / Buyer Condition	String (1-40)	varchar (40)	The Buyer Condition is mandatory information for calculating taxes in Brazil. It represents the type of tax behavior of the entity when buying goods or services.
buyerCNAE / Buyer CNAE	String (1-40)	varchar (40)	The CNAE (National Classification of Economic Activities) five-digit numeric code that identifies optional information for calculating taxes in Brazil. This code: - Identifies what is being purchased by whom - Provides more granular information as compared to the Buyer Condition
natureOfFiscalOperation / Nature of Fiscal Operation	String (1-40)	varchar (40)	Mandatory information for calculating taxes in Brazil. A two-character alphabetical code that identifies the transaction type.
sellerCondition / Seller Condition	String (1-40)	varchar (40)	The Seller Condition is mandatory information for calculating taxes in Brazil. It represents the type of tax behavior of the entity when selling goods or services.
sellerCNAE / Seller CNAE	String (1-40)	varchar (40)	The CNAE (National Classification of Economic Activities) five-digit numeric code that identifies optional information for calculating taxes in Brazil. This code: - Identifies what is being sold by whom - Provides more granular information as compared to the Seller Condition

Buyer fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type
---	------------------	-----------------------

Buyer Registration Number/ buyerRegistrationNumber	String (1-40)	varchar/nvarchar (40)
Buyer Registration Country/ buyerRegistrationCountry	String (1-3)	varchar/nvarchar (3)
Buyer Registration State/ buyerRegMainDivision	String (1-60)	varchar/nvarchar (60)
Buyer Physical Presence Indicator/ buyerPhysicalPresenceInd	Integer (0 - 999999999)	numeric(1)
Buyer Tax Registration Type / buyerRegistrationType	String (1-80)	varchar / nvarchar (80)

Note: This registration is associated with the taxpayer. If you provide the Buyer Registration Number, but not the Buyer Registration Country, BCI uses the Physical Origin Country to process a given transaction.

Calculate Both Perspectives field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Calculate Both Perspective/ calcBothInd	String (1-80)	varchar/ nvarchar (80)	When set to True, indicates to calculate taxes from both the Vendor and the Buyer perspectives.

Chain Transaction Phase

Note: VAT chain transaction calculation logic will be added to the Vertex Calculation Engine in a future release.

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Chain Transaction Phase/ chainTransactionPhase	String (1-20)	varchar/ nvarchar (20)	The Chain Transaction Phase field identifies a phase within a series of transactions in which multiple invoices are raised with only a single movement of goods. Valid values for this field are MANUFACTURER ,

			INTERMEDIARY , and FINAL .
--	--	--	--

Company fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Division Code/ divisionCode	String (1-40)	varchar/ nvarchar (40)	Identifies the mid-level legal entity for which tax exceptions may exist. The O Series user interface is used to set up any taxability rules that apply at this level.
Department Code/ departmentCode	String (1-40)	varchar/ nvarchar (40)	Identifies the low-level legal entity for which specific tax requirements and exceptions may exist. Use the O Series user interface to set up any taxability rules that apply at this level. Based on your legal or tax liabilities at this level, map the appropriate host system parameter to this data element. If all of your tax exceptions are at the top- or mid-level entity, you may choose not to populate this data element. Note that this data element is also used to sort reports.

Currency fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Currency/ CurrencyCode	String (1-3)	varchar/ nvarchar (3)	The three-digit ISO 4217 code for the currency unit. This is the Transaction currency.
Original Currency/ OriginalCurrencyCode	String (1-3)	varchar/ nvarchar (3)	The currency in which the original business transaction took place. This is the Functional or Book currency.

Document Type field

CSV Field Name/	CSV	Database	Description
-----------------	-----	----------	-------------

Database Field Name	Data Type	Data Type	
DocumentType	String (1-20)	varchar/ nvarchar (20)	Identifies the type of transaction to be posted.

Exemption Certificate Number

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Exemption Certificate Number/ exemptionCertificate Number	String (1-30)	varchar/ nvarchar (30)	The certificate identifier assigned by the tax jurisdiction.

Exporter Of Record

Note: VAT chain transaction calculation logic will be added to the Vertex Calculation Engine in a future release.

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Exporter of Record / exporterOfRecord	String (1-40)	varchar/ nvarchar (40)	Indicates the responsible entity for export of goods in a chain transaction. Valid values for this field are Buyer , Seller , Dispatcher , and Recipient .

Importer Of Record

Note: VAT chain transaction calculation logic will be added to the Vertex Calculation Engine in a future release.

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
--	---------------	--------------------	-------------

Database Field Name	Type	Type	
Importer of Record / importerOfRecord	String (1-40)	varchar/ nvarchar (40)	Indicates the responsible entity for import of goods in a chain transaction. Valid values for this field are Buyer , Seller , Dispatcher , and Recipient .

Order Type field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
OrderType	String (1-20)	varchar/ nvarchar (20)	Identifies the purpose of the order. This is useful for Intrastat reporting purposes. Examples of these documents include special orders and rework orders.

Posting Date fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Posting Date/ postingDate	Date	varchar/ nvarchar (10)	The date when the transaction is posted for auditing and reporting purposes. If no date is provided, the Calculation Engine uses the date when the transaction was processed. Valid formats are MM/DD/CCYY (for CSV) and CCYY-MM-DD (for database).

Transport Responsible Entity

Note: VAT chain transaction calculation logic will be added to the Vertex Calculation Engine in a future release.

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Transport Responsible Entity / transportResponsibleEntity	String (1-40)	varchar/ nvarchar (40)	Indicates the responsible entity for organizing or arranging the transport of goods in a chain transaction. Valid values for this field are Buyer , Seller , Dispatcher , and Recipient .

Vendor fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Vendor Code/ vendorCode	String (1-40)	varchar/ nvarchar (40)	A user-defined code that represents the vendor (external seller or vendor) for the transaction or line item. Use the O Series user interface to set up any taxability rules that apply at this level.
Vendor Class Code/ vendorClassCode	String (1-40)	varchar/ nvarchar (40)	A code used to represent groups of vendors, dispatchers, or recipients who have similar taxability. Caution: If you pass a classCode, do not pass a TaxRegistrationNumber because the registration number does not apply to the entire class.
Vendor Registration Number/ vendorRegistration Number	String (1-40)	varchar/ nvarchar (40)	A numeric identifier for the vendor's VAT registration.
Vendor Registration Country/ vendorRegistration Country	String (1-3)	varchar/ nvarchar (3)	A two- or three-character alphabetic ISO code indicating the country represented by the registration.
Vendor Registration Main Division/ vendorRegMainDivision	String (1-60)	varchar/ nvarchar (60)	The proper name or the postal abbreviation of the state, province, or territory represented by the registration.
Vendor Physical Presence Indicator/ vendorPhysicalPresence Ind	Decimal	Numeric(1)	Indicates whether or not the vendor has a physical presence in the country represented by the registration. Valid values are True and False.
Vendor Tax Registration	String	varchar /	Indicates the tax registration type associated with the vendor role in

Type / vendorRegistrationType	(1–80)	nvarchar (80)	the transaction.
----------------------------------	--------	------------------	------------------

Related articles

[BCI Accrual, Distribute Tax, PO, and ERS events: Required fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Optional line-item fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Location role fields](#)

[BCI Inventory Removal and Asset Movement events: Required fields](#)

[BCI Inventory Removal and Asset Movement events: Optional transaction fields](#)

[BCI Inventory Removal and Asset Movement events: Optional line-item fields](#)

[BCI Inventory Removal and Asset Movement events: Location role fields](#)

[BCI fields for Supplies events](#)

[Overview of BCI](#)

BCI Accrual, Distribute Tax, PO, and ERS events: Optional line-item fields

This article describes the optional, line item-level fields for certain types of Procurement transactions that are processed for tax calculation via Batch Client Interface (BCI). The source of transactions can be either a CSV file or a database. The fields described in this article pertain to these transaction types: Accrual, Distribute Tax, Purchase Order (PO), and Evaluated Receipts Settlement (ERS).

The fields are organized alphabetically by these types:

- Administrative Origin (refer to [Location role fields](#))
- Brazil Drivers
- Buyer
- Chain Transaction Phase
- Charged Tax (Previous Tax Paid)

- Commodity Code
- Cost, Material, and Usage
- Country of Origin
- Delivery Term (Shipping Term)
- Export Procedure
- Exporter Of Record
- Extended Price
- Flexible Code
- Flexible Date
- Flexible Numeric
- Importer Of Record
- Input Tax
- Input Total Tax
- Intrastat Commodity Code
- Landed Cost
- Location Code
- Mode of Transportation
- Nature of Transaction
- Net Mass Kilograms
- Physical Origin (refer to [Location role fields](#))
- Recoverable Date
- Simplification Code
- Tax
- Title Transfer

- Transaction ID
- Transaction Type
- Transport Responsible Entity
- Unit of Measure
- User-defined Line Item Synchronization ID
- Vendor
- Volume
- Weight

Brazil Driver fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
buyerCondition / Buyer Condition	String (1-40)	varchar (40)	The Buyer Condition is mandatory information for calculating taxes in Brazil. It represents the type of tax behavior of the entity when buying goods or services.
buyerCNAE / Buyer CNAE	String (1-40)	varchar (40)	The CNAE (National Classification of Economic Activities) five-digit numeric code that identifies optional information for calculating taxes in Brazil. This code: • Identifies what is being purchased by whom • Provides more granular information as compared to the Buyer Condition
natureOfFiscalOperation / Nature of Fiscal Operation	String (1-40)	varchar (40)	Mandatory information for calculating taxes in Brazil. A two-character alphabetical code that identifies the transaction type.
sellerCondition / Seller Condition	String (1-40)	varchar (40)	The Seller Condition is mandatory information for calculating taxes in Brazil. It represents the type of tax behavior of the entity when selling goods or services.
sellerCNAE / Seller CNAE	String (1-40)	varchar (40)	The CNAE (National Classification of Economic Activities) five-digit numeric code that identifies optional information for calculating taxes in

			Brazil. This code: • Identifies what is being sold by whom • Provides more granular information as compared to the Seller Condition
--	--	--	--

Buyer fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type
Buyer Registration Number/ buyerRegistrationNumber	String (1-40)	varchar/nvarchar (40)
Buyer Registration Country/ buyerRegistrationCountry	String (1-3)	varchar/nvarchar (3)
Buyer Registration State/ buyerRegMainDivision	String (1-60)	varchar/nvarchar (60)
Buyer Physical Presence Indicator/ buyerPhysicalPresenceInd	Integer (0 - 999999999)	numeric(1)
Buyer Tax Registration Type / buyerRegistrationType	String (1–80)	varchar / nvarchar (80)

Note: This registration is associated with the taxpayer. If you provide the Buyer Registration Number, but not the Buyer Registration Country, BCI uses the Physical Origin Country to process a given transaction.

Chain Transaction Phase field

Note: VAT chain transaction calculation logic will be added to the Vertex Calculation Engine in a future release.

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
---	---------------------	--------------------------	-------------

Chain Transaction Phase/ chainTransactionPhase	String (1-20)	varchar/ nvarchar (20)	Identifies a phase within a series of transactions in which multiple invoices are raised with only a single movement of goods. Valid values for this field are MANUFACTURER, INTERMEDIARY, and FINAL.
---	------------------	------------------------------	---

Charged Tax (Previous Tax Paid) field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Charged Tax/ chargedTax	Decimal	Numeric (18.3)	The tax already paid on a line item. It is also known as the Previous Tax Paid.

Commodity Code fields

The Commodity Code fields specify a code and code type for:

- United Nations Standard Products and Services Code® (UNSPSC)
- Harmonized System of Nomenclature (HSN)
- Harmonized System of Nomenclature Plus (HSN+)
- Mercosur Common Nomenclature (NCM) code
- Nomenclature of Services, Intangibles, and Other Operations (NBS)
- Imposto Sobre Services (Service)

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
additionalCommodityCode	String (1-40)	varchar (40)	The user-entered commodity code value to be used with the line item in addition to the Commodity Code.
additionalCommodityCodeType	String (1-60)	varchar (60)	The user-entered commodity code type value to be used with the line item in addition to the Commodity Code Type. Valid values for this field are UNSPSC , HSN , HSN+ , NBS , NCM , or Service .

commodityCode	String (1-40)	varchar (40)	The user-entered commodity code value.
commodityCodeType	String (1-60)	varchar (60)	The user-entered commodity code type value. Valid values for this field are UNSPSC , HSN , HSN+ , NBS , NCM , or Service .

Cost, Material, and Usage fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Cost Center/ costCenter	String (1-40)	varchar/ nvarchar (40)	A value that indicates a specific organizational area that is generally related to functional or accounting areas.
General Ledger Account/ generalLedgerAccount	String (1-40)	varchar/ nvarchar (40)	A value that is used with a company's Chart of Accounts.
Material Code/ materialCode	String (1-40)	varchar/ nvarchar (40)	A value that represents a specific item or product.
Material Origin/ materialOrigin	String (1-40)	varchar/ nvarchar (40)	Indicates the original source of the goods in a transaction. For Brazil, the material origin options stem from the official ICMS CST Table A that is published by federal law.
Project Number/ projectNumber	String (1-40)	varchar/ nvarchar (40)	A unique identifier that associates a line item to a project for purchasing purposes.
Purchase Code/ purchaseCode	String (1-40)	varchar/ nvarchar (40)	A value from the host application that identifies the product, material, service, or SKU code.
Purchase Class Code/ purchaseClassCode	String (1-40)	varchar/ nvarchar (40)	A value from the host application that identifies a general classification of product, material, service, or SKU code.
Usage Code/ usageCode	String (1-40)	varchar/ nvarchar (40)	A user-defined code that directly identifies a usage.

Usage Class Code/ usageClassCode	String (1-40)	varchar/ nvarchar (40)	A user-defined code that directly identifies a usage class.
Vendor SKU/ vendorSKU	String (1-40)	varchar/ nvarchar (40)	A value that represents a specific item or product SKU number.

Country of Origin field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Country of Origin/ countryOfOrigin	String (1-3)	varchar/ nvarchar (3)	The three-digit ISO 4217 code for the country.

Delivery Term (Shipping Term) field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Delivery Term/ deliveryTerm	String (1-3)	varchar/ nvarchar (3)	An identifier that identifies the vendor or customer jurisdiction in which the title transfer of a supply takes place. This is also known as Shipping Terms. Delivery Terms information can be critical to determine the place of supply; for example, distance selling.

Export Procedure field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
---	------------------	-----------------------	-------------

exportProcedure	String (1-20)	varchar/ nvarchar (20)	The export procedure (sales) or import procedure (purchases) that is applied for INTRASTAT purposes. This is a pass-through field for BCI.
-----------------	------------------	------------------------------	--

Exporter Of Record

Note: VAT chain transaction calculation logic will be added to the Vertex Calculation Engine in a future release.

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Exporter of Record / exporterOfRecord	String (1-40)	varchar/ nvarchar (40)	Indicates the responsible entity for export of goods in a chain transaction. Valid values for this field are Buyer , Seller , Dispatcher , and Recipient .

Extended Price fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Cost/cost	Decimal	Numeric (18.3)	The price of the line item.
Fair Market Value/ fairMarketValue	Decimal	Numeric (18.3)	The fair market value of the line item.

Flexible Code fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Flexible Code/ flexibleCodeField1	String (1-60)	varchar/ nvarchar	User-defined fields that enable you to make taxability decisions based on the information in your host system beyond the standard taxability drivers

flexibleCodeField2		(60)	defined by Vertex.
flexibleCodeField3			
flexibleCodeField4			
flexibleCodeField5			
flexibleCodeField6			
flexibleCodeField7			
flexibleCodeField8			
flexibleCodeField9			
flexibleCodeField10			
flexibleCodeField11			
flexibleCodeField12			
flexibleCodeField13			
flexibleCodeField14			
flexibleCodeField15			
flexibleCodeField16			
flexibleCodeField17			
flexibleCodeField18			
flexibleCodeField19			
flexibleCodeField20			
flexibleCodeField21			
flexibleCodeField22			
flexibleCodeField23			
flexibleCodeField24			
flexibleCodeField25			
flexibleCodeField26			
flexibleCodeField27			
flexibleCodeField28			
flexibleCodeField29			
flexibleCodeField30			
flexibleCodeField31			
flexibleCodeField32			
flexibleCodeField33			
flexibleCodeField34			

flexibleCodeField35			
flexibleCodeField36			
flexibleCodeField37			
flexibleCodeField38			
flexibleCodeField39			
flexibleCodeField40			
flexibleCodeField41			
flexibleCodeField42			
flexibleCodeField43			
flexibleCodeField44			
flexibleCodeField45			
flexibleCodeField46			
flexibleCodeField47			
flexibleCodeField48			
flexibleCodeField49			
flexibleCodeField50			
flexibleCodeField51			
flexibleCodeField52			
flexibleCodeField53			
flexibleCodeField54			
flexibleCodeField55			
flexibleCodeField56			
flexibleCodeField57			
flexibleCodeField58			
flexibleCodeField59			
flexibleCodeField60			
flexibleCodeField61			
flexibleCodeField62			
flexibleCodeField63			
flexibleCodeField64			
flexibleCodeField65			
flexibleCodeField66			
flexibleCodeField67			

flexibleCodeField68			
flexibleCodeField69			
flexibleCodeField70			
flexibleCodeField71			
flexibleCodeField72			
flexibleCodeField73			
flexibleCodeField74			
flexibleCodeField75			
flexibleCodeField76			
flexibleCodeField77			
flexibleCodeField78			
flexibleCodeField79			
flexibleCodeField80			
flexibleCodeField81			
flexibleCodeField82			
flexibleCodeField83			
flexibleCodeField84			
flexibleCodeField85			
flexibleCodeField86			
flexibleCodeField87			
flexibleCodeField88			
flexibleCodeField89			
flexibleCodeField90			
flexibleCodeField91			
flexibleCodeField92			
flexibleCodeField93			
flexibleCodeField94			
flexibleCodeField95			
flexibleCodeField96			
flexibleCodeField97			
flexibleCodeField98			
flexibleCodeField99			
flexibleCodeField100			

Flexible Date fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Flexible Date/ flexibleDateField1 flexibleDateField2 flexibleDateField3 flexibleDateField4 flexibleDateField5 flexibleDateField6 flexibleDateField7 flexibleDateField8 flexibleDateField9 flexibleDateField10	Date	varchar/ nvarchar (10)	User-defined fields that enable you to make taxability decisions based on the information in your host system beyond the standard taxability drivers defined by Vertex. Valid formats are MM/DD/CCYY (for CSV) and CCYY-MM-DD (for database).

Flexible Numeric fields

CSV Field Name/ Database Field Name	CSV Data type	Database Data Type	Description
Flexible Numeric/ flexibleNumericField1 flexibleNumericField2 flexibleNumericField3 flexibleNumericField4 flexibleNumericField5 flexibleNumericField6 flexibleNumericField7 flexibleNumericField8	Decimal (18.6)	Numeric (18.6)	User-defined fields that enable you to make taxability decisions based on the information in your host system beyond the standard Vertex-defined taxability drivers.

flexibleNumericField9			
flexibleNumericField10			
flexibleNumericField11			
flexibleNumericField12			
flexibleNumericField13			
flexibleNumericField14			
flexibleNumericField15			
flexibleNumericField16			
flexibleNumericField17			
flexibleNumericField18			
flexibleNumericField19			
flexibleNumericField20			
flexibleNumericField21			
flexibleNumericField22			
flexibleNumericField23			
flexibleNumericField24			
flexibleNumericField25			
flexibleNumericField26			
flexibleNumericField27			
flexibleNumericField28			
flexibleNumericField29			
flexibleNumericField30			
flexibleNumericField31			
flexibleNumericField32			
flexibleNumericField33			
flexibleNumericField34			
flexibleNumericField35			
flexibleNumericField36			
flexibleNumericField37			
flexibleNumericField38			
flexibleNumericField39			
flexibleNumericField40			
flexibleNumericField41			

flexibleNumericField42			
flexibleNumericField43			
flexibleNumericField44			
flexibleNumericField45			
flexibleNumericField46			
flexibleNumericField47			
flexibleNumericField48			
flexibleNumericField49			
flexibleNumericField50			

Importer Of Record

Note: VAT chain transaction calculation logic will be added to the Vertex Calculation Engine in a future release.

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Importer of Record / importerOfRecord	String (1-40)	varchar/ nvarchar (40)	Indicates the responsible entity for import of goods in a chain transaction. Valid values for this field are Buyer , Seller , Dispatcher , and Recipient .

Input Tax fields

The Input Tax fields provide information that is needed to calculate the recoverability of an input tax. These fields are used in Value Added Tax calculations.

Each input file can include one, two, or three iterations of each field. Each iteration is represented as the field name followed by the number 1, 2, or 3. For example, a file can have two iterations of the field `inputTaxInputAmount`, which would be represented as follows:

```
inputTaxInputAmount1
inputTaxInputAmount2
```

For best results, Vertex recommends that you supply a Tax Area ID instead of an address.

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
inputTaxIsImport	Boolean	Boolean	Indicates vendor input tax.
inputTaxtaxAreaId	Integer	Integer	Identifies the Tax Area ID for the input VAT recoverability line item.
inputTaxjurisdictionLevel	String	String	Identifies the jurisdiction level to which the tax applies.
inputTaximpositionType	String (0-60)	String (0-60)	Categorizes the tax being imposed. It can be either Vertex-defined or user-defined.
inputTaxInputAmount	Decimal	Decimal	The amount of input tax to be distributed. This can be a negative amount if processing a correction.
inputTaxInvoiceTaxRate	Decimal	Decimal	Identifies the tax rate that is shown on the vendor invoice.
inputTaxBlockingOverridePercent	Decimal (nn.nn)	Decimal (nn.nn)	Percentage that overrides the standard percentage when calculating recoverable input VAT.
inputTaxPartialExempt recoverableOverride Percent	Decimal (nn.nn)	Decimal (nn.nn)	Percentage of input VAT that the taxpayer can recover for transactions that include partial exemptions.
inputTaxStreetAddress1	String (1-100)	String (1-100)	The first line of the street address that determines the Tax Area ID if none is supplied.
inputTaxStreetAddress2	String (1-100)	String (1-100)	The second line of the street address that determines the Tax Area ID if none is supplied.
inputTaxCity	String (1-60)	String (1-60)	The proper name of the city that determines the Tax Area ID is none if supplied.
inputTaxPostalCode	String (1-15)	String (1-15)	The postal code that determines the Tax Area ID if none is supplied.
inputTaxCountry	String (1-100)	String (1-100)	The name of the country that determines the Tax Area ID is none if supplied. The default value of this field is USA.

Input Total Tax field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Input Total Tax/ inputTotalTax	Decimal	Numeric(18.3)	The tax amount to be distributed. This field: • Applies to Distribute Tax transactions only • Captures vendor charged tax and/or import tax • Can also be passed in on an accrual transaction

Intrastat Commodity Code field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Intrastat Commodity Code/ intrastatCommodity Code	String (1-10)	varchar/ nvarchar (10)	The code for the classification of the goods or services. For a list of acceptable values, see the filing instructions for each European Union Member State country where you file an Intrastat report.

Landed Cost field

Landed costs are costs associated with transporting goods. They are additional costs beyond the merchandise cost of inventory incurred in purchasing and receiving items – for example, freight, import duties, and customs charges.

The Landed Cost field is added to the Extended Amount on a line item but is not subject to any discounts or adjustments.

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type
landedCost	Decimal	Numeric(18.3)

Location Code field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Location Code / locationCode	String (1-20)	varchar/ nvarchar (20)	The code of a business location where the taxpayer has a physical presence within a jurisdiction. In general, physical locations do not have an impact on taxation. However, in some jurisdictions, physical locations determine whether tax is charged and the appropriate tax type. This field contains a value that can be used for tax return filing in jurisdictions that require taxes to be filed for individual retail locations. Note: Passing a Location Code at the line-item level when the Location Code is not associated with a taxpayer's registered jurisdiction may cause unexpected results. For example, you may see an unwanted change in tax type and tax amount.

Mode of Transportation field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Mode of Transport/ modeOfTransport	String (1-2)	varchar/ nvarchar (2)	A code that indicates the type of vehicle that transported the product across the country border. For a list of acceptable values, see the filing instructions for each country where you file an Intrastat report.

Nature of Transaction field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Nature of Transaction/ natureOfTransaction	String (1-3)	varchar/ nvarchar (3)	A code that indicates the type of transaction being declared for Intrastat purposes. For a list of acceptable values, see the filing instructions for each country where you file an Intrastat report.

Net Mass Kilograms field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Net Mass Kilograms/ netMassKilograms	Decimal	Numeric(18.0)	The mass of the product in kilograms.

Recoverable Date field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Recoverable Date / recoverableDate	String (1-10)	varchar/ nvarchar (10)	The date used to calculate Recoverable Input VAT. Specify the Recoverable Date field in CCYY-MM-DD or MM/DD/CCYY format.

Simplification Code field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Simplification Code/ simplificationCode	String (1-20)	varchar/ nvarchar (20)	A code that indicates a special action on the transaction being processed. Valid values for this field are: • Consignment • Call_Off • Triangulation • Registration_Group

Tax fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Tax Date/ taxDate	Date	varchar/ nvarchar (10)	The date on which the line-item record was produced. This can also be represented as a PO line-item date, a lease line-item date, and so on. This field defaults to the documentDate of the transaction. Valid formats are MM/DD/CCYY (for CSV) and CCYY-MM-DD (for database).
Tax Point Date/ taxPointDate	Date	varchar/ nvarchar (10)	The date on which the revenue is recorded as received—no matter when the sale was made. This date is a requirement for certain EU countries.
Tax Included Indicator/ taxIncludedInd	Decimal	Numeric(1)	Indicates whether tax is included in the extended price. Valid values are 0=False and 1=True.
Tax Only Adjustment	Boolean	Boolean	When set to True, enables you to provide an externally calculated total tax amount that is distributed across the taxing jurisdictions for the locations that you identify.

Title Transfer field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Title Transfer/ titleTransfer	String (1-20)	varchar/ nvarchar (20)	A contractual term indicating where the title to goods actually changes hands from seller to buyer. This indicator is evaluated to determine the situs (or place of supply) for the transaction. Valid values are: • Origin • In_Transit • Destination

Transaction ID field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Transaction ID/ transactionId	String (1-40)	varchar/ nvarchar (80)	An identifier that further defines the document and corresponds to the transaction stored in the host system. The Transaction ID is used for synchronization services, but is not used for reporting purposes. If you do not provide a Transaction ID, BCI uses the Document Number. If you do not provide either a Transaction ID or a Document Number, BCI uses the Location Code.

Transaction Type field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Transaction Type/ transactionType	String (1-20)	varchar/ nvarchar (20)	An identifier for the specific transaction type to be used by the transaction and/or line item. If transactionType is not set at the line-item level, the line item uses the transaction-level value. Valid values for this field are: • Sale • Lease • Rental If you do not specify a transaction type, the default transaction type is Sale.

Transport Responsible Entity

Note: VAT chain transaction calculation logic will be added to the Vertex Calculation Engine in a future release.

CSV Field Name/ Database	CSV Data	Database Data	Description
-----------------------------	----------	---------------	-------------

Field Name	Type	Type	
Transport Responsible Entity / transportResponsibleEntity	String (1-40)	varchar/ nvarchar (40)	Indicates the responsible entity for organizing or arranging the transport of goods in a chain transaction. Valid values for this field are Buyer , Seller , Dispatcher , and Recipient .

Unit of Measure field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Unit of Measure/ unitOfMeasure	String (1-3)	varchar/ nvarchar (3)	The unit of measure for the line item to be used in surcharges, based on quantity and not on price. If you pass a value that does not match the unit of measure for the quantity-based tax rule, that rule is not used. Note: This field may be required to determine tax liability in some jurisdictions.

User-defined Line Item Synchronization ID field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
User Defined Line Item Sync ID Code/ userDefinedLineItemSyncIdCode	String (1-40)	varchar/ nvarchar (40)	This field enables you to use your own line-item synchronization ID code. You must do this if transaction information is adjusted in the host system after tax calculation, resulting in the host system data and the Vertex Tax Journal data no longer being identical. This field is required if you use synchronization messages.

Vendor fields

CSV Field Name/ Database	CSV Data	Database Data	Description
-----------------------------	----------	---------------	-------------

Field Name	Type	Type	
Vendor Code/ vendorCode	String (1-40)	varchar/ nvarchar (40)	A user-defined code that represents the vendor (external seller or vendor) for the transaction or line item. Use the O Series user interface to set up any taxability rules that apply at this level.
Vendor Class Code/ vendorClassCode	String (1-40)	varchar/ nvarchar (40)	A code used to represent groups of vendors, dispatchers, or recipients who have similar taxability. Caution: If you pass a classCode, do not pass a TaxRegistrationNumber because the registration number does not apply to the entire class.
Vendor Registration Number/ vendorRegistration Number	String (1-40)	varchar/ nvarchar (40)	A numeric identifier for the vendor's VAT registration.
Vendor Registration Country/ vendorRegistration Country	String (1-3)	varchar/ nvarchar (3)	A two- or three-character alphabetic ISO code indicating the country represented by the registration.
Vendor Registration Main Division/ vendorRegMainDivision	String (1-60)	varchar/ nvarchar (60)	The proper name or the postal abbreviation of the state, province, or territory represented by the registration.
Vendor Physical Presence Indicator/ vendorPhysicalPresence Ind	Decimal	Numeric(1)	Indicates whether or not the vendor has a physical presence in the country represented by the registration. Valid values are True and False.
Vendor Tax Registration Type / vendorRegistrationType	String (1–80)	varchar / nvarchar (80)	Indicates the tax registration type associated with the vendor role in the transaction.

Volume fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Volume/volume	Decimal	Numeric(18.3)	The volume of the product.

Volume Unit of Measure/ volumeUnitOfMeasure	String (1-3)	varchar/ nvarchar (3)	The unit of measure for the volume of the line item to be used in surcharges, based on quantity and not on price. If you pass a value that does not match the Volume Unit of Measure for the quantity-based tax rule, that rule is not used. Note: This field may be required to determine tax liability in some jurisdictions.
--	-----------------	--------------------------	--

Weight field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Weight/weight	Decimal	Numeric (18.3)	The weight of the product.
Weight Volume Unit of Measure/ weightUnitOfMeasure	String (1-3)	varchar/ nvarchar (3)	The unit of measure for the weight of the line item to be used in surcharges, based on quantity and not on price. If you pass a value that does not match the Weight Unit of Measure for the quantity-based tax rule, that rule is not used. Note: This field may be required to determine tax liability in some jurisdictions.

Related articles

[BCI Accrual, Distribute Tax, PO, and ERS events: Required fields](#)

[BCI Accrual, Distribute Tax, PO, and ERS events: Optional transaction fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Location role fields](#)

[BCI Inventory Removal and Asset Movement events: Required fields](#)

[BCI Inventory Removal and Asset Movement events: Optional transaction fields](#)

[BCI Inventory Removal and Asset Movement events: Optional line-item fields](#)

[BCI Inventory Removal and Asset Movement events: Location role fields](#)

[BCI fields for Supplies events](#)

[Overview of BCI](#)

BCI Accrual, Distribute Tax, PO, and ERS events: Location role fields

This article describes the location role fields for Procurement transactions that are processed for tax calculation via Batch Client Interface (BCI). The source of transactions can be either a CSV file or a database. The fields described in this article pertain to these transaction types: Accrual, Distribute Tax, Purchase Order (PO), and Evaluated Receipts Settlement (ERS).

The location roles are:

- Destination (applies at the transaction level)
- Administrative Destination (applies at the transaction level)
- Physical Origin (applies at the line-item level)
- Administrative Origin (applies at the line-item level)

Destination fields

Destination is the equivalent of the ship-to location. The term destination itself can correspond to a variety of meanings, including:

- Benefit-received location
- First-used location
- Location of property
- Place-of-use location
- Primary place-of-use location
- Principle-use location
- Where-used location

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Destination Street/ destinationStreet	String (1-100)	varchar/ nvarchar	The first line of the street address.

		(100)	
Destination Street2/ destinationStreet2	String (1-100)	varchar/ nvarchar (100)	The second line of the street address.
Destination City/ destinationCity	String (1-60)	varchar/ nvarchar (60)	The city in the address.
Destination County/ destinationSubDivision	String (1-60)	varchar/ nvarchar (60)	The proper name of the county used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Destination State/ destinationMainDivision	String (1-60)	varchar/ nvarchar (60)	The proper name or the postal abbreviation of the state, province, or territory used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Destination Postal Code/ destinationPostalCode	String (1-20)	varchar/ nvarchar (20)	The postal code used to determine the Tax Area ID (if none is supplied). This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Destination Country/ destinationCountry	String (1-60)	varchar/ nvarchar (60)	The country used to determine the Tax Area ID (if none is supplied). You can use a Custom Reports - VRA Data Extract report to see the valid country values. This field defaults to the value of the Default Country Code For Address setting.
Destination Currency Conversion/ destinationCurr Conversion	Decimal	Numeric(18,3)	The rate (multiplier) used for converting the transaction currency amount to the filing currency amount. Pass in this value and the currency code (isoCurrencyCodeAlpha or isoCurrencyCodeNum) to have the filing currency calculated if your configuration parameters are set up to do so.
Destination Currency Unit/ destinationCurrUnit	String (1-3)	varchar/ nvarchar (3)	The three-digit ISO 4217 numeric code for the currency unit.
Destination Location Customs Status/ destinationLocCustStatus	String (1-60)	varchar/ nvarchar (60)	The customs status at this location.
Destination Location Code/ destinationLocationCode	String (1-20)	varchar/ nvarchar (20)	The alphanumeric identifier for the ship-to location. It is used to identify a business location for address lookup. Note: Passing a Location Code at the line-item level

			when the Location Code is not associated with a taxpayer's registered jurisdiction may cause unexpected results. For example, you may see an unwanted change in tax type and tax amount.
Administrative Origin Latitude/ administrativeOrigin Latitude	String (1-12)	varchar/ nvarchar (12)	Represents the geographical location that is determined by the latitude coordinates. Note: Must be licensed for the partition.
Administrative Origin Longitude/ administrativeOrigin Longitude	String (1-12)	varchar/ nvarchar (12)	Represents the geographical location that is determined by the longitude coordinates. Note: Must be licensed for the partition.
Extended Price fields			
Cost/cost	Decimal	Numeric(18.3)	The price of the line item.
Fair Market Value/ fairMarketValue	Decimal	Numeric(18.3)	The fair market value of the line item.
Fair Rental Value/ fairRentalValue	Decimal	Numeric(18.3)	The rental value of the property on the open market.
Net Book Value/ netBookValue	Decimal	Numeric(18.3)	Cost less depreciation. The depreciation method is dependent on the state rules (straight line depreciation, declining depreciation, and so forth).
Total Cost/ totalCost	Decimal	Numeric(18.3)	The value of the raw materials plus all other costs, such as direct labor, transportation, indirect materials consumed and charged to the product overhead, and so forth (also known as Standard Cost, Manufactured Cost, and Total Manufacturer's Cost).

Administrative Destination fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Admin Destination Tax Area ID/ adminDestination TaxAreald	Integer (0 - 999999999)	numeric(9)	A Vertex-specific number that identifies a tax area. If the Tax Area ID exists in your host system, use that data to populate this data element in a request message.

Admin Destination Street/ adminDestinationStreet	String (1-100)	varchar/ nvarchar (100)	The first line of the street address.
admin DestinationStreet2/ adminDestinationStreet2	String (1-100)	varchar/ nvarchar (100)	The second line of the street address.
admin DestinationCity/ adminDestinationCity	String (1-60)	varchar/ nvarchar (60)	The proper name of the city used to determine the Tax Area ID (if none is supplied). This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Admin Destination County/ adminDestination SubDivision	String (1-60)	varchar/ nvarchar (60)	The proper name of the county used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Admin Destination State/ adminDestination MainDivision	String (1-60)	varchar/ nvarchar (60)	The proper name or the postal abbreviation of the state, province, or territory used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Admin Destination Postal Code/ adminDestinationPostal Code	String (1-20)	varchar/ nvarchar (20)	The postal code used to determine the Tax Area ID (if none is supplied). This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Admin Destination Country/ admin DestinationCountry	String (1-60)	varchar/ nvarchar (60)	The country used to determine the Tax Area ID (if none is supplied). You can use a Custom Reports - VRA Data Extract report to see the valid country values. This field defaults to the value of the Default Country Code For Address setting.
Admin Destination Currency Conversion/ adminDestinationCurr Conversion	Decimal	Numeric (18,3)	The rate (multiplier) used for converting the transaction currency amount to the filing currency amount. Pass in this value and the currency code (isoCurrencyCodeAlpha or isoCurrencyCodeNum) to have the filing currency calculated if your configuration parameters are set up to do so.
Admin Destination Currency Unit/ adminDestinationCurrUnit	String (1-3)	varchar/ nvarchar (3)	The three-digit ISO 4217 numeric code for the currency unit.
Location Customs Status/ adminDestinationLocCustStatus	String (1-60)	varchar/ nvarchar (60)	The customs status at this location. Valid values include:

			• Free Circulation • Bonded Warehouses • Free Trade Zone • Temporary Import
Admin Destination Location Code/ adminDestinationLocationCode	String (1-20)	varchar/ nvarchar (20)	An alphanumeric identifier for the ship-to location. It is used to identify a business location for address lookup. Note: Passing a Location Code at the line-item level when the Location Code is not associated with a taxpayer's registered jurisdiction may cause unexpected results. For example, you may see an unwanted change in tax type and tax amount.
latitude/ administrative DestinationLatitude	String (1-12)	varchar/ nvarchar (12)	Represents the geographical location that is determined by the latitude coordinates.
longitude/ administrativeDestinationLongitude	String (1-12)	varchar/ nvarchar (12)	Represents the geographical location that is determined by the longitude coordinates.

Physical Origin fields

The term physical origin can correspond to a variety of meanings, including:

- First removed
- Service provider's place-of-business address (for service transactions)
- Ship-from location address (for tangible personal property transactions)

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Phys Origin Tax Area ID/ physicalOriginTaxAreald	Integer (0 - 999999999)	numeric (9)	A Vertex-specific number that identifies a tax area. If the Tax Area ID exists in your host system, use that data to populate this data element in a request message.
Phys Origin Street/ physicalOriginStreet	String (1-100)	varchar/ nvarchar	The first line of the street address.

		(100)	
Phys Origin Street2/ physicalOriginStreet2	String (1-100)	varchar/ nvarchar (100)	The second line of the street address.
Phys Origin City/ physicalOriginCity	String (1-60)	varchar/ nvarchar (60)	The proper name of the city used to determine the Tax Area ID (if none is supplied). This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Phys Origin County/ physicalOriginSub Division	String (1-60)	varchar/ nvarchar (60)	The proper name of the county used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Phys Origin State/ physicalOriginMain Division	String (1-60)	varchar/ nvarchar (60)	The proper name or the postal abbreviation of the state, province, or territory used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Phys Origin Postal Code/ physicalOriginPostalCode	String (1-20)	varchar/ nvarchar (20)	The postal code used to determine the Tax Area ID (if none is supplied). This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Phys Origin Country/ physicalOriginCountry	String (1-60)	varchar/ nvarchar (60)	The country used to determine the Tax Area ID (if none is supplied). You can use a Custom Reports - VRA Data Extract report to see the valid country values. Defaults to the value of the Default Country Code For Address setting.
Phys Origin Currency Conversion/ physicalOriginCurr Conversion	Decimal	Numeric (18.3)	The rate (multiplier) used for converting the transaction currency amount to the filing currency amount. Pass in this value and the currency code (isoCurrencyCodeAlpha or isoCurrencyCodeNum) to calculate filing currency if your configuration parameters are set up to do so.
Phys Origin Currency Unit/ physicalOriginCurrUnit	String (1-3)	varchar/ nvarchar (3)	The three-digit ISO 4217 numeric code for the currency unit.
Physical Origin Location Customs Status/ physicalOriginLocCust Status	String (1-60)	varchar/ nvarchar (60)	The customs status at this location. Valid values are Free Circulation, Bonded Warehouse, Free Trade Zone, and Temporary Import.

Physical Origin Location Code/ physicalOriginLocCode	String (1-20)	varchar/ nvarchar (20)	A value that can be used for tax return filing in jurisdictions that require taxes to be filed for individual retail locations. Note: Passing a Location Code at the line-item level when the Location Code is not associated with a taxpayer's registered jurisdiction may cause unexpected results. For example, you may see an unwanted change in tax type and tax amount.
Physical Origin Latitude/ physicalOriginLatitude	String (1-12)	varchar/ nvarchar (12)	Represents the geographical location that is determined by the latitude coordinates. Note: Must be licensed for the partition.
Physical Origin Longitude/ physicalOriginLongitude	String (1-12)	varchar/ nvarchar (12)	Represents the geographical location that is determined by the longitude coordinates. Note: Must be licensed for the partition.

Administrative Origin fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Admin Origin Tax Area ID/ adminOriginTaxAreald	Integer (0 - 999999999)	numeric(9)	A Vertex-specific number that identifies a tax area. If the Tax Area ID exists in your host system, use that data to populate this data element in a request message.
Admin Origin Street/ adminOriginStreet	String (1-100)	varchar/ nvarchar (100)	The first line of the street address.
adminOriginStreet2/ adminOriginStreet2	String (1-100)	varchar/ nvarchar (100)	The second line of the street address.
adminOriginCity/ adminOriginCity	String (1-60)	varchar/ nvarchar 60)	The proper name of the city used to determine the Tax Area ID (if none is supplied). This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Admin Origin County/ adminOriginSubDivision	String (1-60)	varchar/ nvarchar (60)	The proper name or the county used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.

Admin Origin State/ adminOriginMainDivision	String (1-60)	varchar/ nvarchar (60)	The proper name or the postal abbreviation of the state, province, or territory used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Admin Origin Postal Code/ adminOriginPostalCode	String (1-20)	varchar/ nvarchar (20)	The postal code used to determine the Tax Area ID (if none is supplied). This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Admin Origin Country/ adminOriginCountry	String (1-60)	varchar/ nvarchar (60)	The country used to determine the Tax Area ID (if none is supplied). You can use a Custom Reports - VRA Data Extract report to see the valid country values. This field defaults to the value of the Default Country Code For Address setting.
Admin Origin Currency Conversion/ adminOriginCurrConversion	Decimal	Numeric(18.3)	The rate (multiplier) used for converting the transaction currency amount to the filing currency amount. Pass in this value and the currency code (isoCurrencyCodeAlpha or isoCurrencyCodeNum) to calculate filing currency if your configuration parameters are set up to do so.
Admin Origin Currency Unit/ adminOriginCurrUnit	String (1-3)	varchar/ nvarchar (3)	The three-digit ISO 4217 numeric code for the currency unit.
Admin Origin Location Customs Status/ adminOriginLocCustStatus	String (1-60)	varchar/ nvarchar (60)	The customs status at this location.
Admin Origin Location Code/ adminOriginLocationCode	String (1-20)	varchar/ nvarchar (20)	A value that can be used for tax return filing in jurisdictions that require taxes to be filed for individual retail locations. Note: Passing a Location Code at the line-item level when the Location Code is not associated with a taxpayer's registered jurisdiction may cause unexpected results. For example, you may see an unwanted change in tax type and tax amount.
latitude/ administrativeOriginLatitude	String (1-12)	varchar/ nvarchar (12)	Represents the geographical location that is determined by the latitude coordinates.
longitude/ administrativeOriginLongitude	String (1-12)	varchar/ nvarchar (12)	Represents the geographical location that is determined by the longitude coordinates.

Related articles

[BCI Accrual, Distribute Tax, PO, and ERS events: Required fields](#)

[BCI Accrual, Distribute Tax, PO, and ERS events: Optional transaction fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Optional line-item fields](#)

[BCI Inventory Removal and Asset Movement events: Required fields](#)

[BCI Inventory Removal and Asset Movement events: Optional transaction fields](#)

[BCI Inventory Removal and Asset Movement events: Optional line-item fields](#)

[BCI Inventory Removal and Asset Movement events: Location role fields](#)

[BCI fields for Supplies events](#)

[Overview of BCI](#)

BCI Inventory Removal and Asset Movement events: Required fields

This article describes the required fields for Inventory Removal and Asset Movement transactions that are processed for tax calculation via Batch Client Interface (BCI). The source of transactions can be either a CSV file or a database. The Procurement events are Inventory Removal and Asset Movement.

The table distinguishes transaction-level fields from line item-level fields. It also specifies when there is a difference in the field name for CSV files and databases.

Required fields

The following input fields are required for Inventory Removal and Asset Movement events:

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
<i>Transaction-level fields</i>			
None/batchid	N/A	numeric(9)	Identifies a group of transaction records within your input

			database. If you use batch control, this field is required in every row of the input database. Also required is a transaction control database. This field is required for database input.
batchStatus	N/A	numeric(1)	Field for database use only. The status of the transactions that are associated with this batch: • 0 = New. Batch is not ready to be processed. Set batchStatus to 0 when you are building the batch. • 1 = Ready to be processed. Set batchStatus to 1 when the batch is ready to be processed. • 2 = Processing. Batch for which processing is in progress. • 3 = Complete. Batch for which processing is completed. • 4 = Failed. Batch for which processing has failed.
Company Code/ companyCode	String (1-40)	varchar/ nvarchar (40)	The identifier for the taxpayer. In Procurement events, this field refers to the Buyer.
Document Number/ documentNumber	String (1-40)	varchar/ nvarchar (80)	The document number in the host application that references the event.
Document Date/ documentDate	Date	varchar/ nvarchar (10)	The date of the requested action. The Calculation Engine uses this date to determine the valid tax rates and rules. Valid formats are MM/DD/CCYY (for CSV) and CCYY-MM-DD (for database).
Message Type/ messageType	String (1-40)	varchar/ nvarchar (50)	Determines the type of financial event for each transaction in the BCI data input file. Valid values are Inventory Removal and Asset Movement. Note: The message type delete can be used to back out transactions that were not meant to be processed, and flag the transactions as deleted.
Line item level-fields			
Destination Tax Area ID/ destinationTaxAreald	Integer (0 - 999999999)	numeric (9)	A Vertex-specific number that identifies a tax area. If the Tax Area ID exists in your host system, use that data to populate this data element in a request message.
Destination City/ destinationCity	String (1 - 60)	varchar/ nvarchar (60)	The proper name of the city that determines the Tax Area ID (if none is supplied). Optional but recommended for greatest precision if no Tax Area ID is supplied.
Extended Price/ extendedPrice	Decimal	Numeric(18.3)	The price of the line item. However, if quantity and unit price are supplied, this field is not required.

Line Item Number/ lineItemNumber	Integer	Numeric(18.0)	A line number for the line item. This number can be used as a reference in reports or in audits. If no line item number is supplied, a number is assigned.
-------------------------------------	---------	---------------	--

Related articles

[BCI Accrual, Distribute Tax, PO, and ERS events: Required fields](#)

[BCI Accrual, Distribute Tax, PO, and ERS events: Optional transaction fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Optional line-item fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Location role fields](#)

[BCI Inventory Removal and Asset Movement events: Optional transaction fields](#)

[BCI Inventory Removal and Asset Movement events: Optional line-item fields](#)

[BCI Inventory Removal and Asset Movement events: Location role fields](#)

[BCI fields for Supplies events](#)

[Overview of BCI](#)

BCI Inventory Removal and Asset Movement events: Optional transaction fields

This article describes the optional, transaction-level fields for Inventory Removal and Asset Movement transactions that are processed for tax calculation via Batch Client Interface (BCI). The source of transactions can be either a CSV file or a database.

The fields are organized alphabetically by these types:

- Billing Type
- Brazil Drivers
- Company
- Currency
- Document Type
- Exemption Certificate Number

- Order Type
- Owner Registration
- Physical Origin (refer to [Location role fields](#))
- Posting Date
- Transaction ID

Billing Type field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Billing Type	String (1-20)	varchar/ nvarchar (20)	Identifies billing documents that specify business transactions that are involved in billing activities. Examples of these documents include invoices, credit memos, and debit memos.

Brazil Driver fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
buyerCondition / Buyer Condition	String (1-40)	varchar (40)	The Buyer Condition is mandatory information for calculating taxes in Brazil. It represents the type of tax behavior of the entity when buying goods or services.
buyerCNAE / Buyer CNAE	String (1-40)	varchar (40)	The CNAE (National Classification of Economic Activities) five-digit numeric code that identifies optional information for calculating taxes in Brazil. This code: • Identifies what is being purchased by whom • Provides more granular information as compared to the Buyer Condition

natureOfFiscalOperation / Nature of Fiscal Operation	String (1-40)	varchar (40)	Mandatory information for calculating taxes in Brazil. A two-character alphabetical code that identifies the transaction type.
sellerCondition / Seller Condition	String (1-40)	varchar (40)	The Seller Condition is mandatory information for calculating taxes in Brazil. It represents the type of tax behavior of the entity when selling goods or services.
sellerCNAE / Seller CNAE	String (1-40)	varchar (40)	The CNAE (National Classification of Economic Activities) five-digit numeric code that identifies optional information for calculating taxes in Brazil. This code: - Identifies what is being sold by whom - Provides more granular information as compared to the Seller Condition

Company fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Division Code/ divisionCode	String (1-40)	varchar/ nvarchar (40)	Identifies the mid-level legal entity for which tax exceptions may exist. The O Series user interface is used to set up any taxability rules that apply at this level.
Department Code/ departmentCode	String (1-40)	varchar/ nvarchar (40)	Identifies the low-level legal entity for which specific tax requirements and exceptions may exist. Use the O Series user interface to set up any taxability rules that apply at this level. Based on your legal or tax liabilities at this level, map the appropriate host system parameter to this data element. If all of your tax exceptions are at the top- or mid-level entity, you may choose not to populate this data element. Note that this data element is also used to sort reports.

Currency fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
--	---------------	--------------------	-------------

Currency/ CurrencyCode	String (1-3)	varchar/ nvarchar (3)	The three-digit ISO 4217 code for the currency unit. This is the Transaction currency.
Original Currency/ OriginalCurrencyCode	String (1-3)	varchar/ nvarchar (3)	The currency in which the original business transaction took place. This is the Functional or Book currency.

Document Type field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
DocumentType	String (1-20)	varchar/ nvarchar (20)	Identifies the type of transaction to be posted.

Exemption Certificate Number

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Exemption Certificate Number/ exemptionCertificate Number	String (1-30)	varchar/ nvarchar (30)	The certificate identifier assigned by the tax jurisdiction.

Order Type field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
OrderType	String (1-20)	varchar/ nvarchar (20)	Identifies the purpose of the order. This is useful for Intrastat reporting purposes. Examples of these documents include special orders and rework orders.

Owner Registration fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Owner Registration Number/ ownerRegNumber	String (1-40)	varchar/ nvarchar (40)	The registration number associated with a taxpayer. If you provide the Owner Registration Number but not the Owner Registration Country, BCI uses the Destination Country to process a given transaction.
Owner Registration Country/ ownerRegCountry	String (1-3)	varchar/ nvarchar (3)	The registration country associated with a taxpayer.
Owner Registration Main Division/ ownerRegMainDivision	String (1-60)	varchar/ nvarchar (60)	The registration main division associated with a taxpayer.
Owner Physical Presence Indicator/ ownerPhysicalPresence Ind	Integer (0 - 999999999)	Numeric(1)	Indicates whether or not the taxpayer has a physical presence in the country of registration.
Owner Tax Registration Type / ownerRegistrationType	String (1–80)	varchar / nvarchar (80)	Indicates the tax registration type associated with the owner role in the transaction.

Note: Vertex recommends maintaining owner VAT registrations via the O Series Taxpayers feature, rather than via BCI. This is because BCI processes one set of Owner Registration fields from the data input file. If the data input file contains more than one set of Owner Registration fields, only one set is imported properly.

Posting Date field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Posting Date	Date	varchar/ nvarchar	The date when the transaction is posted for auditing and reporting purposes. If no date is provided, the Calculation Engine uses the date when the transaction was

postingDate		(10)	processed. Valid formats are MM/DD/CCYY (for CSV) and CCYY-MM-DD (for database).
-------------	--	------	--

Transaction ID field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Transaction ID/ transactionID	String (1-40)	varchar/ nvarchar (40)	An identifier that further defines the document and corresponds to the transaction stored in the host system. The Transaction ID is used for synchronization services, but is not used for reporting purposes. If you do not provide a Transaction ID, BCI uses the Document Number. If you do not provide either a Transaction ID or a Document Number, BCI uses the Location Code.

Related articles

[BCI Accrual, Distribute Tax, PO, and ERS events: Required fields](#)

[BCI Accrual, Distribute Tax, PO, and ERS events: Optional transaction fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Optional line-item fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Location role fields](#)

[BCI Inventory Removal and Asset Movement events: Required fields](#)

[BCI Inventory Removal and Asset Movement events: Optional line-item fields](#)

[BCI Inventory Removal and Asset Movement events: Location role fields](#)

[BCI fields for Supplies events](#)

[Overview of BCI](#)

BCI Inventory Removal and Asset Movement events: Optional line-item fields

This article describes the optional, line item-level fields for Inventory Removal and Asset Movement transactions that are processed for tax calculation via Batch Client Interface (BCI). The source of transactions can be either a CSV file or a database.

The fields are organized alphabetically by these types:

- Brazil Drivers
- Commodity Code
- Cost, Material, and Usage
- Country of Origin
- Delivery Term (Shipping Term)
- Destination (refer to [Location role fields](#))
- Flexible Code
- Flexible Date
- Flexible Numeric
- Intrastat Commodity Code
- Mode of Transport
- Location Code
- Nature of Transaction
- Net Mass Kilograms
- Owner Registration
- Recoverable Date
- Supplementary Unit
- Tax
- Unit of Measure

- User-defined Line Item Synchronization
- Volume
- Weight

Brazil Driver fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
buyerCondition / Buyer Condition	String (1-40)	varchar (40)	The Buyer Condition is mandatory information for calculating taxes in Brazil. It represents the type of tax behavior of the entity when buying goods or services.
buyerCNAE / Buyer CNAE	String (1-40)	varchar (40)	The CNAE (National Classification of Economic Activities) five-digit numeric code that identifies optional information for calculating taxes in Brazil. This code: • Identifies what is being purchased by whom • Provides more granular information as compared to the Buyer Condition
natureOfFiscalOperation / Nature of Fiscal Operation	String (1-40)	varchar (40)	Mandatory information for calculating taxes in Brazil. A two-character alphabetical code that identifies the transaction type.
sellerCondition / Seller Condition	String (1-40)	varchar (40)	The Seller Condition is mandatory information for calculating taxes in Brazil. It represents the type of tax behavior of the entity when selling goods or services.
sellerCNAE / Seller CNAE	String (1-40)	varchar (40)	The CNAE (National Classification of Economic Activities) five-digit numeric code that identifies optional information for calculating taxes in Brazil. This code: • Identifies what is being sold by whom • Provides more granular information as compared to the Seller Condition

Commodity Code fields

The Commodity Code fields specify a code and code type for:

- United Nations Standard Products and Services Code® (UNSPSC)
- Harmonized System of Nomenclature (HSN)
- Harmonized System of Nomenclature Plus (HSN+)
- Mercosur Common Nomenclature (NCM) code
- Nomenclature of Services, Intangibles, and Other Operations (NBS)
- Imposto Sobre Services (Service)

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
additionalCommodityCode	String (1-40)	varchar (40)	The user-entered commodity code value to be used with the line item in addition to the Commodity Code.
additionalCommodityCodeType	String (1-60)	varchar (60)	The user-entered commodity code type value to be used with the line item in addition to the Commodity Code Type. Valid values for this field are UNSPSC , HSN , HSN+ , NBS , NCM , or Service .
commodityCode	String (1-40)	varchar (40)	The user-entered commodity code value.
commodityCodeType	String (1-60)	varchar (60)	The user-entered commodity code type value. Valid values for this field are UNSPSC , HSN , HSN+ , NBS , NCM , or Service .

Cost, Material, and Usage fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Cost Center/	String	varchar/	A value that indicates a specific organizational area that is generally

costCenter	(1-40)	nvarchar (40)	related to functional or accounting areas.
General Ledger Account/ generalLedgerAccount	String (1-40)	varchar/ nvarchar (40)	A value that is used with a company's Chart of Accounts.
Material Code/ materialCode	String (1-40)	varchar/ nvarchar (40)	A value that represents a specific item or product.
Material Origin/ materialOrigin	String (1-40)	varchar/ nvarchar (40)	Indicates the original source of the goods in a transaction. For Brazil, the material origin options stem from the official ICMS CST Table A that is published by federal law.
Project Number/ projectNumber	String (1-40)	varchar/ nvarchar (40)	A unique identifier that associates a line item to a project for purchasing purposes.
Purchase Code/ purchaseCode	String (1-40)	varchar/ nvarchar (40)	A value from the host application that identifies the product, material, service, or SKU code.
Purchase Class Code/ purchaseClassCode	String (1-40)	varchar/ nvarchar (40)	A value from the host application that identifies a general classification of product, material, service, or SKU code.
Usage Code/ usageCode	String (1-40)	varchar/ nvarchar (40)	A user-defined code that identifies a usage.
Usage Class Code/ usageClassCode	String (1-40)	varchar/ nvarchar (40)	A user-defined code that identifies a usage class.
vendorSKU	String (1-40)	varchar/ nvarchar (40)	A value that represents a specific item or product SKU number.

Country of Origin field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
---	------------------	-----------------------	-------------

Country of Origin/ countryOfOrigin	String (1-3)	varchar/ nvarchar (3)	The three-digit ISO 4217 code for the country.
---------------------------------------	--------------	--------------------------	--

Delivery Term (Shipping Term) field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Delivery Term/ deliveryTerm	String (1-3)	varchar/ nvarchar (3)	Identifies the vendor or customer jurisdiction in which the title transfer of a supply takes place. This is also known as Shipping Terms or Incoterms. Delivery Terms information can be critical to determining the place of supply in value added tax transactions - for example, in distance selling.

Flexible Code fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Flexible Code/ flexibleCodeField1 flexibleCodeField2 flexibleCodeField3 flexibleCodeField4 flexibleCodeField5 flexibleCodeField6 flexibleCodeField7 flexibleCodeField8 flexibleCodeField9 flexibleCodeField10 flexibleCodeField11 flexibleCodeField12	String (1-60)	varchar/ nvarchar (60)	User-defined fields that enable you to make taxability decisions, based on the information in your host system, beyond the standard taxability drivers defined by Vertex.

flexibleCodeField13			
flexibleCodeField14			
flexibleCodeField15			
flexibleCodeField16			
flexibleCodeField17			
flexibleCodeField18			
flexibleCodeField19			
flexibleCodeField20			
flexibleCodeField21			
flexibleCodeField22			
flexibleCodeField23			
flexibleCodeField24			
flexibleCodeField25			
flexibleCodeField26			
flexibleCodeField27			
flexibleCodeField28			
flexibleCodeField29			
flexibleCodeField30			
flexibleCodeField31			
flexibleCodeField32			
flexibleCodeField33			
flexibleCodeField34			
flexibleCodeField35			
flexibleCodeField36			
flexibleCodeField37			
flexibleCodeField38			
flexibleCodeField39			
flexibleCodeField40			
flexibleCodeField41			
flexibleCodeField42			
flexibleCodeField43			
flexibleCodeField44			
flexibleCodeField45			

flexibleCodeField46			
flexibleCodeField47			
flexibleCodeField48			
flexibleCodeField49			
flexibleCodeField50			
flexibleCodeField51			
flexibleCodeField52			
flexibleCodeField53			
flexibleCodeField54			
flexibleCodeField55			
flexibleCodeField56			
flexibleCodeField57			
flexibleCodeField58			
flexibleCodeField59			
flexibleCodeField60			
flexibleCodeField61			
flexibleCodeField62			
flexibleCodeField63			
flexibleCodeField64			
flexibleCodeField65			
flexibleCodeField66			
flexibleCodeField67			
flexibleCodeField68			
flexibleCodeField69			
flexibleCodeField70			
flexibleCodeField71			
flexibleCodeField72			
flexibleCodeField73			
flexibleCodeField74			
flexibleCodeField75			
flexibleCodeField76			
flexibleCodeField77			
flexibleCodeField78			

flexibleCodeField79			
flexibleCodeField80			
flexibleCodeField81			
flexibleCodeField82			
flexibleCodeField83			
flexibleCodeField84			
flexibleCodeField85			
flexibleCodeField86			
flexibleCodeField87			
flexibleCodeField88			
flexibleCodeField89			
flexibleCodeField90			
flexibleCodeField91			
flexibleCodeField92			
flexibleCodeField93			
flexibleCodeField94			
flexibleCodeField95			
flexibleCodeField96			
flexibleCodeField97			
flexibleCodeField98			
flexibleCodeField99			
flexibleCodeField100			

Flexible Date fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Flexible Date/ flexibleDateField1 flexibleDateField2	Date	varchar/ nvarchar (10)	User-defined fields that enable you to make taxability decisions, based on the information in your host system, beyond the standard taxability drivers defined by Vertex. Valid formats are MM/DD/CCYY (for CSV) and CCYY-MM-DD (for database).

flexibleDateField3			
flexibleDateField4			
flexibleDateField5			
flexibleDateField6			
flexibleDateField7			
flexibleDateField8			
flexibleDateField9			
flexibleDateField10			

Flexible Numeric fields

CSV Field Name/ Database Field Name	CSV Data type	Database Data Type	Description
Flexible Numeric/ flexibleNumericField1 flexibleNumericField2 flexibleNumericField3 flexibleNumericField4 flexibleNumericField5 flexibleNumericField6 flexibleNumericField7 flexibleNumericField8 flexibleNumericField9 flexibleNumericField10 flexibleNumericField11 flexibleNumericField12 flexibleNumericField13 flexibleNumericField14 flexibleNumericField15 flexibleNumericField16 flexibleNumericField17	Decimal (18.6)	Numeric (18.6)	User-defined fields that enable you to make taxability decisions, based on the information in your host system, beyond the standard Vertex-defined taxability drivers.

flexibleNumericField18			
flexibleNumericField19			
flexibleNumericField20			
flexibleNumericField21			
flexibleNumericField22			
flexibleNumericField23			
flexibleNumericField24			
flexibleNumericField25			
flexibleNumericField26			
flexibleNumericField27			
flexibleNumericField28			
flexibleNumericField29			
flexibleNumericField30			
flexibleNumericField31			
flexibleNumericField32			
flexibleNumericField33			
flexibleNumericField34			
flexibleNumericField35			
flexibleNumericField36			
flexibleNumericField37			
flexibleNumericField38			
flexibleNumericField39			
flexibleNumericField40			
flexibleNumericField41			
flexibleNumericField42			
flexibleNumericField43			
flexibleNumericField44			
flexibleNumericField45			
flexibleNumericField46			
flexibleNumericField47			
flexibleNumericField48			
flexibleNumericField49			
flexibleNumericField50			

Intrastat Commodity Code field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Intrastat Commodity Code/ intrastatCommodityCode	String (1-10)	varchar/ nvarchar (10)	A code that classifies the goods or services in the line item. For a list of acceptable values, see the filing instructions for each European Union Member State country where you file an Intrastat report.

Mode of Transport field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Mode of Transport/ modeOfTransport	String (1-2)	varchar/ nvarchar (2)	A code that indicates the type of vehicle that transported the product across the country border. For a list of acceptable values, see the filing instructions for each country where you file an Intrastat report.

Location Code field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Location Code / locationCode	String (1-20)	varchar/ nvarchar (20)	A business location where the taxpayer has a physical presence within a jurisdiction. In general, physical locations do not have an impact on taxation. However, in some jurisdictions, physical locations determine whether tax is charged and the appropriate tax type. This field contains a value that can be used for tax return filing in jurisdictions that require taxes to be filed for individual retail locations. Note: Passing a Location Code at the line-item level when the Location Code is not associated with a taxpayer's registered jurisdiction may cause unexpected results. For example, you may see an unwanted change in tax type and tax amount.

Nature of Transaction field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Nature of Transaction/ natureOfTransaction	String (1-3)	varchar/ nvarchar (3)	A code that indicates the type of transaction being declared for Intrastat purposes. For a list of acceptable values, see the filing instructions for each country where you file an Intrastat report.

Net Mass Kilograms field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Net Mass Kilograms/ netMassKilograms	Decimal	Numeric (18.0)	The mass of the product in kilograms.

Owner Registration

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Owner Registration Number/ ownerRegNumber	String (1-40)	varchar/ nvarchar (40)	The registration number associated with a taxpayer. If you provide the Owner Registration Number but not the Owner Registration Country, BCI uses the Destination Country to process a given transaction.
Owner Registration Country/ ownerRegCountry	String (1-3)	varchar/ nvarchar (3)	The registration country associated with a taxpayer.
Owner Registration Main Division/ ownerRegMainDivision	String (1-60)	varchar/ nvarchar (60)	The registration main division associated with a taxpayer.

Owner Physical Presence Indicator/ ownerPhysicalPresenceInd	Integer (0 - 999999999)	Numeric(1)	Indicates whether or not the taxpayer has a physical presence in the country of registration.
Owner Tax Registration Type / ownerRegistrationType	String (1–80)	varchar / nvarchar (80)	Indicates the tax registration type associated with the owner role in the transaction.

Note: Vertex recommends maintaining owner VAT registrations via the O Series Taxpayers feature, rather than via BCI. This is because BCI processes one set of Owner Registration fields from the data input file. If the data input file contains more than one set of Owner Registration fields, only one set is imported properly.

Recoverable Date field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Recoverable Date / recoverableDate	String (1-10)	varchar/ nvarchar (10)	The date used to calculate Recoverable Input VAT. Specify the Recoverable Date field in CCYY-MM-DD or MM/DD/CCYY format.

Supplementary Unit fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Supplementary unit/ supplementaryUnit	Numeric (1-18)	numeric (18,0)	A quantity that is used with commodity codes that require a unit of measurement other than kilograms. For example, a supplementary unit can be the number of pieces, liters, or cubic meters.
Supplementary unit type/ supplementaryUnitType	String (1-20)	varchar/ nvarchar(20)	A unit type that is used with commodity codes that require an alternative to Net Mass by Kilograms.

Tax fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Tax Date/ taxDate	Date	varchar/ nvarchar (10)	The date on which the line item record was produced. This can also be represented as a PO line-item date, a lease line-item date, and so on. Defaults to the documentDate of the transaction. Valid formats are MM/DD/CCYY (for CSV) and CCYY-MM-DD (for database).
Tax Point Date/ taxPointDate	Date	varchar/ nvarchar (10)	The date on which the revenue is recorded as received—no matter when the sale was made. This is a requirement for certain EU countries.
Tax Included Indicator/ taxIncludedInd	Decimal	Numeric(1)	Indicates whether tax is included in the Extended Price. Valid values are 0=False and 1=True.

Unit of Measure field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Unit of Measure/ unitOfMeasure	String (1-3)	varchar/ nvarchar (3)	The unit of measure for the line item to be used in surcharges, based on quantity and not price. If you pass a value that does not match the unit of measure for the quantity-based tax rule, that rule is not used. Note: This field may be required to determine tax liability in some jurisdictions.

User-defined Line Item Synchronization field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
User Defined Line Item Sync ID Code/	String (1-40)	varchar/ nvarchar	This field enables you to use your own line item synchronization ID code.

userDefinedLineItem SyncIdCode		(40)	You must do this if transaction information is adjusted in the host system after tax calculation, resulting in the host system data and the Vertex Tax Journal data no longer being identical. This field is required if you use synchronization messages.
-----------------------------------	--	------	--

Volume field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Volume/volume	Decimal	Numeric(18.3)	The volume of the product.
Volume Unit of Measure/ volumeUnitOfMeasure	String (1-3)	varchar/ nvarchar (3)	The unit of measure for the volume of the line item to be used in surcharges, based on quantity and not on price. If you pass a value that does not match the Volume Unit of Measure for the quantity-based tax rule, that rule is not used. Note: This field may be required to determine tax liability in some jurisdictions.

Weight field

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Weight/weight	Decimal	Numeric(18.3)	The weight of the product.
Weight Volume Unit of Measure/ weightUnitOfMeasure	String (1-3)	varchar/ nvarchar (3)	The unit of measure for the weight for the line item to be used in surcharges, based on quantity and not price. If you pass a value that does not match the Weight Unit of Measure for the quantity-based tax rule, that rule is not used. Note: This field may be required to determine tax liability in some jurisdictions.

Related articles

[BCI Accrual, Distribute Tax, PO, and ERS events: Required fields](#)

[BCI Accrual, Distribute Tax, PO, and ERS events: Optional transaction fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Optional line-item fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Location role fields](#)

[BCI Inventory Removal and Asset Movement events: Required fields](#)

[BCI Inventory Removal and Asset Movement events: Optional transaction fields](#)

[BCI Inventory Removal and Asset Movement events: Location role fields](#)

[BCI fields for Supplies events](#)

[Overview of BCI](#)

BCI Inventory Removal and Asset Movement events: Location role fields

This article describes the location role fields for Inventory Removal and Asset Movement transactions that are processed for tax calculation via Batch Client Interface (BCI). The source of transactions can be either a CSV file or a database.

The location roles are:

- Destination (applies at the line-item level)
- Physical Origin (applies at the transaction level)

Destination fields

Destination is the equivalent to the ship-to location. The term destination itself can correspond to a variety of meanings, including:

- Benefit-received location
- First-used location
- Location of property
- Place-of-use location
- Primary place-of-use location
- Principle-use location

- Where-used location

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Destination Street/ destinationStreet	String (1-100)	varchar/ nvarchar (100)	The first line of the street address.
Destination Street2/ destinationStreet2	String (1-100)	varchar/ nvarchar (100)	The second line of the street address.
Destination City/ destinationCity	String (1-60)	varchar/ nvarchar (60)	The city in the address.
Destination County/ destinationSubDivision	String (1-60)	varchar/ nvarchar (60)	The proper name of the county used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Destination State/ destinationMainDivision	String (1-60)	varchar/ nvarchar (60)	The proper name or the postal abbreviation of the state, province, or territory used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Destination Postal Code/ destinationPostalCode	String (1-20)	varchar/ nvarchar (20)	The postal code used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Destination Country/ destinationCountry	String (1-60)	varchar/ nvarchar (60)	The country used to determine the Tax Area ID if none is supplied. You can use a Custom Reports - VRA Data Extract report to see the valid country values. Defaults to the value of the Default Country Code For Address setting.
Destination Currency Conversion/ destinationCurr Conversion	Decimal	Numeric(18,3)	The rate (multiplier) used for converting the transaction currency amount to the filing currency amount. Pass in this value and the currency code (isoCurrencyCodeAlpha or isoCurrencyCodeNum) to have filing currency calculated if your configuration parameters are set up to do so.
Destination Currency Unit/ destinationCurrUnit	String (1-3)	varchar/ nvarchar (3)	The three-digit ISO 4217 numeric code for the currency unit.

Destination Location Customs Status/ destinationLocCustStatus	String (1-60)	varchar/ nvarchar (60)	The customs status at this location.
Destination Location Code/ destinationLocationCode	String (1-20)	varchar/ nvarchar (20)	The alphanumeric identifier for the ship-to location. It is used to identify a business location for address lookup. Note: Passing a Location Code at the line-item level when the Location Code is not associated with a taxpayer's registered jurisdiction may cause unexpected results. For example, you may see an unwanted change in tax type and tax amount.
Extended Price Fields			
Cost/cost	Decimal	Numeric(18.3)	The price of the line item.
Fair Market Value/ fairMarketValue	Decimal	Numeric(18.3)	The fair market value of the line item.
Fair Rental Value/ fairRentalValue	Decimal	Numeric(18.3)	The rental value of the property on the open market.
Net Book Value/ netBookValue	Decimal	Numeric(18.3)	Cost less depreciation. The depreciation method is dependent on the state rules (straightline depreciation, declining depreciation, and so forth).
Total Cost/ totalCost	Decimal	Numeric(18.3)	The value of the raw materials plus all other costs such as direct labor, transportation, and indirect materials consumed and charged to the product overhead, and so forth (also known as Standard Cost, Manufactured Cost, Total Manufacturer's Cost).

Physical Origin fields

CSV Field Name/ Database Field Name	CSV Data Type	Database Data Type	Description
Phys Origin Tax Area ID/ physicalOriginTaxAreaId	Integer (0 - 999999999)	numeric(9)	A Vertex-specific number that identifies a tax area. If the Tax Area ID exists in your host system, use that data to populate this data element in a request message.
Phys Origin Street/ physicalOriginStreet	String (1-100)	varchar/ nvarchar	The first line of the street address.

		(100)	
Phys Origin Street2/ physicalOriginStreet2	String (1-100)	varchar/ nvarchar (100)	The second line of the street address.
Phys Origin City/ physicalOriginCity	String (1-60)	varchar/ nvarchar (60)	The proper name of the city used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Phys Origin County/ physicalOriginSub Division	String (1-60)	varchar/ nvarchar (60)	The proper name of the county used to determine the Tax Area ID if none is supplied. This field is optional but recommended for greatest precision if no Tax Area ID is supplied.
Phys Origin State/ physicalOriginMain Division	String (1-60)	varchar/ nvarchar (60)	The proper name or the postal abbreviation of the state, province, or territory used to determine the Tax Area ID if none is supplied. Optional but recommended for greatest precision if no Tax Area ID is supplied.
Phys Origin Postal Code/ physicalOriginPostalCode	String (1-20)	varchar/ nvarchar (20)	The postal code used to determine the Tax Area ID if none is supplied. Optional but recommended for greatest precision if no Tax Area ID is supplied.
Phys Origin Country/ physicalOriginCountry	String (1-60)	varchar/ nvarchar (60)	The country used to determine the Tax Area ID if none is supplied. You can use a Custom Reports - VRA Data Extract report to see the valid country values. This field defaults to the value of the Default Country Code For Address setting.
Phys Origin Currency Conversion/ physicalOriginCurr Conversion	Decimal	Numeric(18.3)	The rate (multiplier) used for converting the transaction currency amount to the filing currency amount. Pass in this value and the currency code (isoCurrencyCodeAlpha or isoCurrencyCodeNum) to calculate filing currency if your configuration parameters are set up to do so.
Phys Origin Currency Unit/ physicalOriginCurrUnit	String (1-3)	varchar/ nvarchar (3)	The three-digit ISO 4217 numeric code for the currency unit.
Location Customs Status/ physicalOriginLocCust Status	String (1-60)	varchar/ nvarchar (60)	The customs status at this location. Valid values are: • Free Circulation • Bonded Warehouse • Free Trade Zone • Temporary Import
Physical Origin Location Code/	String (1-20)	varchar/ nvarchar (20)	A value that can be used for tax return filing in jurisdictions that require taxes to be filed for individual retail locations.

physicalOriginLocCode			Note: Passing a Location Code at the line-item level when the Location Code is not associated with a taxpayer's registered jurisdiction may cause unexpected results. For example, you may see an unwanted change in tax type and tax amount.
Physical Origin Latitude/ physicalOriginLatitude	String (1-12)	varchar/ nvarchar (12)	Represents the geographical location that is determined by the latitude coordinates. Note: Must be licensed for the partition.
Physical Origin Longitude/ physicalOriginLongitude	String (1-12)	varchar/ nvarchar (12)	Represents the geographical location that is determined by the longitude coordinates. Note: Must be licensed for the partition.

Related articles

[BCI Accrual, Distribute Tax, PO, and ERS events: Required fields](#)

[BCI Accrual, Distribute Tax, PO, and ERS events: Optional transaction fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Optional line-item fields](#)

[BCI Accrual, Distribute Tax, PA, and ERS events: Location role fields](#)

[BCI Inventory Removal and Asset Movement events: Required fields](#)

[BCI Inventory Removal and Asset Movement events: Optional transaction fields](#)

[BCI Inventory Removal and Asset Movement events: Optional line-item fields](#)

[BCI fields for Supplies events](#)

[Overview of BCI](#)