



# FastAPI User Creation Flow Documentation

---



## Project Structure (Relevant Files)

```
.
├── main.py
├── routers/
│   └── user.py
├── db/
│   ├── database.py
│   ├── models.py
│   ├── db_user.py
│   └── hash.py
├── schemas.py
└── fastapi_practice.db
```

---

## 1. Pydantic Schemas (`schemas.py`)

These define the structure and validation for request and response data.

```
from pydantic import BaseModel

# Request model: what the client sends
class UserBase(BaseModel):
    username: str
    email: str
    password: str

# Response model: what the API returns (no password for security)
class UserDisplay(BaseModel):
    username: str
    email: str

class Config():
    orm_mode = True # Allows compatibility with ORM objects
```

---

## 2. Database Model (`db/models.py`)

Defines the actual table structure in the database using SQLAlchemy.

```
from sqlalchemy.sql.sqltypes import Integer, String
from db.database import Base
```

```
from sqlalchemy import Column

class DbUser(Base):
    __tablename__ = 'users'
    id = Column(Integer, primary_key=True, index=True)
    username = Column(String)
    email = Column(String)
    password = Column(String) # Stores the hashed password
```

---

### 3. Password Hashing Utility (db/hash.py)

Handles secure password hashing using `passlib`.

```
from passlib.context import CryptContext

# Set up the password hashing context
pwd_cxt = CryptContext(schemes=['bcrypt'], deprecated='auto')

class Hash():
    @staticmethod
    def bcrypt(password: str):
        return pwd_cxt.hash(password)

    @staticmethod
    def verify(hashed_password, plain_password):
        return pwd_cxt.verify(plain_password, hashed_password)
```

---

### 4. CRUD Logic (db/db\_user.py)

Handles the business logic for creating a user, including hashing the password.

```
from sqlalchemy.orm import Session
from schemas import UserBase
from db.models import DbUser
from db.hash import Hash

def create_user(db: Session, request: UserBase):
    # Create a new user instance with hashed password
    new_user = DbUser(
        username=request.username,
        email=request.email,
        password=Hash.bcrypt(request.password) # Hash the password before storing
    )
    db.add(new_user)
```

```
db.commit()
db.refresh(new_user)
return new_user
```

---

## 5. API Route (routers/user.py)

Defines the API endpoint for user creation.

```
from fastapi import APIRouter, Depends
from sqlalchemy.orm import Session
from schemas import UserBase, UserDisplay
from db.database import get_db
from db import db_user

router = APIRouter(
    prefix="/user",
    tags=["user"]
)

# Endpoint to create a new user
@router.post("/", response_model=UserDisplay)
def create_user(request: UserBase, db: Session = Depends(get_db)):
    return db_user.create_user(db, request)
```

---

## 6. Database Setup (db/database.py)

Sets up the database connection and session.

```
from sqlalchemy import create_engine
from sqlalchemy.ext.declarative import declarative_base
from sqlalchemy.orm import sessionmaker

SQLALCHEMY_DATABASE_URL = "sqlite:///./fastapi_practice.db"

engine = create_engine(
    SQLALCHEMY_DATABASE_URL, connect_args={"check_same_thread": False}
)
SessionLocal = sessionmaker(autocommit=False, autoflush=False, bind=engine)
Base = declarative_base()

def get_db():
    db = SessionLocal()
    try:
        yield db
```

```
finally:  
    db.close()
```

---


## 7. Main Application (`main.py`)

Mounts the routers and starts the FastAPI app.

```
from fastapi import FastAPI  
from routers import blog_post, blog_get, user  
from db.database import engine  
from db import models  
  
app = FastAPI(  
    title="FastAPI Blog API",  
    description="A sample blog backend using FastAPI Routers",  
    version="1.0.0"  
)  
  
# Include routers  
app.include_router(user.router)  
app.include_router(blog_post.router, prefix="/blog", tags=["Blog - Post"])  
app.include_router(blog_get.router, prefix="/blog", tags=["Blog - Get"])  
  
@app.get("/", tags=["Root"])  
def root():  
    return {"message": "Welcome to the FastAPI Blog API!"}
```

---

## User Creation Flow Diagram

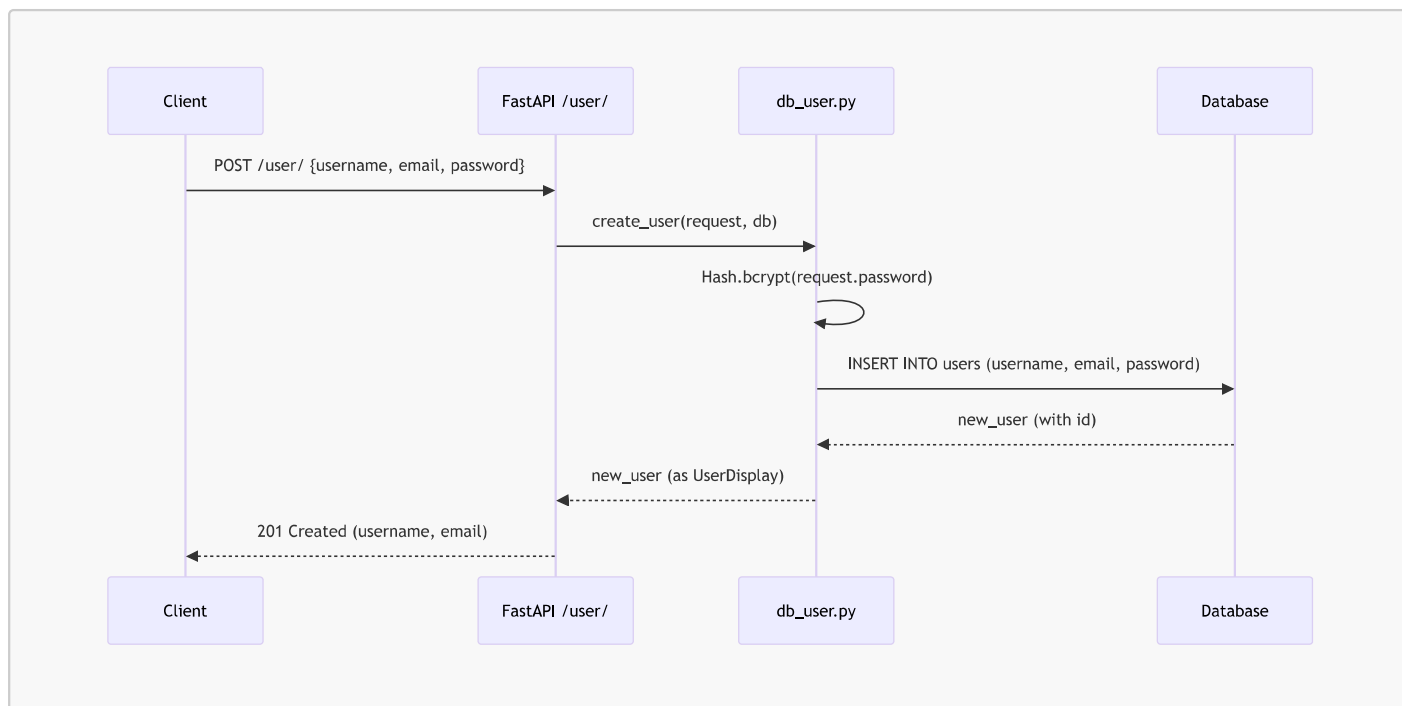

## 🧩 How It All Works

1. **Client** sends a POST request to `/user/` with username, email, and password.
2. **FastAPI** validates the request using the `UserBase` schema.
3. The route calls the `create_user` function in `db_user.py`.
4. The password is **hashed** using bcrypt before storing.
5. A new user is added to the database.
6. The API returns the user data (excluding the password) using the `UserDisplay` schema.

## ✅ Security Note

- **Passwords are never stored in plain text.** They are always hashed using bcrypt.
- The API never returns the password field in responses.

## 🧪 Example Request & Response

**Request:**

```
POST /user/
{
  "username": "alice",
  "email": "alice@example.com",
  "password": "mysecret"
}
```

**Response:**

```
{  
  "username": "alice",  
  "email": "alice@example.com"  
}
```

---