

User Management

Admin Operations and Configuration Manual

Manual 02 of 25
Route: /admin-user-management
Group: Platform
Generated: May 10, 2026


1. Section Overview

User Management lists customer, support, and admin accounts with role, verification, usage, pagination, and actions. It is the control surface for account lookup, support-agent creation, user detail review, and approved data reset workflows.

Use this section to find the exact account under review, confirm role and account state, open user detail, create support agents, and reset derived user data only when a documented repair case requires it.

2. Current Admin Screenshot

Screenshot source: localhost development admin environment with test data. Test data is permitted for these manuals and should still be treated as internal.

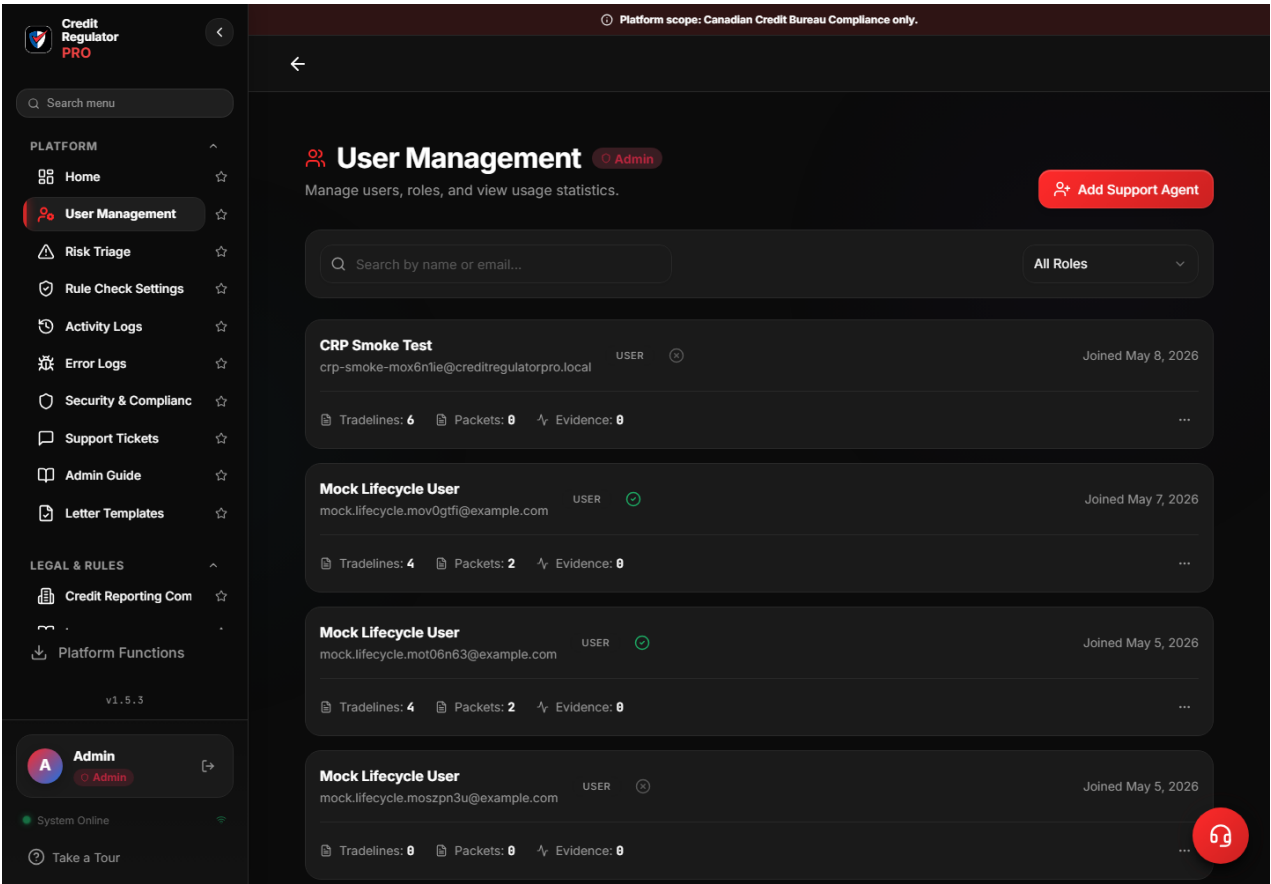

The screenshot shows search, role filters, user cards, account statistics, actions, and pagination.

3. Access and Operating Rules

- Sign in with an account that has admin access. Support users may see some reference sections, but admin configuration and review tools require admin role.
- Use the intended environment. Local admin browser testing uses `http://localhost:5175`. The backend port, `http://localhost:3333`, is API-only.
- Treat screenshots, exports, logs, report text, and record IDs as internal test-environment material. Do not paste them into public channels.
- Confirm the page route, active filters, selected user, selected report, and selected environment before any save, delete, reset, dismissal, or finalize action.
- When an action affects customer-facing findings, packets, pricing, feature flags, or parser truth, record the reason and verify the downstream record after refresh.
- Never reset user data from a vague request. The request must identify the exact user and reason.
- Support-agent accounts bypass user subscription checks but do not receive full admin capabilities.
- A user card count is a warning about blast radius. Open detail before destructive operations.

4. Screen Anatomy and Controls

Area	What it means	Admin procedure
Search and role filter	Narrows the list by name/email and role.	Search by exact email before resetting or reviewing a sensitive user.
User cards	Show display name, email, role badge, verification icon, join date, and counts for tradelines, packets, and evidence.	Use counts to decide whether reset or detail review may affect substantial data.
Actions menu	Opens details or starts reset for non-admin users.	Admin self-reset and self-delete protections must remain respected.
Add Support Agent	Creates an internal support role with email, display name, and temporary password.	Use only with approved staffing requests and communicate credentials through approved internal channels.
Pagination	Shows the visible range and total user count.	Use next/previous before concluding a user is absent.

5. Step-by-Step Instructions

Find and verify a user account

Use this before support, reset, packet, or compliance review work.

Procedure

1. Open User Management from the Platform sidebar group.
2. Search by the exact email address from the support ticket or operational request.
3. If no result appears, clear the role filter and retry with a partial display name.
4. Confirm display name, email, role badge, verification icon, join date, and usage counts.
5. Open View Details for the account and compare the detail page to the original request.
6. Record the user ID and email in the internal work note before performing a mutation.

Verification

- The selected user matches the request by email and ID.
- The role is understood before the next action.
- The action path is documented in the support or admin note.

Reset user data for an approved repair

Use only when the user's derived report, tradeline, packet, evidence, or freeze data must be removed and rebuilt.

Procedure

1. Confirm the repair approval, affected environment, user email, and reason outside the UI.
2. Search by exact email and confirm the visible card is not an admin account.
3. Open the actions menu and choose Reset User Data.
4. Read the destructive-action dialog. Confirm it refers to reports and derived data, not the user account itself.
5. Type the user's exact email into the confirmation field. Do not paste a different user's email from a clipboard history.
6. Click Reset only once and wait for the success or failure message.
7. Refresh User Management and confirm the affected counts changed as expected.
8. Open Activity Logs and verify the reset audit entry includes the actor, user, and timestamp.

Decision options

- User account still exists.
- Derived data counts reflect the reset.
- Activity Logs show the reset action.
- No unrelated admin or support account was affected.

Verification

- Reset dialog cancel: use when approval or identity is uncertain.
- Reset confirm: use only after exact email confirmation and documented approval.
- Escalate: use when counts do not match expected deletion totals or Error Logs show partial failure.

6. Common Tasks With Drilldown Examples

Create a support agent

Example: Operations approves a new contractor to handle assigned support tickets.

Drilldown procedure

1. Click Add Support Agent.
2. Enter the approved work email address and display name.

3. Enter a temporary password that complies with the internal credential handoff process.
4. Submit the form and wait for the success message.
5. Search for the new email and confirm the role badge is support.
6. Have the support agent sign in and change any temporary credential if the operating process requires it.

Best practices for this task

- Do not create support accounts for customers.
- Do not share temporary passwords in tickets, public chats, screenshots, or documentation.
- Use a work-controlled email, not a personal address, unless approved.

Done when

- The new account appears in the support role filter.
- The account can access support/reference routes but not admin-only configuration routes.

Investigate a packet-count mismatch

Example: A user says a packet was created, but their card shows zero packets.

Drilldown procedure

1. Search the exact user email and record the visible packet count.
2. Open user detail to review related reports, tradelines, and packet records.
3. Open Activity Logs and search around the reported packet creation time.
4. Open Error Logs if the activity trail shows a failed packet save or export.
5. If a hidden-risk finding blocked packet generation, open Risk Triage or the relevant tradeline detail.

Best practices for this task

- Use count mismatches as a starting point, not proof that a packet is missing.
- Distinguish packet generation, packet download, and packet delivery events.

Done when

- The packet state is verified on the source page.
- Any failure path has a matching log or a documented absence of logs.

7. Configuration and Change-Control Scope

- Creating support agents changes authentication and support access state.
- Reset User Data deletes derived credit-report data for the selected user while leaving the account intact.
- Role changes are not performed from the visible list page. Do not improvise role changes outside approved admin workflows.

8. Common Errors

Problem	Likely cause	Admin response
Access denied or redirected to	The session expired, the role is not admin, or the	Sign back in, confirm admin role, and reopen the

Problem	Likely cause	Admin response
login	wrong environment is open.	route from the sidebar instead of using an old bookmark.
Expected record is missing	Search terms, tabs, filters, pagination, or environment selection are hiding the record.	Clear filters, search by exact ID or email, verify the environment, and compare Activity Logs when available.
Save appears to do nothing	Required fields are missing, there are no dirty changes, or the API returned a validation error.	Read the inline validation text, correct one field at a time, save again, refresh, and check Error Logs if the state still does not persist.
user management state conflicts with another page	The source record was changed elsewhere or the current page is stale.	Refresh the page, reopen the source record, and use timestamps or record IDs to decide which state is authoritative.

9. Troubleshooting

Check	Why it matters	How to proceed
Start with a refresh	A refresh confirms whether the user management view is stale or whether the backend rejected the action.	Refresh once, then repeat the exact search or selection. Do not repeat destructive actions until the latest state is visible.
Check Activity Logs	Successful admin actions should leave an audit trail for sensitive workflows.	Search by actor, affected user, entity ID, route, or timestamp. Use the log entry as confirmation, not just the toast message.
Check Error Logs	Repeated UI failures usually have matching server or API errors.	Search around the action time. Capture the route, status, error summary, and request context for developer follow-up.
Escalate with evidence	Developer review is faster when the exact record and reproduction path are known.	Provide environment, route, selected filters, record ID, expected outcome, actual outcome, screenshot, and timestamp.

10. Best Practices

- Search by exact email for sensitive actions.
- Open user detail before reset when the card shows any report, tradeline, packet, or evidence counts.
- Use support-agent creation only for approved internal staffing.
- Capture reset result counts in the operational note.

11. Completion Checklist

- The user management page was reopened or refreshed after the change.
- The expected saved state remained visible after refresh.

- Related logs, downstream records, or generated artifacts agree with the visible page state.
- Any customer-facing wording, finding status, packet state, or support note was reviewed for factual and neutral language.
- Any unresolved risk, failed test, suspicious log, or unclear source evidence was escalated with record IDs and screenshots.

12. Related Admin Areas

- User detail
- Support Tickets
- Activity Logs
- Error Logs
- Risk Triage