

# Error Logs

## Admin Operations and Configuration Manual

Manual 06 of 25  
Route: /admin-error-logs  
Group: Platform  
Generated: May 10, 2026


### 1. Section Overview

Error Logs list application errors and failed operations that need operational review. They help diagnose failed saves, parser failures, API problems, import/export issues, and unexpected UI states.

Use this section when the UI shows a failure, a save does not persist, a parser test fails unexpectedly, or support reports an operation that cannot be confirmed through Activity Logs.

### 2. Current Admin Screenshot

Screenshot source: localhost development admin environment with test data. Test data is permitted for these manuals and should still be treated as internal.

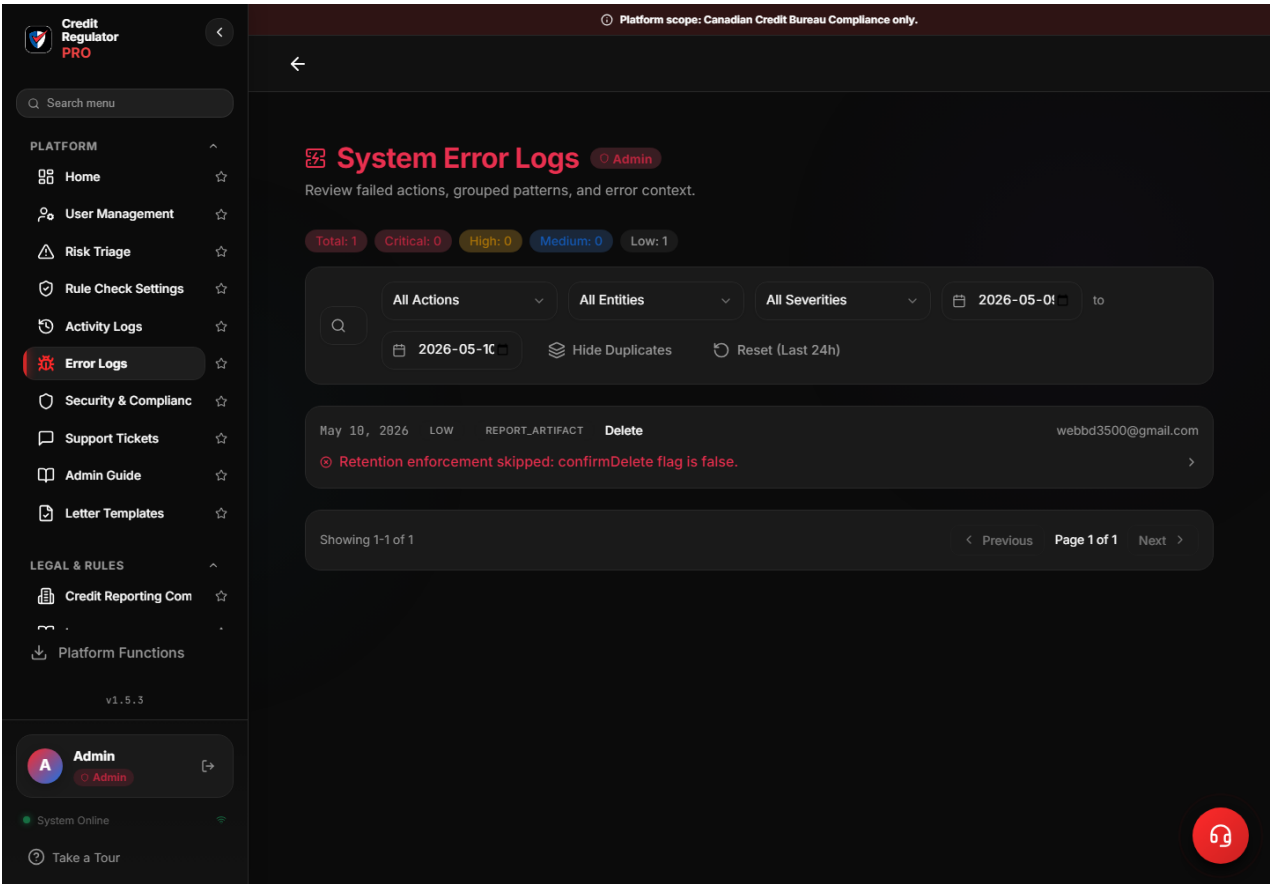

The screenshot shows error filters, severity/status fields, message context, route/API context, and timestamps.

### 3. Access and Operating Rules

- Sign in with an account that has admin access. Support users may see some reference sections, but admin configuration and review tools require admin role.
- Use the intended environment. Local admin browser testing uses `http://localhost:5175`. The backend port, `http://localhost:3333`, is API-only.
- Treat screenshots, exports, logs, report text, and record IDs as internal test-environment material. Do not paste them into public channels.
- Confirm the page route, active filters, selected user, selected report, and selected environment before any save, delete, reset, dismissal, or finalize action.
- When an action affects customer-facing findings, packets, pricing, feature flags, or parser truth, record the reason and verify the downstream record after refresh.
- A single error may not mean the workflow failed if a retry later succeeded. Compare Activity Logs and source state.
- Repeated critical errors across users usually need developer attention.
- Parser and PDF extraction failures often require source PDF, test case ID, replay hash, and route context.

### 4. Screen Anatomy and Controls

| Area             | What it means                                                       | Admin procedure                                                 |
|------------------|---------------------------------------------------------------------|-----------------------------------------------------------------|
| Severity filters | Separate critical errors, warnings, and informational failures.     | Prioritize repeated critical errors and user-blocking failures. |
| Search           | Finds messages by action, route, user, or error text.               | Use exact route or endpoint names from the failing workflow.    |
| Error rows       | Show message, context, user/actor when available, time, and status. | Do not copy stack traces to customers.                          |
| Context fields   | Help identify the page, endpoint, or entity involved.               | Capture these fields for developer escalation.                  |

### 5. Step-by-Step Instructions

#### Investigate a failed save

Use this when a form reports failure or saved values disappear after refresh.

##### Procedure

1. Record the route, approximate time, actor, and entity ID from the source page.
2. Open Error Logs and search by route, endpoint, or action name.
3. Filter to the time window around the failed save.
4. Read the validation or error message and identify whether it is user-correctable or developer-facing.

5. Return to the source page and correct required fields if the error is validation-related.
6. If the error is server, database, permission, or unexpected exception, do not retry repeatedly. Escalate with context.

### Decision options

- A retry succeeds and Activity Logs confirm it, or escalation includes exact error context.

### Verification

- Validation error: correct input and retry once.
- Permission error: confirm role and environment.
- Server exception: capture details and escalate.

## Review parser/PDF extraction failures

Use when Parser Testing, upload, Stage Lab, or Finding Corrections fails unexpectedly.

### Procedure

1. Search Error Logs by parser, extraction, PDF, upload, test case, or endpoint name.
2. Record test case ID, extraction run ID, source artifact ID, and timestamp if available.
3. Open Parser Testing and confirm whether the test case or Stage Lab result still exists.
4. Check whether the error is input-file related, deterministic replay related, or storage related.
5. Export the affected test case if possible before making changes.
6. Escalate with source PDF/test case reference, replay hash when available, and the error row context.

### Verification

- The affected parser artifact is preserved when possible.
- The escalation contains enough context to reproduce the failure.

## 6. Common Tasks With Drilldown Examples

### Separate user-correctable errors from defects

*Example: A pricing save fails because the surcharge value is out of range.*

### Drilldown procedure

1. Open the relevant error row.
2. Look for validation language such as missing required field, invalid number, out of range, or unauthorized.
3. If validation is clear, correct the source form and retry once.
4. If the message indicates exception, database, undefined field, or failed invariant, stop and escalate.

### Best practices for this task

- Do not treat repeated validation errors as system defects until the input has been corrected.
- Do not expose stack traces or internal endpoint names to customers.

### Done when

- Correctable issues are resolved in the source page.

- Defects are escalated with exact error context.

## Document a recurring critical error

*Example: Multiple users hit the same packet export failure.*

### Drilldown procedure

1. Filter to critical errors and search for the packet/export endpoint or message.
2. Count how many distinct users or artifacts are affected.
3. Collect first seen, latest seen, route, status, and repeated message pattern.
4. Open Activity Logs to see whether any later retry succeeded.
5. Escalate with the pattern summary and affected IDs.

### Best practices for this task

- Prioritize repeated user-blocking errors over isolated transient messages.
- Summarize patterns rather than pasting full logs.

### Done when

- The escalation includes impact, frequency, and reproduction route.

## 7. Configuration and Change-Control Scope

- Error Logs are read-only from the UI.
- They can reveal internal endpoints, stack context, and test data.
- Use them for diagnosis and escalation, not customer messaging.

## 8. Common Errors

| Problem                                      | Likely cause                                                                                     | Admin response                                                                                                                               |
|----------------------------------------------|--------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|
| Access denied or redirected to login         | The session expired, the role is not admin, or the wrong environment is open.                    | Sign back in, confirm admin role, and reopen the route from the sidebar instead of using an old bookmark.                                    |
| Expected record is missing                   | Search terms, tabs, filters, pagination, or environment selection are hiding the record.         | Clear filters, search by exact ID or email, verify the environment, and compare Activity Logs when available.                                |
| Save appears to do nothing                   | Required fields are missing, there are no dirty changes, or the API returned a validation error. | Read the inline validation text, correct one field at a time, save again, refresh, and check Error Logs if the state still does not persist. |
| error logs state conflicts with another page | The source record was changed elsewhere or the current page is stale.                            | Refresh the page, reopen the source record, and use timestamps or record IDs to decide which state is authoritative.                         |

## 9. Troubleshooting

| Check                  | Why it matters                                                                                      | How to proceed                                                                                                                 |
|------------------------|-----------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------|
| Start with a refresh   | A refresh confirms whether the error logs view is stale or whether the backend rejected the action. | Refresh once, then repeat the exact search or selection. Do not repeat destructive actions until the latest state is visible.  |
| Check Activity Logs    | Successful admin actions should leave an audit trail for sensitive workflows.                       | Search by actor, affected user, entity ID, route, or timestamp. Use the log entry as confirmation, not just the toast message. |
| Check Error Logs       | Repeated UI failures usually have matching server or API errors.                                    | Search around the action time. Capture the route, status, error summary, and request context for developer follow-up.          |
| Escalate with evidence | Developer review is faster when the exact record and reproduction path are known.                   | Provide environment, route, selected filters, record ID, expected outcome, actual outcome, screenshot, and timestamp.          |

## 10. Best Practices

- Start with source route and timestamp.
- Use Error Logs with Activity Logs to distinguish failed and successful retries.
- Escalate repeated critical errors quickly.
- Never send raw stack traces to users.

## 11. Completion Checklist

- The error logs page was reopened or refreshed after the change.
- The expected saved state remained visible after refresh.
- Related logs, downstream records, or generated artifacts agree with the visible page state.
- Any customer-facing wording, finding status, packet state, or support note was reviewed for factual and neutral language.
- Any unresolved risk, failed test, suspicious log, or unclear source evidence was escalated with record IDs and screenshots.

## 12. Related Admin Areas

- Activity Logs
- Parser Testing
- Rule Check Settings
- User Management
- Support Tickets