

Parser Testing

Admin Operations and Configuration Manual

Manual 20 of 25
Route: /admin-parser-testing
Group: Tools
Generated: May 10, 2026


1. Section Overview

Parser Testing validates credit report extraction, Stage Lab runs, saved test cases, deterministic replay, parser output, import/export, run-all regression behavior, and finding correction handoff.

Use this section to prove that report ingestion and extraction are reliable before relying on findings, packets, training examples, or downstream user-facing output.

2. Current Admin Screenshot

Screenshot source: localhost development admin environment with test data. Test data is permitted for these manuals and should still be treated as internal.

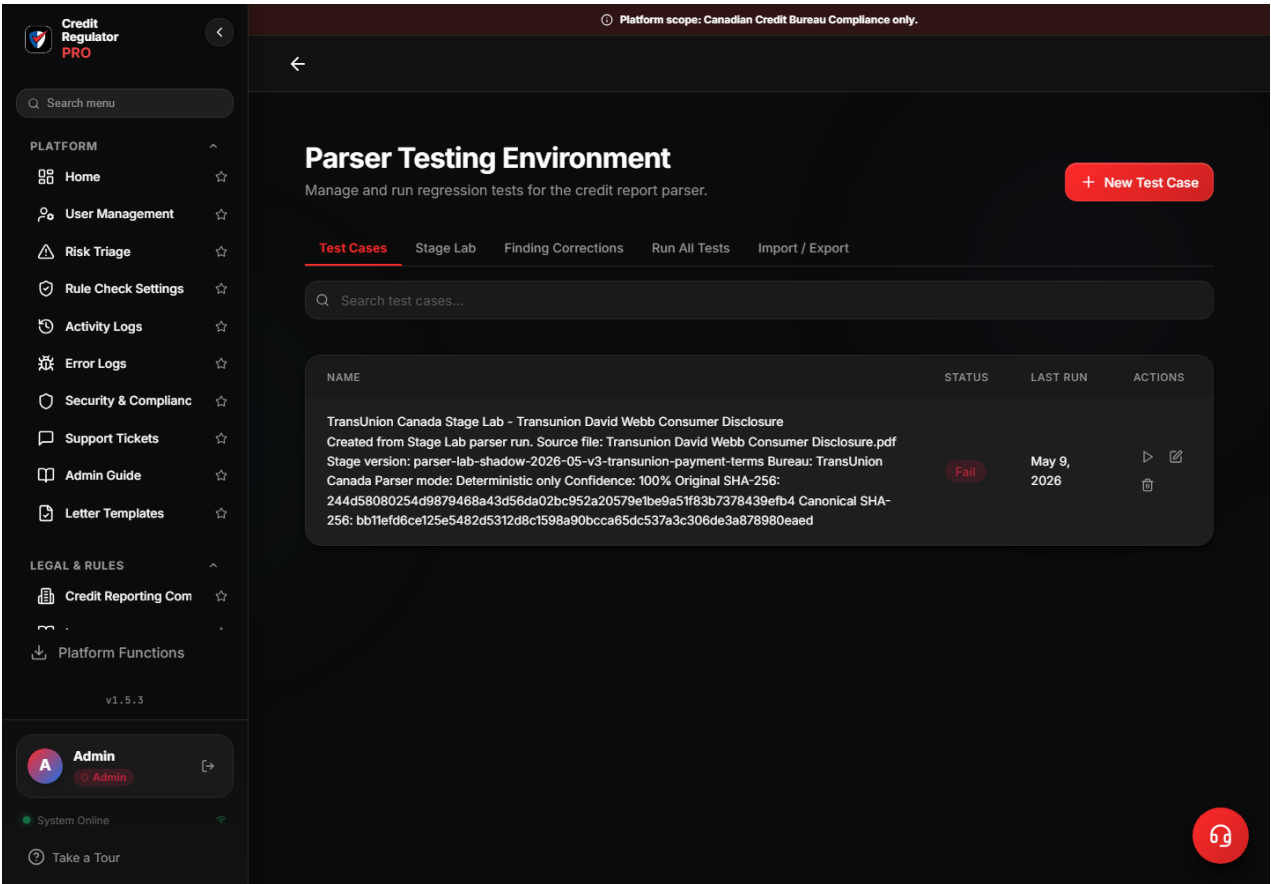

The screenshot shows Parser Testing tabs, saved cases, Stage Lab, run controls, and parser output review areas.

3. Access and Operating Rules

- Sign in with an account that has admin access. Support users may see some reference sections, but admin configuration and review tools require admin role.
- Use the intended environment. Local admin browser testing uses `http://localhost:5175`. The backend port, `http://localhost:3333`, is API-only.
- Treat screenshots, exports, logs, report text, and record IDs as internal test-environment material. Do not paste them into public channels.
- Confirm the page route, active filters, selected user, selected report, and selected environment before any save, delete, reset, dismissal, or finalize action.
- When an action affects customer-facing findings, packets, pricing, feature flags, or parser truth, record the reason and verify the downstream record after refresh.
- Treat the parser as untrusted until a human verifies source output against the original bureau report.
- AI, LLM, DocStrange, and OCR-assisted outputs are diagnostic only unless deterministic rules validate and adopt behavior later.
- A passing parser test means current parser output matches expected or approved truth. It does not automatically prove the baseline is correct.

4. Screen Anatomy and Controls

Area	What it means	Admin procedure
Test Cases	Durable regression cases with PDFs, expected values, saved output, approved truth, and adjudication decisions.	Use for parser baselines and single-case validation.
Stage Lab	Runs a shadow parse without immediately changing baselines.	Use for exploratory parsing and source-quality inspection.
Finding Corrections	Reviews machine findings, admin corrections, evidence, regulation mappings, and training labels.	Use when parser output affects compliance findings.
Run All Tests	Runs every active test case through deterministic parser checks.	Use as parser release gate.
Import/Export	Moves parser test case bundles between environments or stores backups.	Export before bulk edits or deletion.

5. Step-by-Step Instructions

Turn a new PDF into a regression test

Use when a report layout, parser defect, or new bureau variation should become durable test coverage.

Procedure

1. Open Parser Testing and select Stage Lab.
2. Upload the authorized test PDF and run a shadow parse.
3. Review quality gates, source coverage, review queue, raw text, parsed consumer fields, parsed tradelines, canonical hash, and replay validation when available.
4. If the output is useful, save the Stage Lab run to Test Cases.
5. Open the new Test Case and review Saved Parser Output.
6. Accept saved output only if it matches the source report. Otherwise, use Admin Adjudication to correct fields one at a time.
7. Run the single test case and resolve Failed or Needs Review states.
8. Run All Tests before considering the parser change release-ready.
9. Export updated test cases after meaningful review work.

Decision options

- Single test passes or has documented expected failure.
- Run All has no unexpected failures.
- Exported backup exists after major baseline work.

Verification

- Accept Saved Output: use only after full source comparison.
- Corrected: use when parser value exists but is wrong.
- Missing From Parser: use when bureau reports a value the parser missed.
- Not Reported By Bureau: use when the source truly lacks the field.
- Ignore: use for a field that should not drive baseline truth.

Run parser regression safely

Use before and after parser, mapping, extraction, date handling, or rule-candidate changes.

Procedure

1. Open Run All Tests.
2. Confirm no other admin is editing baselines mid-run.
3. Click Run All Tests and wait for completion.
4. Review total, passed, failed, and needs-review counts.
5. Open each failure with View and compare expected/approved truth to actual output.
6. Classify each failure as parser defect, stale baseline, fixture/source issue, or expected known failure.
7. Fix or document every unexpected failure before release signoff.

Verification

- Every failed case has a classification.
- Unexpected parser defects have issue notes and source IDs.

6. Common Tasks With Drilldown Examples

Investigate Blank / not parsed

Example: The selected date field shows blank even though the PDF appears to contain it.

Drilldown procedure

1. Confirm the selected Entity, Account/Section, and Field to Review are correct.
2. Check Raw Extracted Text for the value.
3. If the value appears in raw text, save Missing From Parser or Corrected with exact source evidence.
4. If the value is absent from raw text, treat it as extraction/OCR/source issue rather than mapping-only.
5. Add parser instruction explaining the expected deterministic behavior.
6. Promote a parser rule only if the correction matches a supported rule template and validation passes.

Best practices for this task

- Do not overwrite non-null extracted values with null unless the source truly does not report the value.
- Preserve raw text and replay context for developer review.

Done when

- Correction decision is saved with source evidence.
- Future parser run either reproduces approved truth or has a documented defect.

Import or export test cases

Example: Move a focused regression bundle from staging to local for developer reproduction.

Drilldown procedure

1. Select exact test cases or Select All for a full backup.
2. Export selected cases and store the JSON in approved internal storage.
3. When importing, choose only trusted parser test exports.
4. Preview the count before import.
5. Import creates new rows and does not deduplicate existing cases.
6. Run All Tests after import.

Best practices for this task

- Export before deletion or bulk editing.
- Protect exported JSON because it can contain PDF base64 and report data.

Done when

- Imported cases are executable.
- Duplicate rows are reviewed intentionally.

7. Configuration and Change-Control Scope

- Saved test cases, approved values, adjudication decisions, parser rule candidates, and imported bundles affect regression truth.
- Run All results are release-gate evidence.
- Exports can include PDFs and report data and must be protected.

8. Common Errors

Problem	Likely cause	Admin response
Access denied or redirected to login	The session expired, the role is not admin, or the wrong environment is open.	Sign back in, confirm admin role, and reopen the route from the sidebar instead of using an old bookmark.
Expected record is missing	Search terms, tabs, filters, pagination, or environment selection are hiding the record.	Clear filters, search by exact ID or email, verify the environment, and compare Activity Logs when available.
Save appears to do nothing	Required fields are missing, there are no dirty changes, or the API returned a validation error.	Read the inline validation text, correct one field at a time, save again, refresh, and check Error Logs if the state still does not persist.
parser testing state conflicts with another page	The source record was changed elsewhere or the current page is stale.	Refresh the page, reopen the source record, and use timestamps or record IDs to decide which state is authoritative.

9. Troubleshooting

Check	Why it matters	How to proceed
Start with a refresh	A refresh confirms whether the parser testing view is stale or whether the backend rejected the action.	Refresh once, then repeat the exact search or selection. Do not repeat destructive actions until the latest state is visible.
Check Activity Logs	Successful admin actions should leave an audit trail for sensitive workflows.	Search by actor, affected user, entity ID, route, or timestamp. Use the log entry as confirmation, not just the toast message.
Check Error Logs	Repeated UI failures usually have matching server or API errors.	Search around the action time. Capture the route, status, error summary, and request context for developer follow-up.
Escalate with evidence	Developer review is faster when the exact record and reproduction path are known.	Provide environment, route, selected filters, record ID, expected outcome, actual outcome, screenshot, and timestamp.

10. Best Practices

- Use deterministic fixtures for parser changes.
- Verify baselines against original reports before trusting pass/fail results.
- Export test cases after major adjudication work.
- Preserve replay hash, source hash, and raw text when escalating parser defects.

11. Completion Checklist

- The parser testing page was reopened or refreshed after the change.
- The expected saved state remained visible after refresh.
- Related logs, downstream records, or generated artifacts agree with the visible page state.
- Any customer-facing wording, finding status, packet state, or support note was reviewed for factual and neutral language.
- Any unresolved risk, failed test, suspicious log, or unclear source evidence was escalated with record IDs and screenshots.

12. Related Admin Areas

- Finding Corrections
- Parser Mappings
- Reporting Format Guide
- Risk Triage
- Error Logs