Deployment architecture — from owned appliance to scored container replica

Addresses are Compose configuration, not measured traffic

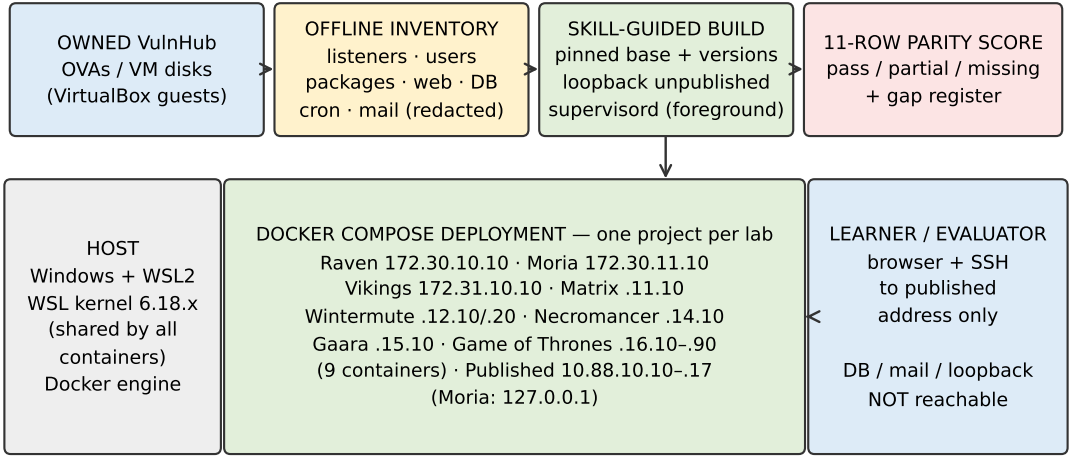

One Compose project per lab on a dedicated bridge subnet; guest port numbers are preserved.