


# : I.T Security Vulnerability Report

Job Name:	job1	Scan time:	2020-05-09 10:12:43
Profile:	Default - Non destructive Full and Fast scan	Generated:	2020-05-09 10:27:01

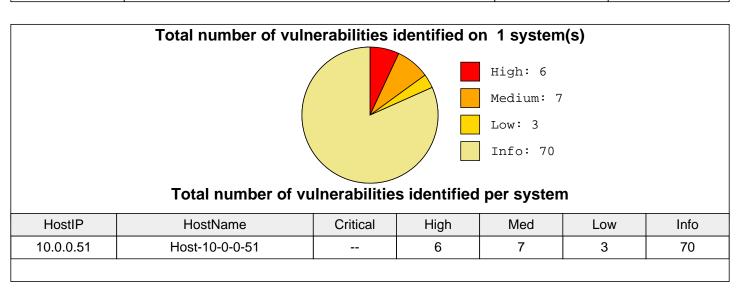

10.0.0.51	Host-10-0-51

**Drupal Coder Remote Code Execution** 

Risk: High Application: http

Port: 80 Protocol: tcp ScriptID: 105818

Vulnerability Detection Result:

Vulnerable url: http://10.0.0.51/drupal/sites/all/modules/coder\_upgrade/scripts/coder\_upgrade.run.php

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:C/I:C/A:C Vulnerability Detection Method:

Check for known error message from affected modules

Insight:

The Coder module checks your Drupal code against coding standards and other best practices. It can also fix coding standard violations and perform basic upgrades on modules. The module doesn't sufficiently validate user inputs in a script file that has the php extension. A malicious unauthenticated user can make requests directly to this file to execute arbitrary php code.

Summary:

The remote Drupal installation is prone to a remote code execution vulnerability.

Solution:

Install the latest version:

References:

https://www.drupal.org/node/2765575

CVSS Base Score: 10.0

Family name: Web application abuses

Category: attack

Copyright: This script is Copyright (C) 2016 Greenbone Networks GmbH

Summary: NOSUMMARY Version: \$Revision: 12313 \$

Drupal Core SQL Injection Vulnerability

Risk: High Application: http

Port: 80 Protocol: tcp ScriptID: 105101

Insight:

Drupal fails to sufficiently sanitize user-supplied data before using

it in an SQL query.

Vulnerability Detection Method:

Send a special crafted HTTP POST request and check the response.

Solution:

Updates are available

Summary:

Drupal is prone to an SQL-injection vulnerability

Impact:

Exploiting this issue could allow an attacker to execute arbitrary

code, to gain elevated privileges and to compromise the application, access or modify data, or exploit latent vulnerabilities in the underlying database.

Affected Software/OS:

Drupal 7.x versions prior to 7.32 are vulnerable.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:P/I:P/A:P

References:

http://www.securityfocus.com/bid/70595

http://drupal.org/ CVSS Base Score: 7.5

Family name: Web application abuses

Category: attack

Copyright: This script is Copyright (C) 2014 Greenbone Networks GmbH

Summary: NOSUMMARY Version: \$Revision: 13659 \$ CVEs: CVE-2014-3704

ProFTPD `mod\_copy` Unauthenticated Copying Of Files Via SITE CPFR/CPTO

Risk: High Application: ftp

Port: 21 Protocol: tcp ScriptID: 105254

Vulnerability Detection Result:

The target was found to be vulnerable

CVSS Base Vector:

AV:N/AC:L/Au:N/C:C/I:C/A:C

Impact:

Under some circumstances this could result in remote code execution

Solution:

Ask the vendor for an update

Summary:

ProFTPD is prone to an unauthenticated copying of files vulnerability.

Vulnerability Detection Method:

Try to copy /etc/passwd to /tmp/passwd.copy with SITE CPFR/CPTO

References:

http://bugs.proftpd.org/show\_bug.cgi?id=4169

CVSS Base Score: 10.0 Family name: FTP Category: attack

Copyright: This script is Copyright (C) 2015 Greenbone Networks GmbH

Summary: NOSUMMARY Version: \$Revision: 11831 \$ CVEs: CVE-2015-3306

Check for Backdoor in UnrealIRCd

Risk: High Application: irc Port: 6667 Protocol: tcp ScriptID: 80111 Summary:

Detection of backdoor in UnrealIRCd.

Solution:

Install latest version of unrealired

and check signatures of software you're installing.

Insight:

Remote attackers can exploit this issue

to execute arbitrary system commands within the context of the affected application.

The issue affects Unreal 3.2.8.1 for Linux. Reportedly package Unreal3.2.8.1.tar.gz downloaded in November 2009 and later is affected. The MD5 sum of the affected file is 752e46f2d873c1679fa99de3f52a274d. Files with MD5 sum of

7b741e94e867c0a7370553fd01506c66 are not affected.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:P/I:P/A:P

References:

http://www.unrealircd.com/txt/unrealsecadvisory.20100612.txt

http://seclists.org/fulldisclosure/2010/Jun/277 http://www.securityfocus.com/bid/40820

CVSS Base Score: 7.5

Family name: Gain a shell remotely

Category: unknown

Copyright: This script is Copyright (C) 2010 Vlatko Kosturjak

Version: \$Revision: 13960 \$CVEs: CVE-2010-2075

SSH Brute Force Logins With Default Credentials Reporting

Risk: High Application: ssh

Port: 22 Protocol: tcp ScriptID: 103239

Vulnerability Detection Result:

It was possible to login with the following credentials <User>:<Password>

vagrant:vagrant
CVSS Base Vector:

AV:N/AC:L/Au:N/C:P/I:P/A:P

Solution:

Change the password as soon as possible.

Summary:

It was possible to login into the remote SSH server using default credentials.

As the VT 'SSH Brute Force Logins With Default Credentials' (OID: 1.3.6.1.4.1.25623.1.0.108013) might run into a timeout the actual reporting of this vulnerability takes place in this VT instead. The script preference 'Report timeout' allows you to configure if such an timeout is reported.

Vulnerability Detection Method:

Reports default credentials detected by the VT 'SSH Brute Force Logins With Default Credentials'

(OID: 1.3.6.1.4.1.25623.1.0.108013).

CVSS Base Score: 7.5

Family name: Default Accounts

Category: end

Copyright: Copyright (c) 2016 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-26T13:48:10+0000

Test HTTP dangerous methods

Risk: High Application: http

Port: 80 Protocol: tcp ScriptID: 10498

Vulnerability Detection Result:

We could upload the following files via the PUT method at this web server:

http://10.0.0.51/uploads/puttest866222339.html

We could delete the following files via the DELETE method at this web server:

http://10.0.0.51/uploads/puttest866222339.html

Summary:

Misconfigured web servers allows remote clients to perform

dangerous HTTP methods such as PUT and DELETE.

This script checks if they are enabled and can be misused to upload or delete files.

Solution:

Use access restrictions to these dangerous HTTP methods

or disable them completely.

Impact:

- Enabled PUT method: This might allow an attacker to upload and run arbitrary code on this web server.
  - Enabled DELETE method: This might allow an attacker to delete additional files on this web server.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:P/I:P/A:P

References:

OWASP:OWASP-CM-001 CVSS Base Score: 7.5

Family name: Remote file access

Category: unknown

Copyright: This script is Copyright (C) 2000 Michel Arboi

Version: 2019-12-04T13:23:25+0000

**Drupal Information Disclosure Vulnerability** 

Risk: Medium
Application: http

Port: 80 Protocol: tcp ScriptID: 902574

**Vulnerability Detection Result:** 

Vulnerable url: http://10.0.0.51/drupal/modules/simpletest/tests/upgrade/drupal-6.upload.database.php

Solution:

No known solution was made available for at least one year since the disclosure

of this vulnerability. Likely none will be provided anymore. General solution options are to upgrade to a newer release, disable respective features, remove the product or replace the product by another one.

Summary:

The host is running Drupal and is prone to information disclosure vulnerability.

Insight:

The flaw is due to insufficient error checking, allows remote attackers to obtain sensitive information via a direct request to a .php

file, which reveals the installation path in an error message.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:P/I:N/A:N

Impact:

Successful exploitation will allow attacker to obtain sensitive

information that could aid in further attacks.

Affected Software/OS:

Drupal Version 7.0.

References:

http://code.google.com/p/inspathx/source/browse/trunk/paths\_vuln/!\_README http://code.google.com/p/inspathx/source/browse/trunk/paths\_vuln/drupal-7.0

CVSS Base Score: 5.0

Family name: Web application abuses

Category: attack

Copyright: Copyright (C) 2011 SecPod

Summary: NOSUMMARY

Version: 2019-05-14T12:12:41+0000

CVEs: CVE-2011-3730

FTP Unencrypted Cleartext Login

Risk: Medium Application: ftp

Port: 21 Protocol: tcp ScriptID: 108528

**Vulnerability Detection Result:** 

The remote FTP service accepts logins without a previous sent 'AUTH TLS' command. Response(s):

Anonymous sessions: 331 Anonymous login ok, send your complete email address as your password

Non-anonymous sessions: 331 Password required for openvas-vt

**Vulnerability Detection Method:** 

Tries to login to a non FTPS enabled FTP service without sending a

'AUTH TLS' command first and checks if the service is accepting the login without enforcing the use of the 'AUTH TLS' command.

Summary:

The remote host is running a FTP service that allows cleartext logins over unencrypted connections.

Solution:

Enable FTPS or enforce the connection via the 'AUTH TLS' command. Please see

the manual of the FTP service for more information.

Impact:

An attacker can uncover login names and passwords by sniffing traffic to the

FTP service.

**CVSS Base Vector:** 

AV:A/AC:L/Au:N/C:P/I:P/A:N

CVSS Base Score: 4.8 Family name: General Category: unknown

Copyright: Copyright (C) 2019 Greenbone Networks GmbH

Version: 2020-03-24T12:27:11+0000

SSL/TLS: Report Weak Cipher Suites

Risk: Medium Application: ipp Port: 631 Protocol: tcp ScriptID: 103440

**Vulnerability Detection Result:** 

Weak ciphers offered by this service: TLS1\_RSA\_DES\_192\_CBC3\_SHA TLS1\_RSA\_DES\_192\_CBC3\_SHA

TLS\_1\_2\_RSA\_WITH\_3DES\_EDE\_CBC\_SHA

#### Insight:

These rules are applied for the evaluation of the cryptographic strength:

- Any SSL/TLS using no cipher is considered weak.
- All SSLv2 ciphers are considered weak due to a design flaw within the SSLv2 protocol.
- RC4 is considered to be weak.
- Ciphers using 64 bit or less are considered to be vulnerable to brute force methods and therefore considered as weak.
- 1024 bit RSA authentication is considered to be insecure and therefore as weak.
- CBC ciphers in TLS < 1.2 are considered to be vulnerable to the BEAST or Lucky 13 attacks
- Any cipher considered to be secure for only the next 10 years is considered as medium
- Any other cipher is considered as strong

## Solution:

The configuration of this services should be changed so that it does not support the listed weak ciphers anymore.

Summary:

This routine search for weak SSL ciphers offered by a service.

**CVSS Base Vector:** 

AV:N/AC:M/Au:N/C:P/I:N/A:N

CVSS Base Score: 4.3 Family name: SSL and TLS

Category: infos

Copyright: This script is Copyright (C) 2012 Greenbone Networks GmbH

Summary: NOSUMMARY Version: \$Revision: 11135 \$

CVEs: CVE-2013-2566, CVE-2015-2808, CVE-2015-4000

Medium: SSH Weak Encryption Algorithms Supported Risk: Medium Application: ssh Port: 22 Protocol: tcp ScriptID: 105611 **Vulnerability Detection Result:** The following weak client-to-server encryption algorithms are supported by the remote service: 3des-cbc aes128-cbc aes192-cbc aes256-cbc arcfour arcfour128 arcfour256 blowfish-cbc cast128-cbc rijndael-cbc@lysator.liu.se The following weak server-to-client encryption algorithms are supported by the remote service: 3des-cbc aes128-cbc aes192-cbc aes256-cbc arcfour arcfour128 arcfour256 blowfish-cbc cast128-cbc rijndael-cbc@lysator.liu.se Insight: The 'arcfour' cipher is the Arcfour stream cipher with 128-bit keys. The Arcfour cipher is believed to be compatible with the RC4 cipher [SCHNEIER]. Arcfour (and RC4) has problems with weak keys, and should not be used anymore. The `none` algorithm specifies that no encryption is to be done. Note that this method provides no confidentiality protection, and it is NOT RECOMMENDED to use it. A vulnerability exists in SSH messages that employ CBC mode that may allow an attacker to recover plaintext from a block of ciphertext. **Vulnerability Detection Method:** Check if remote ssh service supports Arcfour, none or CBC ciphers. Solution: Disable the weak encryption algorithms. Summary: The remote SSH server is configured to allow weak encryption algorithms. **CVSS Base Vector:** AV:N/AC:M/Au:N/C:P/I:N/A:N References: https://tools.ietf.org/html/rfc4253#section-6.3 https://www.kb.cert.org/vuls/id/958563 CVSS Base Score: 4.3 Family name: General

Category: infos

Copyright: This script is Copyright (C) 2016 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-26T13:48:10+0000

Cleartext Transmission of Sensitive Information via HTTP

Risk: Medium

Application: http

Port: 80 Protocol: tcp ScriptID: 108440

**Vulnerability Detection Result:** 

The following input fields where identified (URL:input name):

http://10.0.0.51/drupal/:pass http://10.0.0.51/drupal/?D=A:pass

http://10.0.0.51/payroll\_app.php:password http://10.0.0.51/phpmyadmin/:pma\_password http://10.0.0.51/phpmyadmin/?D=A:pma\_password

http://10.0.0.51/phpmyadmin/index.php:pma\_password http://10.0.0.51/phpmyadmin/license.php:pma\_password

http://10.0.0.51/phpmyadmin/url.php:pma\_password

Affected Software/OS:

Hosts / applications which doesn't enforce the transmission of sensitive data via an encrypted SSL/TLS connection.

## Impact:

An attacker could use this situation to compromise or eavesdrop on the

HTTP communication between the client and the server using a man-in-the-middle attack to get access to sensitive data like usernames or passwords.

**CVSS Base Vector:** 

AV:A/AC:L/Au:N/C:P/I:P/A:N Vulnerability Detection Method:

Evaluate previous collected information and check if the host / application is not enforcing the transmission of sensitive data via an encrypted SSL/TLS connection.

The script is currently checking the following:

- HTTP Basic Authentication (Basic Auth)
- HTTP Forms (e.g. Login) with input field of type 'password'

#### Summary:

The host / application transmits sensitive information (username, passwords) in cleartext via HTTP.

## Solution:

Enforce the transmission of sensitive data via an encrypted SSL/TLS connection.

Additionally make sure the host / application is redirecting all users to the secured SSL/TLS connection before allowing to input sensitive data into the mentioned functions.

#### References:

https://www.owasp.org/index.php/Top\_10\_2013-A2-Broken\_Authentication\_and\_Session\_Management

https://www.owasp.org/index.php/Top\_10\_2013-A6-Sensitive\_Data\_Exposure

https://cwe.mitre.org/data/definitions/319.html

CVSS Base Score: 4.8

Family name: Web application abuses

Category: infos

Copyright: Copyright (C) 2018 Greenbone Networks GmbH

Summary: NOSUMMARY Version: \$Revision: 10726 \$

Unprotected Web App Installers (HTTP)

Risk: Medium
Application: http

Port: 80 Protocol: tcp ScriptID: 107307

**Vulnerability Detection Result:** 

The following Web App installers are unprotected and publicly accessible (URL:Description):

http://10.0.0.51/phpmyadmin/setup/index.php - CubeCart / phpMyAdmin installer

Impact:

It is possible to install or reconfigure the software. In doing so,

the attacker could overwrite existing configurations. It could be possible for the attacker to gain access to the base system

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:P/I:N/A:N Vulnerability Detection Method:

Enumerate the remote web server and check if unprotected

Web Apps are accessible for installation.

Summary:

The script attempts to identify installation pages of various

Web Apps that are publicly accessible and not protected by account restrictions.

Solution:

Setup and/or installation pages for Web Apps should not be

publicly accessible via a web server. Restrict access to it or remove it completely.

CVSS Base Score: 5.0

Family name: Web application abuses

Category: infos

Copyright: Copyright (C) 2018 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2019-12-17T11:41:26+0000

**UnrealIRCd Authentication Spoofing Vulnerability** 

Risk: Medium Application: irc Port: 6667 Protocol: tcp ScriptID: 809883

Vulnerability Detection Result: Installed version: 3.2.8.1 Fixed version: 3.2.10.7 Vulnerability Detection Method:

Checks if a vulnerable version is present on the target host.

Insight:

The flaw exists due to an error in

the 'm\_authenticate' function in 'modules/m\_sasl.c' script.

Solution:

Upgrade to UnrealIRCd 3.2.10.7,

or 4.0.6, or later.

Summary:

This host is installed with UnrealIRCd

and is prone to authentication spoofing vulnerability.

Impact:

Successful exploitation of this vulnerability

will allows remote attackers to spoof certificate fingerprints and consequently

log in as another user.
Affected Software/OS:

UnrealIRCd before 3.2.10.7 and

4.x before 4.0.6.

CVSS Base Vector:

AV:N/AC:M/Au:N/C:P/I:P/A:P

References:

http://seclists.org/oss-sec/2016/q3/420

http://www.openwall.com/lists/oss-security/2016/09/05/8

https://github.com/unrealircd/unrealircd/commit/f473e355e1dc422c4f019dbf86bc50ba1a34a766

https://bugs.unrealircd.org/main\_page.php

CVSS Base Score: 6.8
Family name: General
Category: infos

Copyright: Copyright (C) 2017 Greenbone Networks GmbH

Summary: NOSUMMARY Version: \$Revision: 11874 \$ CVEs: CVE-2016-7144 Low:

**ICMP Timestamp Detection** 

Risk: Low

Application: general

Port: 0

Protocol: icmp ScriptID: 103190

Summary:

The remote host responded to an ICMP timestamp request.

The Timestamp Reply is an ICMP message which replies to a Timestamp message. It consists of the originating timestamp sent by the sender of the Timestamp as well as a receive timestamp and a transmit timestamp. This information could theoretically be used to exploit weak time-based random number generators in other services.

CVSS Base Vector:

AV:L/AC:L/Au:N/C:N/I:N/A:N

References:

http://www.ietf.org/rfc/rfc0792.txt

CVSS Base Score: 0.0

Family name: Service detection

Category: infos

Copyright: This script is Copyright (C) 2011 Greenbone Networks GmbH

Summary: NOSUMMARY Version: \$Revision: 10411 \$ CVEs: CVE-1999-0524 Low:

SSH Weak MAC Algorithms Supported

Risk: Low Application: ssh

Port: 22 Protocol: tcp ScriptID: 105610

**Vulnerability Detection Result:** 

The following weak client-to-server MAC algorithms are supported by the remote service:

hmac-md5 hmac-md5-96

hmac-md5-96-etm@openssh.com hmac-md5-etm@openssh.com

hmac-sha1-96

hmac-sha1-96-etm@openssh.com

The following weak server-to-client MAC algorithms are supported by the remote service:

hmac-md5 hmac-md5-96

hmac-md5-96-etm@openssh.com hmac-md5-etm@openssh.com

hmac-sha1-96

hmac-sha1-96-etm@openssh.com

**CVSS Base Vector:** 

AV:N/AC:H/Au:N/C:P/I:N/A:N

Summary:

The remote SSH server is configured to allow weak MD5 and/or 96-bit MAC algorithms.

Solution:

Disable the weak MAC algorithms.

CVSS Base Score: 2.6 Family name: General

Category: infos

Copyright: This script is Copyright (C) 2016 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-26T13:48:10+0000

Low:

TCP timestamps

Risk: Low

Application: general

Port: 0 Protocol: tcp ScriptID: 80091

**Vulnerability Detection Result:** 

It was detected that the host implements RFC1323.

The following timestamps were retrieved with a delay of 1 seconds in-between:

Packet 1: 9169728 Packet 2: 9169989

Solution:

To disable TCP timestamps on linux add the line 'net.ipv4.tcp\_timestamps = 0' to

/etc/sysctl.conf. Execute 'sysctl -p' to apply the settings at runtime.

To disable TCP timestamps on Windows execute 'netsh int tcp set global timestamps=disabled' Starting with Windows Server 2008 and Vista, the timestamp can not be completely disabled.

The default behavior of the TCP/IP stack on this Systems is to not use the

Timestamp options when initiating TCP connections, but use them if the TCP peer

that is initiating communication includes them in their synchronize (SYN) segment.

See the references for more information.

Summary:

The remote host implements TCP timestamps and therefore allows to compute the uptime.

Insight:

The remote host implements TCP timestamps, as defined by RFC1323.

**Vulnerability Detection Method:** 

Special IP packets are forged and sent with a little delay in between to the

target IP. The responses are searched for a timestamps. If found, the timestamps are reported.

**CVSS Base Vector:** 

AV:N/AC:H/Au:N/C:P/I:N/A:N

Impact:

A side effect of this feature is that the uptime of the remote

host can sometimes be computed.

Affected Software/OS:

TCP/IPv4 implementations that implement RFC1323.

References:

http://www.ietf.org/rfc/rfc1323.txt

http://www.microsoft.com/en-us/download/details.aspx?id=9152

CVSS Base Score: 2.6 Family name: General Category: unknown

Copyright: Copyright (C) 2008 Michel Arboi Version: 2020-03-21T13:23:23+0000

Apache Web Server Version Detection

Risk: Info

Application: http

Port: 80 Protocol: tcp ScriptID: 900498

Vulnerability Detection Result:

Detected Apache HTTP/Web Server

Version: 2.4.7 Location: 80/tcp

CPE: cpe:/a:apache:http\_server:2.4.7

Concluded from version/product identification result:

Server: Apache/2.4.7 CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

Checks whether Apache HTTP/Web Server is present

on the target system. CVSS Base Score: 0.0

Family name: Product detection

Category: infos

Copyright: Copyright (C) 2009 SecPod

Summary: NOSUMMARY

Version: 2020-03-04T13:56:06+0000

**CGI Scanning Consolidation** 

Risk: Info

Application: unknown

Port: 8181 Protocol: tcp ScriptID: 111038

**Vulnerability Detection Result:** 

The Hostname/IP "10.0.0.51" was used to access the remote host.

Generic web application scanning is disabled for this host via the "Enable generic web application scanning" option within the "Global variable settings" of the scan config in use.

Requests to this service are done via HTTP/1.1.

This service seems to be able to host PHP scripts.

This service seems to be able to host ASP scripts.

The User-Agent "Mozilla/5.0 [en] (X11, U; OpenVAS-VT 9.0.3)" was used to access the remote host.

Historic /scripts and /cgi-bin are not added to the directories used for CGI scanning. You can enable this again with the "Add historic /scripts and /cgi-bin to directories for CGI scanning" option within the "Global variable settings" of the scan config in use.

The following directories were used for CGI scanning:

http://10.0.0.51:8181/

While this is not, in and of itself, a bug, you should manually inspect these directories to ensure that they are in compliance with company security standards

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

The script consolidates various information for CGI scanning.

This information is based on the following scripts / settings:

- HTTP-Version Detection (OID: 1.3.6.1.4.1.25623.1.0.100034)
- No 404 check (OID: 1.3.6.1.4.1.25623.1.0.10386)
- Web mirroring / webmirror.nasl (OID: 1.3.6.1.4.1.25623.1.0.10662)
- Directory Scanner / DDI\_Directory\_Scanner.nasl (OID: 1.3.6.1.4.1.25623.1.0.11032)
- The configured 'cgi\_path' within the 'Scanner Preferences' of the scan config in use
- The configured 'Enable CGI scanning', 'Enable generic web application scanning' and

'Add historic /scripts and /cgi-bin to directories for CGI scanning' within the

'Global variable settings' of the scan config in use

If you think any of this information is wrong please report it to the referenced community portal.

References:

https://community.greenbone.net/c/vulnerability-tests

CVSS Base Score: 0.0

Family name: Web application abuses

Category: infos

Copyright: This script is Copyright (C) 2015 SCHUTZWERK GmbH

Summary: NOSUMMARY

Version: 2019-09-23T09:25:24+0000

**Drupal Version Detection** 

Risk: Info

Application: http

Port: 80 Protocol: tcp ScriptID: 100169

Vulnerability Detection Result:

Detected Drupal
Version: 7.5
Location: /drupal

CPE: cpe:/a:drupal:drupal:7.5

Concluded from version/product identification result:

Drupal 7.5, 2011-07-27

Concluded from version/product identification location:

http://10.0.0.51/drupal/CHANGELOG.txt

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

Detects the installed version of Drupal.

This script sends an HTTP GET request and tries to get the version from the

response.

CVSS Base Score: 0.0

Family name: Product detection

Category: infos

Copyright: Copyright (C) 2009 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2019-12-10T12:07:42+0000

Fingerprint web server with favicon.ico

Risk: Info

Application: http

Port: 80 Protocol: tcp ScriptID: 20108

Vulnerability Detection Result:

The following apps/services were identified:

"Drupal CMS (5.10) " fingerprinted by the file: "http://10.0.0.51/drupal/misc/favicon.ico"

"phpmyadmin (2.11.8.1 - 4.2.x)" fingerprinted by the file: "http://10.0.0.51/phpmyadmin/favicon.ico"

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Impact:

The 'favicon.ico' file found on the remote web server belongs to a

popular webserver/application. This may be used to fingerprint the webserver/application.

Solution:

Remove the 'favicon.ico' file or create a custom one for your site.

Summary:

The remote web server contains a graphic image that is prone to

information disclosure. CVSS Base Score: 0.0

Family name: Web application abuses

Category: unknown

Copyright: Copyright (C) 2005 Javier Fernandez-Sanguino

Version: 2020-02-26T12:57:19+0000

Info:

FTP Banner Detection

Risk: Info
Application: ftp

Port: 21 Protocol: tcp ScriptID: 10092

Vulnerability Detection Result: Remote FTP server banner:

220 ProFTPD 1.3.5 Server (ProFTPD Default Installation) [10.0.0.51]

This is probably:

- ProFTPD

Server operating system information collected via "SYST" command:

215 UNIX Type: L8 CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This Plugin detects and reports a FTP Server Banner.

CVSS Base Score: 0.0

Family name: Product detection

Category: unknown

Copyright: Copyright (C) 2005 SecuriTeam Version: 2020-03-24T12:27:11+0000

FTP Missing Support For AUTH TLS

Risk: Info Application: ftp

Port: 21 Protocol: tcp ScriptID: 108553

Vulnerability Detection Result:

The remote FTP server does not support the 'AUTH TLS' command.

Summary:

The remote FTP server does not support the 'AUTH TLS' command.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0 Family name: FTP

Category: unknown

Copyright: Copyright (C) 2019 Greenbone Networks GmbH

Version: \$Revision: 13863 \$

HTTP Security Headers Detection

Risk: Info

Application: unknown

Port: 8181 Protocol: tcp ScriptID: 112081

Vulnerability Detection Result:

Header Name | Header Value

-----

X-Content-Type-Options | nosniff
X-Frame-Options | SAMEORIGIN
X-Xss-Protection | 1; mode=block

Missing Headers | More Information

-----

Content-Security-Policy | https://owasp.org/www-project-secure-headers/#content-security-policy

Feature-Policy | https://owasp.org/www-project-secure-headers/#feature-policy | https://owasp.org/www-project-secure-headers/#referrer-policy

X-Permitted-Cross-Domain-Policies |

https://owasp.org/www-project-secure-headers/#x-permitted-cross-domain-policies

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

All known security headers are being checked on the host. On completion a report

will hand back whether a specific security header has been implemented (including its value) or is missing on the target.

References:

https://owasp.org/www-project-secure-headers/

https://owasp.org/www-project-secure-headers/#div-headers

https://securityheaders.io/ CVSS Base Score: 0.0 Family name: General

Category: infos

Copyright: This script is Copyright (C) 2017 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-18T09:31:42+0000

HTTP Security Headers Detection

Risk: Info

Application: unknown

Port: 3500 Protocol: tcp ScriptID: 112081

Vulnerability Detection Result:

Header Name | Header Value

-----

X-Content-Type-Options | nosniff
X-Frame-Options | SAMEORIGIN
X-Xss-Protection | 1; mode=block

Missing Headers | More Information

-----

Content-Security-Policy | https://owasp.org/www-project-secure-headers/#content-security-policy

Feature-Policy | https://owasp.org/www-project-secure-headers/#feature-policy Referrer-Policy | https://owasp.org/www-project-secure-headers/#referrer-policy

X-Permitted-Cross-Domain-Policies |

https://owasp.org/www-project-secure-headers/#x-permitted-cross-domain-policies

Summary:

All known security headers are being checked on the host. On completion a report

will hand back whether a specific security header has been implemented (including its value) or is missing on the target.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://owasp.org/www-project-secure-headers/

https://owasp.org/www-project-secure-headers/#div-headers

https://securityheaders.io/ CVSS Base Score: 0.0 Family name: General

Category: infos

Copyright: This script is Copyright (C) 2017 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-18T09:31:42+0000

**CGI Scanning Consolidation** 

Risk: Info

Application: unknown

Port: 3500 Protocol: tcp ScriptID: 111038

**Vulnerability Detection Result:** 

The Hostname/IP "10.0.0.51" was used to access the remote host.

Generic web application scanning is disabled for this host via the "Enable generic web application scanning" option within the "Global variable settings" of the scan config in use.

Requests to this service are done via HTTP/1.1.

This service seems to be able to host PHP scripts.

This service seems to be able to host ASP scripts.

The User-Agent "Mozilla/5.0 [en] (X11, U; OpenVAS-VT 9.0.3)" was used to access the remote host.

Historic /scripts and /cgi-bin are not added to the directories used for CGI scanning. You can enable this again with the "Add historic /scripts and /cgi-bin to directories for CGI scanning" option within the "Global variable settings" of the scan config in use.

The following directories were used for CGI scanning:

http://10.0.0.51:3500/

http://10.0.0.51:3500/rails/info

While this is not, in and of itself, a bug, you should manually inspect these directories to ensure that they are in compliance with company security standards

Summary:

The script consolidates various information for CGI scanning.

This information is based on the following scripts / settings:

- HTTP-Version Detection (OID: 1.3.6.1.4.1.25623.1.0.100034)
- No 404 check (OID: 1.3.6.1.4.1.25623.1.0.10386)
- Web mirroring / webmirror.nasl (OID: 1.3.6.1.4.1.25623.1.0.10662)
- Directory Scanner / DDI\_Directory\_Scanner.nasl (OID: 1.3.6.1.4.1.25623.1.0.11032)
- The configured 'cgi\_path' within the 'Scanner Preferences' of the scan config in use
- The configured 'Enable CGI scanning', 'Enable generic web application scanning' and

'Add historic /scripts and /cgi-bin to directories for CGI scanning' within the

'Global variable settings' of the scan config in use

If you think any of this information is wrong please report it to the referenced community portal.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://community.greenbone.net/c/vulnerability-tests

CVSS Base Score: 0.0

Family name: Web application abuses

Category: infos

Copyright: This script is Copyright (C) 2015 SCHUTZWERK GmbH

Summary: NOSUMMARY

Version: 2019-09-23T09:25:24+0000

HTTP Security Headers Detection

Risk: Info Application: ipp Port: 631 Protocol: tcp ScriptID: 112081

Vulnerability Detection Result:

Missing Headers | More Information

\_\_\_\_\_\_

-----

Content-Security-Policy | https://owasp.org/www-project-secure-headers/#content-security-policy

Expect-CT | https://owasp.org/www-project-secure-headers/#expect-ct | Feature-Policy | https://owasp.org/www-project-secure-headers/#feature-policy

Public-Key-Pins | Please check the output of the VTs including 'SSL/TLS:' and 'HPKP' in their name for

more information and configuration help.

Referrer-Policy | https://owasp.org/www-project-secure-headers/#referrer-policy

Strict-Transport-Security | Please check the output of the VTs including 'SSL/TLS:' and 'HSTS' in their name for

more information and configuration help.

X-Content-Type-Options | https://owasp.org/www-project-secure-headers/#x-content-type-options

X-Frame-Options | https://owasp.org/www-project-secure-headers/#x-frame-options

X-Permitted-Cross-Domain-Policies |

https://owasp.org/www-project-secure-headers/#x-permitted-cross-domain-policies

X-XSS-Protection | https://owasp.org/www-project-secure-headers/#x-xss-protection

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

All known security headers are being checked on the host. On completion a report

will hand back whether a specific security header has been implemented (including its value) or is missing on the target.

References:

https://owasp.org/www-project-secure-headers/

https://owasp.org/www-project-secure-headers/#div-headers

https://securityheaders.io/ CVSS Base Score: 0.0 Family name: General Category: infos

Copyright: This script is Copyright (C) 2017 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-18T09:31:42+0000

HTTP Security Headers Detection

Risk: Info

Application: http

Port: 80 Protocol: tcp ScriptID: 112081

**Vulnerability Detection Result:** 

Missing Headers | More Information

\_\_\_\_\_\_

Content-Security-Policy | https://owasp.org/www-project-secure-headers/#content-security-policy

Feature-Policy | https://owasp.org/www-project-secure-headers/#feature-policy Referrer-Policy | https://owasp.org/www-project-secure-headers/#referrer-policy

X-Content-Type-Options | https://owasp.org/www-project-secure-headers/#x-content-type-options

X-Frame-Options | https://owasp.org/www-project-secure-headers/#x-frame-options

X-Permitted-Cross-Domain-Policies |

https://owasp.org/www-project-secure-headers/#x-permitted-cross-domain-policies

X-XSS-Protection | https://owasp.org/www-project-secure-headers/#x-xss-protection

Summary:

All known security headers are being checked on the host. On completion a report

will hand back whether a specific security header has been implemented (including its value) or is missing on the target.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://owasp.org/www-project-secure-headers/

https://owasp.org/www-project-secure-headers/#div-headers

https://securityheaders.io/ CVSS Base Score: 0.0 Family name: General

Category: infos

Copyright: This script is Copyright (C) 2017 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-18T09:31:42+0000

HTTP Server Banner Enumeration

Risk: Info

Application: unknown

Port: 8181 Protocol: tcp ScriptID: 108708

Vulnerability Detection Result:

It was possible to enumerate the following HTTP server banner(s):

Server banner | Enumeration technique

-----

Server: WEBrick/1.3.1 (Ruby/2.3.7/2018-03-28) | Valid HTTP 1.0 GET request to '/index.htm'

Summary:

This script tries to detect / enumerate different HTTP server banner (e.g. from a

frontend, backend or proxy server) by sending various different HTTP requests (valid and invalid ones).

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0

O VOO Base Ocore. 0.0

Family name: Service detection

Category: unknown

Copyright: Copyright (C) 2020 Greenbone Networks GmbH

Version: 2020-02-25T12:12:27+0000

Info:

**HTTP Server Banner Enumeration** 

Risk: Info

Application: unknown

Port: 3500 Protocol: tcp ScriptID: 108708

Vulnerability Detection Result:

It was possible to enumerate the following HTTP server banner(s):

Server banner | Enumeration technique

-----

Server: WEBrick/1.3.1 (Ruby/2.3.7/2018-03-28) | Valid HTTP 1.0 GET request to '/index.htm'

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script tries to detect / enumerate different HTTP server banner (e.g. from a

frontend, backend or proxy server) by sending various different HTTP requests (valid and invalid ones).

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Copyright (C) 2020 Greenbone Networks GmbH

Version: 2020-02-25T12:12:27+0000

HTTP Server Banner Enumeration

Risk: Info Application: ipp Port: 631 Protocol: tcp ScriptID: 108708

**Vulnerability Detection Result:** 

It was possible to enumerate the following HTTP server banner(s):

Server banner | Enumeration technique

Server: CUPS/1.7 IPP/2.1 | Valid HTTP 0.9 GET request to '/index.html'

Summary:

This script tries to detect / enumerate different HTTP server banner (e.g. from a

frontend, backend or proxy server) by sending various different HTTP requests (valid and invalid ones).

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Copyright (C) 2020 Greenbone Networks GmbH

Version: 2020-02-25T12:12:27+0000

Info:

HTTP Server Banner Enumeration

Risk: Info Application: http

Port: 80 Protocol: tcp ScriptID: 108708

Vulnerability Detection Result:

It was possible to enumerate the following HTTP server banner(s):

Server banner | Enumeration technique

Server: Apache/2.4.7 (Ubuntu) | Valid HTTP 0.9 GET request to '/index.html'

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script tries to detect / enumerate different HTTP server banner (e.g. from a

frontend, backend or proxy server) by sending various different HTTP requests (valid and invalid ones).

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Copyright (C) 2020 Greenbone Networks GmbH

Version: 2020-02-25T12:12:27+0000

HTTP Server type and version

Risk: Info

Application: unknown

Port: 8181 Protocol: tcp ScriptID: 10107

Vulnerability Detection Result:

The remote HTTP Server banner is:

Server: WEBrick/1.3.1 (Ruby/2.3.7/2018-03-28)

Summary:

This script detects and reports the HTTP Server's banner

which might provide the type and version of it.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Copyright (C) 2005 H. Scholz & Contributors

Version: 2020-02-06T14:44:42+0000

Info:

HTTP Server type and version

Risk: Info

Application: unknown

Port: 3500 Protocol: tcp ScriptID: 10107

Vulnerability Detection Result:

The remote HTTP Server banner is:

Server: WEBrick/1.3.1 (Ruby/2.3.7/2018-03-28)

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script detects and reports the HTTP Server's banner

which might provide the type and version of it.

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Copyright (C) 2005 H. Scholz & Contributors

Version: 2020-02-06T14:44:42+0000

HTTP Server type and version

Risk: Info Application: ipp Port: 631 Protocol: tcp

ScriptID: 10107

Vulnerability Detection Result: The remote HTTP Server banner is:

Server: CUPS/1.7 IPP/2.1

Summary:

This script detects and reports the HTTP Server's banner

which might provide the type and version of it.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Copyright (C) 2005 H. Scholz & Contributors

Version: 2020-02-06T14:44:42+0000

#### Info:

HTTP Server type and version

Risk: Info Application: http

Port: 80 Protocol: tcp ScriptID: 10107

Vulnerability Detection Result: The remote HTTP Server banner is: Server: Apache/2.4.7 (Ubuntu)

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script detects and reports the HTTP Server's banner

which might provide the type and version of it.

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Copyright (C) 2005 H. Scholz & Contributors

Version: 2020-02-06T14:44:42+0000

**CGI Scanning Consolidation** 

Risk: Info Application: ipp Port: 631 Protocol: tcp

ScriptID: 111038

Vulnerability Detection Result:

The Hostname/IP "10.0.0.51" was used to access the remote host.

Generic web application scanning is disabled for this host via the "Enable generic web application scanning" option within the "Global variable settings" of the scan config in use.

Requests to this service are done via HTTP/1.1.

This service seems to be able to host PHP scripts.

This service seems to be able to host ASP scripts.

The User-Agent "Mozilla/5.0 [en] (X11, U; OpenVAS-VT 9.0.3)" was used to access the remote host.

Historic /scripts and /cgi-bin are not added to the directories used for CGI scanning. You can enable this again with the "Add historic /scripts and /cgi-bin to directories for CGI scanning" option within the "Global variable settings" of the scan config in use.

A possible recursion was detected during CGI scanning:

The service is using a relative URL in one or more HTML references where e.g. /file1.html contains <a href="subdir/file2.html"> and a subsequent request for subdir/file2.html is linking to subdir/file2.html. This would resolves to subdir/subdir/file2.html causing a recursion. To work around this counter-measures have been enabled but the service should be fixed as well to not use such problematic links. Below an excerpt of URLs is shown to help identify those issues.

Syntax : URL (HTML link)

https://10.0.0.51:631/es (help/accounting.html)

https://10.0.0.51:631/es (help/api-cups.html)

https://10.0.0.51:631/es (help/api-filter.html)

https://10.0.0.51:631/es (help/api-httpipp.html)

https://10.0.0.51:631/es (help/api-overview.html)

The following directories were used for CGI scanning:

https://10.0.0.51:631/

https://10.0.0.51:631/admin

https://10.0.0.51:631/admin-bak

https://10.0.0.51:631/admin-console

https://10.0.0.51:631/admin-old

https://10.0.0.51:631/admin.back

https://10.0.0.51:631/admin/log

https://10.0.0.51:631/admin\_

https://10.0.0.51:631/adminer

https://10.0.0.51:631/administration

https://10.0.0.51:631/administrator

https://10.0.0.51:631/adminuser

https://10.0.0.51:631/adminweb

https://10.0.0.51:631/classes

https://10.0.0.51:631/es

https://10.0.0.51:631/fr

https://10.0.0.51:631/help

https://10.0.0.51:631/helpdesk

https://10.0.0.51:631/printers

While this is not, in and of itself, a bug, you should manually inspect these directories to ensure that they are in compliance with company security standards

The following directories were excluded from CGI scanning because the "Regex pattern to exclude directories from CGI scanning" setting of the NVT "Global variable settings" (OID: 1.3.6.1.4.1.25623.1.0.12288) for this scan was: "/(index\.php|image|img|css|js\$|js/|javascript|style|theme|icon|jquery|graphic|grafik|picture|bilder|thumbnail|media/|skins?/)"

https://10.0.0.51:631/images

NOTE: The 'Maximum number of items shown for each list' setting has been reached. There are 1 additional entries available for the following truncated list.

The following CGIs were discovered:

Syntax : cginame (arguments [default value])

https://10.0.0.51:631/admin (USER\_CANCEL\_ANY [] SHARE\_PRINTERS [] DEBUG\_LOGGING [] REMOTE\_ANY [] org.cups.sid [89c9a9acf9d162bc05b99ed931b88f14] CHANGESETTINGS [Change Settings] KERBEROS [] OP [config-server] REMOTE\_ADMIN [] )

https://10.0.0.51:631/admin/ (org.cups.sid [89c9a9acf9d162bc05b99ed931b88f14] ADVANCEDSETTINGS [YES] OP [add-printer] )

https://10.0.0.51:631/admin/log/access\_log ()

https://10.0.0.51:631/admin/log/error\_log ()

https://10.0.0.51:631/admin/log/page\_log()

https://10.0.0.51:631/classes/ (CLEAR [Clear] QUERY [] )

https://10.0.0.51:631/help/ (SEARCH [Search] CLEAR [Clear] TOPIC [Getting+Started] QUERY [] )

https://10.0.0.51:631/help/accounting.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

https://10.0.0.51:631/help/api-array.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/api-cgi.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/api-cups.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/api-driver.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/api-filedir.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/api-filter.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/api-httpipp.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/api-mime.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/api-overview.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/api-ppd.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/api-ppdc.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/api-raster.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/cgi.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

https://10.0.0.51:631/help/glossary.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

https://10.0.0.51:631/help/kerberos.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Getting+Started] QUERY [] )

https://10.0.0.51:631/help/license.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

```
https://10.0.0.51:631/help/man-backend.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )
https://10.0.0.51:631/help/man-cancel.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )
https://10.0.0.51:631/help/man-classes.conf.html (TOPIC [Man+Pages] )
https://10.0.0.51:631/help/man-cups-config.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC
```

[Man+Pages] QUERY [] )
https://10.0.0.51:631/help/man-cups-deviced.html (TOPIC [Man+Pages] )

https://10.0.0.51:631/help/man-cups-driverd.html (TOPIC [Man+Pages])

https://10.0.0.51:631/help/man-cups-lpd.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Man+Pages] )

https://10.0.0.51:631/help/man-cups-snmp.conf.html (TOPIC [Man+Pages] )

https://10.0.0.51:631/help/man-cups-snmp.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Man+Pages] )

https://10.0.0.51:631/help/man-cupsaccept.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-cupsaddsmb.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-cupsd.conf.html (TOPIC [Man+Pages])

https://10.0.0.51:631/help/man-cupsd.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Man+Pages] )

https://10.0.0.51:631/help/man-cupsenable.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-cupsfilter.html (TOPIC [Man+Pages] )

https://10.0.0.51:631/help/man-cupstestdsc.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-cupstestppd.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-filter.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Man+Pages] )

https://10.0.0.51:631/help/man-ipptool.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-ipptoolfile.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-lp.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man Pages] QUERY [] )

https://10.0.0.51:631/help/man-lpadmin.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Man+Pages] )

https://10.0.0.51:631/help/man-lpc.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-lpinfo.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Man+Pages] )

https://10.0.0.51:631/help/man-lpmove.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-lpoptions.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-lppasswd.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-lpq.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-lpr.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-lprm.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC

[Man+Pages])

https://10.0.0.51:631/help/man-lpstat.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-mime.convs.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-mime.types.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-notifier.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-ppdc.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-ppdhtml.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-ppdi.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-ppdmerge.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-ppdpo.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Man+Pages] QUERY [] )

https://10.0.0.51:631/help/man-printers.conf.html (TOPIC [Man+Pages])

https://10.0.0.51:631/help/network.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

https://10.0.0.51:631/help/options.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

https://10.0.0.51:631/help/overview.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting Started] )

https://10.0.0.51:631/help/perqueue.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

https://10.0.0.51:631/help/policies.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

https://10.0.0.51:631/help/postscript-driver.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/ppd-compiler.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/raster-driver.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] TOPIC [Programming] QUERY [] )

https://10.0.0.51:631/help/ref-access\_log.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [References] )

https://10.0.0.51:631/help/ref-classes-conf.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [References] )

https://10.0.0.51:631/help/ref-client-conf.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [References] )

https://10.0.0.51:631/help/ref-cups-files-conf.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [References] )

https://10.0.0.51:631/help/ref-cupsd-conf.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [References] )

https://10.0.0.51:631/help/ref-error\_log.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [References] )

https://10.0.0.51:631/help/ref-mailto-conf.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [References] )

https://10.0.0.51:631/help/ref-page\_log.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [References] )

https://10.0.0.51:631/help/ref-ppdcfile.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC

### [References])

https://10.0.0.51:631/help/ref-printers-conf.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [References] )

https://10.0.0.51:631/help/ref-snmp-conf.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [References] )

https://10.0.0.51:631/help/ref-subscriptions-conf.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [References] )

https://10.0.0.51:631/help/security.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

https://10.0.0.51:631/help/sharing.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

https://10.0.0.51:631/help/spec-banner.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Specifications] )

https://10.0.0.51:631/help/spec-cmp.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Specifications] )

https://10.0.0.51:631/help/spec-command.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Specifications] )

https://10.0.0.51:631/help/spec-design.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Specifications] )

https://10.0.0.51:631/help/spec-ipp.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Specifications] )

https://10.0.0.51:631/help/spec-pdf.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Specifications] )

https://10.0.0.51:631/help/spec-postscript.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Specifications] )

https://10.0.0.51:631/help/spec-ppd.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Specifications] )

https://10.0.0.51:631/help/spec-raster.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Specifications] )

https://10.0.0.51:631/help/spec-stp.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Specifications] )

https://10.0.0.51:631/help/translation.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

https://10.0.0.51:631/help/whatsnew.html (SEARCH [Search] CLEAR [Clear] PRINTABLE [YES] QUERY [] TOPIC [Getting+Started] )

https://10.0.0.51:631/jobs (which jobs [completed])

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

The script consolidates various information for CGI scanning.

This information is based on the following scripts / settings:

- HTTP-Version Detection (OID: 1.3.6.1.4.1.25623.1.0.100034)
- No 404 check (OID: 1.3.6.1.4.1.25623.1.0.10386)
- Web mirroring / webmirror.nasl (OID: 1.3.6.1.4.1.25623.1.0.10662)
- Directory Scanner / DDI\_Directory\_Scanner.nasl (OID: 1.3.6.1.4.1.25623.1.0.11032)
- The configured 'cgi\_path' within the 'Scanner Preferences' of the scan config in use
- The configured 'Enable CGI scanning', 'Enable generic web application scanning' and

'Add historic /scripts and /cgi-bin to directories for CGI scanning' within the

'Global variable settings' of the scan config in use

If you think any of this information is wrong please report it to the referenced community portal.

#### References:

https://community.greenbone.net/c/vulnerability-tests

CVSS Base Score: 0.0

Family name: Web application abuses

Category: infos

Copyright: This script is Copyright (C) 2015 SCHUTZWERK GmbH

Summary: NOSUMMARY

Version: 2019-09-23T09:25:24+0000

**IRC Server Banner Detection** 

Risk: Info Application: irc Port: 6667 Protocol: tcp ScriptID: 11156

Vulnerability Detection Result: The IRC server banner is:

:irc.TestIRC.net 002 CDHHDJGBH :Your host is irc.TestIRC.net, running version Unreal3.2.8.1

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script tries to detect the banner of an IRC server.

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: This script is Copyright (C) 2002 Michel Arboi

Version: \$Revision: 13541 \$

Info:

Microsoft Windows SMB Accessible Shares

Risk: Info

Application: microsoft-ds

Port: 445 Protocol: tcp ScriptID: 902425

Vulnerability Detection Result: The following shares were found

IPC\$

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

The script detects the Windows SMB Accessible Shares and sets the

result into KB.

CVSS Base Score: 0.0 Family name: Windows

Category: infos

Copyright: Copyright (c) 2012 SecPod

Summary: NOSUMMARY Version: \$Revision: 11420 \$

MySQL/MariaDB Detection

Risk: Info

Application: mysql

Port: 3306 Protocol: tcp ScriptID: 100152

Vulnerability Detection Result:

Detected MySQL Version: unknown Location: 3306/tcp

CPE: cpe:/a:oracle:mysql

Extra information:

Scanner received a ER\_HOST\_NOT\_PRIVILEGED error from the remote MySQL server.

Some tests may fail. Allow the scanner to access the remote MySQL server for better results.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

Detects the installed version of

MySQL/MariaDB.

Detect a running MySQL/MariaDB by getting the banner, extract the version

from the banner. CVSS Base Score: 0.0

Family name: Product detection

Category: infos

Copyright: This script is Copyright (C) 2009 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2019-11-05T16:13:01+0000

Obtain list of all port mapper registered programs via RPC

Risk: Info

Application: rpcbind

Port: 111 Protocol: tcp ScriptID: 11111

Vulnerability Detection Result:

These are the registered RPC programs:

RPC program #100000 version 4 'portmapper' (portmap sunrpc rpcbind) on port 111/TCP RPC program #100000 version 3 'portmapper' (portmap sunrpc rpcbind) on port 111/TCP RPC program #100000 version 2 'portmapper' (portmap sunrpc rpcbind) on port 111/TCP

RPC program #100024 version 1 'status' on port 46866/TCP

RPC program #100000 version 4 'portmapper' (portmap sunrpc rpcbind) on port 111/UDP RPC program #100000 version 3 'portmapper' (portmap sunrpc rpcbind) on port 111/UDP

RPC program #100000 version 2 'portmapper' (portmap sunrpc rpcbind) on port 111/UDP

RPC program #100024 version 1 'status' on port 50533/UDP

Summary:

This script calls the DUMP RPC on the port mapper, to obtain the

list of all registered programs.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

CVSS Base Score: 0.0 Family name: RPC Category: unknown

Copyright: This script is Copyright (C) 2002 Michel Arboi

Version: \$Revision: 13541 \$

OpenSSH Detection Consolidation

Risk: Info

Application: general

Port: 0 Protocol: tcp ScriptID: 108577

Vulnerability Detection Result: Detected OpenSSH Server

Version: 6.6.1p1 Location: 22/tcp

CPE: cpe:/a:openbsd:openssh:6.6.1p1

Concluded from version/product identification result: SSH-2.0-OpenSSH\_6.6.1p1 Ubuntu-2ubuntu2.13

Summary:

The script reports a detected OpenSSH including the

version number.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://www.openssh.com/ CVSS Base Score: 0.0

Family name: Product detection

Category: unknown

Copyright: Copyright (C) 2019 Greenbone Networks GmbH

Version: 2019-05-23T06:42:35+0000

OS Detection Consolidation and Reporting

Risk: Info

Application: general

Port: 0 Protocol: tcp ScriptID: 105937

Vulnerability Detection Result:

Best matching OS:
OS: Ubuntu
Version: 14.04

CPE: cpe:/o:canonical:ubuntu\_linux:14.04

Found by NVT: 1.3.6.1.4.1.25623.1.0.105586 (SSH OS Identification)

Concluded from SSH banner on port 22/tcp: SSH-2.0-OpenSSH\_6.6.1p1 Ubuntu-2ubuntu2.13

Setting key "Host/runs\_unixoide" based on this information

Other OS detections (in order of reliability):

OS: Ubuntu 14.04 or 16.04

CPE: cpe:/o:canonical:ubuntu\_linux:16.04

Found by NVT: 1.3.6.1.4.1.25623.1.0.102011 (SMB NativeLanMan)

Concluded from SMB/Samba banner on port 445/tcp:

OS String: Windows 6.1

SMB String: Samba 4.3.11-Ubuntu

Note: The service is running on a Linux/Unix based OS but reporting itself with an Windows related OS string.

OS: Ubuntu

CPE: cpe:/o:canonical:ubuntu\_linux

Found by NVT: 1.3.6.1.4.1.25623.1.0.111067 (HTTP OS Identification)

Concluded from HTTP Server banner on port 80/tcp: Server: Apache/2.4.7 (Ubuntu)

OS: Linux/Unix

CPE: cpe:/o:linux:kernel

Found by NVT: 1.3.6.1.4.1.25623.1.0.111067 (HTTP OS Identification)

Concluded from HTTP Server banner on port 631/tcp: Server: CUPS/1.7 IPP/2.1

OS: Linux/Unix

CPE: cpe:/o:linux:kernel

Found by NVT: 1.3.6.1.4.1.25623.1.0.111067 (HTTP OS Identification)

Concluded from HTTP Server default page on port 631/tcp: <TITLE>Home - CUPS 1.7.2</TITLE>

Summary:

This script consolidates the OS information detected by several NVTs and tries to find the best matching OS.

Furthermore it reports all previously collected information leading to this best matching OS. It also reports possible additional information

which might help to improve the OS detection.

If any of this information is wrong or could be improved please consider to report these to the referenced community portal.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://community.greenbone.net/c/vulnerability-tests

CVSS Base Score: 0.0

Family name: Product detection

Category: infos

Copyright: This script is Copyright (C) 2016 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-30T08:21:10+0000

PHP Version Detection (Remote)

Risk: Info

Application: http

Port: 80 Protocol: tcp ScriptID: 800109

Vulnerability Detection Result:

Detected PHP
Version: 5.4.5
Location: 80/tcp

CPE: cpe:/a:php:php:5.4.5

Concluded from version/product identification result:

X-Powered-By: PHP/5.4.5

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

Detects the installed version of PHP.

This script sends an HTTP GET request and tries to get the version from the

response.

CVSS Base Score: 0.0

Family name: Product detection

Category: infos

Copyright: Copyright (C) 2008 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2019-12-17T14:07:10+0000

phpMyAdmin Detection

Risk: Info

Application: http

Port: 80 Protocol: tcp ScriptID: 900129

Vulnerability Detection Result:

Detected phpMyAdmin Version: 3.5.8

Location: /phpmyadmin

CPE: cpe:/a:phpmyadmin:phpmyadmin:3.5.8 Concluded from version/product identification result:

Version 3.5.8

Concluded from version/product identification location:

http://10.0.0.51/phpmyadmin/README

Extra information:

- Possible unprotected setup dir identified at http://10.0.0.51/phpmyadmin/setup/

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

Detection of phpMyAdmin.

The script sends a connection request to the server and attempts to

extract the version number from the reply.

CVSS Base Score: 0.0

Family name: Product detection

Category: infos

Copyright: Copyright (C) 2008 SecPod

Summary: NOSUMMARY

Version: 2019-12-04T13:23:25+0000

Ping Host Risk: Info

Application: general

Port: 0 Protocol: tcp ScriptID: 100315

Vulnerability Detection Result:

The alive test was not launched because no method was selected.

Summary:

This check tries to determine whether a remote host is up (alive).

Several methods are used for this depending on configuration of this check. Whether a host is up can be detected in 3 different ways:

- A ICMP message is sent to the host and a response is taken as alive sign.
- An ARP request is sent and a response is taken as alive sign.
- A number of typical TCP services (namely the 20 top ports of nmap) are tried and their presence is taken as alive sign.

None of the methods is failsafe. It depends on network and/or host configurations whether they succeed or not. Both, false positives and false negatives can occur.

Therefore the methods are configurable.

If you select to not mark unreachable hosts as dead, no alive detections are executed and the host is assumed to be available for scanning.

In case it is configured that hosts are never marked as dead, this can cause considerable timeouts and therefore a long scan duration in case the hosts are in fact not available.

The available methods might fail for the following reasons:

- ICMP: This might be disabled for a environment and would then cause false negatives as hosts are believed to be dead that actually are alive. In contrast it is also possible that a Firewall between the scanner and the target host is answering to the ICMP message and thus hosts are believed to be alive that actually are dead.
- TCP ping: Similar to the ICMP case a Firewall between the scanner and the target might answer to the sent probes and thus hosts are believed to be alive that actually are dead.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0 Family name: Port scanners

Category: scanner

Copyright: This script is Copyright (C) 2009, 2014, 2016 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-26T16:09:27+0000

**CGI Scanning Consolidation** 

Risk: Info

Application: http

Port: 80 Protocol: tcp ScriptID: 111038

**Vulnerability Detection Result:** 

The Hostname/IP "10.0.0.51" was used to access the remote host.

Generic web application scanning is disabled for this host via the "Enable generic web application scanning" option within the "Global variable settings" of the scan config in use.

Requests to this service are done via HTTP/1.1.

This service seems to be able to host PHP scripts.

This service seems to be NOT able to host ASP scripts.

The User-Agent "Mozilla/5.0 [en] (X11, U; OpenVAS-VT 9.0.3)" was used to access the remote host.

Historic /scripts and /cgi-bin are not added to the directories used for CGI scanning. You can enable this again with the "Add historic /scripts and /cgi-bin to directories for CGI scanning" option within the "Global variable settings" of the scan config in use.

A possible recursion was detected during CGI scanning:

The service is using a relative URL in one or more HTML references where e.g. /file1.html contains <a href="subdir/file2.html"> and a subsequent request for subdir/file2.html is linking to subdir/file2.html. This would resolves to subdir/subdir/file2.html causing a recursion. To work around this counter-measures have been enabled but the service should be fixed as well to not use such problematic links. Below an excerpt of URLs is shown to help identify those issues.

Syntax: URL (HTML link)

http://10.0.0.51/drupal/sites/all/modules/coder/?D=A (images/)

http://10.0.0.51/drupal/sites/default/files/styles/medium/public/field/ (image/)

http://10.0.0.51/drupal/sites/default/files/styles/thumbnail/ (public/)

http://10.0.0.51/phpmyadmin/index.php (themes/dot.gif)

http://10.0.0.51/phpmyadmin/license.php (themes/dot.gif)

The following directories were used for CGI scanning:

http://10.0.0.51/

http://10.0.0.51/cgi-bin

http://10.0.0.51/chat

http://10.0.0.51/drupal

http://10.0.0.51/drupal/misc

http://10.0.0.51/drupal/misc/farbtastic

http://10.0.0.51/drupal/misc/ui

http://10.0.0.51/drupal/sites

http://10.0.0.51/drupal/sites/all

http://10.0.0.51/drupal/sites/all/modules

http://10.0.0.51/drupal/sites/all/modules/coder

http://10.0.0.51/drupal/sites/all/modules/coder/coder\_review

http://10.0.0.51/drupal/sites/all/modules/coder/coder\_sniffer

http://10.0.0.51/drupal/sites/all/modules/coder/coder\_upgrade

http://10.0.0.51/drupal/sites/all/modules/coder/scripts

http://10.0.0.51/drupal/sites/default

http://10.0.0.51/drupal/sites/default/files

http://10.0.0.51/drupal/sites/default/files/field

http://10.0.0.51/phpmyadmin

http://10.0.0.51/phpmyadmin/setup

http://10.0.0.51/uploads

While this is not, in and of itself, a bug, you should manually inspect these directories to ensure that they are in compliance with company security standards

The following directories were excluded from CGI scanning because the "Regex pattern to exclude directories from CGI scanning" setting of the NVT "Global variable settings" (OID: 1.3.6.1.4.1.25623.1.0.12288) for this scan was: "/(index\.php|image|img|css|js\$|js/|javascript|style|theme|icon|jquery|graphic|grafik|picture|bilder|thumbnail|media/|skins?/)"

http://10.0.0.51/drupal/misc/ui/images

http://10.0.0.51/drupal/sites/all/themes

http://10.0.0.51/drupal/sites/default/files/field/image

http://10.0.0.51/drupal/sites/default/files/styles

http://10.0.0.51/drupal/sites/default/files/styles/large

http://10.0.0.51/drupal/sites/default/files/styles/large/public

http://10.0.0.51/drupal/sites/default/files/styles/medium

http://10.0.0.51/drupal/sites/default/files/styles/medium/public

http://10.0.0.51/drupal/sites/default/files/styles/medium/public/field

http://10.0.0.51/drupal/sites/default/files/styles/thumbnail

http://10.0.0.51/icons

http://10.0.0.51/phpmyadmin/js

http://10.0.0.51/phpmyadmin/js/jquery

http://10.0.0.51/phpmyadmin/themes

http://10.0.0.51/phpmyadmin/themes/original/img

http://10.0.0.51/phpmyadmin/themes/original/img/pmd

http://10.0.0.51/phpmyadmin/themes/pmahomme/img

http://10.0.0.51/phpmyadmin/themes/pmahomme/jquery

Directory index found at:

http://10.0.0.51/

http://10.0.0.51/drupal/misc/

http://10.0.0.51/drupal/misc/ui/

http://10.0.0.51/drupal/sites/

http://10.0.0.51/drupal/sites/all/

http://10.0.0.51/drupal/sites/all/themes/

http://10.0.0.51/drupal/sites/default/files/

http://10.0.0.51/drupal/sites/default/files/field/

http://10.0.0.51/drupal/sites/default/files/field/image/

http://10.0.0.51/drupal/sites/default/files/styles/

http://10.0.0.51/drupal/sites/default/files/styles/large/

http://10.0.0.51/drupal/sites/default/files/styles/medium/

http://10.0.0.51/drupal/sites/default/files/styles/medium/public/

http://10.0.0.51/drupal/sites/default/files/styles/medium/public/field/

http://10.0.0.51/drupal/sites/default/files/styles/thumbnail/

http://10.0.0.51/uploads/

The "Number of pages to mirror" setting (Current: 200) of the NVT "Web mirroring" (OID:

1.3.6.1.4.1.25623.1.0.10662) was reached. Raising this limit allows to mirror this host more thoroughly but might increase the scanning time.

The following CGIs were discovered:

Syntax : cginame (arguments [default value])

http://10.0.0.51/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )

http://10.0.0.51/chat/index.php (name [] enter [Enter] )

http://10.0.0.51/drupal/ (destination [node] form\_build\_id

[form-wowl30TKB5xKi1ky\_81OYrxCylQOCbByuOuE-D37n38] pass [] name [] q [rss.xml] op [Log in] form\_id [user\_login\_block] )

http://10.0.0.51/drupal/misc/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )

http://10.0.0.51/drupal/misc/farbtastic/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )

```
http://10.0.0.51/drupal/misc/ui/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/all/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/all/modules/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/all/modules/coder/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/all/themes/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/default/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/default/files/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/default/files/field/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/default/files/field/image/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/default/files/styles/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/default/files/styles/large/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/default/files/styles/medium/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/default/files/styles/medium/public/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/default/files/styles/medium/public/field/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/drupal/sites/default/files/styles/thumbnail/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   http://10.0.0.51/payroll_app.php (user [] password [] s [OK] )
   http://10.0.0.51/phpmyadmin/index.php (token [71edd992752ceb656583db93887f5a87] pma_username [] table []
collation_connection [utf8_general_ci] lang [] server [1] db [] pma_password [] )
   http://10.0.0.51/phpmyadmin/js/get_image.js.php (theme [pmahomme])
   http://10.0.0.51/phpmyadmin/js/messages.php (token [71edd992752ceb656583db93887f5a87] collation_connection
[utf8_general_ci] lang [en] db [])
   http://10.0.0.51/phpmyadmin/phpmyadmin.css.php (token [71edd992752ceb656583db93887f5a87]
collation_connection [utf8_general_ci] lang [en] js_frame [right] server [1] nocache [4263716059] )
   http://10.0.0.51/phpmyadmin/setup/ (D [A] token [163ee39702a905d11afca297ad5568b1] version_check [1] formset
[Features] collation connection [utf8 general ci] lang [] page [form] )
   http://10.0.0.51/phpmyadmin/setup/config.php (token [163ee39702a905d11afca297ad5568b1] tab hash []
submit_clear [Clear] ServerDefault [] submit_download [Download] submit_delete [Delete] submit_load [Load]
collation_connection [utf8_general_ci] submit_save [Save] lang [en] submit_display [Display] eol [] DefaultLang [] )
   http://10.0.0.51/phpmyadmin/setup/index.php (token [163ee39702a905d11afca297ad5568b1] submit [New server]
tab_hash [] collation_connection [utf8_general_ci] mode [add] lang [en] page [servers] check_page_refresh [] )
   http://10.0.0.51/phpmyadmin/url.php (token [71edd992752ceb656583db93887f5a87] url
[http%3A%2F%2Fwww.phpmyadmin.net%2F] collation_connection [utf8_general_ci] lang [en] )
   http://10.0.0.51/uploads/ (C=S;O [A] C=N;O [D] C=M;O [A] C=D;O [A] )
   The following cgi scripts were excluded from CGI scanning because of the "Regex pattern to exclude cgi scripts"
setting of the NVT "Web mirroring" (OID: 1.3.6.1.4.1.25623.1.0.10662) for this scan was: "\.(js|css)$"
   Syntax: cginame (arguments [default value])
   http://10.0.0.51/drupal/misc/drupal.js (or3865 [] )
   http://10.0.0.51/drupal/misc/jquery.js (v [1.4.4])
   http://10.0.0.51/drupal/misc/jquery.once.js (v [1.2])
   http://10.0.0.51/phpmyadmin/js/cross_framing_protection.js (ts [1365422810])
   http://10.0.0.51/phpmyadmin/js/functions.js (ts [1365422810])
   http://10.0.0.51/phpmyadmin/js/jquery/jquery-1.6.2.js (ts [1365422810])
   http://10.0.0.51/phpmyadmin/js/jquery/jquery-ui-1.8.16.custom.js (ts [1365422810])
   http://10.0.0.51/phpmyadmin/js/jquery/jquery.qtip-1.0.0-rc3.js (ts [1365422810])
   http://10.0.0.51/phpmyadmin/js/update-location.js (ts [1365422810])
   The script consolidates various information for CGI scanning.
    This information is based on the following scripts / settings:
    - HTTP-Version Detection (OID: 1.3.6.1.4.1.25623.1.0.100034)
    - No 404 check (OID: 1.3.6.1.4.1.25623.1.0.10386)
```

- Web mirroring / webmirror.nasl (OID: 1.3.6.1.4.1.25623.1.0.10662)

- Directory Scanner / DDI\_Directory\_Scanner.nasl (OID: 1.3.6.1.4.1.25623.1.0.11032)

- The configured 'cgi\_path' within the 'Scanner Preferences' of the scan config in use
- The configured 'Enable CGI scanning', 'Enable generic web application scanning' and 'Add historic /scripts and /cgi-bin to directories for CGI scanning' within the

'Global variable settings' of the scan config in use

If you think any of this information is wrong please report it to the referenced community portal.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://community.greenbone.net/c/vulnerability-tests

CVSS Base Score: 0.0

Family name: Web application abuses

Category: infos

Copyright: This script is Copyright (C) 2015 SCHUTZWERK GmbH

Summary: NOSUMMARY

Version: 2019-09-23T09:25:24+0000

ProFTPD Server Version Detection (Remote)

Risk: Info Application: ftp

Port: 21 Protocol: tcp ScriptID: 900815

Vulnerability Detection Result:

Detected ProFTPD Version: 1.3.5 Location: 21/tcp

CPE: cpe:/a:proftpd:proftpd:1.3.5

Concluded from version/product identification result:

220 ProFTPD 1.3.5 Server (ProFTPD Default Installation) [10.0.0.51]

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script detects the installed version of ProFTP Server.

CVSS Base Score: 0.0

Family name: Product detection

Category: infos

Copyright: Copyright (C) 2009 SecPod

Summary: NOSUMMARY

Version: 2020-03-24T12:27:11+0000

robot(s).txt exists on the Web Server

Risk: Info

Application: unknown

Port: 3500 Protocol: tcp ScriptID: 10302

Vulnerability Detection Result:

The file 'robots.txt' contains the following:

# See http://www.robotstxt.org/robotstxt.html for documentation on how to use the robots.txt file

#

# To ban all spiders from the entire site uncomment the next two lines:

# User-agent: \*

# Disallow: /

Insight:

Any serious web search engine will honor the /robot(s).txt file

and not scan the files and directories listed there.

Any entries listed in this file are not even hidden anymore.

Solution:

Review the content of the robots file and consider removing the files

from the server or protect them in other ways in case you actually intended non-public availability.

Summary:

Web Servers can use a file called /robot(s).txt to ask search engines

to ignore certain files and directories. By nature this file can not be used to protect private files from public read access.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

CVSS Base Score: 0.0

Family name: Web application abuses

Category: unknown

Copyright: This script is Copyright (C) 1999 SecuriTeam

Version: 2019-11-22T13:51:04+0000

```
Info:
   robot(s).txt exists on the Web Server
   Risk: Info
   Application: ipp
   Port: 631
   Protocol: tcp
   ScriptID: 10302
   Vulnerability Detection Result:
   The file 'robots.txt' contains the following:
   # "$Id: robots.txt 3494 2003-03-19 15:37:44Z mike $"
   # This file tells search engines not to index your CUPS server.
   #
   # Copyright 1993-2003 by Easy Software Products.
   #
   # These coded instructions, statements, and computer programs are the
   # property of Easy Software Products and are protected by Federal
   # copyright law. Distribution and use rights are outlined in the file
   # "LICENSE.txt" which should have been included with this file. If this
   # file is missing or damaged please contact Easy Software Products
   # at:
   #
   #
        Attn: CUPS Licensing Information
   #
        Easy Software Products
   #
        44141 Airport View Drive, Suite 204
   #
        Hollywood, Maryland 20636-3111 USA
   #
   #
        Voice: (301) 373-9600
   #
        EMail: cups-info@cups.org
   #
         WWW: http://www.cups.org
   #
   User-agent: *
   Disallow: /
   # End of "$Id: robots.txt 3494 2003-03-19 15:37:44Z mike $".
   CVSS Base Vector:
   AV:N/AC:L/Au:N/C:N/I:N/A:N
   Summary:
   Web Servers can use a file called /robot(s).txt to ask search engines
    to ignore certain files and directories. By nature this file can not be used to protect private files
    from public read access.
   Solution:
   Review the content of the robots file and consider removing the files
    from the server or protect them in other ways in case you actually intended non-public availability.
   Insight:
   Any serious web search engine will honor the /robot(s).txt file
    and not scan the files and directories listed there.
    Any entries listed in this file are not even hidden anymore.
   CVSS Base Score: 0.0
   Family name: Web application abuses
```

Category: unknown

Copyright: This script is Copyright (C) 1999 SecuriTeam Version: 2019-11-22T13:51:04+0000

RPC portmapper (TCP)

Risk: Info

Application: rpcbind

Port: 111 Protocol: tcp ScriptID: 108090

Vulnerability Detection Result:

RPC portmapper is running on this port.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script performs detection of RPC portmapper on TCP.

CVSS Base Score: 0.0 Family name: RPC Category: infos

Copyright: Copyright (C) 2009 SecPod

Summary: NOSUMMARY

Version: 2020-03-26T06:41:35+0000

Info:

Ruby on Rails Version Detection

Risk: Info

Application: unknown

Port: 3500 Protocol: tcp ScriptID: 902089

Vulnerability Detection Result:

Detected Ruby on Rails

Version: 4.2.4 Location: /

CPE: cpe:/a:rubyonrails:ruby\_on\_rails:4.2.4 Concluded from version/product identification result:

>4.2.4

Extra information:

Version information available at /rails/info/properties/

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script finds the running Ruby on Rails version.

CVSS Base Score: 0.0

Family name: Product detection

Category: infos

Copyright: Copyright (c) 2010 SecPod

Summary: NOSUMMARY

Version: 2019-11-21T13:29:18+0000

Ruby on Rails Version Detection

Risk: Info

Application: unknown

Port: 3500 Protocol: tcp ScriptID: 902089

Vulnerability Detection Result:

**Detected Ruby** 

Version: 2.3.7-p456

Location: /

CPE: cpe:/a:ruby-lang:ruby:2.3.7

Concluded from version/product identification result:

>2.3.7-p456

Extra information:

Version information available at /rails/info/properties/

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script finds the running Ruby on Rails version.

CVSS Base Score: 0.0

Family name: Product detection

Category: infos

Copyright: Copyright (c) 2010 SecPod

Summary: NOSUMMARY

Version: 2019-11-21T13:29:18+0000

### Info:

Service Detection with 'GET' Request

Risk: Info Application: irc Port: 6667 Protocol: tcp ScriptID: 17975

Vulnerability Detection Result:

An IRC server seems to be running on this port.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This plugin performs service detection.

This plugin is a complement of find\_service.nasl. It sends a 'GET' request

to the remaining unknown services and tries to identify them.

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Copyright (C) 2005 Michel Arboi Version: 2020-03-25T13:50:09+0000

Services
Risk: Info
Application: ipp
Port: 631
Protocol: tcp
ScriptID: 10330

Vulnerability Detection Result:

A TLScustom server answered on this port

Summary:

This routine attempts to guess which service is running on the

remote ports. For instance, it searches for a web server which could listen on another port than

80 or 443 and makes this information available for other check routines.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Written by Renaud Deraison <a href="mailto:deraison@cvs.nessus.org">deraison@cvs.nessus.org</a>

Version: 2019-07-08T14:12:44+0000

#### Info:

Services
Risk: Info
Application: ipp
Port: 631
Protocol: tcp
ScriptID: 10330

Vulnerability Detection Result:

A web server is running on this port through SSL

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This routine attempts to guess which service is running on the

remote ports. For instance, it searches for a web server which could listen on another port than

80 or 443 and makes this information available for other check routines.

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Written by Renaud Deraison <a href="mailto:deraison@cvs.nessus.org">deraison@cvs.nessus.org</a>

Services Risk: Info

Application: http

Port: 80 Protocol: tcp ScriptID: 10330

Vulnerability Detection Result: A web server is running on this port

Summary:

This routine attempts to guess which service is running on the

remote ports. For instance, it searches for a web server which could listen on another port than

80 or 443 and makes this information available for other check routines.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Written by Renaud Deraison <a href="mailto:deraison@cvs.nessus.org">deraison@cvs.nessus.org</a>

Version: 2019-07-08T14:12:44+0000

#### Info:

Services Risk: Info

Application: unknown

Port: 8181 Protocol: tcp ScriptID: 10330

Vulnerability Detection Result: A web server is running on this port

Summary:

This routine attempts to guess which service is running on the

remote ports. For instance, it searches for a web server which could listen on another port than

80 or 443 and makes this information available for other check routines.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Written by Renaud Deraison <a href="mailto:deraison@cvs.nessus.org">deraison@cvs.nessus.org</a>

Services Risk: Info

Application: unknown

Port: 3500 Protocol: tcp ScriptID: 10330

Vulnerability Detection Result: A web server is running on this port

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This routine attempts to guess which service is running on the

remote ports. For instance, it searches for a web server which could listen on another port than

80 or 443 and makes this information available for other check routines.

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Written by Renaud Deraison <a href="mailto:deraison@cvs.nessus.org">deraison@cvs.nessus.org</a>

Version: 2019-07-08T14:12:44+0000

#### Info:

Services Risk: Info Application: ssh

Port: 22 Protocol: tcp ScriptID: 10330

Vulnerability Detection Result:

An ssh server is running on this port

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This routine attempts to guess which service is running on the

remote ports. For instance, it searches for a web server which could listen on another port than

80 or 443 and makes this information available for other check routines.

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Written by Renaud Deraison <a href="mailto:deraison@cvs.nessus.org">deraison@cvs.nessus.org</a>

Services Risk: Info Application: ftp

Port: 21 Protocol: tcp ScriptID: 10330

Vulnerability Detection Result:

An FTP server is running on this port.

Here is its banner:

220 ProFTPD 1.3.5 Server (ProFTPD Default Installation) [10.0.0.51]

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This routine attempts to guess which service is running on the

remote ports. For instance, it searches for a web server which could listen on another port than

80 or 443 and makes this information available for other check routines.

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Written by Renaud Deraison <a href="mailto:deraison@cvs.nessus.org">deraison@cvs.nessus.org</a>

Version: 2019-07-08T14:12:44+0000

# Info:

Services Risk: Info

Application: mysql

Port: 3306 Protocol: tcp ScriptID: 10330

Vulnerability Detection Result:

A MySQL server is running on this port

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This routine attempts to guess which service is running on the

remote ports. For instance, it searches for a web server which could listen on another port than

80 or 443 and makes this information available for other check routines.

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: Written by Renaud Deraison <a href="mailto:deraison@cvs.nessus.org">deraison@cvs.nessus.org</a>

SMB log in Risk: Info

Application: microsoft-ds

Port: 445 Protocol: tcp ScriptID: 10394

Vulnerability Detection Result:

It was possible to log into the remote host using the SMB protocol.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script attempts to logon into the remote host using

login/password credentials. CVSS Base Score: 0.0 Family name: Windows

Category: unknown

Copyright: Copyright (C) 2008 SecPod Version: 2019-10-16T06:21:07+0000

Info:

SMB Login Successful For Authenticated Checks

Risk: Info

Application: microsoft-ds

Port: 445 Protocol: tcp ScriptID: 108539

Summary:

It was possible to login using the provided SMB

credentials. Hence authenticated checks are enabled.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0 Family name: Windows Category: unknown

Copyright: Copyright (C) 2019 Greenbone Networks GmbH

Version: \$Revision: 13248 \$

SMB NativeLanMan

Risk: Info

Application: microsoft-ds

Port: 445 Protocol: tcp ScriptID: 102011

Vulnerability Detection Result:

Detected Samba
Version: 4.3.11
Location: 445/tcp

CPE: cpe:/a:samba:samba:4.3.11

Concluded from version/product identification result:

Samba 4.3.11-Ubuntu Extra information:

Detected SMB workgroup: WORKGROUP Detected SMB server: Samba 4.3.11-Ubuntu

Summary:

It is possible to extract OS, domain and SMB server information

from the Session Setup AndX Response packet which is generated during NTLM authentication.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

CVSS Base Score: 0.0

Family name: Service detection

Category: infos

Copyright: Copyright (C) 2009 LSS

Summary: NOSUMMARY

Version: 2019-12-12T09:38:57+0000

Info:

SMB NativeLanMan

Risk: Info

Application: microsoft-ds

Port: 445
Protocol: tcp
ScriptID: 102011

Vulnerability Detection Result:

Detected SMB workgroup: WORKGROUP
Detected SMB server: Samba 4.3.11-Ubuntu
Detected OS: Ubuntu 14.04 or Ubuntu 16.04

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

It is possible to extract OS, domain and SMB server information

from the Session Setup AndX Response packet which is generated during NTLM authentication.

CVSS Base Score: 0.0

Family name: Service detection

Category: infos

Copyright: Copyright (C) 2009 LSS

Summary: NOSUMMARY

Version: 2019-12-12T09:38:57+0000

SMB Remote Version Detection

Risk: Info

Application: microsoft-ds

Port: 445 Protocol: tcp ScriptID: 807830

Vulnerability Detection Result:

SMBv1 and SMBv2 are enabled on remote target

Summary:

Detection of Server Message Block(SMB).

This script sends SMB Negotiation request and try to get the version from the

response.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0

Family name: Service detection

Category: infos

Copyright: Copyright (C) 2016 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2019-05-16T07:13:31+0000

Info:

SMB/CIFS Server Detection

Risk: Info

Application: microsoft-ds

Port: 445 Protocol: tcp ScriptID: 11011

Vulnerability Detection Result:

A CIFS server is running on this port

Summary:

This script detects whether port 445 and 139 are open and

if they are running a CIFS/SMB server.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: This script is Copyright (C) 2002 Renaud Deraison

Version: \$Revision: 13541 \$

SMB/CIFS Server Detection

Risk: Info

Application: netbios-ssn

Port: 139 Protocol: tcp ScriptID: 11011

Vulnerability Detection Result:

A SMB server is running on this port

Summary:

This script detects whether port 445 and 139 are open and

if they are running a CIFS/SMB server.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

CVSS Base Score: 0.0

Family name: Service detection

Category: unknown

Copyright: This script is Copyright (C) 2002 Renaud Deraison

Version: \$Revision: 13541 \$

Info:

SMBv1 enabled (Remote Check)

Risk: Info

Application: microsoft-ds

Port: 445 Protocol: tcp ScriptID: 140151

Vulnerability Detection Result:

SMBv1 is enabled for the SMB Server

Vulnerability Detection Method:

Checks if SMBv1 is enabled for the SMB Server based on the

information provided by the following VT:

- SMB Remote Version Detection (OID: 1.3.6.1.4.1.25623.1.0.807830).

Summary:

The host has enabled SMBv1 for the SMB Server.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://www.us-cert.gov/ncas/current-activity/2017/01/16/SMB-Security-Best-Practices

https://support.microsoft.com/en-us/kb/2696547 https://support.microsoft.com/en-us/kb/204279

CVSS Base Score: 0.0 Family name: Windows

Category: infos

Copyright: Copyright (C) 2017 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2019-05-20T06:24:13+0000

SSH Protocol Algorithms Supported

Risk: Info Application: ssh

Port: 22 Protocol: tcp ScriptID: 105565

Vulnerability Detection Result:

The following options are supported by the remote ssh service:

kex\_algorithms:

curve25519-sha256@libssh.org,ecdh-sha2-nistp256,ecdh-sha2-nistp384,ecdh-sha2-nistp521,diffie-hellman-group-exchange-sha1,diffie-hellman-group1-sha1

server\_host\_key\_algorithms:

ssh-rsa,ssh-dss,ecdsa-sha2-nistp256,ssh-ed25519

encryption\_algorithms\_client\_to\_server:

aes128-ctr,aes192-ctr,aes256-ctr,arcfour256,arcfour128,aes128-gcm@openssh.com,aes256-gcm@openssh.com,chacha20-poly1305@openssh.com,aes128-cbc,3des-cbc,blowfish-cbc,cast128-cbc,aes192-cbc,aes256-cbc,arcfour,rijndael-cbc@lysator.liu.se

encryption\_algorithms\_server\_to\_client:

aes128-ctr,aes192-ctr,aes256-ctr,arcfour256,arcfour128,aes128-gcm@openssh.com,aes256-gcm@openssh.com,chacha20-poly1305@openssh.com,aes128-cbc,3des-cbc,blowfish-cbc,cast128-cbc,aes192-cbc,aes256-cbc,arcfour,rijndael-cbc@lysator.liu.se

mac\_algorithms\_client\_to\_server:

hmac-md5-etm@openssh.com,hmac-sha1-etm@openssh.com,umac-64-etm@openssh.com,umac-128-etm@openssh.com,hmac-sha2-256-etm@openssh.com,hmac-sha2-512-etm@openssh.com,hmac-ripemd160-etm@openssh.com,hmac-sha1-96-etm@openssh.com,hmac-md5-96-etm@openssh.com,hmac-md5,hmac-sha1,umac-64@openssh.com,umac-128@openssh.com,hmac-sha2-256,hmac-sha2-512,hmac-ripemd160,hmac-ripemd160@openssh.com,hmac-sha1-96,hmac-md5-96

mac\_algorithms\_server\_to\_client:

hmac-md5-etm@openssh.com,hmac-sha1-etm@openssh.com,umac-64-etm@openssh.com,umac-128-etm@openssh.com,hmac-sha2-256-etm@openssh.com,hmac-sha2-512-etm@openssh.com,hmac-ripemd160-etm@openssh.com,hmac-sha1-96-etm@openssh.com,hmac-md5-96-etm@openssh.com,hmac-sha1,umac-64@openssh.com,umac-128@openssh.com,hmac-sha2-256,hmac-sha2-512,hmac-ripemd160,hmac-ripemd160@openssh.com,hmac-sha1-96,hmac-md5-96

compression\_algorithms\_client\_to\_server:

none,zlib@openssh.com

compression\_algorithms\_server\_to\_client:

none,zlib@openssh.com

Summary:

This script detects which algorithms are supported by the remote SSH Service.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

CVSS Base Score: 0.0

Family name: Service detection

Category: infos

Copyright: This script is Copyright (C) 2016 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-26T13:48:10+0000

SSH Protocol Versions Supported

Risk: Info Application: ssh

Port: 22 Protocol: tcp ScriptID: 100259

Vulnerability Detection Result:

The remote SSH Server supports the following SSH Protocol Versions:

1.99 2.0

SSHv2 Fingerprint(s):

ecdsa-sha2-nistp256: 6f:3a:67:21:7c:1c:cc:71:f3:f2:33:58:ba:ea:17:0f

ssh-dss: b9:07:bc:1e:21:f8:aa:09:7a:f3:66:c9:4c:1e:93:82 ssh-ed25519: 31:0c:79:ba:be:a8:ef:8f:0a:f6:bb:45:70:97:b3:9b ssh-rsa: 41:1c:56:97:4e:77:d2:3a:c5:fc:e1:e8:bb:52:c7:58

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

Identification of SSH protocol versions supported by the remote

SSH Server. Also reads the corresponding fingerprints from the service.

The following versions are tried: 1.33, 1.5, 1.99 and 2.0

CVSS Base Score: 0.0

Family name: Service detection

Category: infos

Copyright: This script is Copyright (C) 2009 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-26T13:48:10+0000

SSH Server type and version

Risk: Info

Application: ssh

Port: 22 Protocol: tcp ScriptID: 10267

Vulnerability Detection Result:

Remote SSH server banner: SSH-2.0-OpenSSH\_6.6.1p1 Ubuntu-2ubuntu2.13

Remote SSH supported authentication: password, publickey

Remote SSH text/login banner: (not available)

This is probably:
- OpenSSH

Concluded from remote connection attempt with credentials:

Login: OpenVAS-VT Password: OpenVAS-VT CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This detects the SSH Server's type and version by connecting to the server

and processing the buffer received.

This information gives potential attackers additional information about the system they are attacking.

Versions and Types should be omitted where possible.

CVSS Base Score: 0.0

Family name: Product detection

Category: unknown

Copyright: Copyright (C) 2006 SecuriTeam Version: 2020-03-26T13:48:10+0000

SSL/TLS: Certificate - Self-Signed Certificate Detection

Risk: Info Application: ipp Port: 631 Protocol: tcp ScriptID: 103140

Vulnerability Detection Result:

The certificate of the remote service is self signed.

Certificate details: subject ...: CN=ubuntu

subject alternative names (SAN):

None

issued by .: CN=ubuntu

serial ....: 00CAF8B28C21AF760A valid from : 2018-07-29 13:09:31 UTC valid until: 2028-07-26 13:09:31 UTC

fingerprint (SHA-1): 2E765C0FA2F712952EEAAA57F287394B6C715C1D

fingerprint (SHA-256): 14B55D5019ECA82A814A4107ED1139BCC30EB3B97C717D5A9106C159C98B7F61

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

The SSL/TLS certificate on this port is self-signed.

References:

http://en.wikipedia.org/wiki/Self-signed\_certificate

CVSS Base Score: 0.0 Family name: SSL and TLS

Category: infos

Copyright: This script is Copyright (C) 2011 Greenbone Networks GmbH

Summary: NOSUMMARY Version: \$Revision: 8981 \$

SSL/TLS: Collect and Report Certificate Details

Risk: Info Application: ipp Port: 631 Protocol: tcp ScriptID: 103692

**Vulnerability Detection Result:** 

The following certificate details of the remote service were collected.

Certificate details: subject ...: CN=ubuntu

subject alternative names (SAN):

None

issued by .: CN=ubuntu

serial ....: 00CAF8B28C21AF760A valid from : 2018-07-29 13:09:31 UTC valid until: 2028-07-26 13:09:31 UTC

fingerprint (SHA-1): 2E765C0FA2F712952EEAAA57F287394B6C715C1D

fingerprint (SHA-256): 14B55D5019ECA82A814A4107ED1139BCC30EB3B97C717D5A9106C159C98B7F61

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script collects and reports the details of all SSL/TLS certificates. This data will be used by other tests to verify server certificates.

CVSS Base Score: 0.0 Family name: SSL and TLS

Category: infos

Copyright: Copyright 2013 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2019-04-04T13:38:03+0000

Info:

SSL/TLS: Hostname discovery from server certificate

Risk: Info

Application: general

Port: 0 Protocol: tcp ScriptID: 111010

Vulnerability Detection Result:

The following additional but not resolvable hostnames were detected:

ubuntu Summary:

It was possible to discover an additional hostname

of this server from its certificate Common or Subject Alt Name.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0 Family name: SSL and TLS

Category: infos

Copyright: This script is Copyright (C) 2015 SCHUTZWERK GmbH

Summary: NOSUMMARY Version: \$Revision: 13774 \$

SSL/TLS: HTTP Public Key Pinning (HPKP) Missing

Risk: Info Application: ipp Port: 631 Protocol: tcp ScriptID: 108247

Vulnerability Detection Result:

The remote web server is not enforcing HPKP.

HTTP-Banner:
HTTP/1.1 200 OK
Date: \*\*\*replaced\*\*\*
Server: CUPS/1.7 IPP/2.1
Content-Language: en

Content-Type: text/html; charset=utf-8

Last-Modified: \*\*\*replaced\*\*\*
Content-Length: \*\*\*replaced\*\*\*

Solution:

Enable HPKP or add / configure the required directives correctly following the guides linked in the references.

Summary:

The remote web server is not enforcing HPKP.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://owasp.org/www-project-secure-headers/

https://owasp.org/www-project-secure-headers/#public-key-pinning-extension-for-http-hpkp

https://tools.ietf.org/html/rfc7469

https://securityheaders.io/ CVSS Base Score: 0.0 Family name: SSL and TLS

Category: infos

Copyright: This script is Copyright (C) 2017 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-03-18T09:31:42+0000

SSL/TLS: HTTP Strict Transport Security (HSTS) Missing

Risk: Info Application: ipp Port: 631 Protocol: tcp ScriptID: 105879

Vulnerability Detection Result:

The remote web server is not enforcing HSTS.

HTTP-Banner: HTTP/1.1 200 OK Date: \*\*\*replaced\*\*\* Server: CUPS/1.7 IPP/2.1

Content-Language: en

Content-Type: text/html; charset=utf-8

Last-Modified: \*\*\*replaced\*\*\* Content-Length: \*\*\*replaced\*\*\*

Summary:

The remote web server is not enforcing HSTS.

Solution:

Enable HSTS or add / configure the required directives correctly following the

guides linked in the references.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://owasp.org/www-project-secure-headers/

https://owasp.org/www-project-cheat-sheets/cheatsheets/HTTP\_Strict\_Transport\_Security\_Cheat\_Sheet.html

https://owasp.org/www-project-secure-headers/#http-strict-transport-security-hsts

https://tools.ietf.org/html/rfc6797

https://securityheaders.io/ CVSS Base Score: 0.0 Family name: SSL and TLS

Category: infos

Copyright: This script is Copyright (C) 2016 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2020-02-28T07:44:42+0000

Traceroute Risk: Info

Application: general

Port: 0 Protocol: tcp ScriptID: 51662

Vulnerability Detection Result:

Here is the route from 10.0.0.5 to 10.0.0.51:

10.0.0.5 10.0.0.51 Solution:

Block unwanted packets from escaping your network.

Summary:

A traceroute from the scanning server to the target system was

conducted. This traceroute is provided primarily for informational value only. In the vast majority of cases, it does not represent a vulnerability. However, if the displayed traceroute contains any private addresses that should not have been publicly visible, then you have an issue you need to correct.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

CVSS Base Score: 0.0 Family name: General Category: unknown

Copyright: Copyright (C) 2010 E-Soft Inc. http://www.securityspace.com

Version: 2020-03-21T13:23:23+0000

Unknown OS and Service Banner Reporting

Risk: Info

Application: general

Port: 0 Protocol: tcp ScriptID: 108441

Vulnerability Detection Result:

Unknown banners have been collected which might help to identify the OS running on this host. If these banners containing information about the host OS please report the following information to https://community.greenbone.net/c/vulnerability-tests:

Banner: 220 ProFTPD 1.3.5 Server (ProFTPD Default Installation) [10.0.0.51]

Identified from: FTP banner on port 21/tcp

Summary:

This NVT consolidates and reports the information collected by

the following NVTs:

- Collect banner of unknown services (OID: 1.3.6.1.4.1.25623.1.0.11154)
- Service Detection (unknown) with nmap (OID: 1.3.6.1.4.1.25623.1.0.66286)
- Service Detection (wrapped) with nmap (OID: 1.3.6.1.4.1.25623.1.0.108525)
- OS Detection Consolidation and Reporting (OID: 1.3.6.1.4.1.25623.1.0.105937) If you know any of the information reported here, please send the full output to the referenced community portal.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://community.greenbone.net/c/vulnerability-tests

CVSS Base Score: 0.0

Family name: Service detection

Category: infos

Copyright: Copyright (C) 2018 Greenbone Networks GmbH

Summary: NOSUMMARY Version: \$Revision: 12934 \$

CPE Inventory Risk: Info

Application: general

Port: 0

Protocol: CPE-T ScriptID: 810002

Vulnerability Detection Result:

10.0.0.51|cpe:/a:apache:http\_server:2.4.7

10.0.0.51|cpe:/a:apple:cups:1.7.2 10.0.0.51|cpe:/a:drupal:drupal:7.5

10.0.0.51|cpe:/a:openbsd:openssh:6.6.1p1

10.0.0.51|cpe:/a:oracle:mysql 10.0.0.51|cpe:/a:php:php:5.4.5

10.0.0.51|cpe:/a:phpmyadmin:phpmyadmin:3.5.8

10.0.0.51|cpe:/a:proftpd:proftpd:1.3.5 10.0.0.51|cpe:/a:ruby-lang:ruby:2.3.7

10.0.0.51|cpe:/a:ruby-lang:webrick:1.3.1

10.0.0.51|cpe:/a:rubyonrails:ruby\_on\_rails:4.2.4

10.0.0.51|cpe:/a:samba:samba:4.3.11

10.0.0.51|cpe:/a:unrealircd:unrealircd:3.2.8.1

10.0.0.51|cpe:/o:canonical:ubuntu\_linux:14.04

Summary:

This routine uses information collected by other routines about

CPE identities of operating systems, services and applications detected during the scan.

Note: Some CPEs for specific products might show up twice or more in the output. Background: After a product got renamed or a specific vendor was acquired by another one it might happen that a product gets a new CPE within the NVD CPE Dictionary but older entries are kept with the older CPE.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://nvd.nist.gov/products/cpe

CVSS Base Score: 0.0

Family name: Service detection

Category: end

Copyright: Copyright (c) 2009 Greenbone Networks GmbH

Summary: NOSUMMARY

Version: 2019-10-24T11:29:24+0000

**UnrealIRCd Detection** 

Risk: Info Application: irc Port: 6667 Protocol: tcp ScriptID: 809884

**Vulnerability Detection Result:** 

Detected UnrealIRCd Version: 3.2.8.1 Location: 6667/tcp

CPE: cpe:/a:unrealircd:unrealircd:3.2.8.1
Concluded from version/product identification result:

Unreal3.2.8.1 Summary:

Detection of UnrealIRCd Daemon. This script

sends a request to the server and gets the version from the response.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0

Family name: Product detection

Category: infos

Copyright: Copyright (C) 2017 Greenbone Networks GmbH

Summary: NOSUMMARY Version: \$Revision: 10987 \$

Info:

WEBrick Detection (HTTP)

Risk: Info

Application: unknown

Port: 8181 Protocol: tcp ScriptID: 112709

Vulnerability Detection Result:

Detected WEBrick Version: 1.3.1 Location: 8181/tcp

CPE: cpe:/a:ruby-lang:webrick:1.3.1

Concluded from version/product identification result:

1.3.1

Summary:

This script detects the installed version of WEBrick. In addition this script also tries to detect Ruby itself.

**CVSS Base Vector:** 

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://github.com/ruby/webrick

CVSS Base Score: 0.0

Family name: Product detection

Category: unknown

Copyright: Copyright (C) 2020 Greenbone Networks GmbH

Version: 2020-03-12T10:10:18+0000

WEBrick Detection (HTTP)

Risk: Info

Application: unknown

Port: 8181 Protocol: tcp ScriptID: 112709

Vulnerability Detection Result:

Detected Ruby
Version: 2.3.7
Location: 8181/tcp

CPE: cpe:/a:ruby-lang:ruby:2.3.7

Concluded from version/product identification result:

2.3.7

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script detects the installed version of WEBrick. In addition this script also tries to detect Ruby itself.

References:

https://github.com/ruby/webrick

CVSS Base Score: 0.0

Family name: Product detection

Category: unknown

Copyright: Copyright (C) 2020 Greenbone Networks GmbH

Version: 2020-03-12T10:10:18+0000

WEBrick Detection (HTTP)

Risk: Info

Application: unknown

Port: 3500 Protocol: tcp ScriptID: 112709

Vulnerability Detection Result:

Detected WEBrick
Version: 1.3.1
Location: 3500/tcp

CPE: cpe:/a:ruby-lang:webrick:1.3.1

Concluded from version/product identification result:

1.3.1

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

Summary:

This script detects the installed version of WEBrick. In addition this script also tries to detect Ruby itself.

References:

https://github.com/ruby/webrick

CVSS Base Score: 0.0

Family name: Product detection

Category: unknown

Copyright: Copyright (C) 2020 Greenbone Networks GmbH

Version: 2020-03-12T10:10:18+0000

WEBrick Detection (HTTP)

Risk: Info

Application: unknown

Port: 3500 Protocol: tcp ScriptID: 112709

Vulnerability Detection Result:

Detected Ruby
Version: 2.3.7
Location: 3500/tcp

CPE: cpe:/a:ruby-lang:ruby:2.3.7

Concluded from version/product identification result:

2.3.7

Summary:

This script detects the installed version of WEBrick. In addition this script also tries to detect Ruby itself.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N

References:

https://github.com/ruby/webrick

CVSS Base Score: 0.0

Family name: Product detection

Category: unknown

Copyright: Copyright (C) 2020 Greenbone Networks GmbH

Version: 2020-03-12T10:10:18+0000

### Info:

**CUPS Version Detection** 

Risk: Info Application: ipp Port: 631 Protocol: tcp

ScriptID: 900348

Vulnerability Detection Result:

Detected CUPS
Version: 1.7.2
Location: /

CPE: cpe:/a:apple:cups:1.7.2

Concluded from version/product identification result:

<TITLE>Home - CUPS 1.7.2</TITLE>

Summary:

Detects the installed version of Common Unix Printing System (CUPS)

This script sends an HTTP GET request and tries to get the version from the response.

CVSS Base Vector:

AV:N/AC:L/Au:N/C:N/I:N/A:N CVSS Base Score: 0.0

Family name: Product detection

Category: infos

Copyright: Copyright (C) 2009 SecPod

Summary: NOSUMMARY

Version: 2019-12-17T11:41:26+0000