


vtm::CU::isBcwIdxCoded

vtm::HLSyntaxReader
::parseSliceHeader

vtm::Slice::isInterP

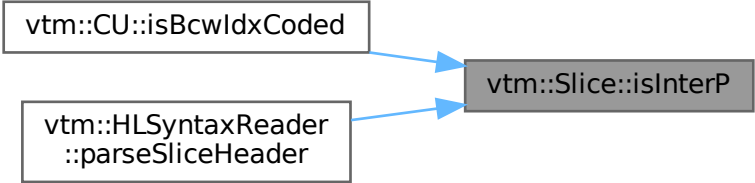

```
graph LR; A[vtm::CU::isBcwIdxCoded] --> C[vtm::Slice::isInterP]; B[vtm::HLSyntaxReader::parseSliceHeader] --> C;
```

The diagram illustrates a dependency or call relationship. Two source functions, 'vtm::CU::isBcwIdxCoded' and 'vtm::HLSyntaxReader::parseSliceHeader', are shown in white boxes on the left. Two blue arrows originate from these boxes and point to a single target function, 'vtm::Slice::isInterP', which is shown in a gray box on the right.