

SBML2L^AT_EX: Conversion of SBML files into human-readable reports

Andreas Dräger^{1,*}, Hannes Planatscher¹, Dieudonné Motsou Wouamba¹, Adrian Schröder¹, Michael Hucka², Lukas Endler³, Martin Golebiewski⁴, Wolfgang Müller⁴, Andreas Zell¹

¹Center for Bioinformatics Tübingen (ZBIT), University of Tübingen, Tübingen, Germany

²Beckman Institute BNMC, California Institute of Technology, Pasadena, United States

³European Bioinformatics Institute, Wellcome Trust Genome Campus, Hinxton, United Kingdom

⁴Scientific Databases and Visualization Group, EML Research gGmbH, Heidelberg, Germany

Received on XXXXX; revised on XXXXX; accepted on XXXXX

Associate Editor: XXXXXXXX

ABSTRACT

Summary: The XML-based Systems Biology Markup Language (SBML) has emerged as a standard for storage, communication, and interchange of models in systems biology. As a machine-readable format XML is difficult for humans to read and understand. Many tools are available that visualize the reaction pathways stored in SBML files, but many components, e.g., unit declarations, complex kinetic equations, or links to MIRIAM resources, are often not made visible in these diagrams. For a broader understanding of the models, support in scientific writing and error detection, a human-readable report of the complete model is needed. We present SBML2L^AT_EX, a Java-based stand-alone program to fill this gap. A convenient web service allows users to directly convert SBML to various formats, including DVI, L^AT_EX, and PDF, and provides many settings for customization.

Availability: Source code, documentation, and a web service are freely available at <http://webservices.cs.uni-tuebingen.de/webservices>.

Contact: andreas.draeger@uni-tuebingen.de

1 INTRODUCTION

SBML (Hucka *et al.*, 2003) has become the *de facto* standard format for storing models of biochemical systems. SBML allows for definitions of complex models of molecular interactions and cellular processes. Over one hundred software tools now support SBML, including many with intuitive graphical interfaces. Many tools support visualizing and saving molecular interaction graphs (Funahashi *et al.*, 2003), but important details such as unit definitions, kinetic rate equations, user-defined functions, events, model notes, or annotations whether in Systems Biology Ontology (SBO) (Le Novère *et al.*, 2006a) or MIRIAM format (Le Novère *et al.*, 2005) are usually not made explicit in the graphical presentations. To detect potential errors or to gain an overview of the model as a whole, it is necessary to examine the full content of the SBML file, but the unfriendliness of XML to human readers makes this an inconvenient and difficult task.

To address this problem, we have developed SBML2L^AT_EX, a tool that accepts SBML files as input and generates summaries of their

contents as reports in L^AT_EX source code format. For convenience of usage an online web service directly produces human-readable files in various formats. Several settings allow for customization of the output, e.g., adding an extra title page instead of headlines, or choosing the paper size, orientation (portrait or landscape), font sizes, and styles. SBML2L^AT_EX covers all constructs defined in the latest specification of SBML (Level 2 Version 4) and is able to typeset complex kinetic formulas. It computes the derived units for all SBML elements using libSBML (Bornstein *et al.*, 2008) and shows warnings if kinetic equations cannot be evaluated to the correct units. All information is presented in clearly arranged tables, reaction equations, and plain text, simplifying the task of understanding and communicating the model as well as detecting and correcting errors.

This work extends the approach of the rate law generator SBML-squeezer (Dräger *et al.*, 2008) to translate rate equations to L^AT_EX summaries currently for SBML up to Level 2 Version 1 that includes information relevant for generated rate laws: global parameters, species, and compartments. This earlier work does not comprise the full functionality of SBML2L^AT_EX because of its focus on rate equations.

2 TRANSLATION OF SBML

Besides the mandatory field “id” (short identifier), every SBML component may contain optional attributes for a detailed name, SBO term number, notes (XHTML formatted explanation to be displayed to humans), and annotation (machine readable extension for software tools). Most SBML components contain special additional fields specific to each component type, e.g., the unit of a parameter, species, or compartment. SBML2L^AT_EX translates every optional field if it exists and writes this information in the description of the respective component. The URNs in MIRIAM annotations are translated to hyperlinks to the actual URLs. However, software-specific annotations (such as graph layout extensions) are not translated. The headline of the model report contains the model’s name, or its “id” attribute value if the SBML file does not assign a name to the model. The first section presents a general overview of the model, including the number of SBML components within the model, SBML level and version, and the model’s history. All five predefined SBML unit definitions are made explicit, which simplifies the error detection process. As SBML does not contain mandatory components, SBML2L^AT_EX displays the sections about the following components in this order only if they

*to whom correspondence should be addressed

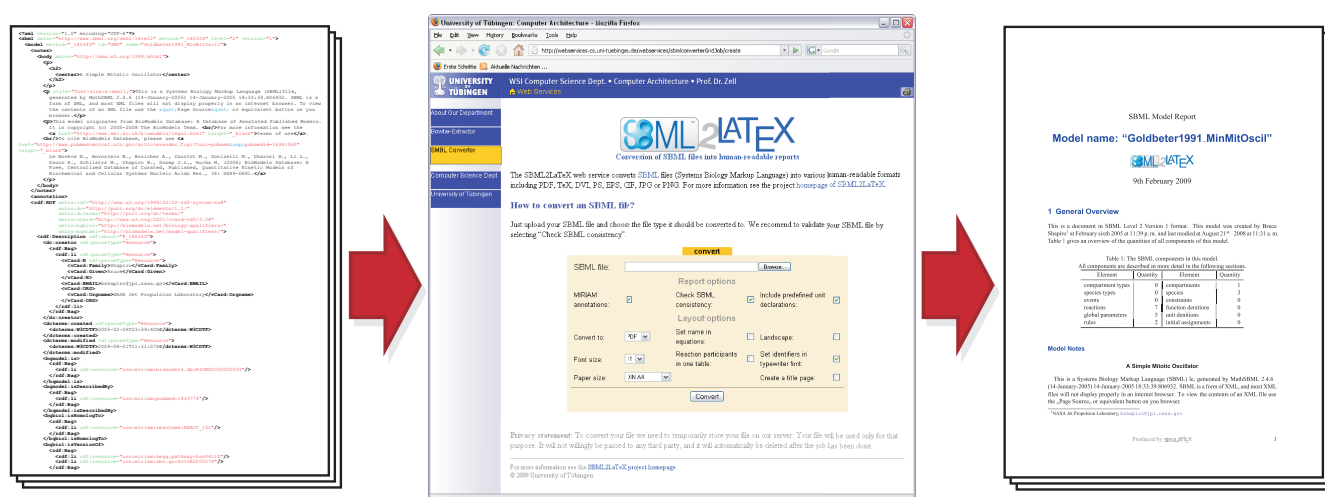


Fig. 1. Example workflow using the SBML2LATEX web service and SBML file BIOMD0000000003.xml (available at <http://www.ebi.ac.uk/biomodels>). After upload of an SBML file, several options allow customizing the output: MIRIAM annotations, an SBML consistency check, or predefined unit declarations can be excluded, the desired file format can be selected; the paper size can be set to the US formats letter, legal or executive as well as to the European formats DIN A0-9 and the page orientation can be switched to landscape (especially important if the report contains fractions with very long denominators, where no automatic line break can be inserted). Several other options influence the layout of the report, e.g., names can be used in equations instead of identifiers, which can be displayed in typewriter or roman font. When the user clicks on the “convert” button, the report file is generated and accessible for download.

are declared in the model: compartment types, compartments, species types, species, global parameters, initial assignments, function definitions, rules, events, constraints, and reactions. Each one of these sections in the report starts with a sentence that gives the number of components to be described and displays all available information about each respective component. For instance, section “Reactions” contains a table with all reaction equations and one subsection for each single reaction. For each reaction, its reactants, products, and modifiers are displayed in a table, followed by the formula of the kinetic law, its derived units, and a table of local parameters. For events, the trigger condition, the delay function, if one exists, and all assignments are given. If the model contains any species, the last section shows the derived rate equations for the temporal changes of their amount. SBML2LATEX highlights kinetic equations whose units cannot be reduced to substance per time. Hyperlinks allow the user to jump to each referenced kinetic equation, event, or rule a species is involved in. If the model contains any SBO annotations, a glossary presents the SBO numbers together with terms and definitions. Finally, a consistency report of the model is included at the end of the document.

SBML2LATEX is distributed under the GNU General Public License and completely written in Java™. It contains a modified version of HTML2LATEX (<http://htmltolatex.sourceforge.net>), and depends on an installation of libSBML.

3 CONCLUSION

SBML2LATEX facilitates the complicated and cumbersome model development process by providing a simple method to translate such models to human-readable reports. These reports support scientific writing because sophisticated formulas can be directly adopted and ease the error detection and model communication. The web service version provides a convenient way to create such reports in various formats and offers several options. If further customization becomes necessary, the source code and the binaries can be downloaded and used locally. SBML2LATEX has been integrated into the SABIO-RK database (Rojas et al., 2007) and can directly be

accessed from the SBML homepage, <http://sbml.org>. The BioModels Database (Le Novère et al., 2006b) also relies on it to provide PDF versions of its models.

ACKNOWLEDGMENTS

The authors are grateful to Henning Schmidt, Detlev Bannasch, and Jochen Supper. This work was funded by the German Federal Ministry of Education and Research (BMBF) in the National Genome Research Network (NGFN+) under Project Number 01GS08134 and HepatoSys under Project Number 0313080 L, and federal state Baden-Württemberg in the Tübinger Bioinformatik-Grid under Project Number 23-7532.24-4-18/1. *Conflict of Interest:* none declared.

REFERENCES

- Bornstein, B. J. et al. (2008). LibSBML: an API Library for SBML. *Bioinformatics*, **24**(6), 880–881.
- Dräger, A. et al. (2008). SBMLsqueezer: a CellDesigner plug-in to generate kinetic rate equations for biochemical networks. *BMC Systems Biology*, **2**(1), 39.
- Funahashi, A. et al. (2003). CellDesigner: a process diagram editor for gene-regulatory and biochemical networks. *BioSilico*, **1**(5), 159–162.
- Hucka, M. et al. (2003). The systems biology markup language (SBML): a medium for representation and exchange of biochemical network models. *Bioinformatics*, **19**(4), 524–531.
- Le Novère, N. et al. (2005). Minimum information requested in the annotation of biochemical models (MIRIAM). *Nature Biotechnology*, **23**(12), 1509–1515.
- Le Novère, N. et al. (2006a). Adding semantics in kinetics models of biochemical pathways. In C. Kettner and M. G. Hicks, editors, *2nd International ESCEC Workshop on Experimental Standard Conditions on Enzyme Characterizations*. Beilstein Institut, Rüdesheim, Germany, Rüdesheim/Rhein, Germany. ESEC.
- Le Novère, N. et al. (2006b). BioModels Database: a free, centralized database of curated, published, quantitative kinetic models of biochemical and cellular systems. *Nucleic Acids Research*, **34**, D689–D691.
- Rojas, I. et al. (2007). Storing and Annotating of Kinetic Data. *In Silico Biology*, **7**, 37–44.