


Does longer complex context improve reconstruction?




Matched 4.64M-parameter WaveNets | RFUAV development | one training seed

● Outside-crop I/Q masked ■ Full 20.89 ms I/Q visible

2 recorded components | 210 mixtures

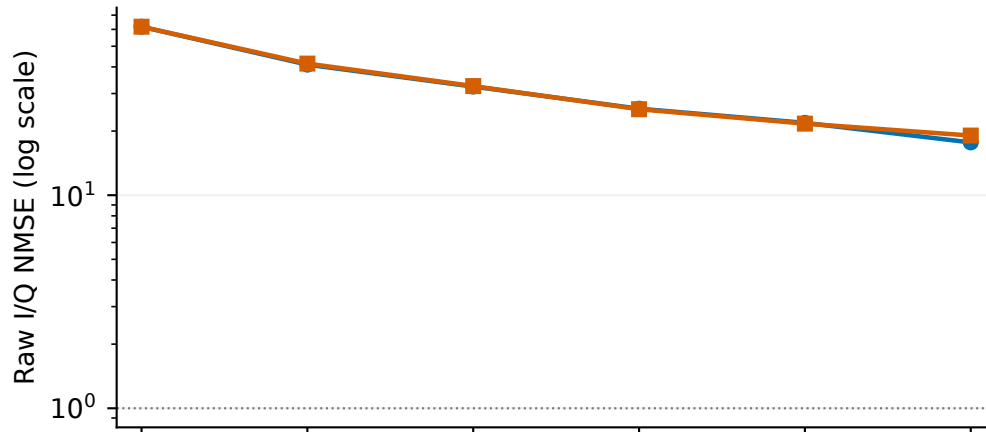

3 recorded components | 210 mixtures

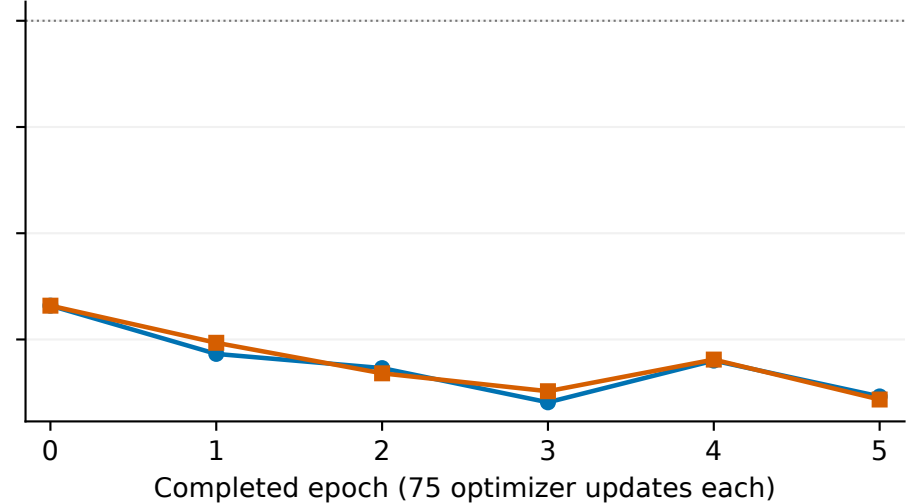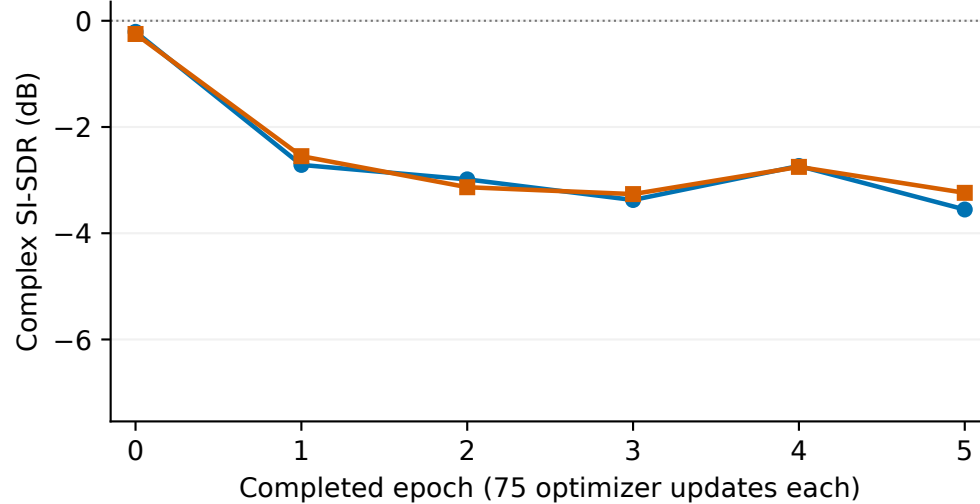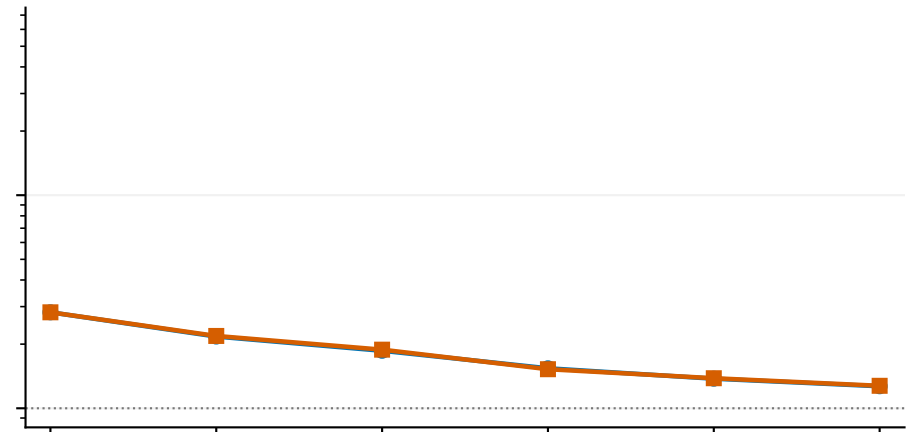

NMSE: lower is better. SI-SDR: higher is better. Dotted lines: NMSE = 1 and SI-SDR = 0 dB.

Every actual epoch shown, including initialization; no output gain correction.

Both arms receive full-mixture RMS and time-averaged power features.

The only arm difference is visibility of complex I/Q outside the 0.63872 ms target crop.

Correlated development crops; this initial-budget screen is not an independent test or a convergence study.