

PREDICTING PNEUMONIA IN LUNGS X-RAYS


Dhruv Ragunathan

BUSINESS OBJECTIVES


- We have been tasked to improve identification of pneumonia.
- Staffing resources are in a crunch and there aren't enough radiologists to review all x-rays.
- We use a machine learning model called a convolutional neural network (CNN) to identify pneumonia in lung x-rays.
- We believe our findings show promise in using this technique to alleviate hospital staff time.

DATA

- Data sets off lungs with Pneumonia and healthy lungs were provided by Guangzhou Women and Children's Medical Center, Guangzhou.
- The data contains 3 data sets, train, test, and validation. In each file, there are two folders: Pneumonia and normal.
- The data only contained chest x-rays of patients that are less than 5 years old.

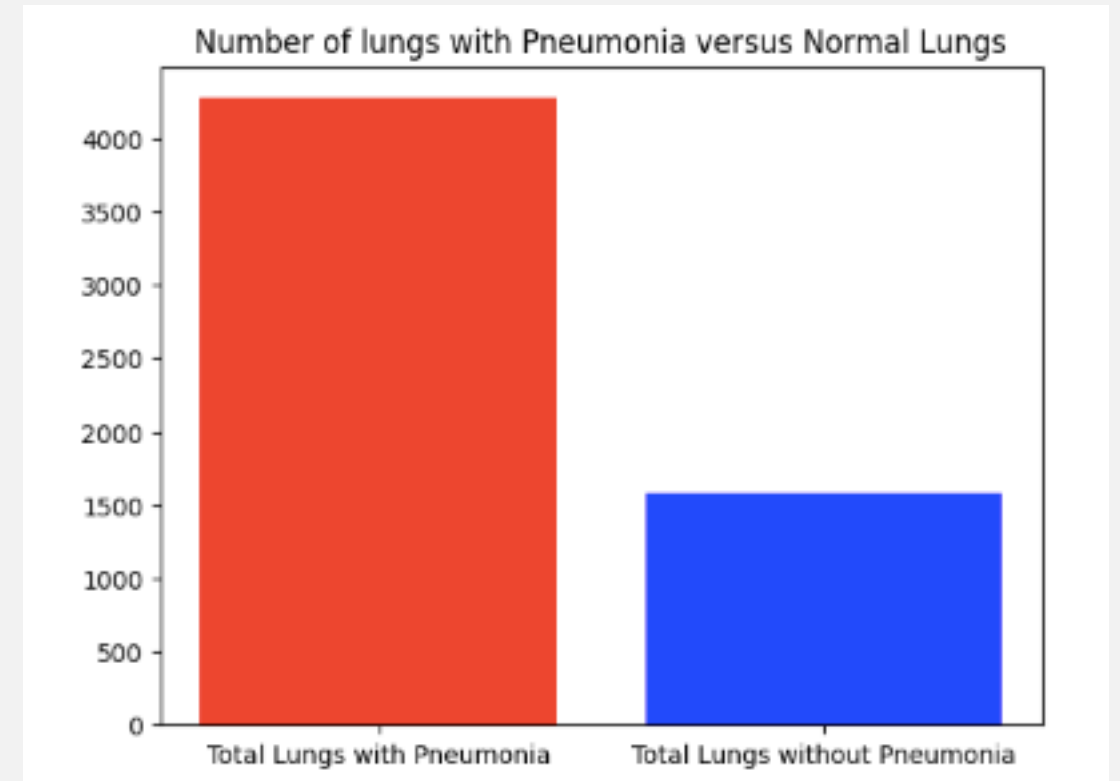

DATA CONTINUED


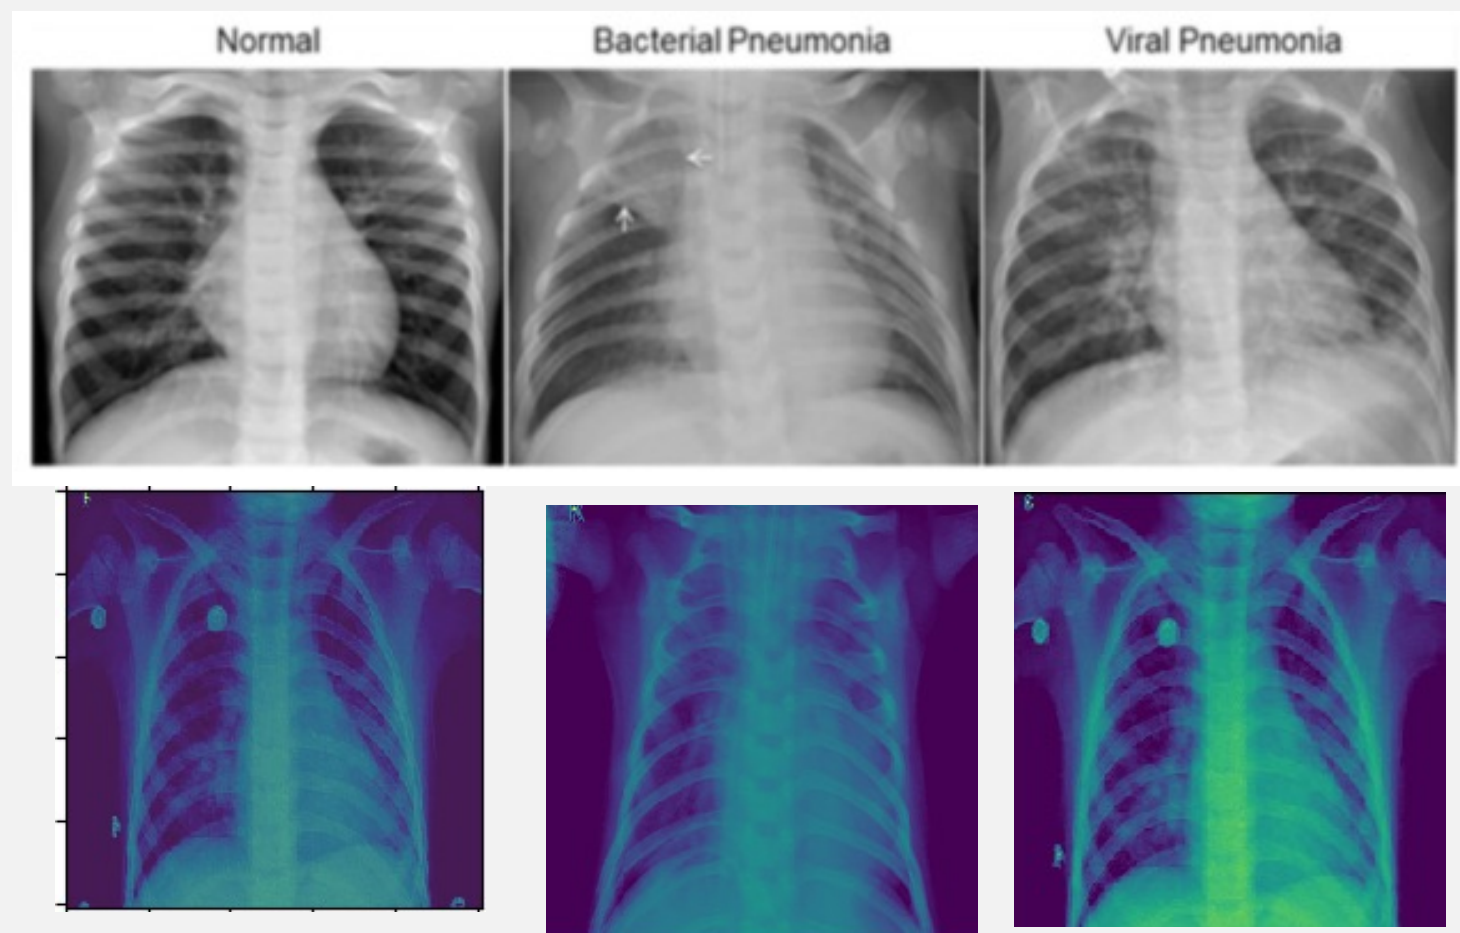


MODELS AND EVALUATION CRITERIA


- Due to resource and the limits off the machines, only 2500 off the 5800 X-rays could be used in training the model.
- Four CNN models were created as part off this project.
- The evaluation criteria were accuracy and recall.
 - Accuracy: Higher accuracy means more model predictions were correct (lower false positive)
 - Recall: Higher recall means more pneumonia x-rays were identified (lower false negatives)
- Recall was prioritized over accuracy because a higher recall implies that more lives were saved.

MODEL RESULTS

- The model's accuracies ranged from 94.5% to 95.5%. They were only off by 1%.
- The model's recall ranged from 86 to 92%.
- Since recall is more important than accuracy, we are selecting model 4.

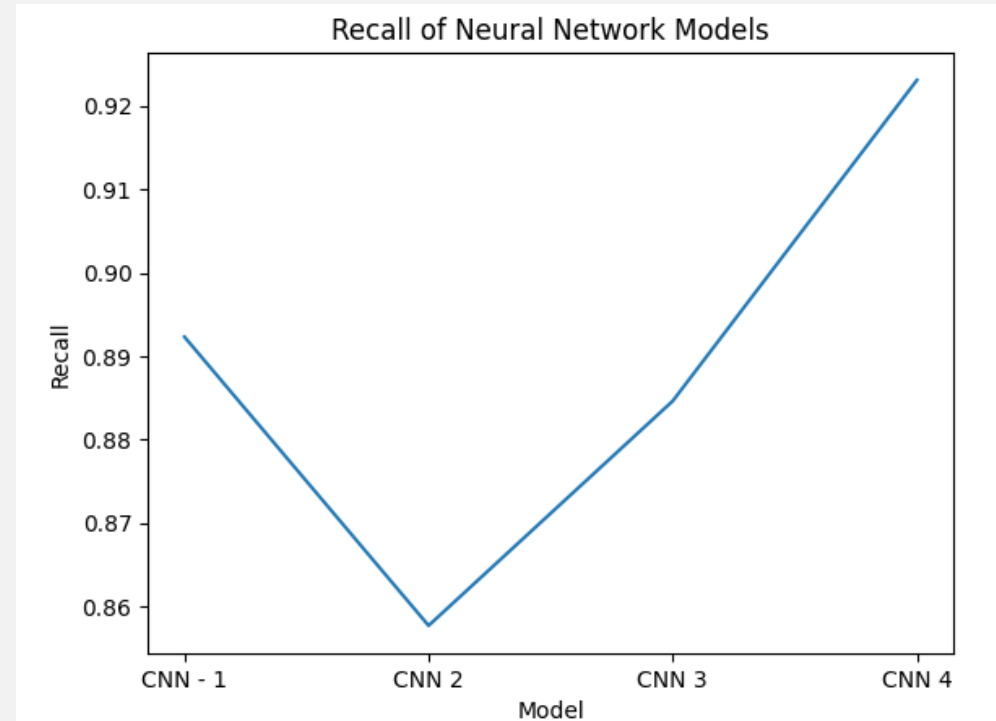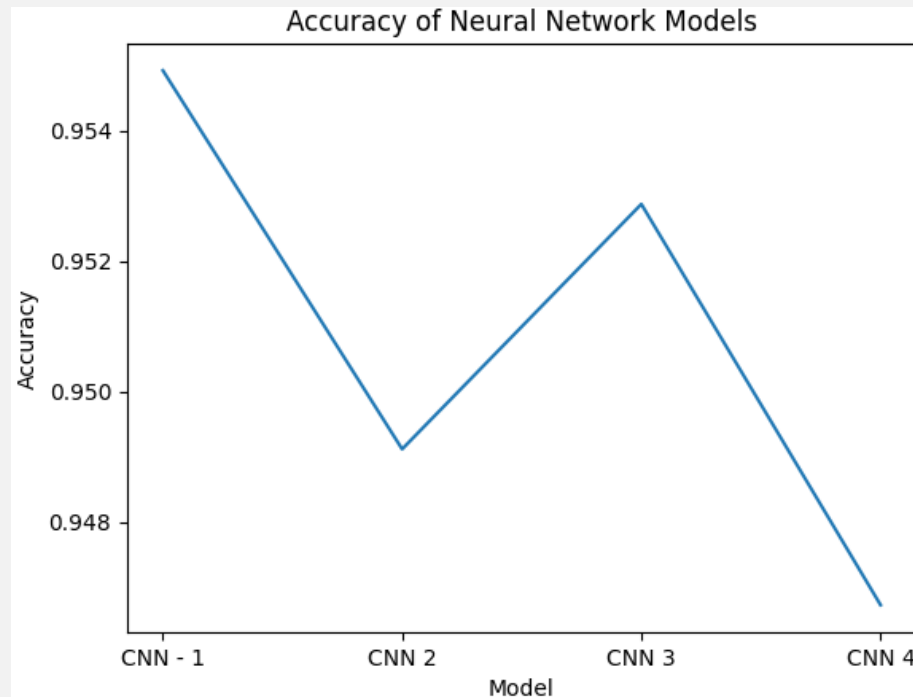

MODEL RESULTS – CONFUSION MATRIX

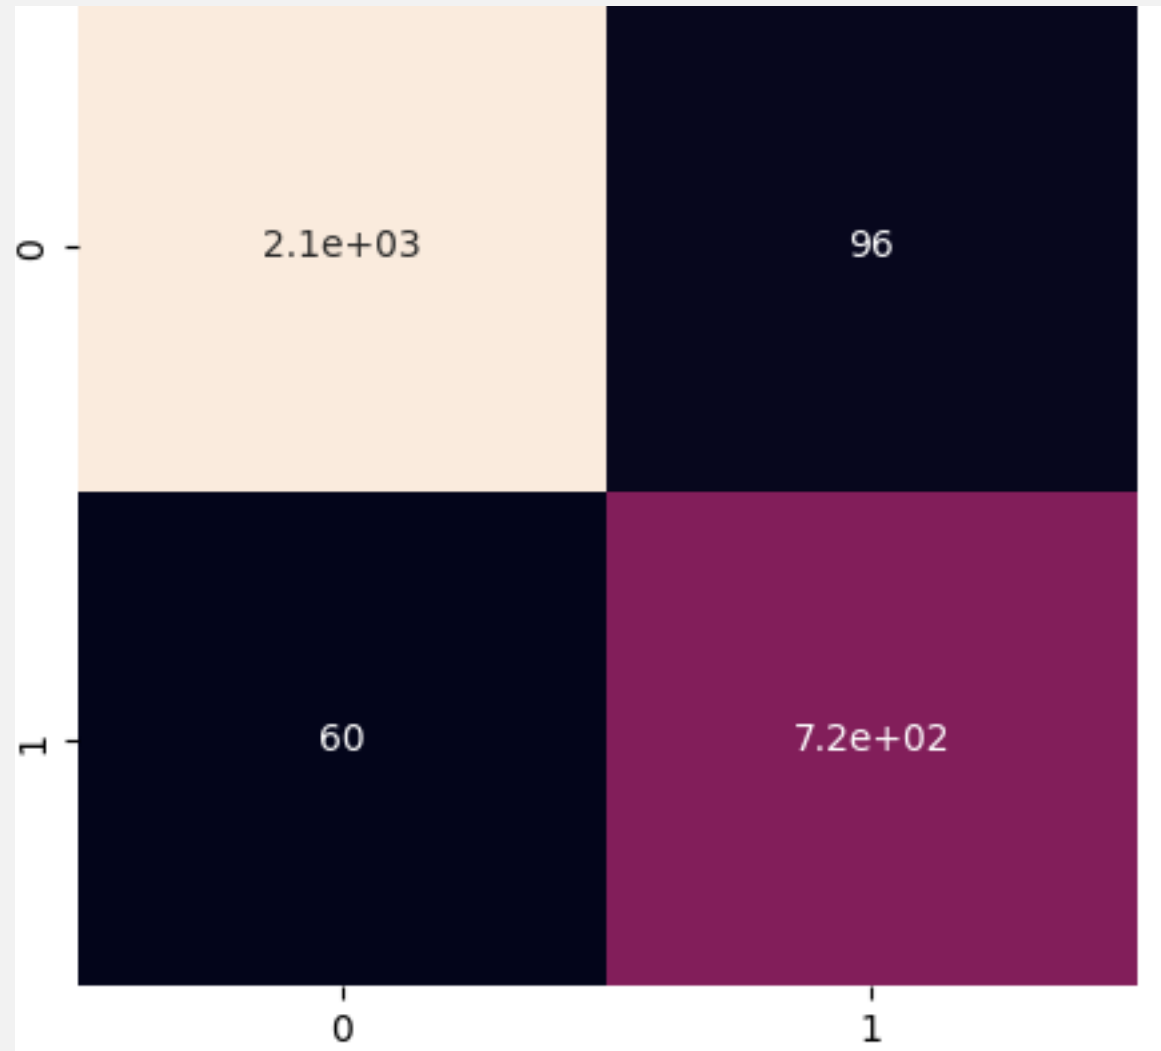

RECOMMENDATIONS

- Recommend that you move forward with using the final model since it had the highest recall by 3% and only was 1% less accurate than the other models.
- Further research on how to operationalize this model in hospital workflows.
Examples:
 - How are false positives and negatives handled in a hospital?
 - Is there a method for clinicians to quickly determine that the patient does not have pneumonia?
- Training on larger and more diverse data sets is necessary before it's deployed.

FUTURE PROJECTS

- Aggregate significantly more lung data across groups of different ages.
- Enhance the model by allowing it to identify bacterial and viral pneumonia.
- Deploy the model in a small hospital. Observe the following:
 - Record time saved by radiologists
 - impact of false positives on clinician workflows.

CONTACT INFORMATION

- Email: Dhruvragunathan@gmail.com
- LinkedIn: <https://www.linkedin.com/in/dhruv-ragunathan-908993b1/>
- Github: https://github.com/dragunat2016/Pneumonia_Image_Detection