


MIT App Inventor Cheat Sheet

Visit appinventor.pevest.com for more fun stuff


Designer

User Interface	Layout	Connectivity	Drawing and Animation
Button	HorizontalArrangement	ActivityStarter	Ball
CheckBox	TableArrangement	BluetoothClient	Canvas
DatePicker	VerticalArrangement	BluetoothServer	ImageSprite
Image	Media	Web	
Label	Camcorder		
ListPicker	Camera		
ListView	ImagePicker		
Notifier	Player		
PasswordTextBox	Sound		
Slider	SoundRecorder		
Spinner	SpeechRecognizer		
TextBox	TextToSpeech		
TimePicker	VideoPlayer		
WebViewer	YandexTranslate		
Sensors		LEGO® MINDSTORMS®	Social
AccelerometerSensor		NxtDrive	ContactPicker
BarcodeScanner		NxtColorSensor	EmailPicker
Clock		NxtLightSensor	PhoneCall
LocationSensor		NxtSoundSensor	PhoneNumberPicker
NearField		NxtTouchSensor	Sharing
OrientationSensor		NxtUltrasonicSensor	Texting
ProximitySensor		NxtDirectCommands	Twitter

Blocks - Button

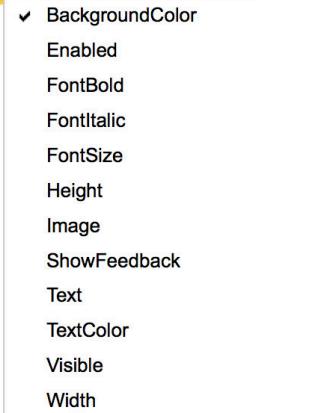


"Set" uses same properties plus
HeightPercent & WidthPercent




MIT App Inventor Cheat Sheet

Visit appinventor.pevest.com for more fun stuff



Checkbox

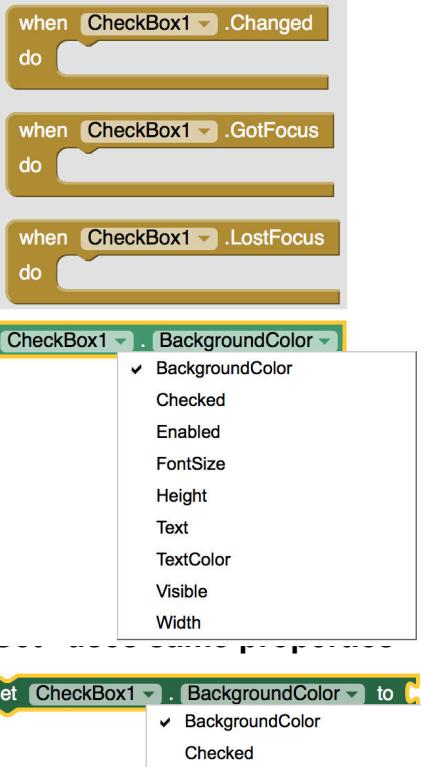

Datepicker

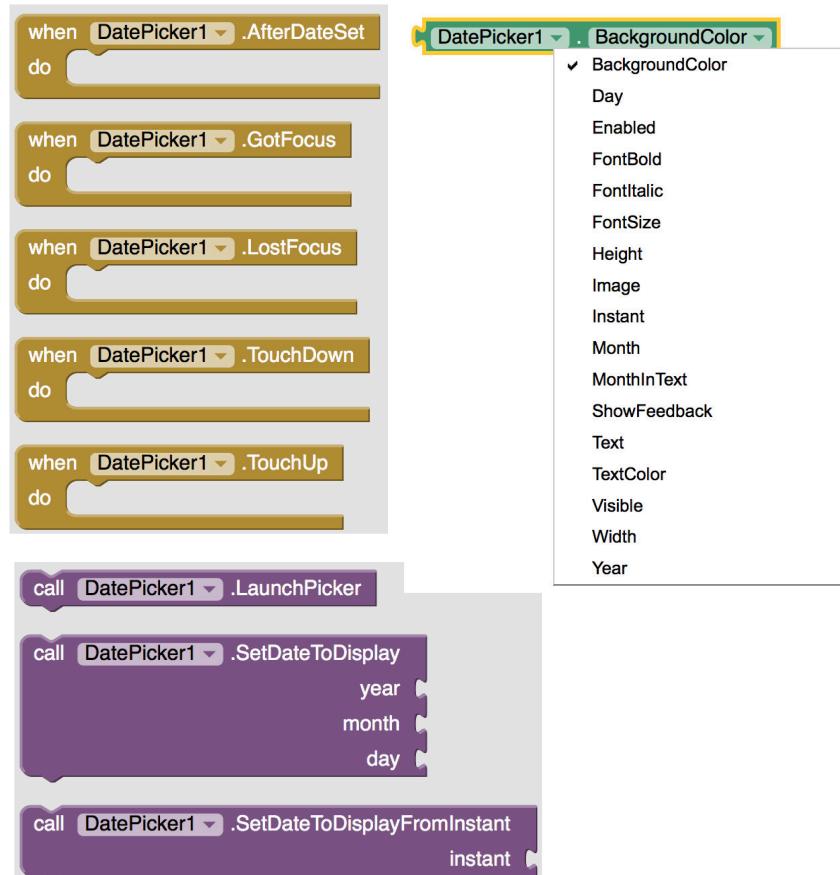


Image

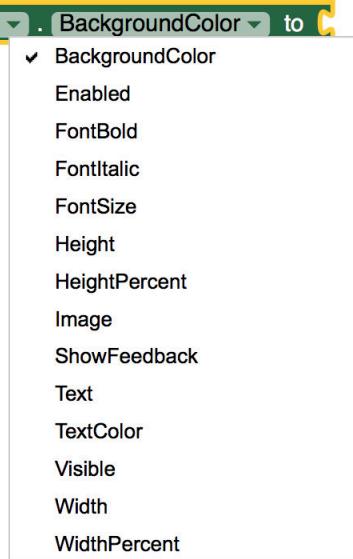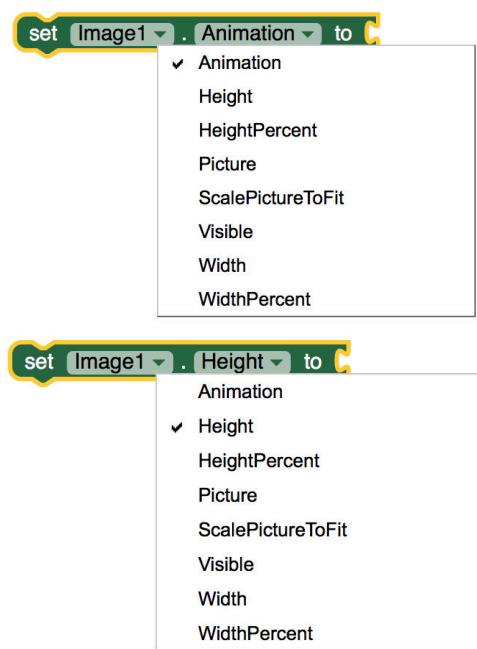

MIT App Inventor Cheat Sheet

Visit appinventor.pevest.com for more fun stuff



Label

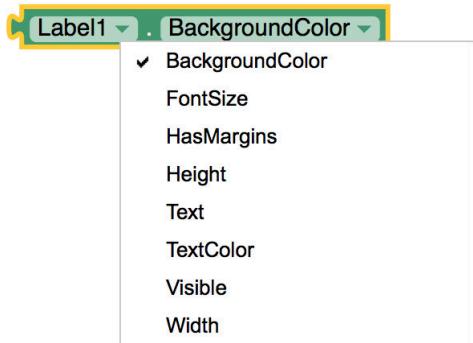

ListPicker




Color Blocks

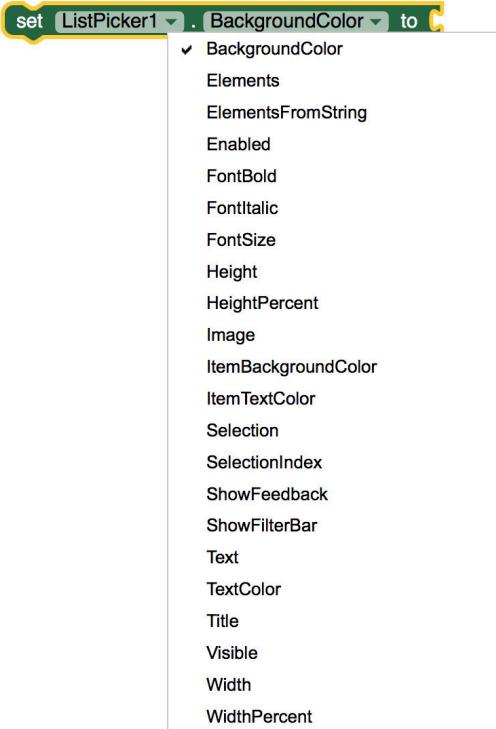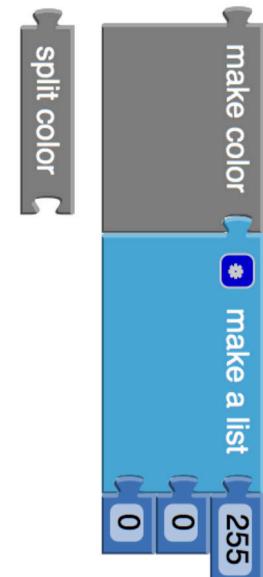


MIT App Inventor Cheat Sheet

Visit appinventor.pevest.com for more fun stuff

ListViewer


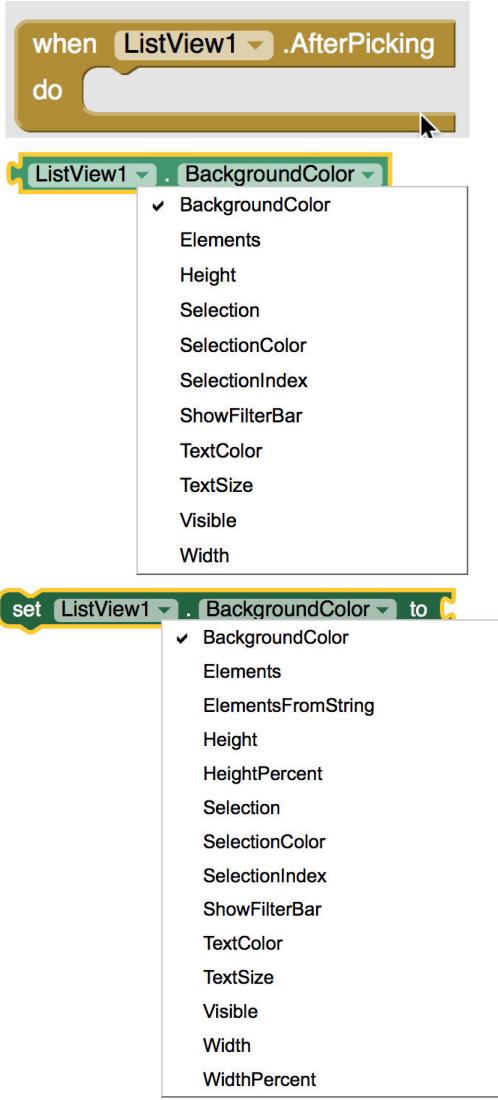


Slider

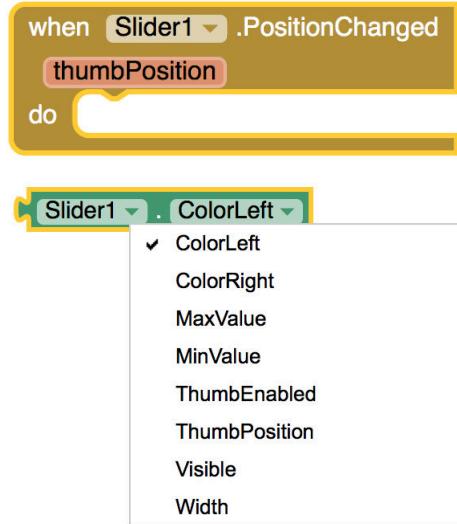

Set is the same plus HeightPercent and WidthPercent

PasswordTextBox

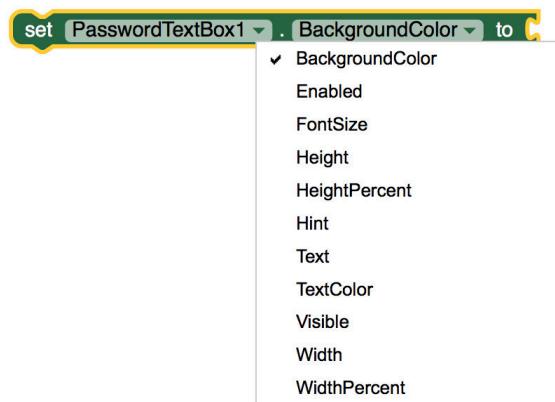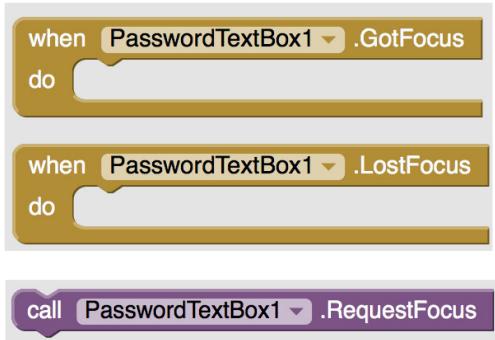


MIT App Inventor Cheat Sheet

Visit appinventor.pevest.com for more fun stuff

Spinner

```
when Spinner1 .AfterSelecting  
do
```

```
call Spinner1 .DisplayDropdown
```

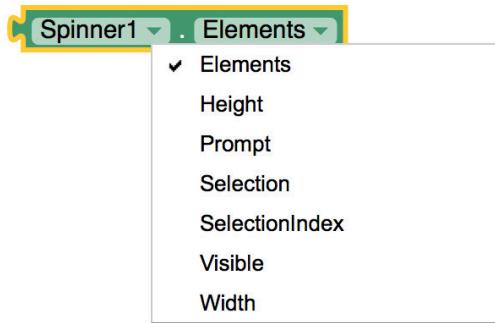

"Set" uses same properties plus
HeightPercent & WidthPercent

Textbox

```
when TextBox1 .GotFocus  
do
```

```
when TextBox1 .LostFocus  
do
```

```
call TextBox1 .HideKeyboard
```

```
call TextBox1 .RequestFocus
```

Variable Blocks

```
initialize global name to
```

```
get
```

```
set to
```

```
* initialize local name to
```

```
in
```

```
* initialize local name to
```

```
in
```

Logic Blocks

```
true
```

✓ true
false

```
=
```

✓ =
≠

```
and
```

✓ and
or

```
not
```

Procedure Blocks

```
* to procedure
```

```
do
```

```
* to procedure
```

```
result
```

```
TextBox1 . BackgroundColor
```




✓ BackgroundColor
Enabled
FontSize
Height
Hint
MultiLine
NumbersOnly
Text
TextColor
Visible
Width

"Set" uses same properties plus
HeightPercent & WidthPercent








MIT App Inventor Cheat Sheet

Visit appinventor.pevest.com for more fun stuff

TimePicker

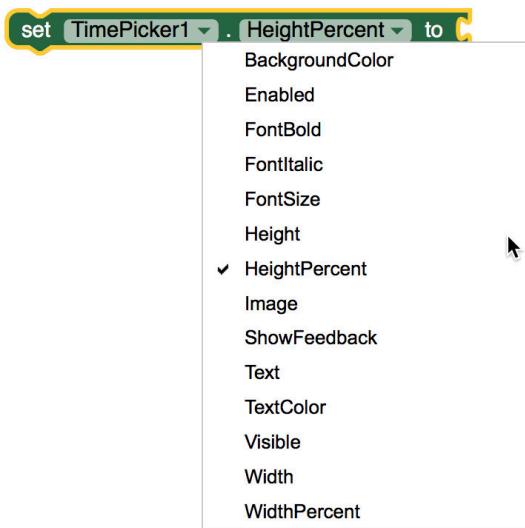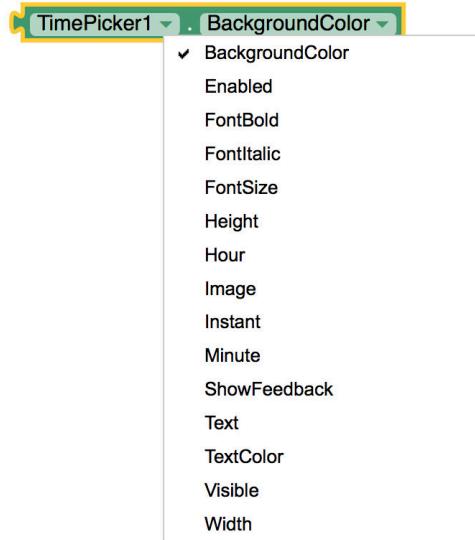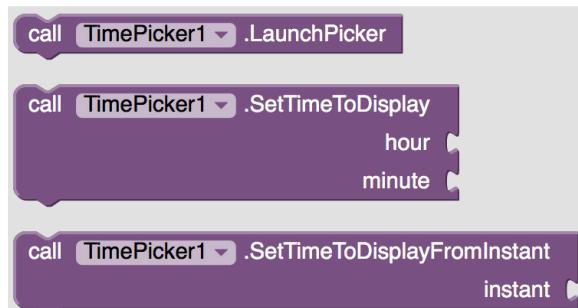




Math

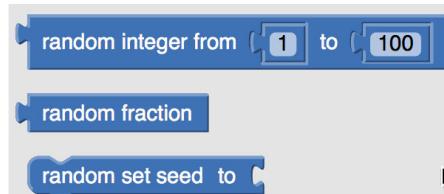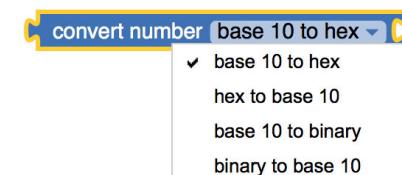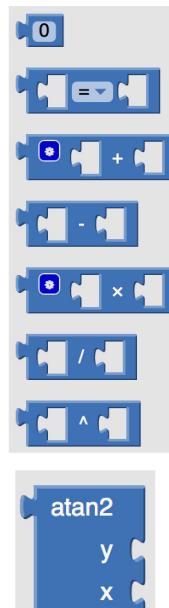




MIT App Inventor Cheat Sheet

Visit appinventor.pevest.com for more fun stuff

WebViewer

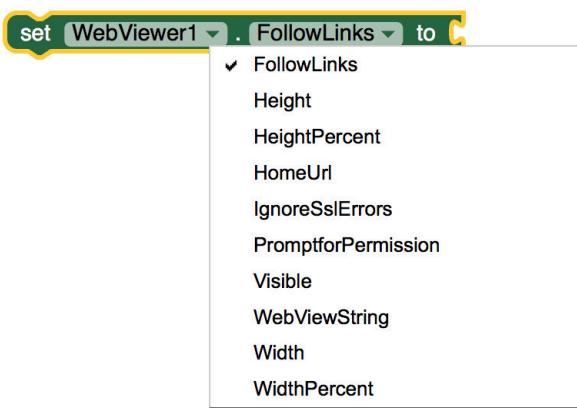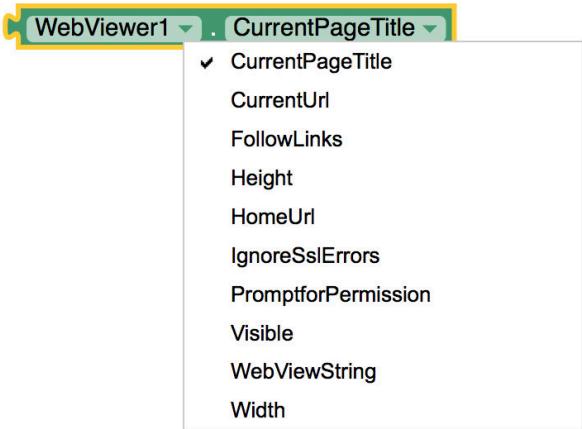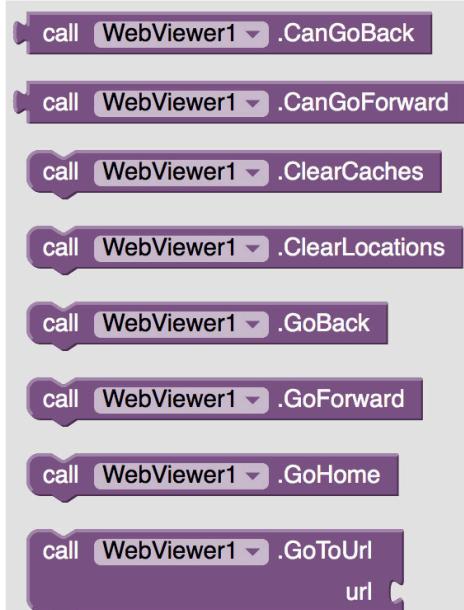

Notifier

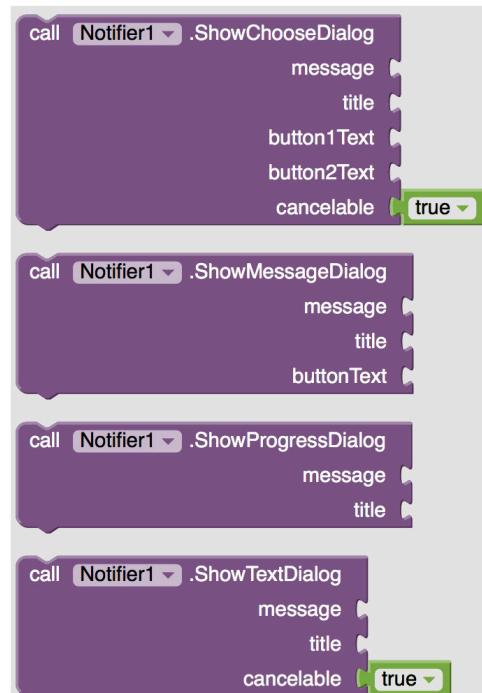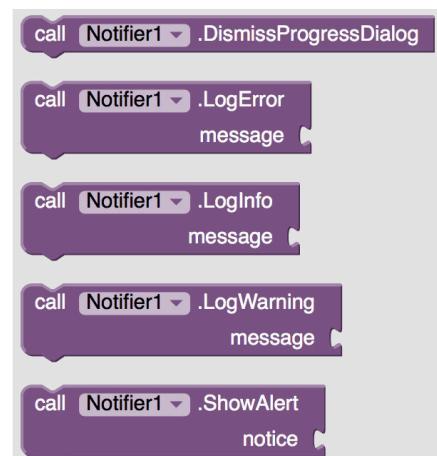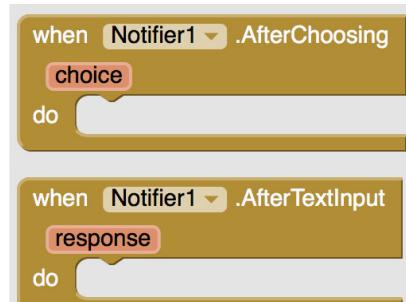




Implement the event handler to compare 'choice' to 'buttonText' options




MIT App Inventor Cheat Sheet

Visit appinventor.pevest.com for more fun stuff


List Blocks

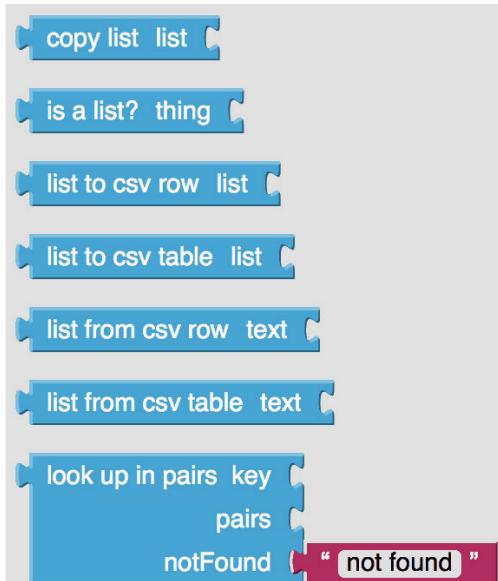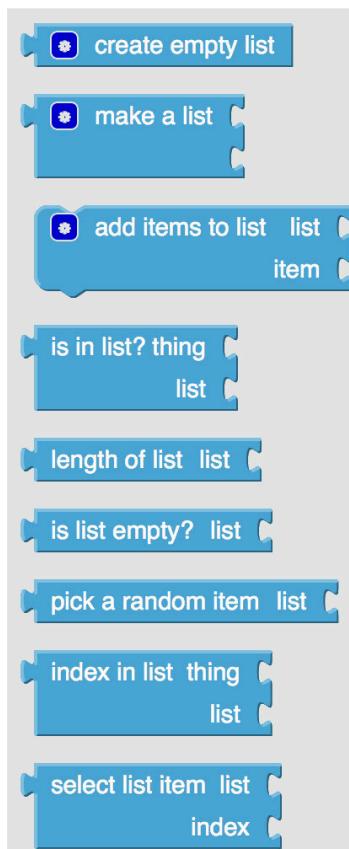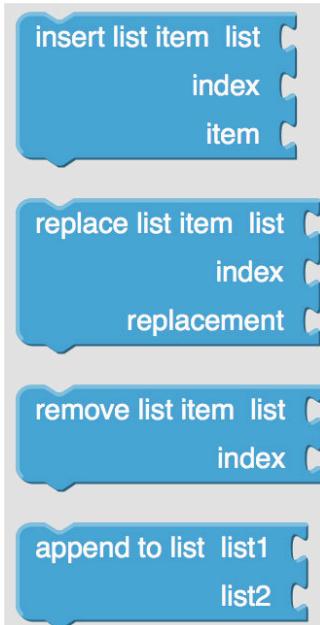

Screen1

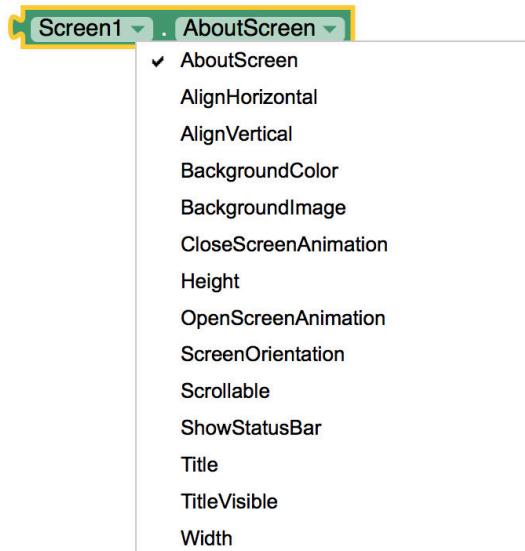

Set options are the same except
that Width is not available

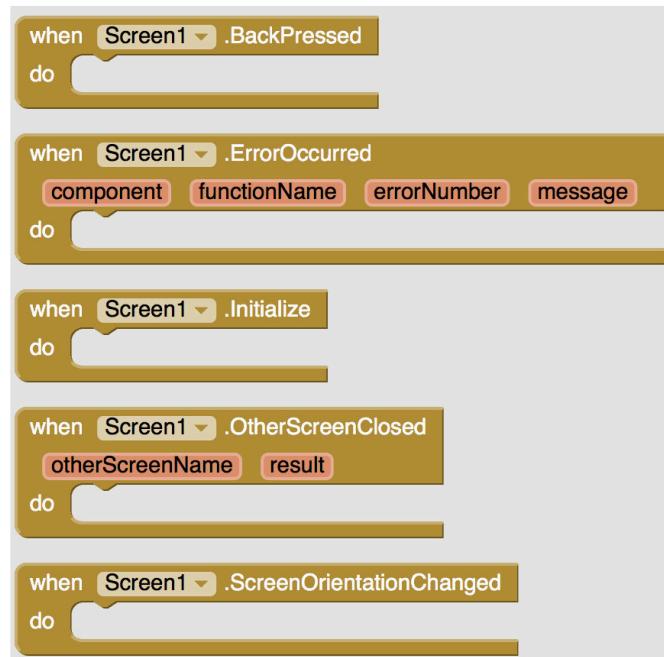


MIT App Inventor Cheat Sheet

Visit appinventor.pevest.com for more fun stuff

Control Blocks


if-then-else



Loops



open/close other screens

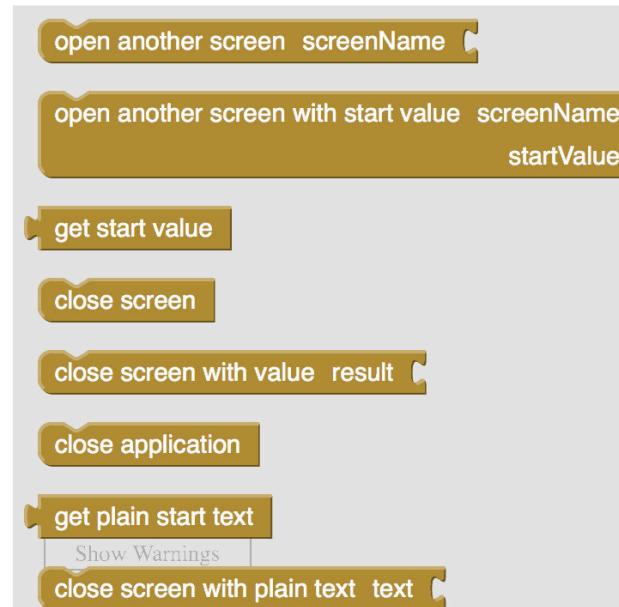

Text Blocks

