DRASTICSTATIC LAB · TEMPLATE

my-template, walked through

The path a new repository walks, laid out once: for a new person, and the AI helper beside them

Eight stops, the footer every commit carries, the coordination lanes, the private and public halves, proposals and procedures in every organisation's colour, and how a change travels. Source: github.com/drasticstatic/my-template.

Who this is for, and how to read it

- **You**, if you are starting a repository in this fleet or joining an organisation it serves.
- **Your helper** (Claude, Codex, Augment, any of them), which will read the same files you do.
- Every slide points at a real page. The deck shows the **order**; the pages hold the detail.

> Read it once top to bottom. After that, jump to the stop you need. The README is the same path in text: `README.md`.

Nothing here is secret. The template is public on purpose; the private halves it describes live in each organisation's own repositories.

The path at a glance

	Stop	What you leave with
1	Two commands, every clone	the commit hook switched on, the right lanes for this repo
2	Decide visibility before the first commit	private, public, or private with a public twin
3	License, security, contributors, topics	a true `LICENSE`, a README that stays true on both halves
4	Let the helpers read the map	`AGENTS.md`, a graph of the repo, the footer
5	Publish the safe half	an allowlist or exclude-list sync workflow
6	Proposals, in your colour	a `proposals` repo that renders PDFs on every push
7	People, and their helpers	the walkthroughs and the onboarding kit
8	A folder of repos	a light parent with independent children

1 Two commands, every clone

```
sh scripts/install-hooks.sh        # switch on the commit-attribution hook
sh scripts/scaffold-agent-sync.sh  # make the coordination lanes this repo's visibility allows
```

And at the **start of every session**, before reading deeply or editing:

```
git pull --rebase --autostash
```

- Git will not carry hooks for you, on purpose: a committed hook does nothing until a person points the clone at it.
- Several people and helpers push to the same repositories, some of them unattended. A stale clone fails at push time, when the tempting fix is a force-push that throws away someone else's work. `--autostash` makes the pull safe on a dirty tree.

2 Decide visibility, 3 make it true

Stop 2. Choose before the first commit, because un-publishing is not something deletion can do.

The repo is	It gets
private	`AGENT-SYNC/`, `logs/`, and optionally `AGENT-SYNC_PUBLIC/` for what may reach a twin
public	`AGENT-SYNC_PUBLIC/` only; never `logs/`
private with a public twin	the above, plus a twin named `<repo>-public-preview`, wired at Stop 5

Stop 3. A real `LICENSE` in every public repository (the shared `.github` fallback covers `SECURITY.md` and `CONTRIBUTING.md`, never the licence), a licence section that stays true on both halves of a pair, and a description and topics with `gh repo edit`. Then `CLAUDE.md` and `.github/dependabot.yml`.

4 Let the helpers read the map

- `./scripts/init-graphify.sh` builds a keyless map of the repository that a helper can query instead of reading every file.
- `AGENTS.md`, written from `org-onboarding/AGENTS.template.md`, tells every helper the house rules in one place.
- `CLAUDE.md` adds what is specific to Claude Code; the two stay in step.
- From here on, **every commit carries the footer** (next slides).

> A helper that has read `AGENTS.md` knows: sync first, commit only the files it changed, never force-push, never merge its own Promote.

5 Publish the safe half, 6 proposals

Stop 5. Copy one sync workflow into `.github/workflows/`:

Model	Use when	Default
allowlist	most of the repo is private	everything private; named paths published
exclude list	most of the repo is public	everything published; named paths held back

Any new root-level path is classified in the **same commit** that introduces it. The allowlist model fails CI until you do.

Stop 6. Copy `proposals-template/repo/` into a private `proposals` repository. It opens with **000 Start here**, renders a PDF on every push, keeps one child folder per site repository, and wears the organisation's colour family.

7 People and helpers, 8 a folder of repos

Stop 7. `walkthroughs/`: joining an organisation, connecting Littlebird, Firecrawl, Google Drive, Wix and WordPress, security settings, secret scans, ultra runs. `org-onboarding/`: the kit every organisation's `.github` carries, the hook-in note on the members' page, and the `legal` repository every organisation gets.

Stop 8. `NESTED-REPOS-GUIDE.md`: a light parent folder that git tracks, with independent child repositories it ignores. No submodules.

```
my-org/                    ← the parent: README, CLAUDE.md, a map of the children
├── .gitignore             ← lists each child, so the parent never swallows it
├── site/                  ← its own repository, its own history
└── proposals/             ← its own repository, its own history
```

Hooks and trailers: who wrote this, on what

Every commit ends with two trailer lines:

```
Co-Authored-By: <Agent> · <Engine> · <Provider> [<Model>]                # direct
Co-Authored-By: <Agent> · <Engine> · <Gateway> · <Provider> [<Model>]    # proxied
Claude-Session: <the full session URL>                                   # or Cosmos-Session:, per platform
```

- **Agent** is the seat (Alfred, Kavanah, Fortuna, …), **Engine** the harness, **Provider** who ran the weights, **Model** in square brackets. A **Gateway** appears only when something routed the request.
- The separator is the middle dot `·`. The session trailer is its **own line**; folded onto the first, git stops reading it as a trailer.
- `.githooks/commit-msg` rejects a commit without them. People committing by hand use `--no-verify`; helpers never do.

Why: when a commit later turns out to be subtly wrong, the first useful question is which model produced it. Single source: AGENT-SYNC/README.md.

Gitmoji: the subject line

```
:sparkles: feat(scope): what the change does
```

`:sparkles:` **feat**	`:bug:` **fix**	`:memo:` **docs**	`:white_check_mark:` **test**
`:lock:` security	`:recycle:` refactor	`:wrench:` config	`:rocket:` deploy
`:bookmark:` release	`:rewind:` revert	`:truck:` move	`:construction:` wip

- **The alias, not the glyph.** `:sparkles:` is plain text: it reads the same in every terminal, log and email, and `git log --grep '^:bug:'` just works. GitHub draws the glyph anyway.
- **Warn-only.** A subject that does not follow it still lands, with a one-line hint from `.githooks/gitmoji-check.sh`. The footer is still enforced.


Single source: GITMOJI.md.

AGENT-SYNC: one lane per creator

```
AGENT-SYNC/                      private repos only; never reaches a public twin
├── created-by-alfred/           what Alfred wrote, for whoever it is addressed to
├── created-by-christopher/
├── created-by-kavanah/
├── created-by-Littlebird/       the observer's notes, marked as observer-generated
└── …                            one folder per agent that writes here
AGENT-SYNC_PUBLIC/               the only lane a public repo gets; assume every word is public
logs/                            the session timeline; private only, no public counterpart
```

- A file lives in its **creator's** folder and is **named for its recipient**: `created-by-alfred/prompts/2026/10-Oct/KAVANAH_PROMPT_20261031.md`.
- Nobody writes into another agent's file. You answer by writing your own.
- Public lanes link to private material **by pointer**, never by copying it in.

Private → public: two halves of one repository

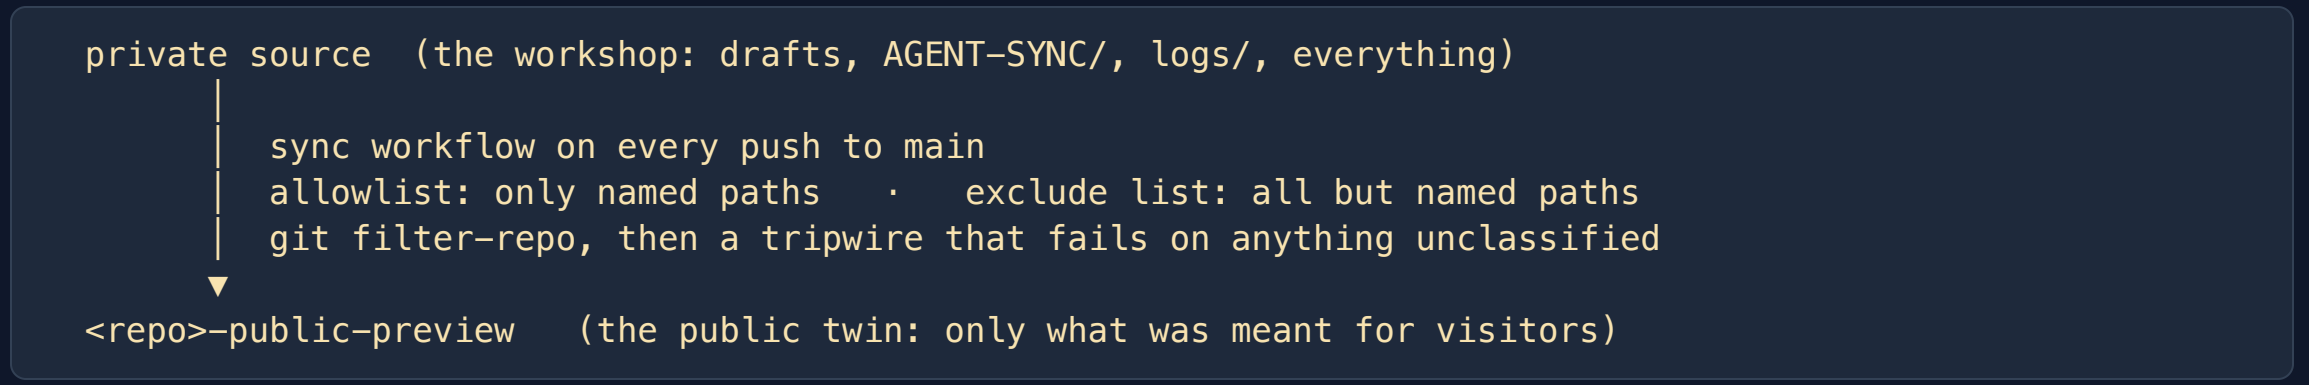

- The twin is **generated**. Never edit it by hand: change the source or its allowlist, and the next sync carries it.
- The workflow pushes with a per-twin **deploy key**. Until that secret exists the workflow says so and stops cleanly.
- `gitexporter` is retired. Its config file stays as a readable manifest of what is meant to be public.

Proposals and procedures, one colour each

Organisation	Family	Primary · Deep · Mid · Tint
The Holy Earth Foundation	amber	d97706
Psychedelics in Recovery	purple	5b2bb5
Psanctuary · Ethereal Offering	teal	0d9488
Psanctuary Church	blue	2563eb
O-R-G	emerald	059669
Taylor'd Wraps	magenta	ec4899
the drasticstatic lab	brass on slate	d9a441
For (everyone, the same)	slate	64748b


The same shape everywhere (TL;DR first, a decisions log, a PDF beside the markdown); the colour says whose it is before a word is read. Register: TONES.md.

Procedures beside proposals

- A **proposal** asks: *should we?* A **procedure** (SOP) records: *this is how we do it now.*
- `sop-template/repo/` becomes an organisation's `ops-standard-operating-procedures`: `<DEPT>/SOP-<DEPT>-<ID>-<name>.md`, a draft until the officers tag an approved version.
- Every push renders each SOP to `pdf/<DEPT>/…pdf` in the organisation's four shades. The header carries the badge row: SOP id in the primary, status in the deep, date in the mid, **For** in the shared slate.

Shipped with the template	Says
SOP-OPS-001	how a change travels; the two things called *preview*
SOP-OPS-002	pull requests and Promotes; merge commits only
SOP-GOV-001	the board's reading room and its membership
SOP-IT-001 · 002 · 003	resolver stalls · reading room and helper access · observer dashboards local by default

How a change travels

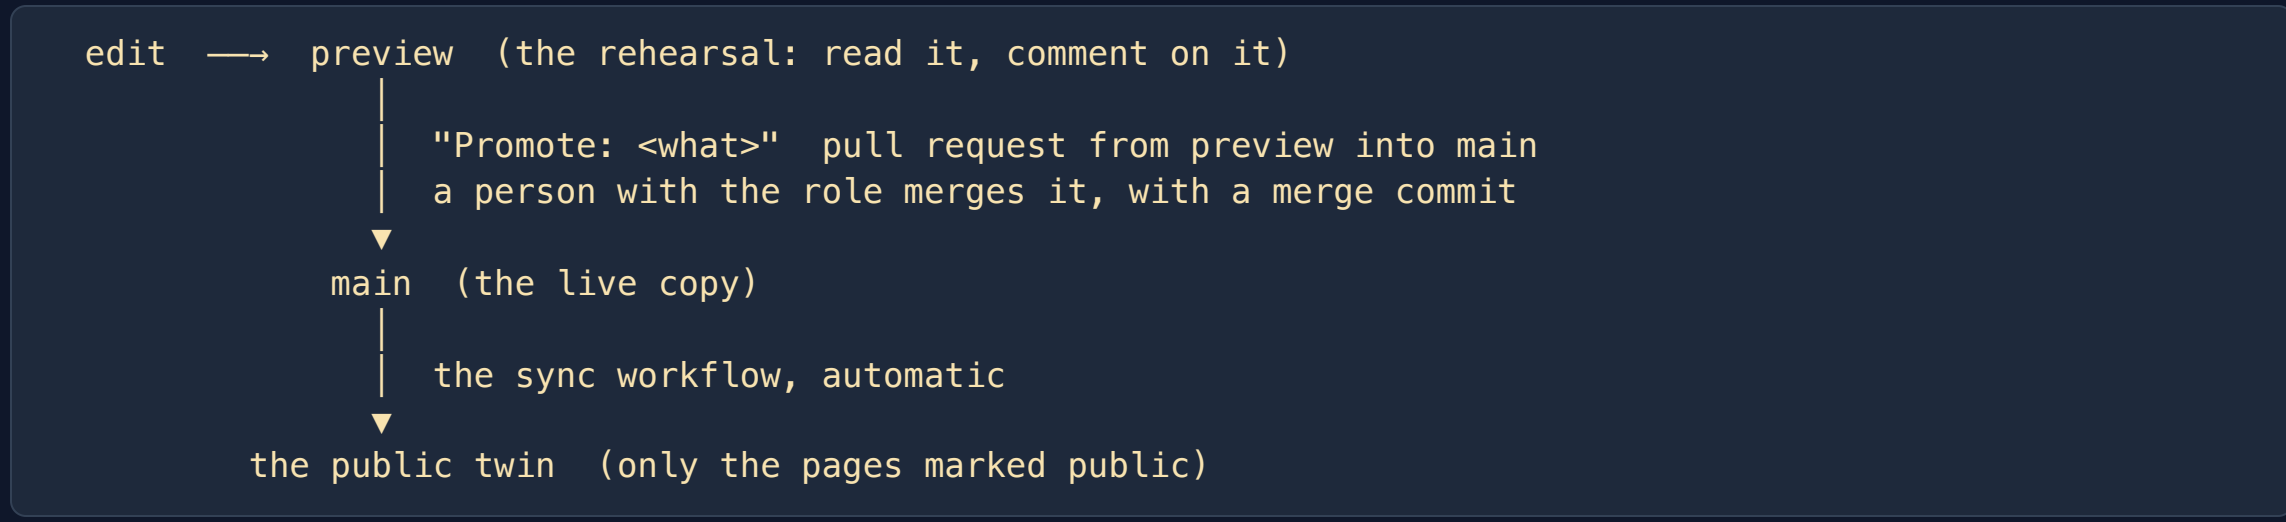

- **Merge commits only.** Squash and rebase are switched off, so every author's footer survives the merge.
- **A helper opens the Promote; a person merges it.** Helpers never merge, never force-push, never rewrite history.
- A site with **lanes** builds a rehearsal website from `preview` and the live one from `main`: the same Promote moves both. SOP-OPS-001 tells them apart.

Where to start

You are…	Open
starting a new repository	Stop 1, then the checklist in the README
joining an organisation, or its helper	`walkthroughs/` and `org-onboarding/`
writing a proposal	`proposals-template/` and `TONES.md`
writing a procedure	`sop-template/`
welcoming someone to an organisation	`decks-template/`: this deck's sibling, in their colour
an AI helper	`AGENTS.md`, then `AGENT-SYNC/README.md`

> Questions go where the work is: an issue on the repository, or a comment on the Promote.