

# Linear regression: Abalone growth and pH example

Damian Rojas

2026-05-15

## Table of contents

|                                                                                  |          |
|----------------------------------------------------------------------------------|----------|
| <b>Set up</b>                                                                    | <b>1</b> |
| <b>Abalone example</b>                                                           | <b>2</b> |
| a. Questions and hypotheses . . . . .                                            | 2        |
| b. Cleaning . . . . .                                                            | 2        |
| c. Exploratory data visualization . . . . .                                      | 2        |
| d. Abalone model . . . . .                                                       | 3        |
| Model fitting . . . . .                                                          | 3        |
| Diagnostics . . . . .                                                            | 4        |
| Model summary . . . . .                                                          | 4        |
| Generating predictions . . . . .                                                 | 5        |
| Why generate model predictions? . . . . .                                        | 6        |
| Visualizing model predictions and data . . . . .                                 | 7        |
| Creating a table with model coefficients, 95% confidence intervals, and more . . | 8        |

## Set up

```
library(tidyverse) # general use
library(janitor) # cleaning data frames
library(here) # file/folder organization
library(readxl) # reading .xlsx files
library(ggeffects) # generating model predictions
library(flextable) # creating tables
```

```
# abalone data from Hamilton et al. 2022
abalone <- read_xlsx(here("data", "Abalone IMTA_growth and pH.xlsx"))
```

## Abalone example

Data from Hamilton et al. 2022. “Integrated multi-trophic aquaculture mitigates the effects of ocean acidification: Seaweeds raise system pH and improve growth of juvenile abalone.”  
<https://doi.org/10.1016/j.aquaculture.2022.738571>

### a. Questions and hypotheses

Question: How does pH predict abalone growth (measured in change in shell surface area per day,  $\text{mm}^2 \text{d}^{-1}$ )?

$H_0$ : pH has no effect abalone shell growth

$H_A$ : pH does have an effect on abalone shell growth


### b. Cleaning

```
# creating a new object for clean data
abalone_clean <- abalone |>
  # cleaning column names to remove spaces
  clean_names() |>
  # selecting specific columns
  select(mean_p_h, change_in_area_mm2_d_1_25) |>
  # rename columns |>
  rename(mean_ph = mean_p_h,
         change_in_area = change_in_area_mm2_d_1_25)
```

Don't forget to look at your data! Use `View(abalone_clean)` in the Console.

### c. Exploratory data visualization

```
# base layer ggplot
ggplot(data = abalone_clean, # data from abalone clean
       aes(x = mean_ph, # x-axis is mean ph
           y = change_in_area)) + #y-axis is change in area
# second layer points to represent observations
geom_point(size = 4, #point size
           stroke = 1,
           fill = "firebrick4", #change color of plot
           shape = 21)
```

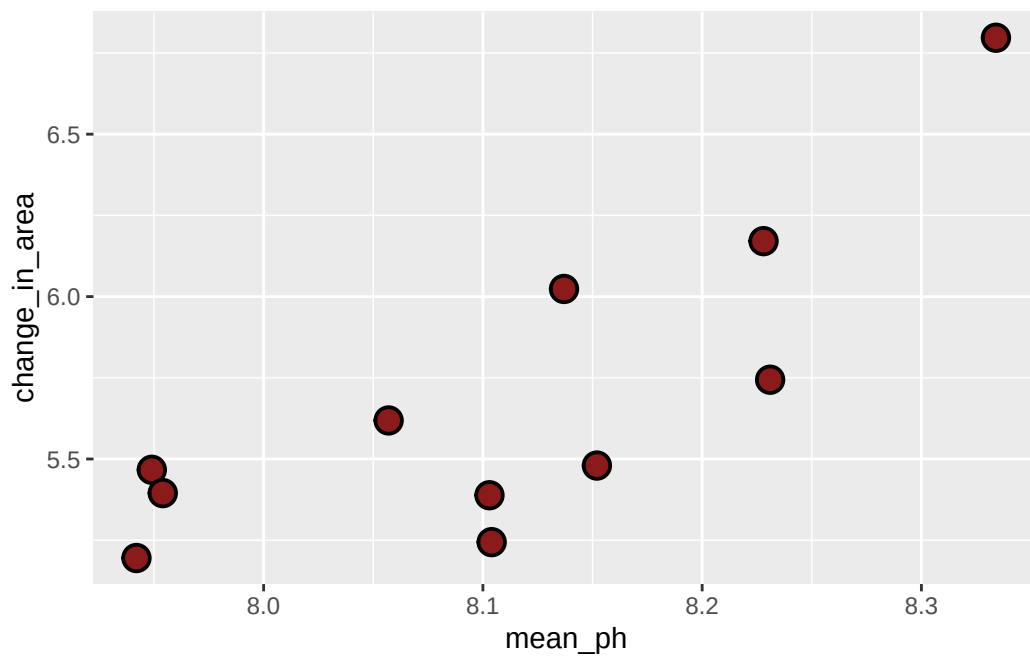

Where does the missing value come from?

The missing value comes from the pair of tanks in which pH sensor malfunctioned

Don't forget to turn your warnings off either in the individual code chunk or in the YAML at the top of the file.


#### d. Abalone model

##### Model fitting

```
abalone_model <- lm(
  change_in_area ~ mean_ph, # formula: change in shell SA/day as a function of PH
  data = abalone_clean      # data fram: cleaned abalone data
)
```

## Diagnostics

```
par(mfrow = c(2, 2)) # displays plots in a 2x2 grid
plot(abalone_model)   # displays diagnostic plots for model
```

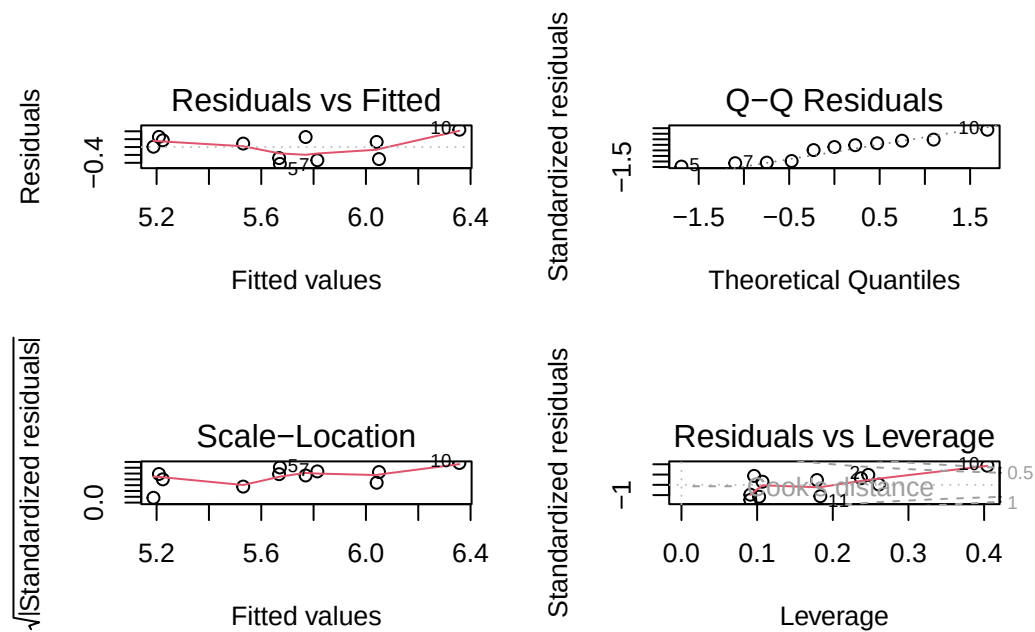

## Model summary

```
# more information about the model
summary(abalone_model)
```

Call:

```
lm(formula = change_in_area ~ mean_ph, data = abalone_clean)
```

Residuals:

| Min      | 1Q       | Median  | 3Q      | Max     |
|----------|----------|---------|---------|---------|
| -0.42714 | -0.29282 | 0.08769 | 0.21258 | 0.43965 |

Coefficients:

|             | Estimate | Std. Error | t value | Pr(> t )   |
|-------------|----------|------------|---------|------------|
| (Intercept) | -18.5010 | 6.1601     | -3.003  | 0.01488 *  |
| mean_ph     | 2.9827   | 0.7596     | 3.926   | 0.00348 ** |

---

Signif. codes: 0 '\*\*\*' 0.001 '\*\*' 0.01 '\*' 0.05 '.' 0.1 ' ' 1

Residual standard error: 0.3063 on 9 degrees of freedom

(1 observation deleted due to missingness)

Multiple R-squared: 0.6314, Adjusted R-squared: 0.5905

F-statistic: 15.42 on 1 and 9 DF, p-value: 0.003477

What is the slope estimate (with standard error?)

$\beta_1$ :  $2.98 \pm 0.76$

What is the intercept estimate (with standard error?)

$\beta_0$ :  $-18.50 \pm 6.16$

## Generating predictions

```
# creating a new object called abalone_preds
abalone_preds <- ggpredict(
  abalone_model,      # model object
  terms = "mean_ph"   # predictor (in quotation marks)
)
```

```
# display the predictions
```

```
abalone_preds
```

```
# Predicted values of change_in_area
```

| mean_ph | Predicted | 95% CI     |
|---------|-----------|------------|
| 7.94    | 5.19      | 4.83, 5.54 |

|      |  |      |  |            |
|------|--|------|--|------------|
| 7.95 |  | 5.21 |  | 4.86, 5.55 |
| 8.06 |  | 5.53 |  | 5.30, 5.76 |
| 8.10 |  | 5.67 |  | 5.46, 5.88 |
| 8.10 |  | 5.67 |  | 5.46, 5.88 |
| 8.14 |  | 5.77 |  | 5.55, 5.98 |
| 8.15 |  | 5.81 |  | 5.59, 6.04 |
| 8.33 |  | 6.36 |  | 5.92, 6.80 |

Look at the column names using `colnames(abalone_preds)` in the Console.

What are the column names?

'x', 'predicted', 'std.error', 'conf.low', 'conf.high'(not going to worry about 'group' right now)

Look at the actual object (by clicking on it in Environment).

Look at the class of the object using `class(abalone_preds)` in the Console.

What is this type of object?

It is a 'ggeffects' output and a regular data frame

View `abalone_preds` like a data frame.

### Why generate model predictions?

This dataset does not include any actual observations of abalone growth at  $\text{pH} = 8$ .

However, the model can tell us a prediction for what abalone growth could be if  $\text{pH} = 8$  based on the existing data.

Figure out what abalone growth the model would predict at  $\text{pH} = 8$ .

```
# finding the model prediction at a specific value
ggpredict(
  abalone_model,      # model object
  terms = "mean_ph[8]" # predictor (in quotation marks) and predictor value in brackets
)
```

# Predicted values of change\_in\_area


| mean_ph |  | Predicted |  | 95% CI     |
|---------|--|-----------|--|------------|
| 8       |  | 5.36      |  | 5.08, 5.64 |

How would you interpret this?

At  $\text{ph} = 8$ , the model predicts change in abalone shell surface area to be 5.36 [95% CI: 5.08, 5.65]  $\text{mm}^2 \text{d}^{-1}$ .

### Visualizing model predictions and data

```
# base layer: ggplot
# using clean data frame
ggplot(data = abalone_clean,
       aes(x = mean_ph,
           y = change_in_area)) +
# first layer: points representing abalones
geom_point(size = 4,
           stroke = 1,
           fill = "firebrick4",
           shape = 21) +
# second layer: ribbon representing confidence interval
# using predictions data frame
geom_ribbon(data = abalone_preds,
          aes(x = x,
              y = predicted,
              ymin = conf.low,
              ymax = conf.high),
          alpha = 0.1) +
# third layer: line representing model predictions
# using predictions data frame
geom_line(data = abalone_preds,
         aes(x = x,
             y = predicted)) +
# axis labels
labs(x = "Mean pH",
     y = expression("Change in shell area ("*mm^{2}*d^{-1}*")")) +
# theme
theme_minimal()
```

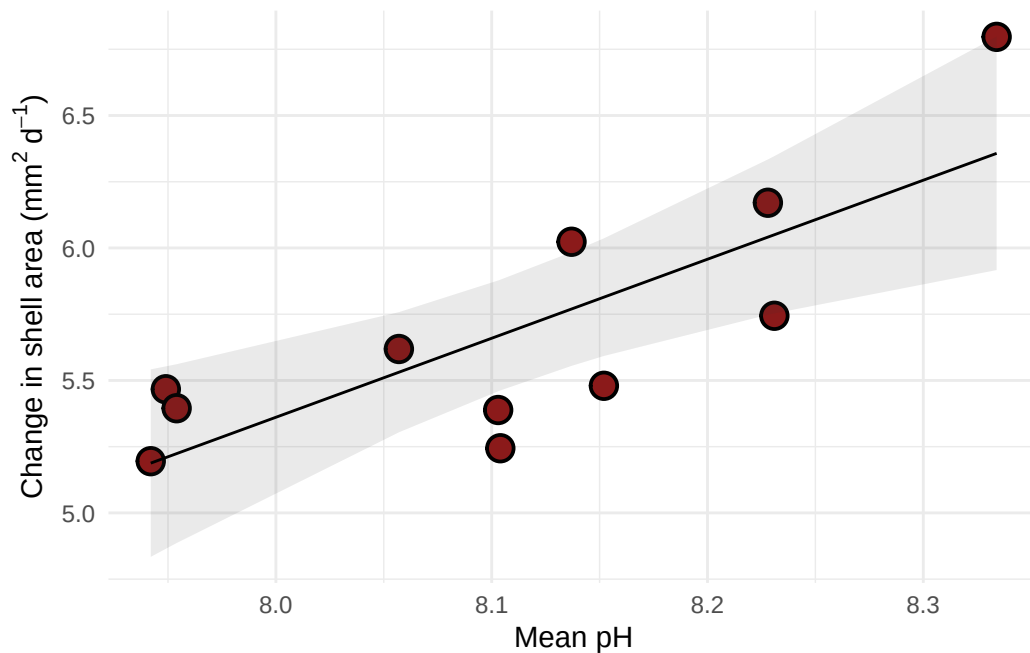

**Creating a table with model coefficients, 95% confidence intervals, and more**

**Note:** this function is from `flextable`.

```
as_flextable(abalone_model)
```

|             | Estimate | Standard Error | t value | Pr(> t )  |
|-------------|----------|----------------|---------|-----------|
| (Intercept) | -18.501  | 6.160          | -3.003  | 0.0149 *  |
| mean_ph     | 2.983    | 0.760          | 3.926   | 0.0035 ** |

*Signif. codes: 0 '\*\*\*' < 0.001 < '\*\*' < 0.01 < '\*' < 0.05*

Residual standard error: 0.3063 on 9 degrees of freedom

Multiple R-squared: 0.6314, Adjusted R-squared: 0.5905

F-statistic: 15.42 on 9 and 1 DF, p-value: 0.0035

**END OF ABALONE EXAMPLE**