



Generación de token:

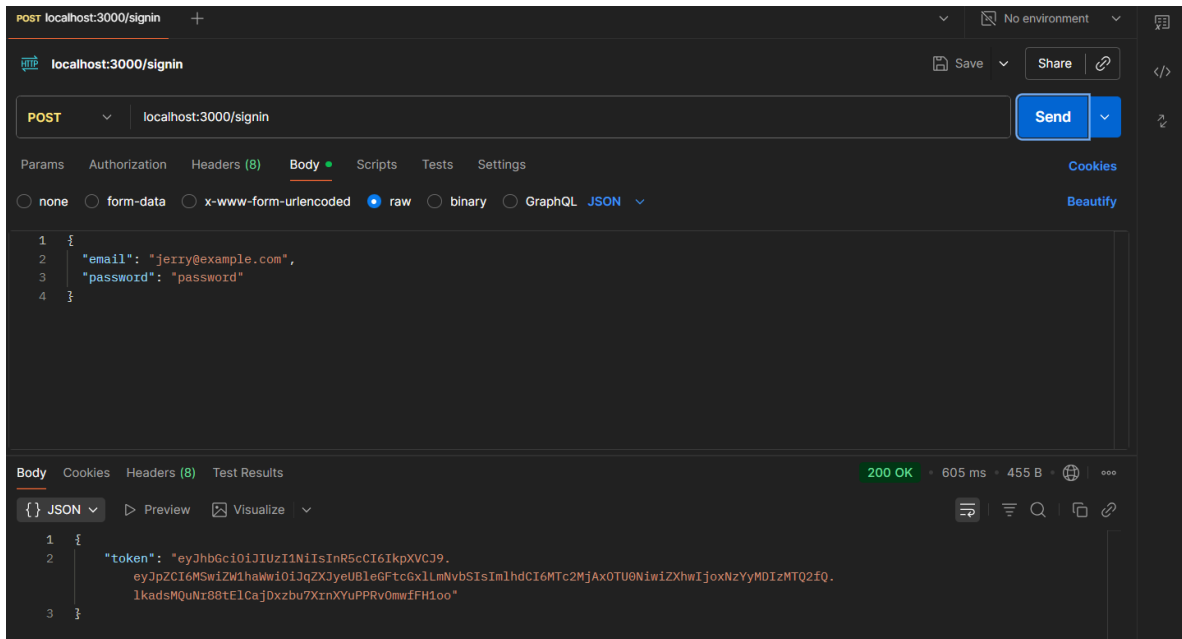

Capturas de pantalla de endpoints:

Sin token:

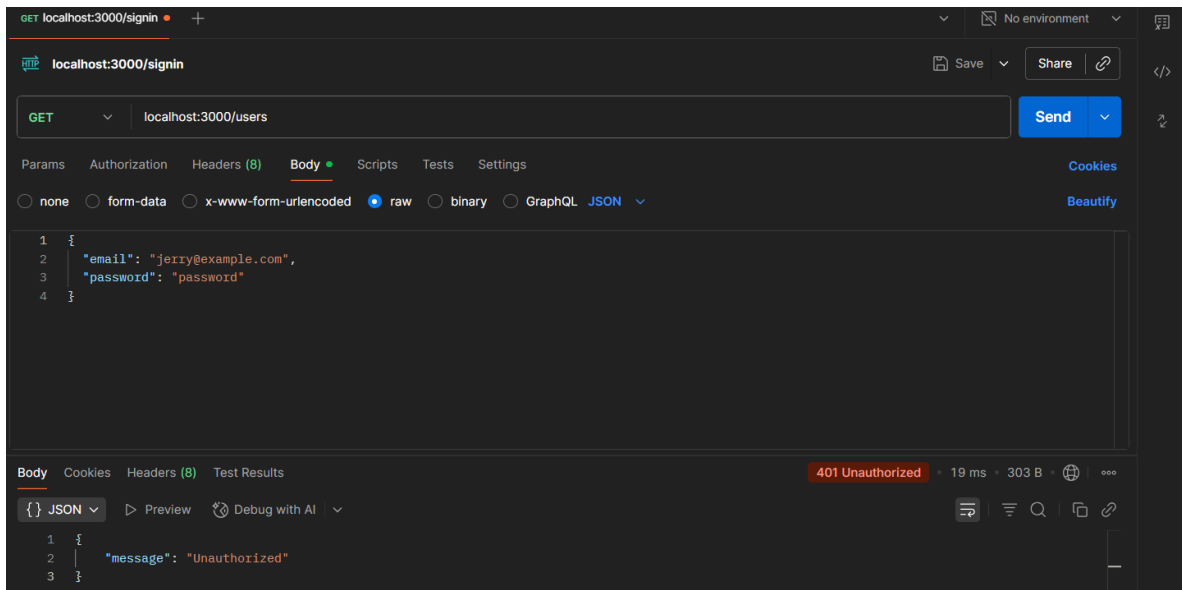

Con token:

The screenshot shows the Postman interface for a GET request to `localhost:3000/users`. The request is configured with a Bearer Token authorization. The response is a 200 OK status with a response time of 634 ms and a body size of 7.45 KB. The response body is a JSON array of two user objects.

Request:

- Method: GET
- URL: `localhost:3000/users`
- Authorization: Bearer Token

Response:

```
200 OK • 634 ms • 7.45 KB
```

```
{
  "id": 17,
  "name": "antonio",
  "email": "antonio@gmail.com",
  "password": "$2b$10$obF9fhon7VI8JinSpc8Md0c2ye0mkEUrNfXlw0gZ.pBZGIKUBQ6ly"
},
{
  "id": 18,
  "name": "Gerardoo Cornejo",
  "email": "00043524@uca.edu.sv",
  "password": "$2b$10$obF9fhon7VI8JinSpc8Md0c2ye0mkEUrNfXlw0gZ.pBZGIKUBQ6ly"
}
```

The screenshot shows the Postman interface for a GET request to `localhost:3000/users/120`. The request is configured with a Bearer Token authorization. The response is a 200 OK status with a response time of 83 ms and a body size of 394 B. The response body is a JSON object representing a single user.

Request:

- Method: GET
- URL: `localhost:3000/users/120`
- Authorization: Bearer Token

Response:

```
200 OK • 83 ms • 394 B
```

```
{
  "id": 120,
  "name": "Diego",
  "email": "dais@gmail.com",
  "password": "$2b$10$QPwTNyg1hWYJLseBh4U06uW3Bauk70IE0EndD6C1p5KbdTwGxxS.W"
}
```

