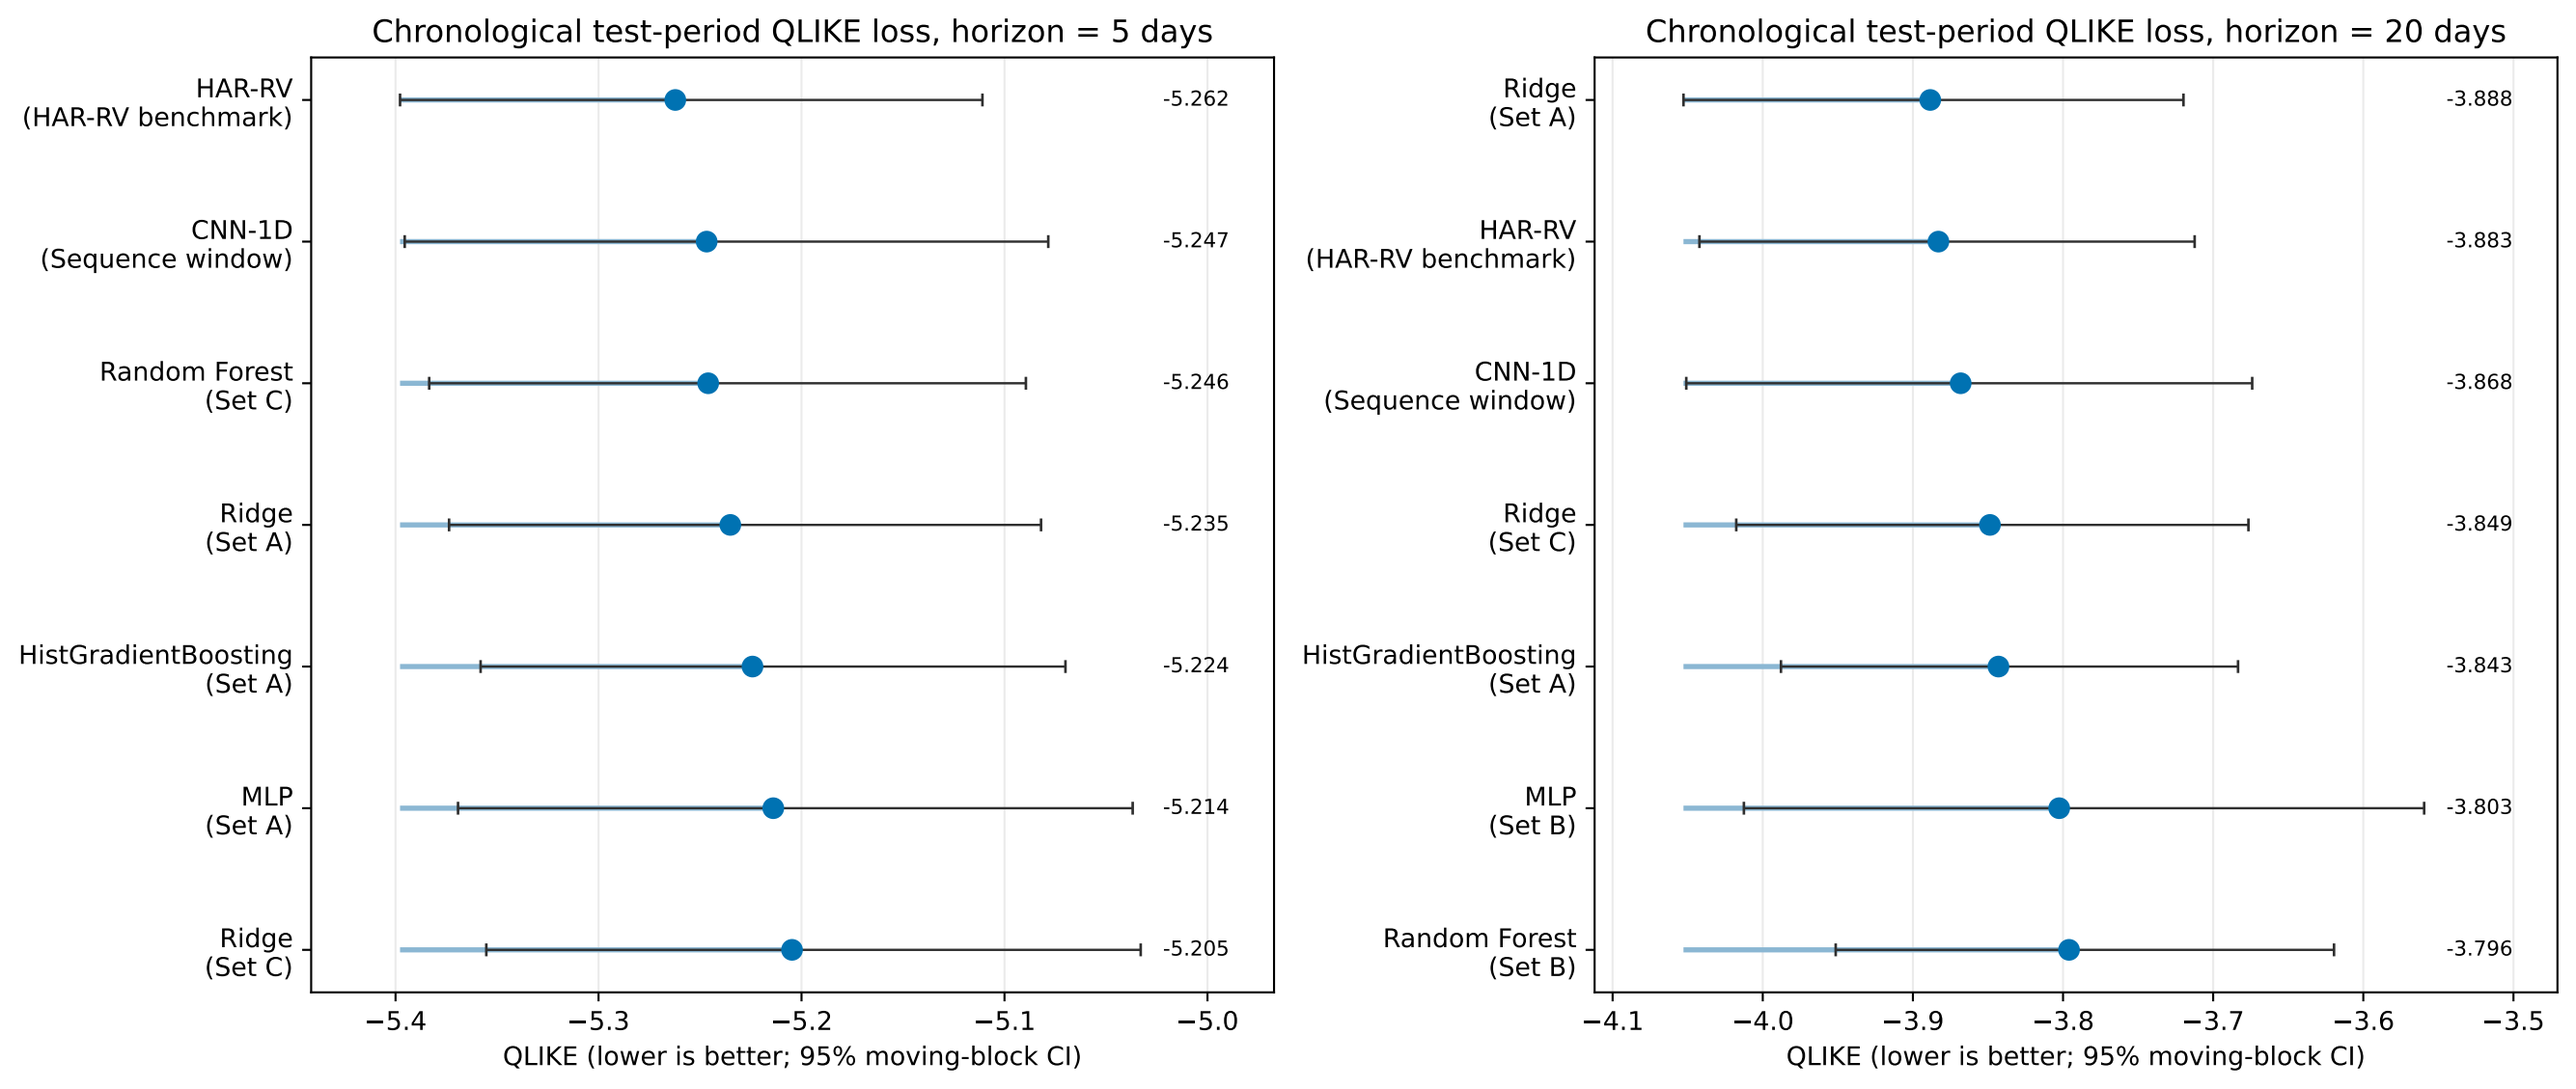
Chronological test-period QLIKE loss, horizon = 5 days
HAR-RV
(HAR-RV benchmark)
CNN-1D
(Sequence window)
Random Forest
(Set C)
Ridge
(Set A)
HistGradientBoosting
(Set A)
MLP
(Set A)
Ridge
(Set C)
-5.262
-5.247
-5.246
-5.235
-5.224
-5.214
-5.205
−5.4
−5.3
−5.2
−5.1
−5.0
QLIKE (lower is better; 95% moving-block CI)
Chronological test-period QLIKE loss, horizon = 20 days
Ridge
(Set A)
HAR-RV
(HAR-RV benchmark)
CNN-1D
(Sequence window)
Ridge
(Set C)
HistGradientBoosting
(Set A)
MLP
(Set B)
Random Forest
(Set B)
-3.888
-3.883
-3.868
-3.849
-3.843
-3.803
-3.796
−4.1
−4.0
−3.9
−3.8
−3.7
−3.6
−3.5
QLIKE (lower is better; 95% moving-block CI)