

# Hyperscaler Dependency Map

SLIBRARY 09 · SHEET 4 / 5

Concentration and lock-in risk

## PROFESSIONAL DEFINITION

The Hyperscaler Dependency Map visualises an organisation's reliance on a small number of cloud and model providers, exposing concentration and vendor lock-in risk.

## WHO DEVELOPED IT

A risk-management construct from cloud-strategy and concentration-risk practice, echoed by regulators concerned with cloud concentration.

## WHY IT WAS DEVELOPED

It was developed to surface the strategic risk of depending on one or two hyperscalers for compute, models and data.

FIGURE 1 · HYPERSCALER DEPENDENCY MAP

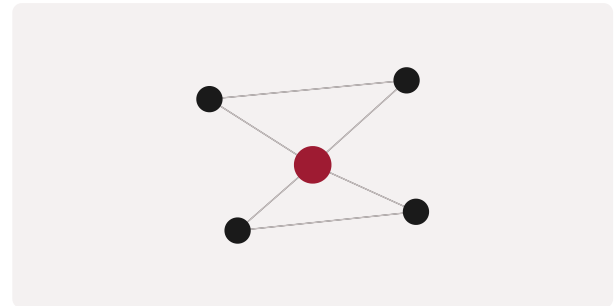


Figure 1. A schematic of the Hyperscaler Dependency Map as applied in BARBM312 (illustrative).

## HOW IT IS USED

Dependencies are mapped as a network; single points of failure and lock-in are identified and mitigation (multi-cloud, portability) considered.

## WHEN IT IS USED

During cloud and AI sourcing strategy and resilience planning.

## BY WHOM IT IS USED

CTOs, risk officers and procurement.

## INNOVATION RELATIVE TO THE PREDECESSOR TOOL

It makes provider concentration explicit and actionable, balancing the convenience of hyperscalers against strategic dependency.

## RELATED FRAMEWORKS IN THIS COURSE

AI Value Stack · Slibrary 9

Compute Cost Pyramid · Slibrary 9

Token Economics · Slibrary 9

Capex vs. Opex Shift · Slibrary 9

## SOURCES (HARVARD REFERENCING STYLE)

Bank of England (2022) 'Financial Stability in Focus: Cloud services'.

Armbrust, M. et al. (2010) 'A view of cloud computing', Communications of the ACM, 53(4).