

Licensing Models Map

SLIBRARY 16 · SHEET 2 / 5

Open · permissive · restrictive · proprietary

PROFESSIONAL DEFINITION

The Licensing Models Map arranges software and data licences from fully open and permissive through to restrictive and proprietary, clarifying the rights and obligations each entails.

WHO DEVELOPED IT

A construct from open-source and IP-licensing practice, reflecting licence taxonomies maintained by the Open Source Initiative.

WHY IT WAS DEVELOPED

It was developed to help firms choose and comply with licences, since obligations differ sharply across the spectrum.

FIGURE 1 · LICENSING MODELS MAP

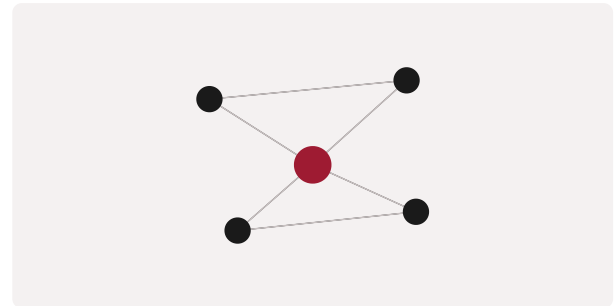


Figure 1. A schematic of the Licensing Models Map as applied in BARBM312 (illustrative).

HOW IT IS USED

Components and outputs are mapped to their licences; obligations (e.g. copyleft) are identified and managed before distribution.

WHEN IT IS USED

When using or distributing AI models, code and data.

BY WHOM IT IS USED

Legal, engineering and compliance teams.

INNOVATION RELATIVE TO THE PREDECESSOR TOOL

It makes the consequences of licence choice explicit, particularly important where AI code may inherit obligations from training data.

RELATED FRAMEWORKS IN THIS COURSE

IP Protection Portfolio · Slibrary 16

Freedom-to-Operate Check · Slibrary 16

Open-Source Compliance Ladder · Slibrary 16

AI Output Ownership Flow · Slibrary 16

SOURCES (HARVARD REFERENCING STYLE)

Open Source Initiative (2024) 'Licenses & Standards'.

Rosen, L. (2004) Open Source Licensing. Upper Saddle River: Prentice Hall.