

# CSSE 220

Objects

```
Import SuperSimpleObjects from repo  
Import TeamGradebook from repo
```

# Plan for today

- Talk about object references and box and pointer diagrams
- Talk about static methods
- Continue working on writing your own classes
- Get started on TeamGradebook
- Date changes HW:
  - TeamGradebook – due Saturday
  - Design Problems – due Friday at start of class, I'll provide handout in class Wednesday

# TeamGradebook

- 1st: Read through all the instructions on Moodle
- Just a quick demo of this command interpreter
  - Add a couple of students
  - then a team of the two
  - then add grade for team
  - then get average for 1 of the students
- There are JUnit tests – take a look at them
- Command interpreter code written for you
- Features:
  - Handle absences first
  - Get average will probably require the most thought
- Use toString to output state of all objects

# Finishing up from last time...


- Complete the StudentAssignments problem in the SuperSimpleObject project (or the one from last class)
- I need to say a word about StudentAssignments

Differences between primitive types and object types in Java

# **OBJECT REFERENCES**

# What Do Variables Really Store?

- Variables of **primitive type** store *values*
- Variables of **class type** store *references*


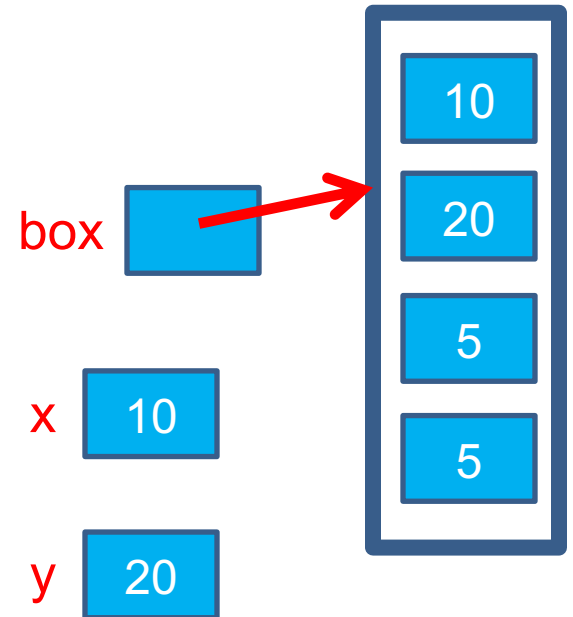


```
1. int x = 10;  
2. int y = 20;  
3. Rectangle box = new Rectangle(x, y, 5, 5);
```

# Assignment Copies Values

- **Actual** value for number types
- **Reference** value for object types
  - The actual **object is not copied**
  - The **reference value** (“the pointer”) **is copied**
- Consider:

```
1. int x = 10;  
2. int y = x;  
3. y = 20;
```

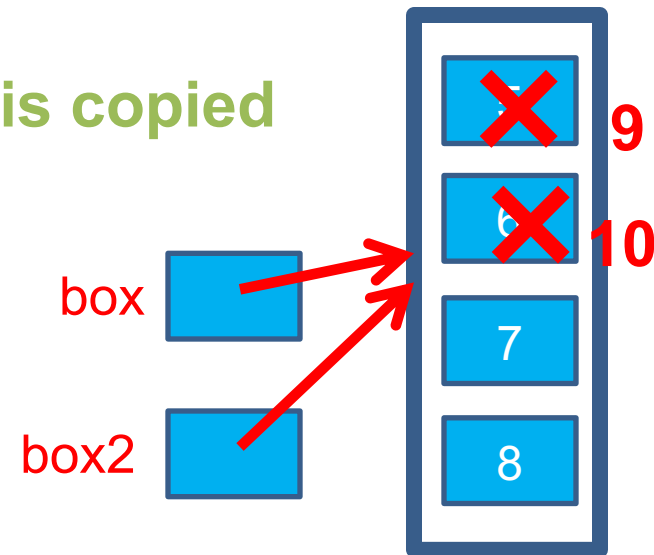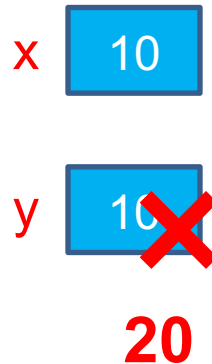

```
4. Rectangle box = new Rectangle(5, 6, 7, 8);  
5. Rectangle box2 = box;  
6. box2.translate(4, 4);
```

# Equality testing of objects

- `==` tests if the references of two objects are equal
- Using “`.equals`” method (usually) tests to see if the contents (internal data fields) are equal
- `==` with objects is most often used to determine if the object variable stores *null*



# Reference vs Value Equality

## What gets printed?

```
String t1 = "hello";  
String t2 = "hello";  
System.out.println(t1 == t2);  
System.out.println(t1.equals(t2));
```

Prints **true**

May print **true** or **false**


## What gets printed here?

```
ArrayList<Integer> l1 = new ArrayList<Integer>();  
l1.add(1);  
l1.add(2);  
ArrayList<Integer> l2 = new ArrayList<Integer>();  
l2.add(1);  
l2.add(2);  
System.out.println(l1 == l2);  
System.out.println(l1.equals(l2));
```

Prints **false**

Prints **true**

**== operator compares references of two objects**

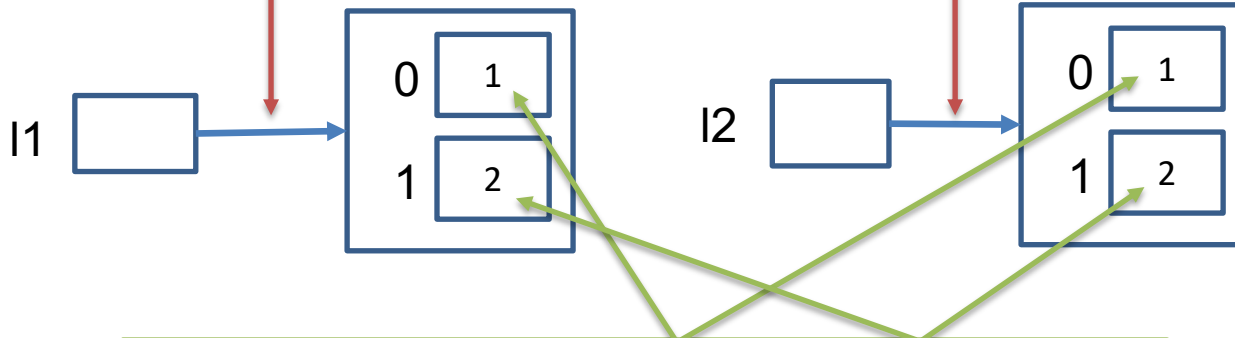

**equals(), in general, compares values of two objects**

# Strings

- Strings are immutable – for the following, why does immutable matter
- So Java will sometimes make 2 string variables, e.g., s1 and s2, store the same reference if the string they reference is character for character identical

## Example:

```
String s1 = "CSSE220";  
String s2 = "CSSE220";  
// s1 and s2 are for sure ".equals" equal  
// s1 and s2 might also be == equal
```

# Boxes and lines exercise

- Do questions #1 - #11
- Reference the box and pointer handout

Understanding static

**STATIC**

# Why fields can't always be static

Client program – of Student Class

```
public class Student {  
    private String name;  
    private char grade;  
  
    public Student(  
        String name,  
        char grade){  
        this.name = name;  
        this.grade = grade;  
    }  
  
    @Override  
    public String toString(){  
        return name +  
            " has a grade of "  
            + grade;  
    }  
}
```

```
public static void main(String[] args) {  
    Student a = new Student("Adam", 'A');  
    Student b = new Student("Bryan", 'B');  
    Student c = new Student("Chris", 'C');  
    System.out.println(a);  
    System.out.println(b);  
    System.out.println(c);  
}
```

OUTPUT – from Client program:

Adam has a grade of A  
Bryan has a grade of B  
Chris has a grade of C

# Why fields can't always be static

Client program – of Student Class

```
public class Student {  
    private String name;  
    private static char grade;  
  
    public Student(  
        String name,  
        char grade){  
        this.name = name;  
        Student.grade = grade;  
    }  
  
    @Override  
    public String toString(){  
        return name +  
            " has a grade of "  
            + grade;  
    }  
}
```

```
public static void main(String[] args) {  
    Student a = new Student("Adam", 'A');  
    Student b = new Student("Bryan", 'B');  
    Student c = new Student("Chris", 'C');  
    System.out.println(a);  
    System.out.println(b);  
    System.out.println(c);  
}
```

OUTPUT – from Client program:

Adam has a grade of C  
Bryan has a grade of C  
Chris has a grade of C

Static means there's only one instance of a field/method for every instance of a class that's created. So when you change a grade, they all change.

# When do we declare a method to be static?

- Utility Methods
  - Things like abs, sqrt, etc.
  - Don't need an instance of a class to run them
- How do I know?
  - No references to non-static fields/methods
  - No "this" keyword used in method

# When do we make fields static?

- Never
  - Seriously, this is disallowed for all the code you submit in CSSE220 (exception: CONSTANTS)
  - It makes your designs worse
- If it wasn't disallowed, when would you use it?
  - Very rarely for memory efficiency, state that can't be duplicated, or really meta code
  - BUT even professional programmers misuse static and cause themselves major problems
  - You will talk about some positive uses in CSSE374



```
public class Car {  
  
    private double mileage;  
  
    //other stuff  
  
    public double getMilesTravelled() {  
        return this.mileage;  
    }  
  
    public static double convertMilesToKm(double numberOfMiles) {  
        return numberOfMiles * 1.609344f;  
    }  
  
}
```

//Elsewhere in a client program of Car class

```
//requires you to have a car object  
Car myCar = new Car();  
// getMilesTravelled requires you to have a car object  
System.out.println(myCar.getMilesTravelled());//output depends on code  
//convertMilesToKm can be called on the class Car itself  
System.out.println(Car.convertMilesToKm(77));//output is 123.919488
```

```

public class Bicycle {

    private int speed;
    private static int numCreated = 0;

    public Bicycle(int speed) {
        this.speed = speed;
        Bicycle.numCreated++;
    }
    public int getSpeed() {
        return this.speed;
    }
    public static int getNumCreated() {
        return Bicycle.numCreated;
    }
}

```

```

// Client does not need Bicycle object for calling getNumCreated
System.out.println(Bicycle.getNumCreated());
Bicycle myBike1 = new Bicycle(18);
Bicycle myBike2 = new Bicycle(1);
System.out.println(Bicycle.getNumCreated() + " " + myBike1.getSpeed());

```

0

2 18

Q12 - Q16

# Exercise

- Start working on the TeamGradeBook homework. Try to finish the code for both add-student, add-absence and get-absences today
- If you are confused about what to do, get help!