
Docker



DRIM

Architecture


Architecture

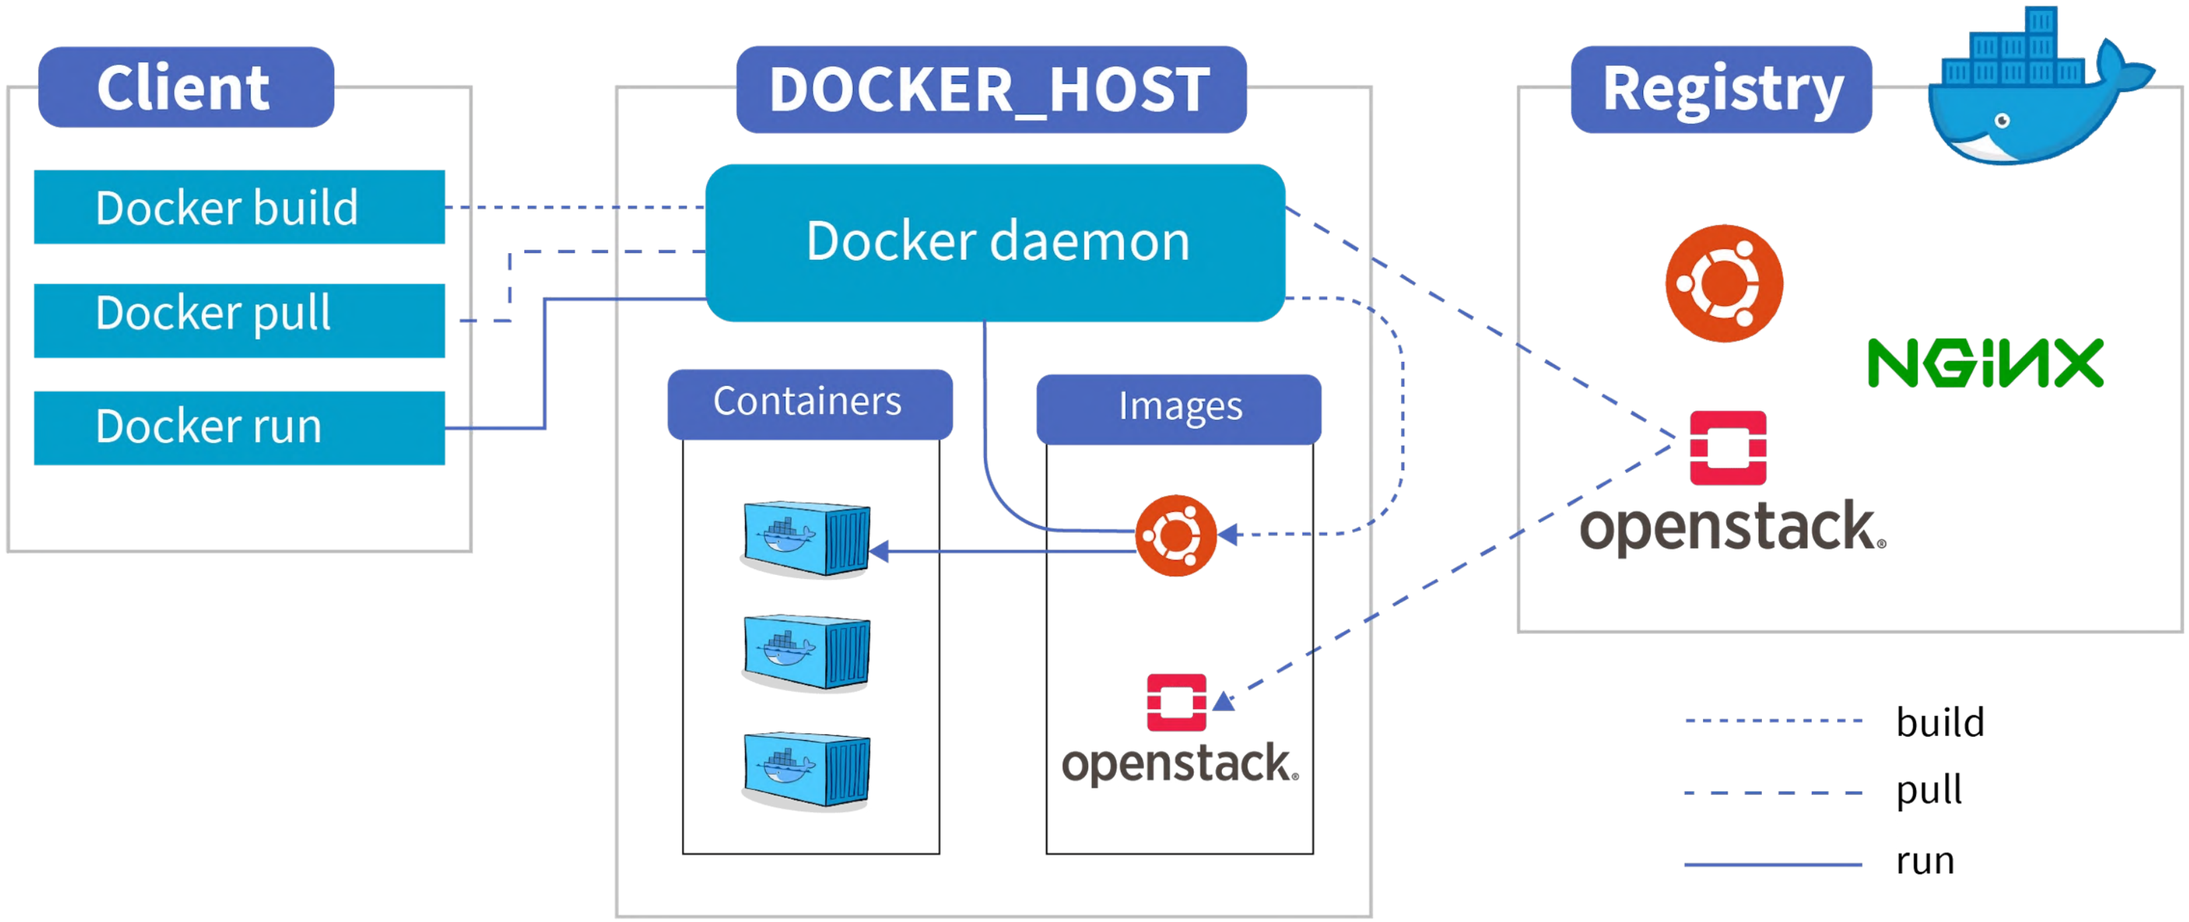

DRIM

Image Commands

build

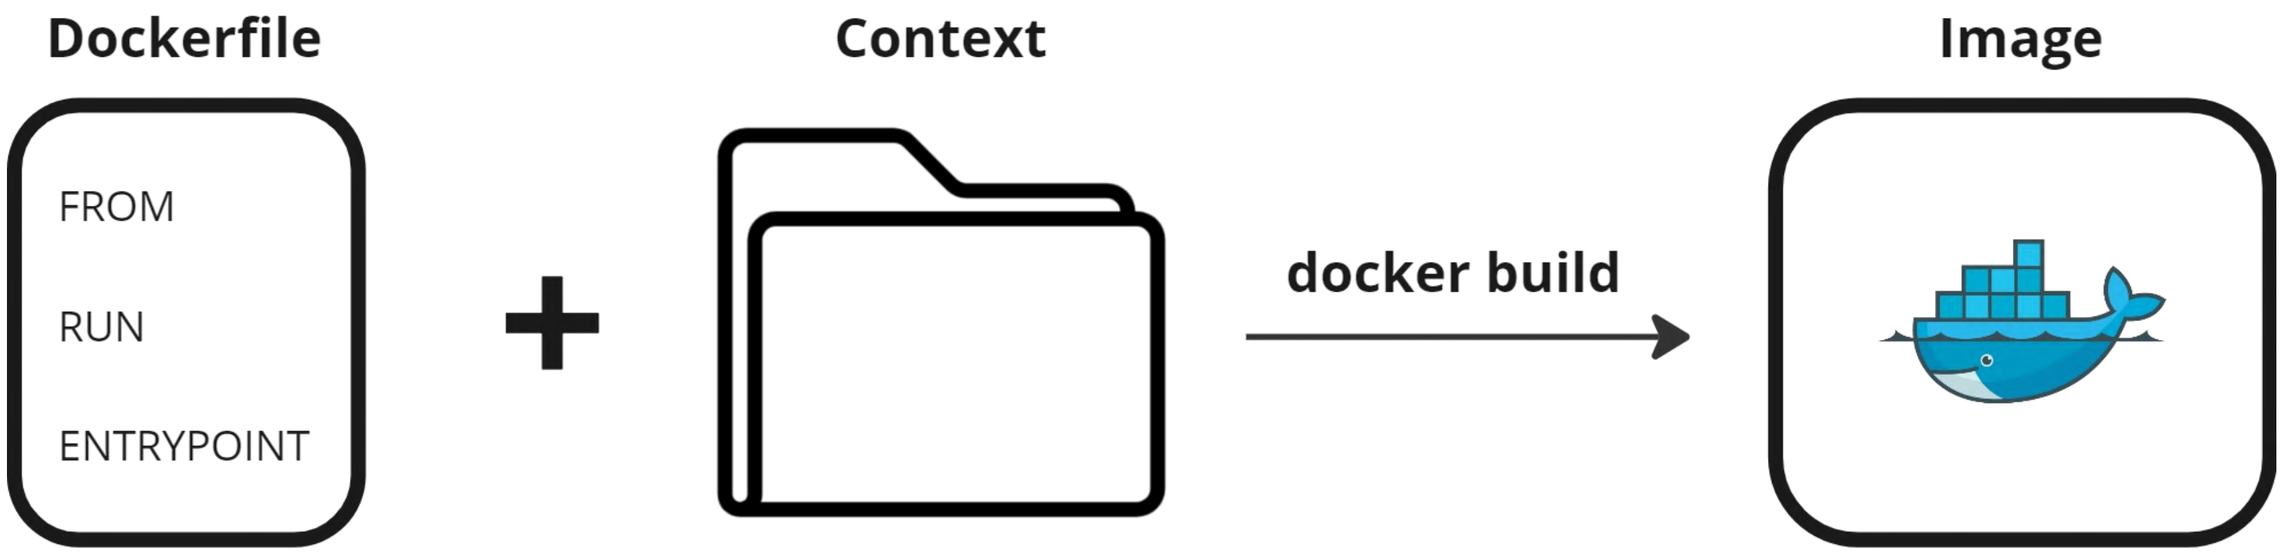
Dockerfile
FROM
RUN
ENTRYPOINT
Context
docker build
Image


build

The command builds Docker images from a Dockerfile and a “context”

```
docker build -t IMAGE[:TAG] -f PATH_TO_DOCKERFILE
PATH_TO_CONTEXT_FOLDER
```

```
docker build -t webapi -f Dockerfile .
```

tag

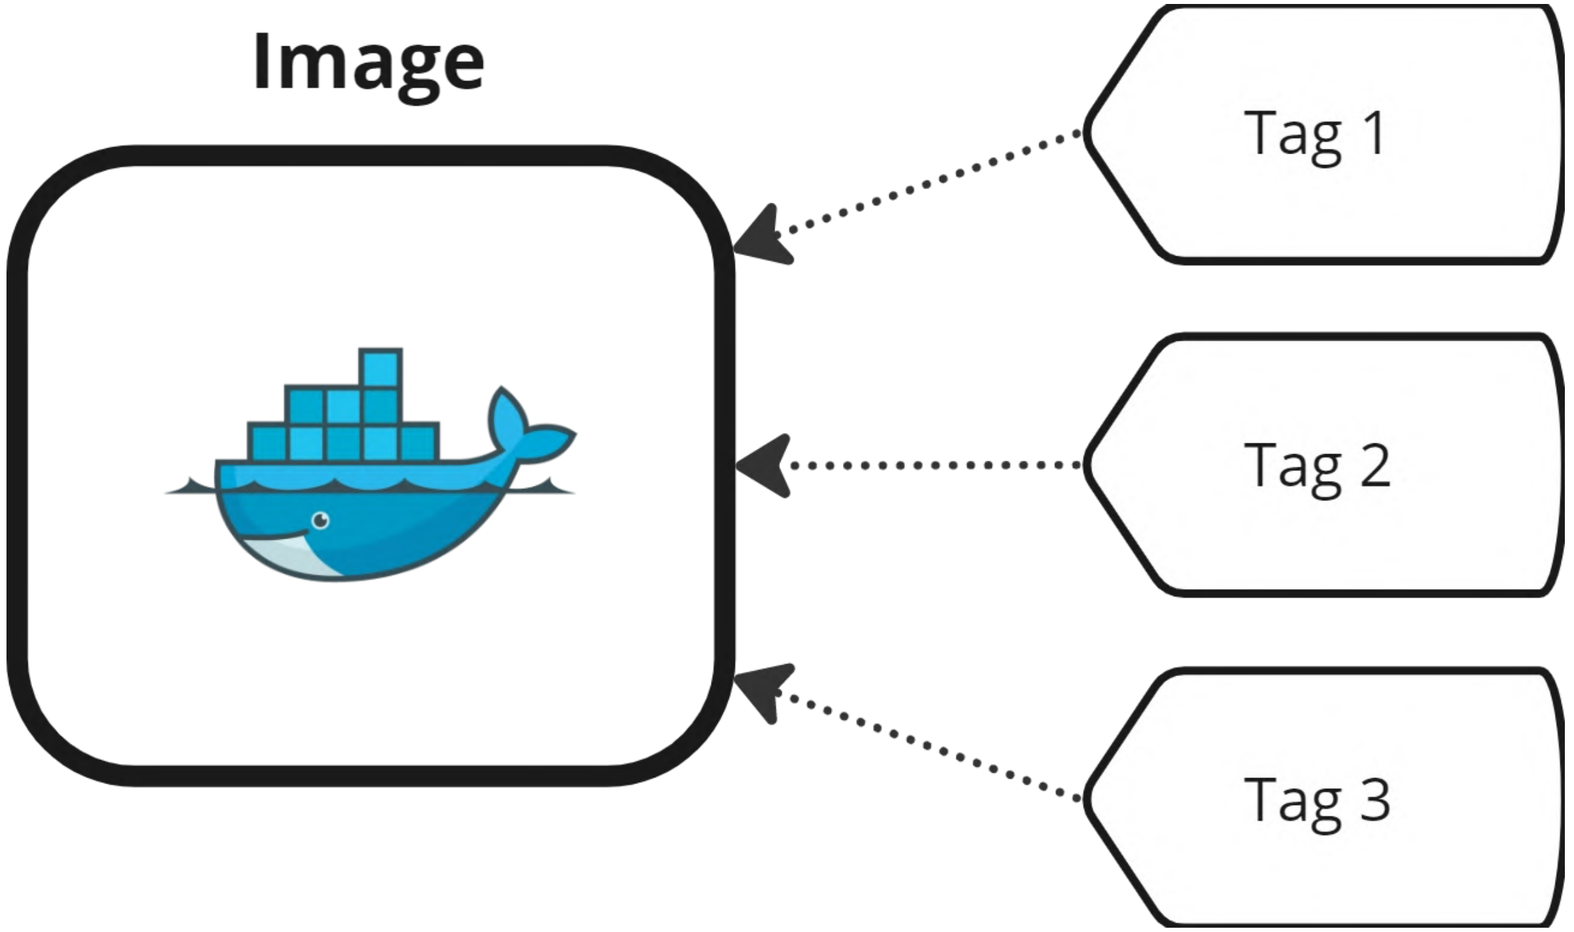

tag

docker.io/drimdev/webapi:v1

registry repository tag


tag

The command creates a tag that refers to some image

```
docker tag SOURCE_IMAGE[:TAG] TARGET_IMAGE[:TAG]
```

```
docker tag webapi docker.io/drimdev/webapi:v1
```

push & pull

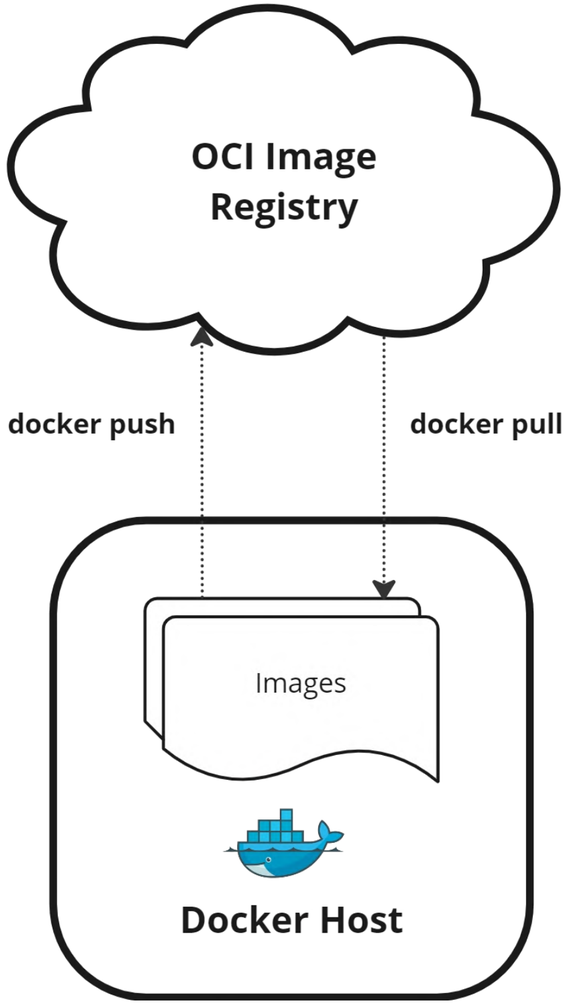
OCI Image
Registry
docker push
docker pull
Images
Docker Host

login

The command logs in to a registry

```
docker login [SERVER]
```

```
docker login quay.io
```

push

The command uploads an image to a registry

```
docker push IMAGE[:TAG|@DIGEST]
```

```
docker push docker.io/drimdev/webapi:v1
```

```
docker push docker.io/drimdev/webapi@sha256:
438525a9d1205b839c5743063dc44c03bfa42d4fe83b84f7f500a39b712f4b78
```

pull

The command downloads an image from a registry

```
docker pull IMAGE[:TAG|@DIGEST]
```

```
docker pull docker.io/drimdev/webapi:v1
```

```
docker pull docker.io/drimdev/webapi@sha256:
438525a9d1205b839c5743063dc44c03bfa42d4fe83b84f7f500a39b712f4b78
```

Misc

The command downloads an image from a registry


`docker images` - list all images on the server

`docker rmi IMAGE[:TAG|@DIGEST]` – remove image from the server

DRIM

Container Commands

Container Lifecycle

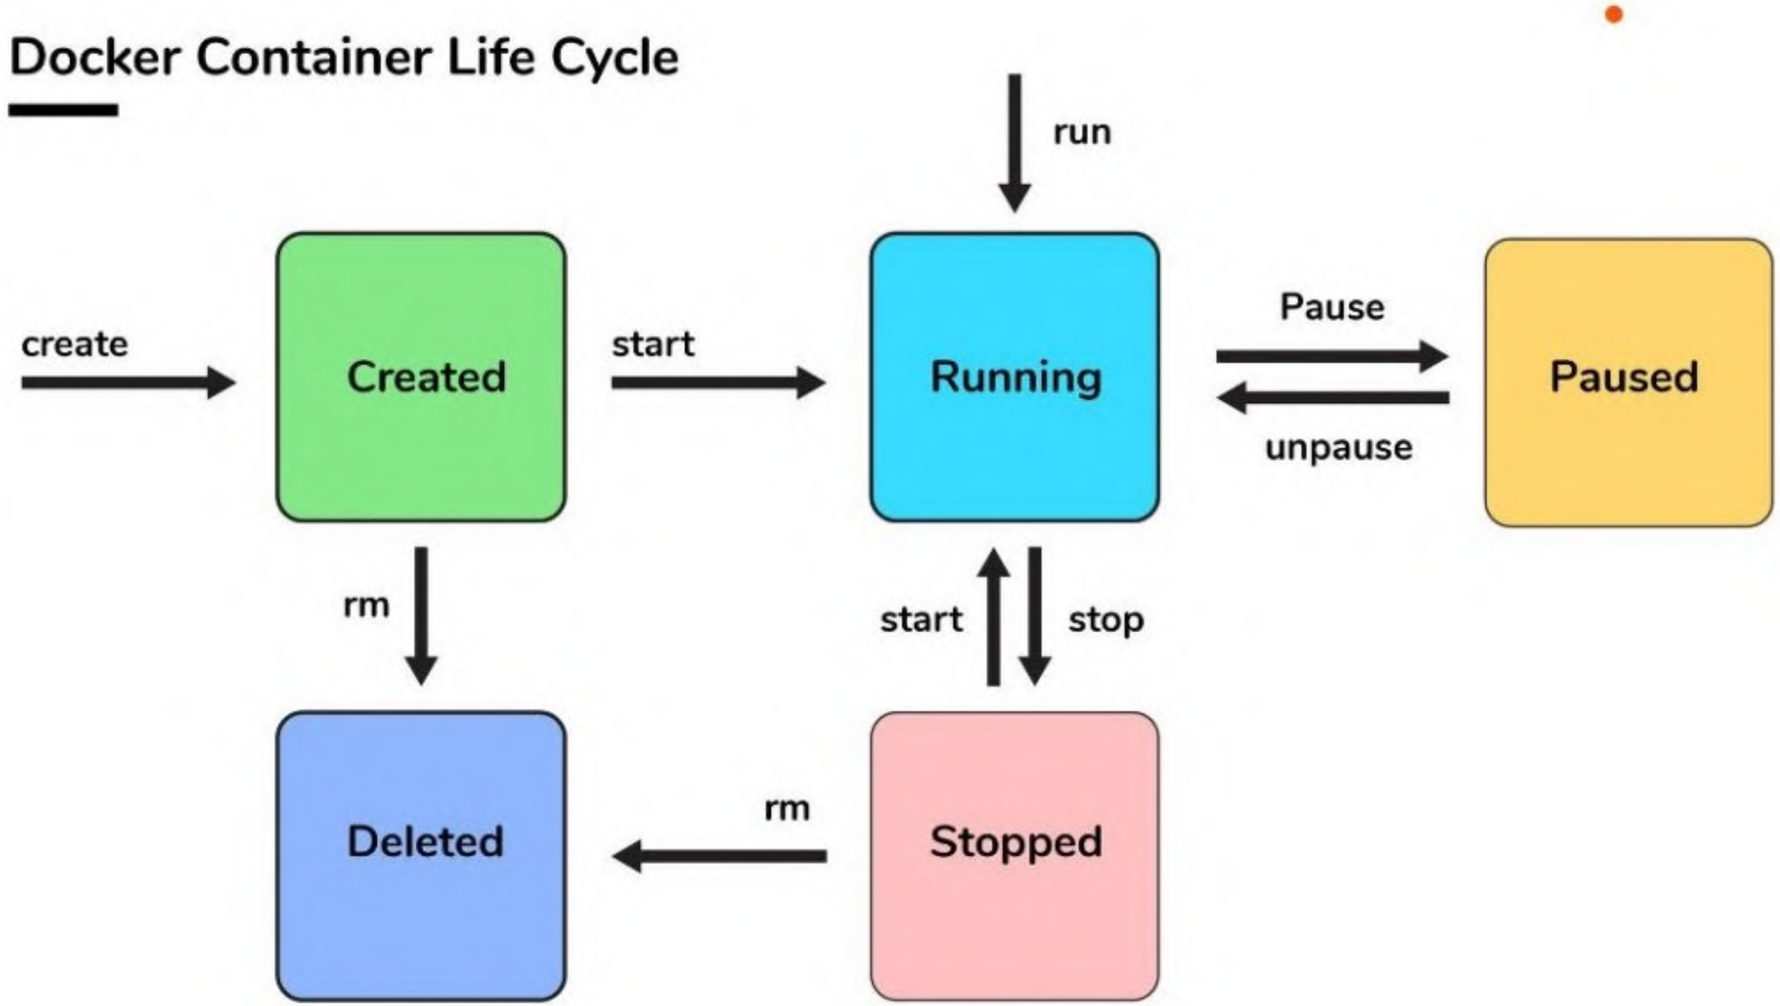

create

The command creates a new container

```
docker create --name CONTAINER IMAGE
```

```
docker create --name webapi docker.io/drimdev/webapi:v1
```

start

The command starts a created container

```
docker start CONTAINER
```

```
docker start webapi
```

run

The command creates and starts a container

```
docker run --name CONTAINER IMAGE
```

```
docker run --name webapi docker.io/drimdev/webapi:v1
```

run

```
docker run --name webapi -i -t -d -p 10000:80 --rm
docker.io/drimdev/webapi:v1
```

-i – keep STDIN open even if not attached

-t – allocate a pseudo-tty

-d – detach STDIN

--rm – remove container after stopping

-p HOST_PORT:CONTAINER_PORT – map a host port to a container port

stop

The command stops a running container

```
docker stop CONTAINER
```

```
docker stop webapi
```

rm

The command removes a container

```
docker rm CONTAINER
```

```
docker rm webapi
```

ps

The command list containers

```
docker ps
```

```
docker ps -a
```

logs

The command fetches the logs of a container

```
docker logs CONTAINER
```

```
docker logs webapi
```

exec

The command executes a command in a running container

```
docker exec CONTAINER COMMAND
```

```
docker exec -it webapi bash
```

DRIM

Thank you! Questions?

