

OVERRIDES SO WEIT DAS AUGE REICHT



Created by Viviana Menzel / [@drmenzelit](https://twitter.com/drmenzelit)

ÜBER MICH

- 1999 - Websites erstellen mit Dreamweaver
- 2002 - Promotion in Biologie (JLU - Gießen)
- 2006 - Joomla! entdeckt
- 2008 - Selbständigkeit – Dr. Menzel IT
- 2014 - J and Beyond, Königstein
- 2015 - j!over


WAS SIND OVERRIDES?

- Joomla arbeitet mit sogenannten "Views"
- Overrides sind Kopien der Views im eigenen Template

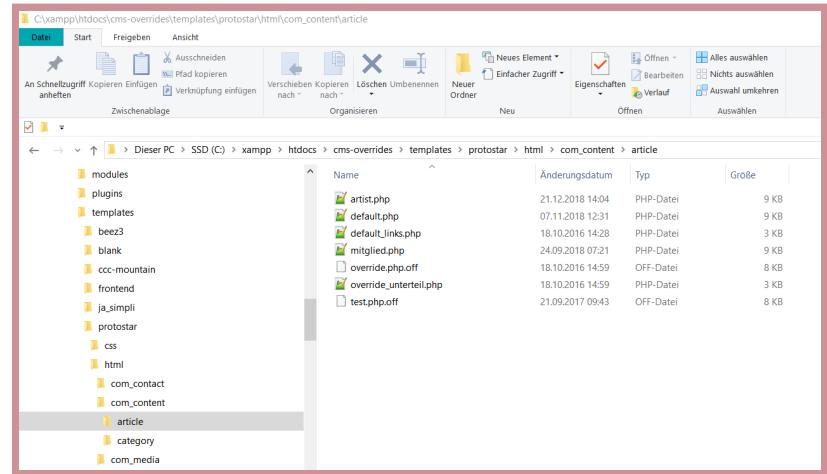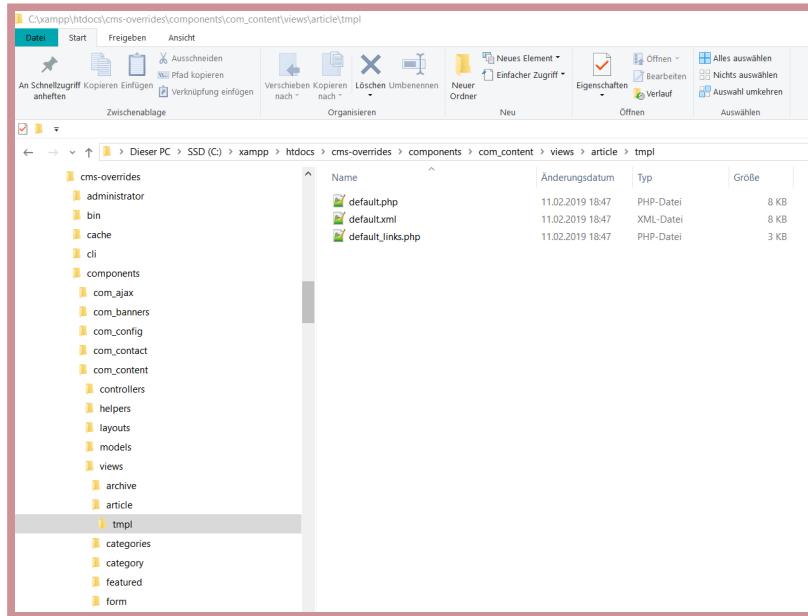

OVERRIDES ANLEGEN

- Übers Backend: Templates -> Templates -> Template Files -> Override anlegen
- View kopieren:
meintemplate/html/com_content/articles/default.php

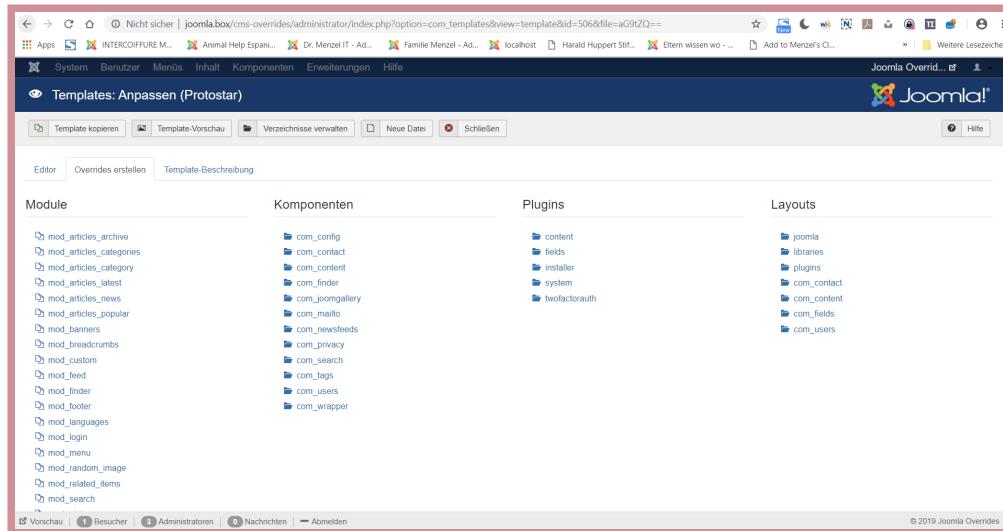

OVERIDES UND ALTERNATIVE LAYOUTS


- Ein Override gilt für alle (default.php)
- Alternative Layouts kann man individuell zuweisen
- Spezialfall mit Menüeintragstyp

WAS KANN MAN OVERRIDE?

- Komponenten
- Module
- Layouts
- Teilweise
Plugins
- Sprachstrings

KATEGORIENLISTE

mod_articles_categories

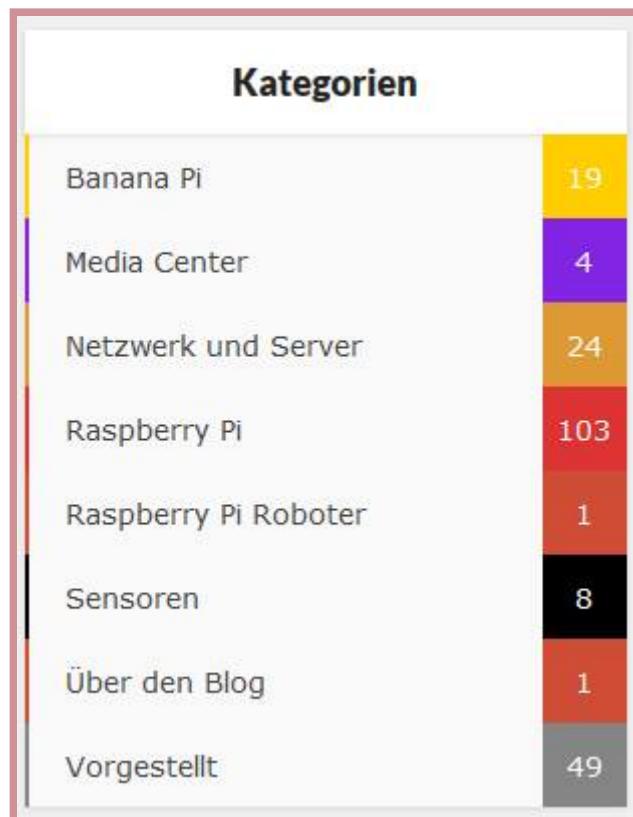

ACCORDION - BLOG

com_content/category

Example

[Collapsible Group Item #1](#)

Anim pariatur cliche reprehenderit, enim eiusmod high life accusamus terry richardson ad squid. 3 wolf moon officia aute, non cupidatat skateboard dolor brunch. Food truck quinoa nesciunt laborum eiusmod. Brunch 3 wolf moon tempor, sunt aliqua put a bird on it squid single-origin coffee nulla assumenda shoreditch et. Nihil anim keffiyeh helvetica, craft beer labore wes anderson cred nesciunt sapiente ea proident. Ad vegan excepteur butcher vice lomo. Leggings occaecat craft beer farm-to-table, raw denim aesthetic synth nesciunt you probably haven't heard of them accusamus labore sustainable VHS.

[Collapsible Group Item #2](#)

[Collapsible Group Item #3](#)

ACCORDION - BLOG

tipp.php = blog.php

```
<?php
/**
 * @package      Joomla.Site
 * @subpackage   com_content
 *
 * @copyright    Copyright (C) 2005 - 2019 Open Source Matters, Inc. All rights reserved.
 * @license      GNU General Public License version 2 or later; see LICENSE.txt
 */

defined('_JEXEC') or die;

JHtml::addIncludePath(JPATH_COMPONENT . '/helpers');

JHtml::_('behavior.caption');

$dispatcher = JEventDispatcher::getInstance();

$this->category->text = $this->category->description;
$dispatcher->trigger('onContentPrepare', array($this->category->extension . '.categories', &$this->category));
$this->category->description = $this->category->text;

$results = $dispatcher->trigger('onContentAfterTitle', array($this->category->extension . '.category'));
$afterDisplayTitle = trim(implode("\n", $results));

$results = $dispatcher->trigger('onContentBeforeDisplay', array($this->category->extension . '.category'));
```

ACCORDION - BLOG

tipp_item.php = blog_item.php

```
<?php
/**
 * @package      Joomla.Site
 * @subpackage   com_content
 *
 * @copyright    Copyright (C) 2005 - 2018 Open Source Matters, Inc. All rights reserved.
 * @license      GNU General Public License version 2 or later; see LICENSE.txt
 */

defined('_JEXEC') or die;

// Create a shortcut for params.
$params = $this->item->params;
JHtml::addIncludePath(JPATH_COMPONENT . '/helpers/html');
$canEdit = $this->item->params->get('access-edit');
$info    = $params->get('info_block_position', 0);

// Check if associations are implemented. If they are, define the parameter.
$assocParam = (JLanguageAssociations::isEnabled() && $params->get('show_associations'));

?>
<?php if ($this->item->state == 0 || strtotime($this->item->publish_up) > strtotime(JFactory::getDate())
        || ((strtotime($this->item->publish_down) < strtotime(JFactory::getDate())) && $this->item->
<div class="system-unpublished">
<?php endif; ?>
```

SLIDESHOW - MODUL

mod_articles_???



SLIDESHOW - MODUL

```
<?php
/**
 * @package      Joomla.Site
 * @subpackage   mod_articles_news
 *
 * @copyright    Copyright (C) 2005 - 2015 Open Source Matters, Inc. All rights reserved.
 * @license      GNU General Public License version 2 or later; see LICENSE.txt
 */

defined('_JEXEC') or die;
$count = count($list);
?>

<div id="slider" class="carousel slide" data-ride="carousel">
    <ol class="carousel-indicators">
        <?php for ($i = 0; $i < $count; $i++) : ?>
        <li data-target="#slider" data-slide-to="<?php echo $i; ?>" class="<?php echo $i == 0 ? 'active' : ''; ?>">
            <?php endfor; ?>
    </ol>
    <div class="carousel-inner">
        <?php for ($i = 0; $i < $count; $i++) : ?>
        <?php $images = json_decode($list[$i]->images); ?>
            <div class="item carousel-item <?php echo $i == 0 ? 'active' : ''; ?>">
                image; ?>"/>
                <div class="carousel-caption d-block">
                    <?php echo $list[$i]->title; ?>
                </div>
            </div>
        <?php endfor; ?>
    </div>
</div>
```

SPRACHOVERRIDES

KATEGORIELISTE

com_content/category

LEKTÜRE

- Wie Sie mit Overrides die Ausgabe von Joomla beeinflussen können
- Joomla-Overrides und Custom Fields – ein Dreamteam
- Joomla! – Muss immer eine Joomla-Erweiterung sein?



VIEL SPASS BEIM NACHBAUEN!





Die deutsche Joomla! Konferenz
Fachvorträge und Netzwerken

13.09. - 14.09.2019

www.joomladay.de