

Approximate Algorithmic Image Matching to Reduce Online Storage Overhead of User Submitted Images

Braden D. Licastro
Department of Computer Science
Allegheny College
licastb@allegheny.edu
<http://skynetgds.no-ip.biz/srthesis>

October 18, 2013

Abstract

Websites similar to Photobucket and imgur must be able to store massively increasing quantities of data; most of these sites already implement systems that limit the number, size, type of image, and compress the uploaded images to save space. Though these systems can be paired with file expiration times in which an upload is deleted, the cost of storage and backups of this data can be high. To further address this problem, the research aims to create an intelligent image uploading system capable of identifying near-duplicate image uploads on-the-fly; This system also provides the user with a higher resolution copy of their image from the server if available, thus providing better user experience while reducing unnecessary redundancy. By using the proposed system, the user will benefit from improved quality and service while the business can reduce storage and other various costs.

1 Introduction

Computers are absolutely everywhere, and society is becoming more digitized every day creating a need for storage of large amount of files. When running a website, storage space is at a premium, and the physical disks in the servers being used may not be local, but may in fact be located around the world. By allowing user submitted data, it quickly becomes apparent that data redundancy reduction can save a significant amount of storage space. This research will target the problem of data redundancy and provide a solution that will reduce not only storage costs but also inefficiencies. An implementation of a file management system will be introduced that is capable of managing large volumes of files using a database of location pointers and hash keys that identify each individual file. By using pointers, it is possible for the files to be stored on one central location or distributed across several systems while avoiding long search times. By using text based entries in a database, a hashing function can be implemented which is capable of producing a unique hash code for each file in the collection. Because this key is unique for each different file, it is a reliable gauge of uniqueness. When multiple files are found to be identical only one physical copy will be kept but pointers to the database entry will allow easy access. On large, distributed network storage servers, the benefits become ever more apparent. As users store files on the disks, the system will hash each file and search for a match in a database, thus allowing the user access to the data, but eliminating the overhead of

storing numerous copies of identical data. An increase in computation time will exist but should be minimal as text comparisons will be the primary task in finding uniqueness, but this will be outweighed by minimized physical storage requirements and costs of data backup. The implementation of this system could be used in tandem with other currently implemented methods of file space cost reduction technologies out of the box. By not only using the proposed method of space requirement reduction, it could in theory be possible that with data expiration times, file size maximums, and similar technologies, that storage needs will plateau after the initial surge of additions and the expiration time has passed for the earliest uploaded file. This would allow webmasters to better predict overall needs and better predict upload trends and react accordingly with preventative maintenance and any required space additions.

2 Related Work

Summarize the previously published papers and books that are related to your proposed research. Whenever possible, you should compare and contrast your approach with the ones that have been discussed in the past. As you describe your papers, please make sure that you cite them properly. Let's use the rest of this section to generate out bibliography! [8] [1] [6] [2] [3] [9] [5] [4] [10] [7].

3 Method of Approach

Use technical diagrams, equations, algorithms, and paragraphs of text to describe the research that you intend to complete. See the \LaTeX source file for the proposal to learn how Figure 1 and Table 1 were included. Be sure to number all figures and tables and to explicitly refer to them in your text.

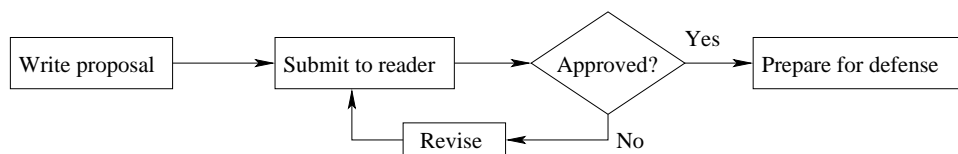


Figure 1: Flow graph for proposal-writing

Task	Begin Date	End Date
First draft	Now	20 Sept
Second draft	20 Sept	27 Sept
Third draft	27 Sept	4 Oct
Fourth draft	4 Oct	11 Oct
Fifth draft	11 Oct	18 Oct

Table 1: Proposed work schedule

4 Evaluation Strategy

Evaluating the effectiveness of the website will entail several benchmark readings. The total number of files, number of unique files, and the overall size of the benchmark folder versus the

duplicate reduced upload folder will all be used in determining the effectiveness of the image comparison algorithms implemented in the website. To perform the tests, a fixed set of images will be used. These images will consist of a collection of 15 artificially generated gray-scale, 15 natural gray-scale, and 15 natural RGB images in addition to 5 duplicate images in each category. These duplicates will consist of one of each of the following images: identical, diminished resolution, text overlaid, reduced resolution, and a color/contrast correction.

$$\left(\frac{Base - Reduced}{Base} \right) * 100 = \% Improvement\ over\ Base$$

Figure 2: Equation for determining efficiency improvements

In order to test the algorithm, all 15 unique images will be uploaded to the server using the built in upload function. Any false positive matches will be noted and the algorithm will be adjusted until none remain. At this point, the baseline folder and the duplicate reduced folders should contain the same set of data. Next, the duplicate images will be uploaded to the server using the same method. The system should find all remaining images as duplicates and prompt the user with the option to upload anyway or use the existing image. For the test I will not allow the upload. After all images have been uploaded, the total number of files in the baseline directory will be compared to the number of files in the duplicate reduced directory using the algorithm in 2, where base is the baseline directory number to be compared and reduced is the duplicate reduced directory number to be compared. The directory sizes and average upload times will also be evaluated using the algorithm in 2. The evaluated result, if positive, will denote a positive improvement in efficiency compared to the baseline directory, and a negative result is interpreted as a decrease in efficiency over the baseline directory.

After analyzing the results of the test outlined above, the algorithm will be refined to provide more accurate results and the folders and database will be reset. At this point, the tests will be run again, and any changes in effectiveness will be noted. Because the system implements a text-based database, the size difference between the baseline and duplicate reduced will be negligible as no image specific information is stored. In addition, the number of entries will be identical due to the upload process outlined in 3, which generates a unique URL for every image upload request whether the image is uploaded or an existing one on the server is used.

5 Research Schedule

The research schedule for the project is to be tentatively based off of the following deadlines. Due to the nature of the project and the wide array of pre-existing software required needing to be modified and implemented, unseen hurdles may arise.

Phase 1 - 1 month: Find acceptable operating system set up a fully functional LAMP server to host website and provide storage of submitted images. During this time, I will begin learning and installing PHP and JavaScript libraries so code implementation can begin shortly after the

completion of server setup.

Phase 2 - 2-3 months: Develop a working image sharing website which is capable of satisfying the requirements outlined in 3. Set up two basic file and database structures to be used throughout the experiment. One will be used as a baseline and the other structure will function as the duplicate-reduced system. Both will host the image files, file information, and time taken to add files to the database. The system will also track the average upload time for each method, the total number of files, and the total size of each upload directory.

Phase 3 - 1 week: During this time I will run various tests on the website using the proposed methods in 3 and record the results of the experiment. After the new image files have been added to the collection, some unique, and others duplicate, the submissions directory on the server will be scanned for duplicates and ensure none were accidentally added. Results to be recorded are the final number of files, the number of duplicate images, and the total storage space used.

Phase 4 - remaining time: The results gathered throughout the test process will be evaluated and the website algorithms tweaked and finalized. After modifications are complete tests will be rerun and the final results will be evaluated.

6 Conclusion

With computers becoming ever more prevalent and data being generated and shared at a rapidly increasing rate, it is becoming more and more necessary every day to reduce the redundancy of shared data and create more efficient sharing systems. By removing duplicate image files from sharing sites and preventing the addition of new duplicates we can begin to tackle this issue and begin reducing the storage requirements of running such systems. Aside from just reducing storage overhead it can also be possible to reduce time overhead of searching for images and the amount of bandwidth needed to operate these systems. In addition, a significant amount of money can be saved as a result of reduced electrical costs per node, and even reduce the number of server nodes in extreme cases of redundancy.

References

- [1] Angela Bradley. Renaming PHP Uploads. http://php.about.com/od/advancedphp/ss/rename_upload.htm, 2011. [Online; accessed 10-October-2013].
- [2] CatPa.ws. PHP GD Duplicate Image Finder. <http://www.catpa.ws/php-duplicate-image-finder/>, 2010. [Online; accessed 13-September-2013].
- [3] Ubuntu Documentation. ApacheMySQLPHP - LAMP Server Setup Guide. <http://php.net/manual/en/ref.image.php>, 2013. [Online; accessed 21-August-2013].
- [4] Jun Jie Foo, Justin Zobel, Ranjan Sinha, and S. M. M. Tahaghoghi. Detection of Near-duplicate Images for Web Search. In *Proceedings of the 6th ACM International Conference on Image and Video Retrieval, CIVR '07*, pages 557–564, New York, NY, USA, 2007. ACM.
- [5] The PHP Group. GD and Image Functions. <http://php.net/manual/en/ref.image.php>, 2013. [Online; accessed 13-October-2013].
- [6] The PHP Group. POST Method Uploads. <http://de.php.net/manual/en/features.file-upload.post-method.php>, 2013. [Online; accessed 09-September-2013].
- [7] David C. Lee, Qifa Ke, and Michael Isard. Partition Min-hash for Partial Duplicate Image Discovery. In *Proceedings of the 11th European Conference on Computer Vision: Part I, ECCV'10*, pages 648–662, Berlin, Heidelberg, 2010. Springer-Verlag.
- [8] Dejan Marjanovic. PDO vs. MySQLi: Which Should You Use? <http://net.tutsplus.com/tutorials/php/pdo-vs-mysqli-which-should-you-use/>, 2012. [Online; accessed 02-October-2013].
- [9] nixCraft. Ubuntu Linux: Install or Add PHP-GD Support to Apache Web Server. <http://www.cyberciti.biz/faq/ubuntu-linux-install-or-add-php-gd-support-to-apache/>, 2012. [Online; accessed 30-September-2013].
- [10] S H. Srinivasan and Neela Sawant. Finding Near-duplicate Images on the Web Using Fingerprints. In *Proceedings of the 16th ACM International Conference on Multimedia, MM '08*, pages 881–884, New York, NY, USA, 2008. ACM.