


Test Suite  $T = \langle T_1, T_2, \dots, T_9, T_{10} \rangle$

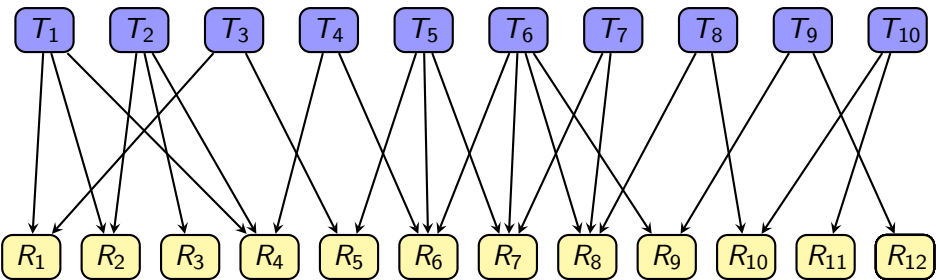

Requirements Set  $R = \{R_1, R_2, \dots, R_{11}, R_{12}\}$

Granularity varies from database to attribute value

See [Kapfhammer and Soffa, ISEC 2008] for more details

Overlap-aware test suite reduction greedily removes redundant tests