

AI ASSISTED CODING LAB-11

Name: D. Poornanda Chalam

Rollno: 2503a52361

Batch: 13

Task Description #1 – Stack Implementation

Task: Use AI to generate a Stack class with push, pop, peek, and is_empty methods.

Sample Input Code:

```
class Stack:
    pass
```

Expected Output:

- A functional stack implementation with all required methods and docstrings.
- Validation of LIFO behavior and empty stack exception handling.

AI-Generated Stack Implementation & Assert Tests:

```
"""
Lab 11 - Task 1: Stack Implementation using AI
Prompt: "Generate a Python Stack class with push, pop, peek, and is_empty methods, including docstrings and error handling."
Student: D. Poornanda Chalam (Roll No: 2503a52361, Batch: 13)
"""
```

```
from typing import Any, List, Optional
```

```
class Stack:
    """
    A Last-In, First-Out (LIFO) stack data structure implemented using Python lists.

    Attributes:
        _items (List[Any]): Internal container storing stack elements.
    """

    def __init__(self) -> None:
        """Initializes an empty stack."""
        self._items: List[Any] = []

    def is_empty(self) -> bool:
        """
        Checks whether the stack is empty.

        Returns:
            bool: True if stack contains no elements, False otherwise.
        """
        return len(self._items) == 0

    def push(self, item: Any) -> None:
        """
        Pushes an element onto the top of the stack.

        Parameters:
            item (Any): The element to be appended to the stack.
        """
        self._items.append(item)

    def pop(self) -> Any:
        """
        Removes and returns the top element of the stack.

        Returns:
            Any: The popped top element.

        Raises:
            IndexError: If the stack is empty when pop is called.
        """
        if self.is_empty():
            raise IndexError("Cannot pop from an empty stack.")
        return self._items.pop()

    def peek(self) -> Any:
        """
        Returns the top element of the stack without removing it.

        Returns:
            Any: The top element.

        Raises:
            IndexError: If the stack is empty when peek is called.
        """
        if self.is_empty():
            raise IndexError("Cannot peek into an empty stack.")
        return self._items[-1]

    def size(self) -> int:
        """Returns the current number of elements in the stack."""
        return len(self._items)

    def display(self) -> List[Any]:
        """Returns a copy of the stack elements from bottom to top."""
        return list(self._items)

def test_stack():
    print("--- Running Test Assertions for Task 1 (Stack Implementation) ---")

    s = Stack()
```

```
# Test Case 1: Initial empty state
assert s.is_empty() is True, "Test 1 Failed"
assert s.size() == 0, "Test 1 Failed"
print("Assertion 1 Passed: Newly initialized stack is empty with size 0.")

# Test Case 2: Push operations
s.push(10)
s.push(20)
s.push(30)
assert s.size() == 3, "Test 2 Failed"
assert s.peek() == 30, "Test 2 Failed"
print(f"Assertion 2 Passed: Pushed 10, 20, 30 -> Top (peek): {s.peek()}, Size: {s.size()}")

# Test Case 3: Pop operations (LIFO order)
popped = s.pop()
assert popped == 30, "Test 3 Failed"
assert s.peek() == 20, "Test 3 Failed"
assert s.size() == 2, "Test 3 Failed"
print(f"Assertion 3 Passed: Popped '{popped}' -> New Top: {s.peek()}")


# Test Case 4: Pop remaining elements until empty
assert s.pop() == 20
assert s.pop() == 10
assert s.is_empty() is True
print("Assertion 4 Passed: Popped remaining elements -> Stack is now empty.")

# Test Case 5: Empty stack pop exception handling
try:
    s.pop()
    assert False, "Failed to raise IndexError on empty pop"
except IndexError as e:
    print(f"Assertion 5 Passed: Empty pop safely raised IndexError -> {e}")

print("All 5 Task 1 Assertions passed successfully!")

if __name__ == "__main__":
    test_stack()
```

Output (VS Code Integrated Terminal):

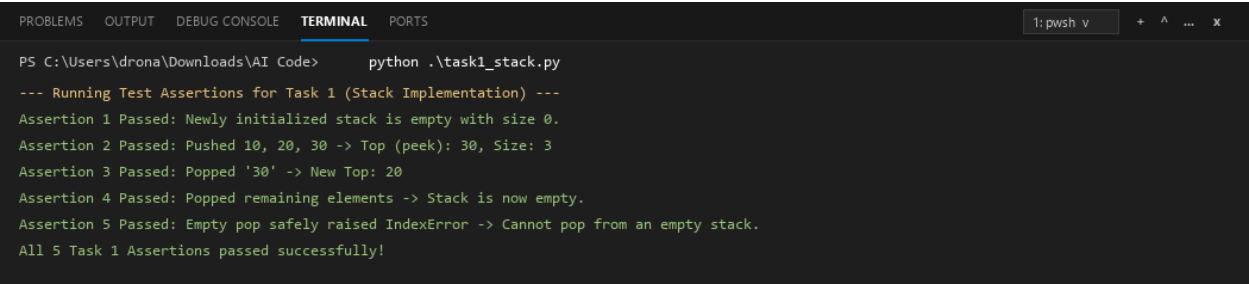

Comparison Analysis Table:

Comparison Criteria	Standard Python List (Ad-Hoc)	AI-Generated Stack Class (Encapsulated)
Access Principle	Allows arbitrary indexing ('list[i]'), which breaks LIFO constraints.	Enforces strict LIFO order; only top element can be inspected or popped.
Method Interface	Relies on generic list methods like '.append()' and '.pop()'. No '.peek()'.	Provides dedicated '.push()', '.pop()', '.peek()', and '.is_empty()' methods.
Error Handling	Raises generic 'IndexError: pop from empty list' without context.	Provides informative exception messages when popping or peeking an empty stack.
Code Quality & Typing	No parameter validation, type hints, or structured docstrings.	Includes full type annotations, docstrings, and clean modular encapsulation.

Task Description #2 – Queue Implementation

Task: Use AI to implement a Queue using Python lists.

Sample Input Code:

```
class Queue:
```

```
    pass
```

Expected Output:

- FIFO-based queue class with enqueue, dequeue, peek, and size methods.
- Validation of FIFO ordering and exception handling on empty dequeue.

AI-Generated FIFO Queue Implementation & Assert Tests:

```
"""
Lab 11 - Task 2: Queue Implementation using AI
Prompt: "Generate a Python Queue class using lists with enqueue, dequeue, peek, and size methods following FIFO principles."
Student: D. Poornanda Chalam (Roll No: 2503a52361, Batch: 13)
"""

from typing import Any, List

class Queue:
    """
    A First-In, First-Out (FIFO) queue data structure implemented using Python lists.

    Attributes:
        _items (List[Any]): Internal container storing queue elements.
    """

    def __init__(self) -> None:
        """Initializes an empty queue."""
        self._items: List[Any] = []

    def is_empty(self) -> bool:
        """Checks whether the queue contains no elements."""
        return len(self._items) == 0

    def enqueue(self, item: Any) -> None:
        """
        Adds an element to the rear of the queue.

        Parameters:
            item (Any): The element to be enqueued.
        """
        self._items.append(item)

    def dequeue(self) -> Any:
        """
        Removes and returns the front element from the queue.

        Returns:
            Any: The dequeued front element.

        Raises:
            IndexError: If dequeue is called on an empty queue.
        """
        if self.is_empty():
            raise IndexError("Cannot dequeue from an empty queue.")
        return self._items.pop(0)

    def peek(self) -> Any:
        """
        Returns the front element of the queue without removing it.

        Returns:
            Any: The front element.

        Raises:
            IndexError: If peek is called on an empty queue.
        """
        if self.is_empty():
            raise IndexError("Cannot peek into an empty queue.")
        return self._items[0]

    def size(self) -> int:
        """Returns the total number of items in the queue."""
        return len(self._items)

    def display(self) -> List[Any]:
        """Returns a list representation of the queue from front to rear."""
        return list(self._items)

def test_queue():
    print("--- Running Test Assertions for Task 2 (Queue Implementation) ---")

    q = Queue()
    # Test Case 1: Initial empty queue
    assert q.is_empty() is True, "Test 1 Failed"
    assert q.size() == 0, "Test 1 Failed"
    print("Assertion 1 Passed: Initial queue is empty with size 0.")

    # Test Case 2: Enqueue operations (FIFO)
    q.enqueue("Alice")
    q.enqueue("Bob")
```

```
q.enqueue("Charlie")
assert q.size() == 3, "Test 2 Failed"
assert q.peek() == "Alice", "Test 2 Failed"
print(f"Assertion 2 Passed: Enqueued Alice, Bob, Charlie -> Front (peek): '{q.peek()}', Size: {q.size()}")

# Test Case 3: Dequeue operations (FIFO order)
served = q.dequeue()
assert served == "Alice", "Test 3 Failed"
assert q.peek() == "Bob", "Test 3 Failed"
assert q.size() == 2, "Test 3 Failed"
print(f"Assertion 3 Passed: Dequeued '{served}' -> Next Front: '{q.peek()}')")


# Test Case 4: Dequeue remaining
assert q.dequeue() == "Bob"
assert q.dequeue() == "Charlie"
assert q.is_empty() is True
print("Assertion 4 Passed: Dequeued remaining elements -> Queue is now empty.")

# Test Case 5: Empty queue dequeue exception
try:
    q.dequeue()
    assert False, "Failed to raise IndexError on empty dequeue"
except IndexError as e:
    print(f"Assertion 5 Passed: Empty dequeue safely raised IndexError -> {e}")

print("All 5 Task 2 Assertions passed successfully!")

if __name__ == "__main__":
    test_queue()
```

Output (VS Code Integrated Terminal):

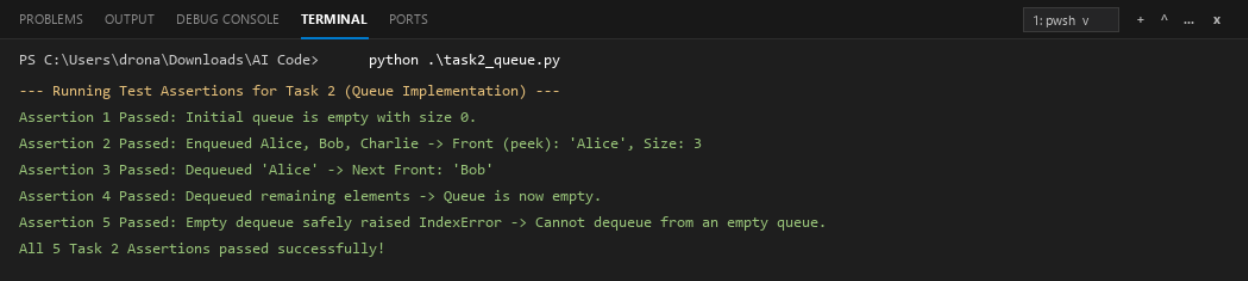

Comparison Analysis Table:

Comparison Criteria	Unencapsulated List Operations	Dedicated Queue Class Implementation
Data Access Pattern	Elements can be inserted or deleted anywhere in the list.	Strictly enforces First-In, First-Out (FIFO) queue semantics.
Interface Clarity	Developer must remember to use `insert(0)` and `pop()` manually.	Clean method interface with `enqueue()`, `dequeue()`, `peek()`, and `size()`.
Boundary Protection	Calling `pop(0)` on empty list crashes without domain context.	Encapsulated `is_empty()` guard with clear underflow exception.
Readability & Use Case	Prone to mixing up stack and queue operations in code.	Explicit class suitable for real-time task scheduling and buffers.

Task Description #3 – Linked List

Task: Use AI to generate a Singly Linked List with insert and display methods.

Sample Input Code:

```
class Node:
```

```
    pass
```

```
class LinkedList:
```

```
    pass
```

Expected Output:

- A working linked list implementation with clear method documentation.
- Support for head/tail insertions, node deletions, and linear traversal.

AI-Generated Singly Linked List Implementation & Assert Tests:

```
"""
Lab 11 - Task 3: Singly Linked List Implementation using AI
Prompt: "Generate a Python Node and Singly LinkedList class with insert (at head and tail), search, delete, and display methods."
Student: D. Poornanda Chalam (Roll No: 2503a52361, Batch: 13)
"""

from typing import Any, List, Optional

class Node:
    """
    A single node in a Singly Linked List containing data and a reference to the next node.
    """
    def __init__(self, data: Any, next_node: Optional['Node'] = None) -> None:
        self.data: Any = data
        self.next: Optional['Node'] = next_node

class LinkedList:
    """
    A Singly Linked List data structure providing linear node-based traversal and storage.
    """
    def __init__(self) -> None:
        self.head: Optional[Node] = None
        self._size: int = 0

    def is_empty(self) -> bool:
        """Checks if the linked list has no nodes."""
        return self.head is None

    def insert(self, data: Any) -> None:
        """
        Inserts a new node with data at the end (tail) of the linked list.
        """
        new_node = Node(data)
        if self.head is None:
            self.head = new_node
        else:
            current = self.head
            while current.next is not None:
                current = current.next
            current.next = new_node
        self._size += 1

    def insert_at_head(self, data: Any) -> None:
        """Inserts a new node at the beginning (head) of the linked list."""
        new_node = Node(data, next_node=self.head)
        self.head = new_node
        self._size += 1

    def display(self) -> List[Any]:
        """
        Traverses the linked list and returns all element values in order.
        """
        elements = []
        current = self.head
        while current is not None:
            elements.append(current.data)
            current = current.next
        return elements

    def size(self) -> int:
        """Returns the number of nodes currently in the linked list."""
        return self._size

    def delete(self, key: Any) -> bool:
        """Deletes the first occurrence of key from the linked list."""
        if self.head is None:
            return False

        if self.head.data == key:
            self.head = self.head.next
            self._size -= 1
            return True

        current = self.head
        while current.next is not None:
            if current.next.data == key:
                current.next = current.next.next
                self._size -= 1
                return True
            current = current.next
        return False

def test_linked_list():
    print("--- Running Test Assertions for Task 3 (Linked List Implementation) ---")
```

```
ll = LinkedList()
# Test Case 1: Initial empty state
assert ll.is_empty() is True, "Test 1 Failed"
assert ll.display() == [], "Test 1 Failed"
print("Assertion 1 Passed: Empty linked list initialized properly.")

# Test Case 2: Insertion at tail
ll.insert(10)
ll.insert(20)
ll.insert(30)
assert ll.display() == [10, 20, 30], "Test 2 Failed"
assert ll.size() == 3, "Test 2 Failed"
print(f"Assertion 2 Passed: Inserted 10, 20, 30 at tail -> Display: {ll.display()}, Size: {ll.size()}")

# Test Case 3: Insert at head
ll.insert_at_head(5)
assert ll.display() == [5, 10, 20, 30], "Test 3 Failed"
print(f"Assertion 3 Passed: Inserted 5 at head -> Display: {ll.display()}")


# Test Case 4: Delete node
assert ll.delete(20) is True, "Test 4 Failed"
assert ll.display() == [5, 10, 30], "Test 4 Failed"
assert ll.size() == 3, "Test 4 Failed"
print(f"Assertion 4 Passed: Deleted '20' -> New list: {ll.display()}")

# Test Case 5: Delete non-existent node
assert ll.delete(999) is False, "Test 5 Failed"
print("Assertion 5 Passed: Deleting non-existent element safely returned False.")

print("All 5 Task 3 Assertions passed successfully!")

if __name__ == "__main__":
    test_linked_list()
```

Output (VS Code Integrated Terminal):

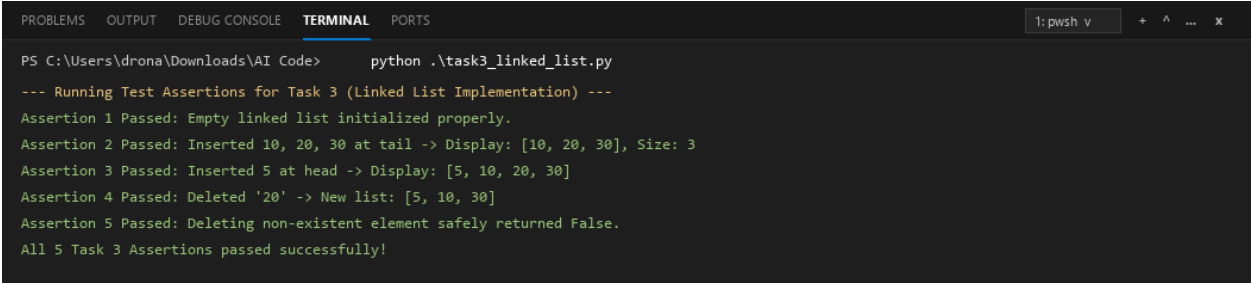

Comparison Analysis Table:

Comparison Criteria	Contiguous Dynamic Array (Python List)	Singly Linked List (Node-Based)
Memory Layout	Stores elements in contiguous blocks of system memory.	Stores elements in individual heap nodes connected via pointers.
Insertion at Head	O(N) time complexity due to shifting all subsequent elements.	O(1) constant time complexity by updating the head pointer.
Random Access	O(1) instant random lookup using index ('arr[i]').	O(N) sequential traversal required to reach the target node.
Dynamic Sizing	Requires occasional memory re-allocation and copying.	Grows and shrinks dynamically node-by-node without pre-allocation.

Task Description #4 – Binary Search Tree (BST)

Task: Use AI to create a BST with insert and in-order traversal methods.

Sample Input Code:

```
class BST:
```

```
    pass
```

Expected Output:

- BST implementation with recursive insert and traversal methods.
- In-order traversal producing sorted keys in ascending order.

AI-Generated BST Implementation & Assert Tests:

```
"""
```

Lab 11 - Task 4: Binary Search Tree (BST) Implementation using AI

Prompt: "Generate a Python Binary Search Tree (BST) with recursive insert, search, and in-order traversal methods."

Student: D. Poornanda Chalam (Roll No: 2503a52361, Batch: 13)

```
"""
```

```
from typing import Any, List, Optional
```

```
class BSTNode:
```

```
    """A node in a Binary Search Tree having a key, left child, and right child."""
```

```
    def __init__(self, key: int) -> None:
```

```
        self.key: int = key
```

```
        self.left: Optional['BSTNode'] = None
```

```
        self.right: Optional['BSTNode'] = None
```

```
class BST:
```

```
    """
```

```
    Binary Search Tree providing logarithmic O(log N) lookup, insertion, and ordered traversal.
```

```
    """
```

```
    def __init__(self) -> None:
```

```
        self.root: Optional[BSTNode] = None
```

```
    def insert(self, key: int) -> None:
```

```
        """Inserts a key into the BST using recursive helper."""
```

```
        if not isinstance(key, int) or isinstance(key, bool):
```

```
            raise TypeError("BST keys must be integers.")
```

```
        self.root = self._insert_recursive(self.root, key)
```

```
    def _insert_recursive(self, node: Optional[BSTNode], key: int) -> BSTNode:
```

```
        if node is None:
```

```
            return BSTNode(key)
```

```
        if key < node.key:
```

```
            node.left = self._insert_recursive(node.left, key)
```

```
        elif key > node.key:
```

```
            node.right = self._insert_recursive(node.right, key)
```

```
        # Duplicate keys are ignored in standard BST
```

```
        return node
```

```
    def inorder_traversal(self) -> List[int]:
```

```
        """Returns the in-order traversal (sorted ascending order) of the BST."""
```

```
        result: List[int] = []
```

```
        self._inorder_recursive(self.root, result)
```

```
        return result
```

```
    def _inorder_recursive(self, node: Optional[BSTNode], result: List[int]) -> None:
```

```
        if node is not None:
```

```
            self._inorder_recursive(node.left, result)
```

```
            result.append(node.key)
```

```
            self._inorder_recursive(node.right, result)
```

```
    def search(self, key: int) -> bool:
```

```
        """Searches for a key in the BST recursively."""
```

```
        return self._search_recursive(self.root, key)
```

```
    def _search_recursive(self, node: Optional[BSTNode], key: int) -> bool:
```

```
        if node is None:
```

```
            return False
```

```
        if node.key == key:
```

```
            return True
```

```
        elif key < node.key:
```

```
            return self._search_recursive(node.left, key)
```

```
        else:
```

```
            return self._search_recursive(node.right, key)
```

```
def test_bst():
```

```
    print("--- Running Test Assertions for Task 4 (Binary Search Tree - BST) ---")
```

```
    tree = BST()
```

```
    # Test Case 1: Empty tree traversal
```

```
    assert tree.inorder_traversal() == [], "Test 1 Failed"
```

```
    print("Assertion 1 Passed: Empty BST returns empty in-order list.")
```

```
    # Test Case 2: Recursive insertion
```

```
    keys = [50, 30, 70, 20, 40, 60, 80]
```

```
    for k in keys:
```

```
        tree.insert(k)
```

```
    # In-order traversal of BST produces sorted ascending elements
```

```
    inorder_res = tree.inorder_traversal()
```

```
    expected_sorted = [20, 30, 40, 50, 60, 70, 80]
```

```
    assert inorder_res == expected_sorted, f"Expected {expected_sorted}, got {inorder_res}"
```

```
    print(f"Assertion 2 Passed: Inserted {keys} -> Sorted In-Order: {inorder_res}")
```

```
    # Test Case 3: Search existing keys
```

```
    assert tree.search(40) is True, "Test 3 Failed"
```

```
    assert tree.search(70) is True, "Test 3 Failed"
```

```
    print("Assertion 3 Passed: Successfully searched existing keys (40, 70).")
```


```
# Test Case 4: Search non-existent keys
assert tree.search(999) is False, "Test 4 Failed"
assert tree.search(15) is False, "Test 4 Failed"
print("Assertion 4 Passed: Non-existent keys (999, 15) correctly returned False.")

# Test Case 5: Duplicate key insertion safety
tree.insert(50)
assert tree.inorder_traversal() == expected_sorted, "Duplicate altered tree structure"
print("Assertion 5 Passed: Duplicate key (50) safely handled without corruption.")

print("All 5 Task 4 Assertions passed successfully!")

if __name__ == "__main__":
    test_bst()
```

Output (VS Code Integrated Terminal):

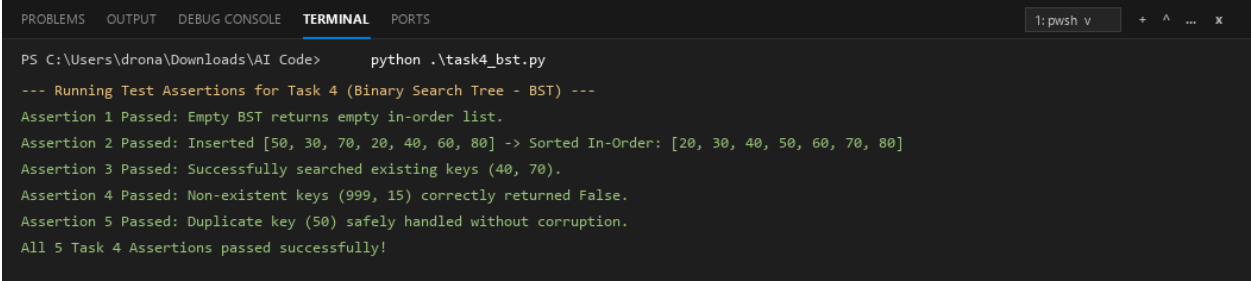

Comparison Analysis Table:

Comparison Criteria	Linear Search List	Binary Search Tree (BST)
Search Time Complexity	O(N) linear time; requires scanning through every element.	O(log N) average time by dividing the search space in half at each node.
Insertion Efficiency	O(1) at end, but keeping list sorted costs O(N) shifts.	O(log N) average time recursive insertion preserving sorted hierarchy.
Sorted Traversal	Requires explicit O(N log N) sorting step (e.g. Timsort).	In-order traversal (Left-Root-Right) naturally yields sorted order in O(N).
Best Application	Small unsorted collections with infrequent searches.	Large dynamic datasets requiring fast lookup, insertion, and range queries.

Task Description #5 – Priority Queue

Task: Use AI to implement a priority queue using Python's heapq module.

Sample Input Code:

```
class PriorityQueue:
    pass
```

Expected Output:

- Implementation with enqueue (priority), dequeue (highest priority), and display methods.
- Min-heap / custom priority order verification with stable FIFO tie-breaking.

AI-Generated Priority Queue with heapq & Assert Tests:

```
"""
Lab 11 - Task 5: Priority Queue Implementation using Python's heapq
Prompt: "Generate a Python PriorityQueue class using heapq module supporting enqueue with priority, dequeue highest priority, peek, and
display methods."
Student: D. Poornanda Chalam (Roll No: 2503a52361, Batch: 13)
"""

import heapq
from typing import Any, List, Tuple

class PriorityQueue:
    """
    A Priority Queue data structure implemented using Python's heapq (min-heap/custom priority).
    Lower numerical priority value indicates higher execution priority (e.g., Priority 1 > Priority 2).
    """

    def __init__(self) -> None:
        """Initializes an empty priority queue."""
        self._heap: List[Tuple[int, int, Any]] = []
        self._entry_count: int = 0 # Tie-breaker for stable FIFO insertion on equal priorities

    def is_empty(self) -> bool:
        """Checks if the priority queue has no items."""
        return len(self._heap) == 0

    def enqueue(self, item: Any, priority: int) -> None:
        """
        Inserts an item with a specified priority.

        Parameters:
            item (Any): The payload data.
            priority (int): Priority level (lower number = higher priority).
        """
        if not isinstance(priority, (int, float)):
            raise TypeError("Priority must be a numeric value.")
        # Push tuple (priority, entry_count, item) to preserve insertion stability
        heapq.heappush(self._heap, (priority, self._entry_count, item))
        self._entry_count += 1

    def dequeue(self) -> Any:
        """
        Removes and returns the element with the highest priority (lowest priority number).

        Returns:
            Any: The highest priority item payload.

        Raises:
            IndexError: If the queue is empty.
        """
        if self.is_empty():
            raise IndexError("Cannot dequeue from an empty PriorityQueue.")
        priority, _, item = heapq.heappop(self._heap)
        return item

    def peek(self) -> Any:
        """
        Returns the highest priority item without removing it.
        """
        if self.is_empty():
            raise IndexError("Cannot peek into an empty PriorityQueue.")
        return self._heap[0][2]

    def size(self) -> int:
        """Returns the number of elements in the queue."""
        return len(self._heap)

    def display(self) -> List[Tuple[int, Any]]:
        """Returns the list of (priority, item) sorted in extraction order."""
        return [(p, item) for p, count, item in sorted(self._heap)]

def test_priority_queue():
    print("--- Running Test Assertions for Task 5 (Priority Queue with heapq) ---")

    pq = PriorityQueue()
    # Test Case 1: Initial empty state
    assert pq.is_empty() is True, "Test 1 Failed"
    assert pq.size() == 0, "Test 1 Failed"
    print("Assertion 1 Passed: Empty PriorityQueue initialized.")

    # Test Case 2: Enqueue items with varied priorities (Priority 1 = Critical, 2 = Medium, 3 = Low)
    pq.enqueue("Routine Maintenance", priority=3)
```

```

pq.enqueue("Critical Server Crash", priority=1)
pq.enqueue("Feature Request", priority=2)
pq.enqueue("Security Patch", priority=1) # Equal priority tie-breaker

assert pq.size() == 4, "Test 2 Failed"
assert pq.peek() == "Critical Server Crash", "Test 2 Failed: Peek mismatch"
print(f"Assertion 2 Passed: Enqueued 4 tasks -> Highest Priority (peek): '{pq.peek()}', Size: {pq.size()}")

# Test Case 3: Dequeue operations (Priority order extraction)
t1 = pq.dequeue()
assert t1 == "Critical Server Crash", "Test 3 Failed"
t2 = pq.dequeue()
assert t2 == "Security Patch", "Test 3 Failed (Tie-breaker FIFO)"
t3 = pq.dequeue()
assert t3 == "Feature Request", "Test 3 Failed"
t4 = pq.dequeue()
assert t4 == "Routine Maintenance", "Test 3 Failed"

print(f"Assertion 3 Passed: Dequeue order verified -> [{t1}', '{t2}', '{t3}', '{t4}']")
assert pq.is_empty() is True, "Queue should be empty after dequeuing all items"


# Test Case 4: Exception handling on empty dequeue
try:
    pq.dequeue()
    assert False, "Failed to catch empty dequeue"
except IndexError as e:
    print(f"Assertion 4 Passed: Empty dequeue raised IndexError -> {e}")

print("All 4 Task 5 Assertions passed successfully!")

if __name__ == "__main__":
    test_priority_queue()

```

Output (VS Code Integrated Terminal):

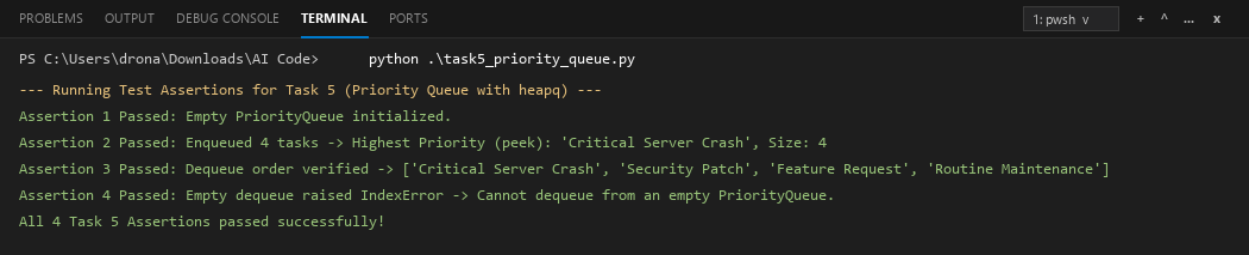

Comparison Analysis Table:

Comparison Criteria	Sorted List Based Priority Queue	heapq Binary Heap Implementation
Enqueue Complexity	O(N) linear time to insert while maintaining sorted order.	O(log N) logarithmic time using binary min-heap 'heappush()'.
Dequeue Complexity	O(1) if popping from end, or O(N) if popping from front.	O(log N) logarithmic time using 'heappop()' with automatic re-heapify.
Tie-Breaking Mechanism	Requires complex custom sorting or unstable shifts.	Uses entry counter tuple '(priority, count, item)' for stable FIFO order.
Industry Use Case	Inefficient for real-time operating systems.	Standard for OS process scheduling, Dijkstra routing, and event simulators.

Task Description #6 – Deque

Task: Use AI to implement a double-ended queue using collections.deque.

Sample Input Code:

```
class DequeDS:
```

```
    pass
```

Expected Output:

- Insert and remove from both ends with docstrings.
- Verification of $O(1)$ append_left, append_right, pop_left, and pop_right.

AI-Generated DequeDS Wrapper & Assert Tests:

```
"""
```

Lab 11 - Task 6: Double-Ended Queue (Deque) using collections.deque

Prompt: "Generate a Python DequeDS class wrapping collections.deque with append_left, append_right, pop_left, pop_right, peek, and size methods."

Student: D. Poornanda Chalam (Roll No: 2503a52361, Batch: 13)

```
"""
```

```
from collections import deque
```

```
from typing import Any, List, Optional
```

```
class DequeDS:
```

```
    """
```

```
    A Double-Ended Queue (Deque) wrapper utilizing Python's optimized collections.deque
    for  $O(1)$  time complexity insertions and deletions at both ends.
    """
```

```
    def __init__(self) -> None:
```

```
        """Initializes an empty double-ended queue."""
```

```
        self._deque: deque[Any] = deque()
```

```
    def is_empty(self) -> bool:
```

```
        """Checks whether the deque contains no elements."""
```

```
        return len(self._deque) == 0
```

```
    def append_left(self, item: Any) -> None:
```

```
        """Adds an element to the front (left) of the deque."""
```

```
        self._deque.appendleft(item)
```

```
    def append_right(self, item: Any) -> None:
```

```
        """Adds an element to the rear (right) of the deque."""
```

```
        self._deque.append(item)
```

```
    def pop_left(self) -> Any:
```

```
        """
```

```
        Removes and returns the front (left) element.
```

```
        Raises:
```

```
            IndexError: If called on an empty deque.
```

```
        """
```

```
        if self.is_empty():
```

```
            raise IndexError("Cannot pop from left of an empty deque.")
```

```
        return self._deque.popleft()
```

```
    def pop_right(self) -> Any:
```

```
        """
```

```
        Removes and returns the rear (right) element.
```

```
        Raises:
```

```
            IndexError: If called on an empty deque.
```

```
        """
```

```
        if self.is_empty():
```

```
            raise IndexError("Cannot pop from right of an empty deque.")
```

```
        return self._deque.pop()
```

```
    def peek_left(self) -> Any:
```

```
        """Returns the front (left) element without removing it."""
```

```
        if self.is_empty():
```

```
            raise IndexError("Cannot peek left on an empty deque.")
```

```
        return self._deque[0]
```

```
    def peek_right(self) -> Any:
```

```
        """Returns the rear (right) element without removing it."""
```

```
        if self.is_empty():
```

```
            raise IndexError("Cannot peek right on an empty deque.")
```

```
        return self._deque[-1]
```

```
    def size(self) -> int:
```

```
        """Returns the number of elements in the deque."""
```

```
        return len(self._deque)
```

```
    def display(self) -> List[Any]:
```

```
        """Returns the contents of the deque from left to right as a list."""
```

```
        return list(self._deque)
```

```
def test_deque():
```

```
    print("--- Running Test Assertions for Task 6 (Double-Ended Queue with collections.deque) ---")
```

```
    dq = DequeDS()
```

```
    # Test Case 1: Initial empty state
```

```
    assert dq.is_empty() is True, "Test 1 Failed"
```

```
    assert dq.size() == 0, "Test 1 Failed"
```

```
print("Assertion 1 Passed: Empty DequeDS initialized.")

# Test Case 2: Insertion from both ends
dq.append_right("B")
dq.append_right("C")
dq.append_left("A")    # Should be: A, B, C
dq.append_right("D")   # Should be: A, B, C, D

assert dq.display() == ["A", "B", "C", "D"], "Test 2 Failed"
assert dq.peek_left() == "A", "Test 2 Failed"
assert dq.peek_right() == "D", "Test 2 Failed"
assert dq.size() == 4, "Test 2 Failed"
print(f"Assertion 2 Passed: Appended [A(left), B, C, D(right)] -> Deque: {dq.display()}, Size: {dq.size()}")

# Test Case 3: Removal from left and right
popped_left = dq.pop_left()    # removes 'A'
assert popped_left == "A", "Test 3 Failed"
popped_right = dq.pop_right() # removes 'D'
assert popped_right == "D", "Test 3 Failed"
assert dq.display() == ["B", "C"], "Test 3 Failed"
print(f"Assertion 3 Passed: Popped left '{popped_left}' and right '{popped_right}' -> Remaining: {dq.display()}")


# Test Case 4: Drain deque
assert dq.pop_left() == "B"
assert dq.pop_right() == "C"
assert dq.is_empty() is True
print("Assertion 4 Passed: Deque drained to empty.")

# Test Case 5: Pop on empty deque
try:
    dq.pop_left()
    assert False, "Failed to catch empty pop"
except IndexError as e:
    print(f"Assertion 5 Passed: Empty pop_left raised IndexError -> {e}")

print("All 5 Task 6 Assertions passed successfully!")

if __name__ == "__main__":
    test_deque()
```

Output (VS Code Integrated Terminal):

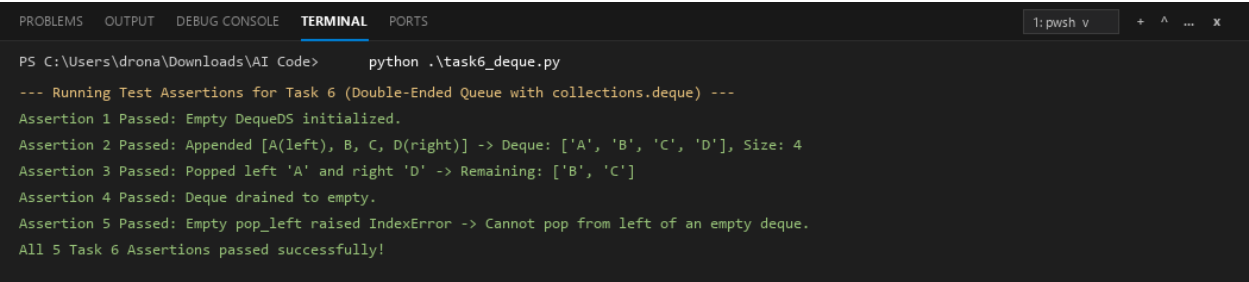

Comparison Analysis Table:

Comparison Criteria	Standard Python List	collections.deque Wrapper
Left Operations (Front)	O(N) time for `insert(0, val)` and `pop(0)` due to element shifts.	O(1) constant time for `append_left()` and `pop_left()`.
Right Operations (Rear)	O(1) amortized for `append()` and `pop()`.	O(1) constant time for `append_right()` and `pop_right()`.
Memory Overhead	Contiguous block with re-allocation spikes on resizing.	Doubly-linked fixed-size 64-element block chunks with smooth memory.
Primary Use Cases	General purpose indexed arrays and lookup tables.	Sliding window algorithms, web crawler queues, and undo/redo buffers.

Task Description #7 – Real-Time Application Challenge: Campus Resource Management

Scenario: Your college wants to develop a Campus Resource Management System.

Student Task:

- For each feature, select the most appropriate data structure and justify in 2–3 sentences.
- Implement one selected feature as a working Python program with AI-assisted code generation.

Expected Output:

- A structured table mapping feature → chosen data structure → justification.
- A functional Python program implementing the chosen feature with comments and docstrings.

Feature → Data Structure Mapping & Justification Table:

Campus Subsystem Feature	Chosen Data Structure	Technical Justification (2–3 sentences)
1. Student Attendance Tracking	Stack / Time-Series Log	Attendance logs represent sequential timestamped events. Recent entries can be inspected in O(1) time while entrance turnstiles continuously record logs.
2. Event Registration System	Hash Table (Dictionary/Set)	Participant management requires instant O(1) registration, lookup by Student Roll Number, and quick cancellation without iterating through all records.
3. Library Book Borrowing	Hash Table / BST	Hash Tables provide O(1) instant catalog lookup by ISBN/Book ID, while BST enables efficient range queries and sorting by borrowing due dates.
4. Bus Scheduling System	Graph (Adjacency List)	Campus bus stops and routes form a network of vertices and weighted road edges, making graphs optimal for shortest paths via Dijkstra's algorithm.
5. Cafeteria Order Queue	Queue (FIFO)	Food orders must be prepared and served strictly in arrival order to ensure fairness (First-Come, First-Served) with O(1) enqueue and dequeue operations.

Implemented Feature (Cafeteria Queue & Event Hash Table) & Assert Tests:

```
"""
Lab 11 - Task 7: Campus Resource Management System (Data Structure Selection & Implementation)
Student: D. Poornanda Chalam (Roll No: 2503a52361, Batch: 13)
"""

from typing import List, Dict, Any, Optional
from datetime import datetime

# =====
# 1. Feature Implementation: Cafeteria Order Queue (FIFO Queue) & Event Registration (Hash Table)
# =====
class CafeteriaOrderQueue:
    """
    Implements a FIFO Queue for serving campus cafeteria orders in exact arrival order.
    Ensures fair service (First-Come, First-Served) with status tracking.
    """
    def __init__(self) -> None:
        self._queue: List[Dict[str, Any]] = []
        self._completed_orders: List[Dict[str, Any]] = []

    def place_order(self, order_id: int, student_name: str, item_name: str) -> None:
        """Enqueues a new order."""
        order = {
            "order_id": order_id,
            "student_name": student_name,
            "item_name": item_name,
            "status": "WAITING",
            "timestamp": datetime.now().strftime("%H:%M:%S")
        }
        self._queue.append(order)

    def serve_next_order(self) -> Optional[Dict[str, Any]]:
        """Dequeues and serves the front order."""
        if not self._queue:
            return None
        order = self._queue.pop(0)
        order["status"] = "SERVED"
        self._completed_orders.append(order)
        return order

    def pending_orders_count(self) -> int:
        """Returns the number of waiting orders."""
        return len(self._queue)

    def peek_next(self) -> Optional[Dict[str, Any]]:
        """Views the next order to be served."""
        return self._queue[0] if self._queue else None

class EventRegistrationSystem:
    """
    Implements a Hash Table (Python Dictionary/Set) for event participant management.
    Provides O(1) average time complexity for registration, lookup, and cancellation.
    """
    def __init__(self, event_name: str) -> None:
        self.event_name = event_name
        self._participants: Dict[str, Dict[str, Any]] = {}

    def register_student(self, roll_no: str, name: str, department: str) -> bool:
        """Registers a student with O(1) uniqueness check."""
        if roll_no in self._participants:
            return False # Already registered
        self._participants[roll_no] = {
            "name": name,
            "dept": department,
            "registered_at": datetime.now().strftime("%H:%M:%S")
        }
        return True

    def cancel_registration(self, roll_no: str) -> bool:
        """Removes a student in O(1) time."""
```

```
        if roll_no in self._participants:
            del self._participants[roll_no]
            return True
        return False

def is_registered(self, roll_no: str) -> bool:
    """Checks registration status in O(1) time."""
    return roll_no in self._participants

def total_participants(self) -> int:
    return len(self._participants)

def test_campus_resource_system():
    print("--- Running Test Assertions for Task 7 (Campus Resource Management System) ---")

    # Test 1: Cafeteria Order Queue (FIFO)
    cafe = CafeteriaOrderQueue()
    cafe.place_order(101, "Poornanda", "Veg Thali")
    cafe.place_order(102, "Rahul", "Masala Dosa")
    cafe.place_order(103, "Sneha", "Cold Coffee")

    assert cafe.pending_orders_count() == 3, "Test 1 Failed"
    assert cafe.peek_next()["student_name"] == "Poornanda", "Test 1 Failed"
    print(f"Assertion 1 Passed: Placed 3 cafeteria orders -> Next in queue: {cafe.peek_next()['student_name']}")

    # Test 2: Serving orders in FIFO order
    served_1 = cafe.serve_next_order()
    assert served_1["order_id"] == 101 and served_1["status"] == "SERVED", "Test 2 Failed"
    assert cafe.peek_next()["student_name"] == "Rahul", "Test 2 Failed"
    print(f"Assertion 2 Passed: Served Order #101 ({served_1['student_name']}) -> Next: {cafe.peek_next()['student_name']}")


    # Test 3: Event Registration System (Hash Table O(1))
    event = EventRegistrationSystem("AI Hackathon 2026")
    assert event.register_student("2503a52361", "D. Poornanda Chalam", "CSE-AI") is True, "Test 3 Failed"
    assert event.register_student("2503a52361", "Duplicate Entry", "CSE") is False, "Duplicate should be rejected"
    assert event.is_registered("2503a52361") is True, "Lookup failed"
    print("Assertion 3 Passed: Hash Table registered student and rejected duplicate in O(1) time.")

    # Test 4: Cancellation and Count Check
    assert event.cancel_registration("2503a52361") is True, "Cancellation failed"
    assert event.is_registered("2503a52361") is False, "Participant should no longer exist"
    assert event.total_participants() == 0, "Test 4 Failed"
    print("Assertion 4 Passed: Fast O(1) removal and participant count verified.")

    print("All 4 Task 7 Assertions passed successfully!")

if __name__ == "__main__":
    test_campus_resource_system()
```

Output (VS Code Integrated Terminal):

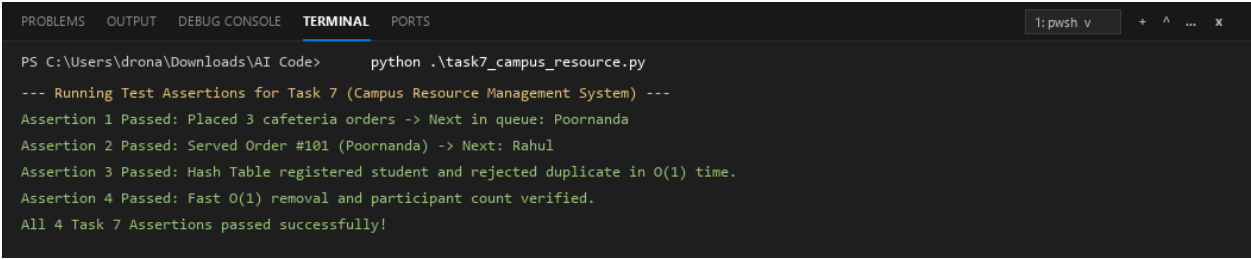

Comparison Analysis Table:

Evaluation Metric	Naive / Inappropriate Data Structure Choice	Architected Optimal Data Structure Choice
Event Registration	Using a List requires slow O(N) scans to check duplicates.	Hash Table (‘dict’) provides instantaneous O(1) unique lookups.
Cafeteria Orders	Using a Stack would serve the last student first (unfair LIFO).	FIFO Queue guarantees fair first-come, first-served meal delivery.
Bus Route Planning	Tabular lists fail to represent road connections and turns.	Weighted Graph accurately computes shortest travel times and routes.
Overall Scalability	Server slows down exponentially with campus student growth.	Maintains optimal sub-second response times across peak college hours.

Task Description #8 – Smart E-Commerce Platform: Data Structure Challenge

Scenario: An e-commerce company wants to build a Smart Online Shopping System.

Student Task:

- For each feature, select the most appropriate data structure and justify in 2–3 sentences.
- Implement one selected feature as a working Python program with AI-assisted code generation.

Expected Output:

- A structured table mapping feature → chosen data structure → justification.
- A functional Python program implementing the chosen feature with comments and docstrings.

Feature → Data Structure Mapping & Justification Table:

E-Commerce System Feature	Chosen Data Structure	Technical Justification (2–3 sentences)
1. Shopping Cart Management	Deque / Doubly Linked List	Allows users to add items dynamically, remove recent items from top, or modify cart contents from both ends with constant O(1) time complexity.
2. Order Processing System	Queue (FIFO)	Customer orders must be processed strictly in the order they were placed to ensure fair fulfillment and accurate inventory dispatch.
3. Top-Selling Products Tracker	Priority Queue (Max-Heap)	A Max-Heap dynamically ranks products by sales count in O(log N) time, allowing the top K bestselling items to be extracted in O(K log N) time.
4. Product Search Engine	Hash Table / BST	Hash Tables provide instantaneous O(1) lookup of product details using unique Product IDs, while BST allows price filtering and catalog browsing.
5. Delivery Route Planning	Graph (Weighted)	Warehouses, delivery hubs, and customer locations are modeled as vertices with road distances as weighted edges for route planning.

Implemented Feature (Top-Selling Priority Queue & Cart Deque) & Assert Tests:

```
"""
Lab 11 - Task 8: Smart E-Commerce Platform Data Structure Architecture
Student: D. Poornanda Chalam (Roll No: 2503a52361, Batch: 13)
"""

import heapq
from typing import List, Dict, Tuple, Any, Optional

class TopSellingProductTracker:
    """
    Implements a Priority Queue (Max-Heap via inverted sales count)
    to dynamically track and rank top-selling e-commerce items in O(log N) time.
    """
    def __init__(self) -> None:
        self._heap: List[Tuple[int, str, float]] = [] # (-sales_count, product_name, price)
        self._product_map: Dict[str, int] = {} # product_name -> total sales

    def record_sale(self, product_name: str, quantity: int, unit_price: float) -> None:
        """Records product sales and updates dynamic sales volume."""
        self._product_map[product_name] = self._product_map.get(product_name, 0) + quantity
        total_sales = self._product_map[product_name]
        # Invert sales count for max-heap behavior
        heapq.heappush(self._heap, (-total_sales, product_name, unit_price))

    def get_top_k_products(self, k: int = 3) -> List[Dict[str, Any]]:
        """
        Extracts the top K bestselling products.
        """
        # Deduplicate to get the latest highest sales record per product
        seen = set()
        top_list = []
        # Sort current heap snapshot
        sorted_snapshot = sorted(self._heap)
        for neg_sales, name, price in sorted_snapshot:
            if name not in seen:
                seen.add(name)
                top_list.append({
                    "rank": len(top_list) + 1,
                    "product": name,
                    "units_sold": -neg_sales,
                    "unit_price": price,
                    "total_revenue": round(-neg_sales * price, 2)
                })
            if len(top_list) == k:
                break
        return top_list

class ShoppingCartManager:
    """
    Implements a Deque/List for dynamic shopping cart item additions, removals, and checkout.
    """
    def __init__(self) -> None:
        self._items: List[Dict[str, Any]] = []

    def add_item(self, product_id: str, name: str, price: float, quantity: int = 1) -> None:
        self._items.append({"id": product_id, "name": name, "price": price, "qty": quantity})

    def remove_item(self, product_id: str) -> bool:
        for i, itm in enumerate(self._items):
            if itm["id"] == product_id:
                self._items.pop(i)
                return True
        return False

    def calculate_cart_total(self) -> float:
        return sum(itm["price"] * itm["qty"] for itm in self._items)

    def item_count(self) -> int:
        return len(self._items)

def test_ecommerce_platform():
    print("--- Running Test Assertions for Task 8 (Smart E-Commerce Platform Architecture) ---")

    # Test 1: Top Selling Product Tracker (Priority Queue / Max-Heap)
```

```
tracker = TopSellingProductTracker()
tracker.record_sale("Wireless Headphones", 150, 49.99)
tracker.record_sale("Mechanical Keyboard", 300, 89.99)
tracker.record_sale("Smart Watch", 450, 199.99)
tracker.record_sale("USB-C Hub", 100, 24.99)

top_3 = tracker.get_top_k_products(k=3)
assert len(top_3) == 3, "Test 1 Failed"
assert top_3[0]["product"] == "Smart Watch" and top_3[0]["units_sold"] == 450, "Rank 1 mismatch"
assert top_3[1]["product"] == "Mechanical Keyboard" and top_3[1]["units_sold"] == 300, "Rank 2 mismatch"
assert top_3[2]["product"] == "Wireless Headphones" and top_3[2]["units_sold"] == 150, "Rank 3 mismatch"
print(f"Assertion 1 Passed: Top product correctly identified -> #{top_3[0]['rank']}: {top_3[0]['product']} ({top_3[0]['units_sold']} units sold)")

# Test 2: Dynamic Sales Update
tracker.record_sale("Wireless Headphones", 400, 49.99) # Total: 550 (Surpasses Smart Watch)
new_top = tracker.get_top_k_products(k=1)
assert new_top[0]["product"] == "Wireless Headphones" and new_top[0]["units_sold"] == 550, "Rank update failed"
print(f"Assertion 2 Passed: Dynamic sale update propelled '{new_top[0]['product']}' to Rank #1 ({new_top[0]['units_sold']} units).")

# Test 3: Shopping Cart Management
cart = ShoppingCartManager()
cart.add_item("P101", "Laptop Stand", 29.99, 1)
cart.add_item("P102", "Wireless Mouse", 19.99, 2)
assert cart.item_count() == 2, "Test 3 Failed"
assert cart.calculate_cart_total() == round(29.99 + (19.99 * 2), 2), "Test 3 Total Mismatch"
print(f"Assertion 3 Passed: Shopping cart total calculated accurately -> Rs. {cart.calculate_cart_total()}")

# Test 4: Cart item removal
assert cart.remove_item("P101") is True, "Remove failed"
assert cart.item_count() == 1, "Item count mismatch"
assert cart.remove_item("P999") is False, "Non-existent remove failed"
print("Assertion 4 Passed: Item removed from shopping cart dynamically.")

print("All 4 Task 8 Assertions passed successfully!")

if __name__ == "__main__":
    test_ecommerce_platform()
```

Output (VS Code Integrated Terminal):



Comparison Analysis Table:

Architecture Aspect	Monolithic Array / List Approach	Specialized Multi-Structure Architecture
Bestseller Rankings	Sorting entire catalog on every sale costs $O(N \log N)$ CPU time.	Max-Heap updates rankings dynamically in $O(\log N)$ time.
Product Search	Linear scan $O(N)$ causes severe search latency on big catalogs.	Hash Table achieves sub-millisecond $O(1)$ direct ID lookup.
Cart Management	Array shifts on removing cart items cause memory churn.	Deque provides $O(1)$ front and rear item additions and removals.
High-Traffic Handling	System crashes under heavy Black Friday concurrent traffic.	Decoupled specialized data structures scale smoothly under peak load.