
### Each Node Has its Own Memory

#### RackMixBus: rendering (Linux)


96000, 128, MT, lock-free, lightweightSemaphoreHybrid, 2 channels, 20s

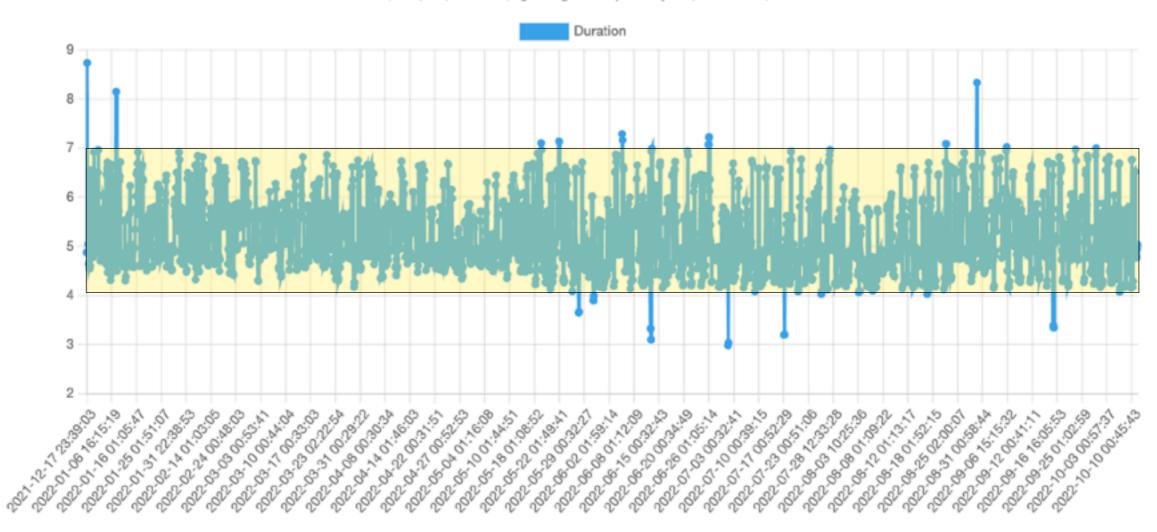

### Run-time Memory Assignment


#### RackMixBus: rendering (Linux)

96000, 128, MT, lock-free, pooled-memory, lightweightSemaphore, 2 channels, 20s

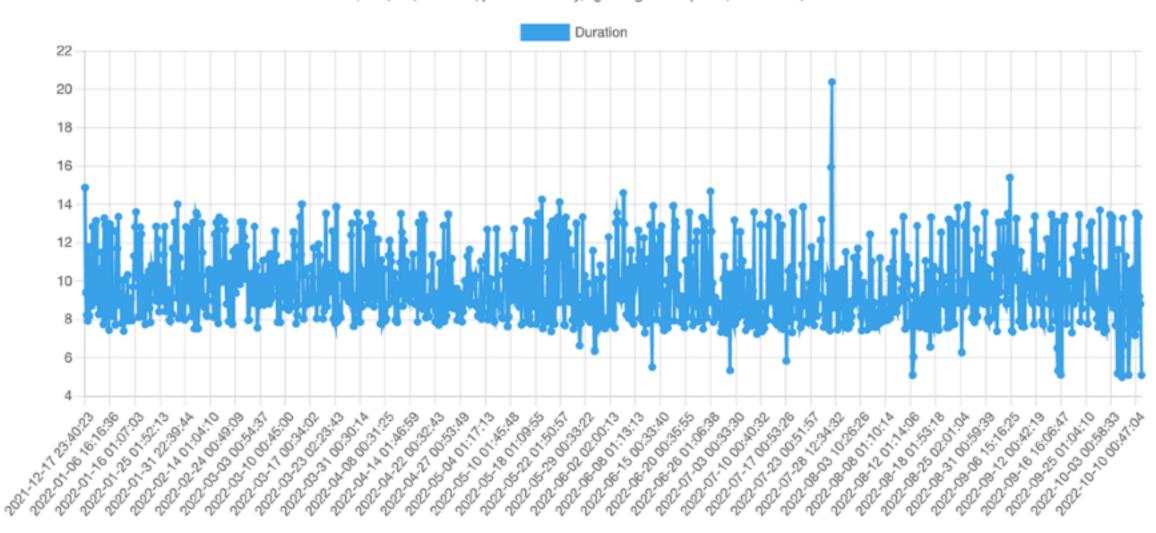




# Each Node Has its Own Memory

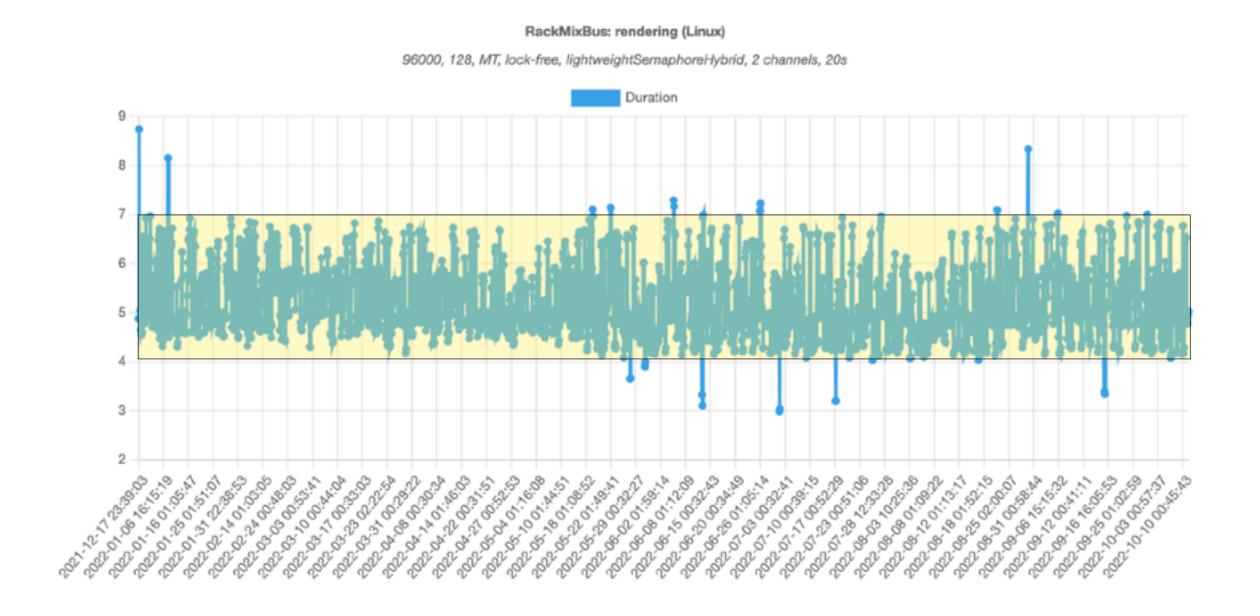

## Run-time Memory Assignment

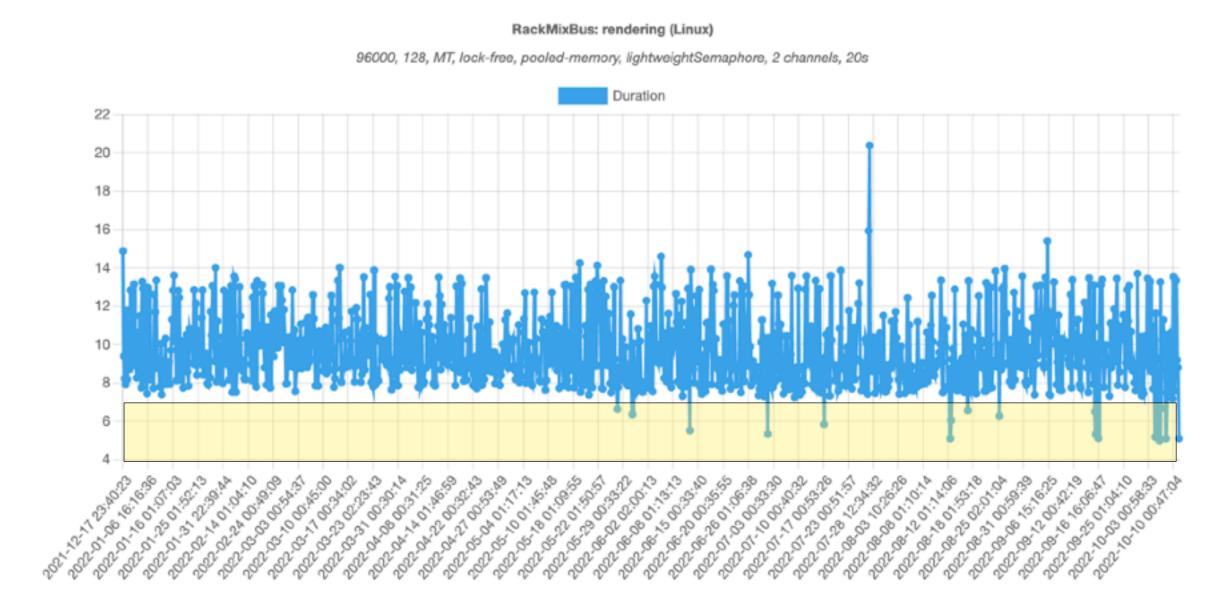

• The overhead of using less memory outweighed the cache benefits