
Each Node Has its Own Memory

RackMixBus: rendering (Linux)


96000, 128, MT, lock-free, lightweightSemaphoreHybrid, 2 channels, 20s

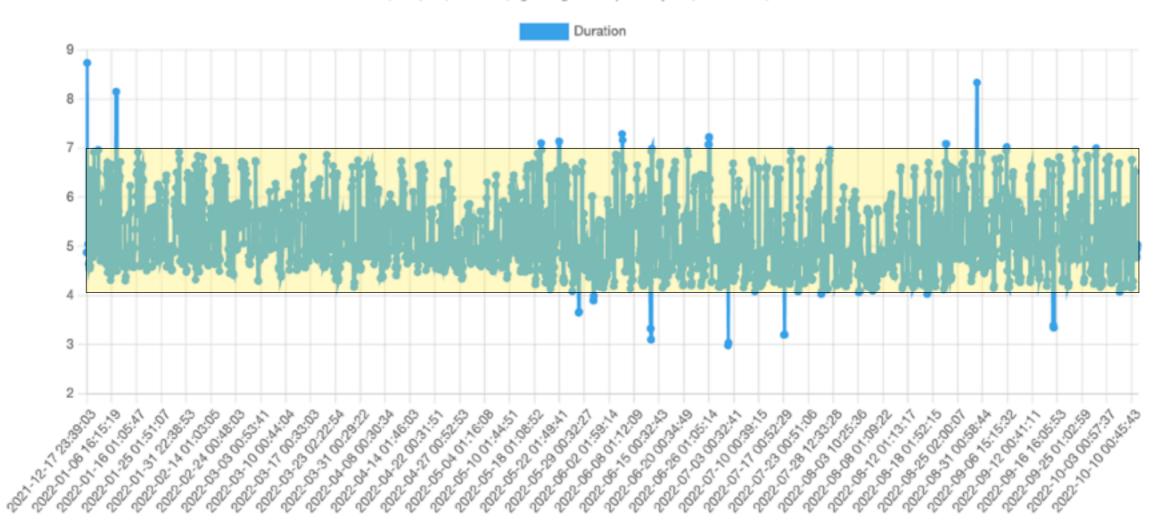

Run-time Memory Assignment


RackMixBus: rendering (Linux)

96000, 128, MT, lock-free, pooled-memory, lightweightSemaphore, 2 channels, 20s

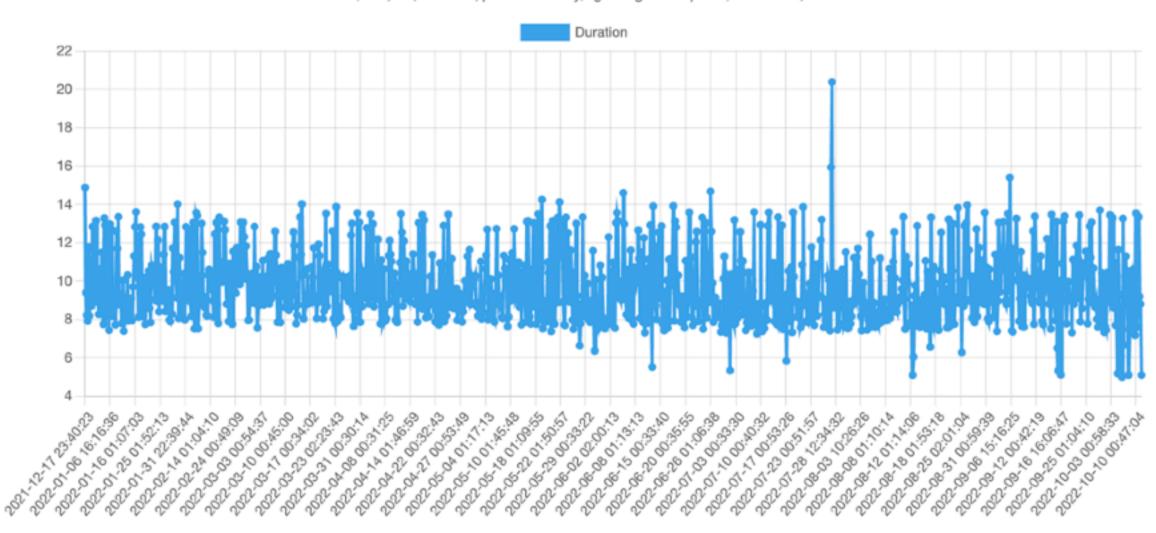




Each Node Has its Own Memory

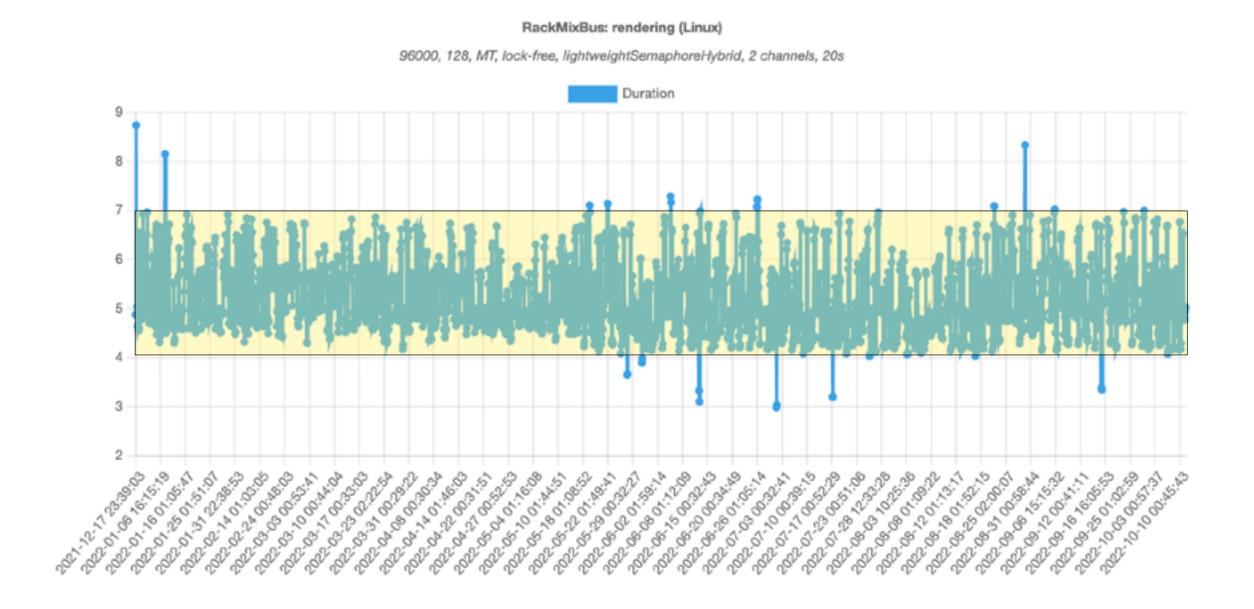

Run-time Memory Assignment

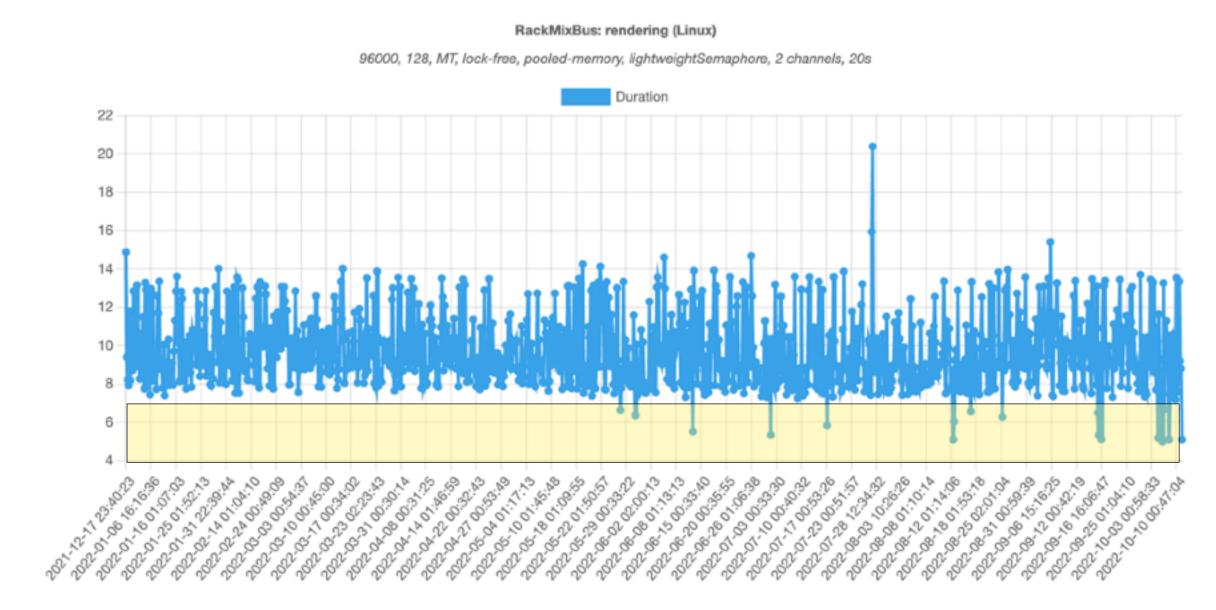

• The overhead of using less memory outweighed the cache benefits