`odin3_ast_node`: 24 bytes, one per node, in a `pagevec` (IDs from 1)

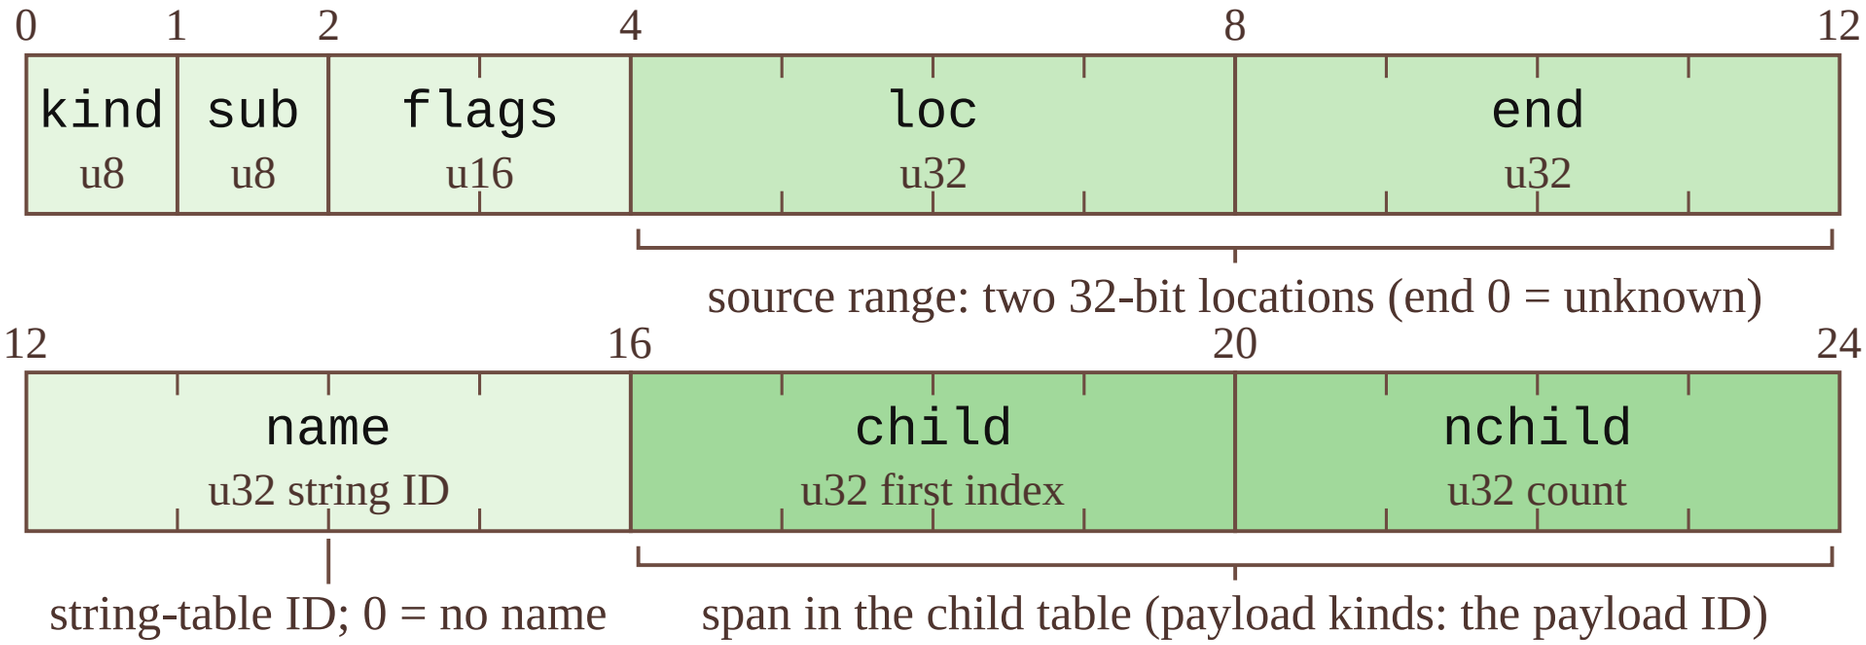

stores for `assign y = a + 1;`

ID	kind.sub	name	child	nchild
1	`IDENT`	y	0	0
2	`IDENT`	a	0	0
3	`NUMBER.dec`	–	1	0
4	`BINARY.+`	–	0	2
5	`NET_ASSIGN`	–	2	2
6	`CONT_ASSIGN`	–	4	3

payload table
1: `NUMBER`
width 0, nbits 32,
bits[ ] in the arena

child ID < parent ID:
a forward sweep visits
children first
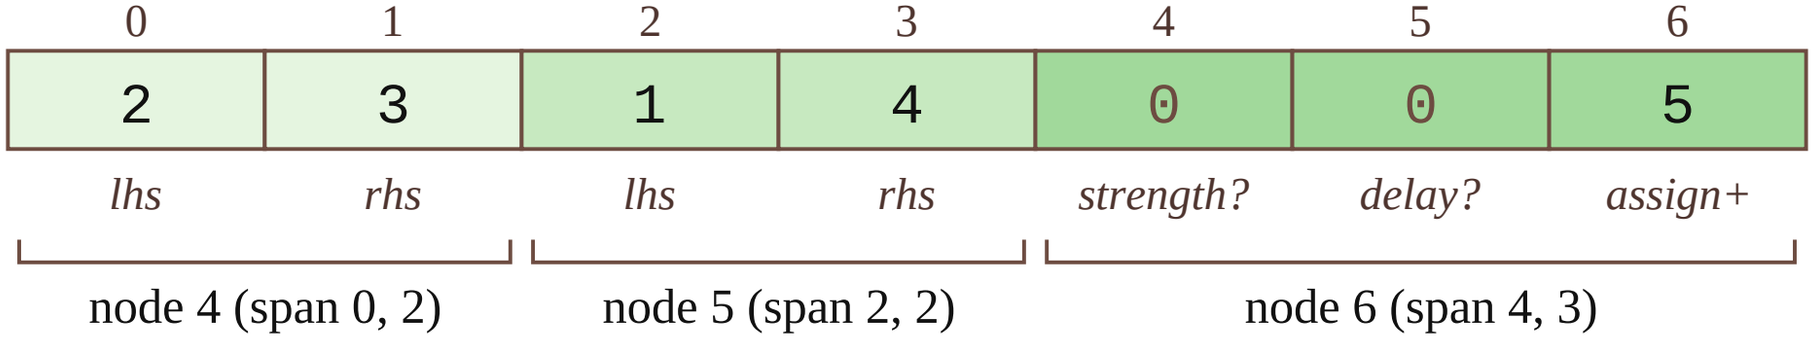
child table: one vector of node IDs; absent slots are 0