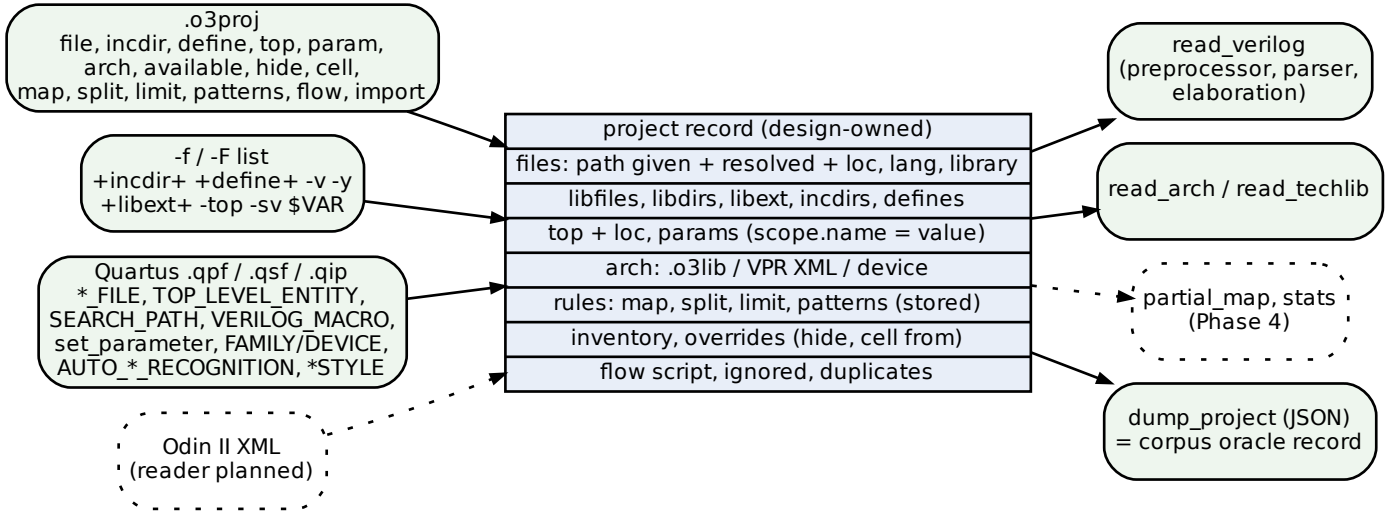
.o3proj
file, incdir, define, top, param,
arch, available, hide, cell,
map, split, limit, patterns, flow, import
-f / -F list
+incdir+ +define+ -v -y
+libext+ -top -sv $VAR
Quartus .qpf / .qsf / .qip
*_FILE, TOP_LEVEL_ENTITY,
SEARCH_PATH, VERILOG_MACRO,
set_parameter, FAMILY/DEVICE,
AUTO_*_RECOGNITION, *STYLE
Odin II XML
(reader planned)
project record (design-owned)
files: path given + resolved + loc, lang, library
libfiles, libdirs, libext, incdirs, defines
top + loc, params (scope.name = value)
arch: .o3lib / VPR XML / device
rules: map, split, limit, patterns (stored)
inventory, overrides (hide, cell from)
flow script, ignored, duplicates
read_verilog
(preprocessor, parser,
elaboration)
read_arch / read_techlib
partial_map, stats
(Phase 4)
dump_project (JSON)
= corpus oracle record